


2023 Global Product Catalog



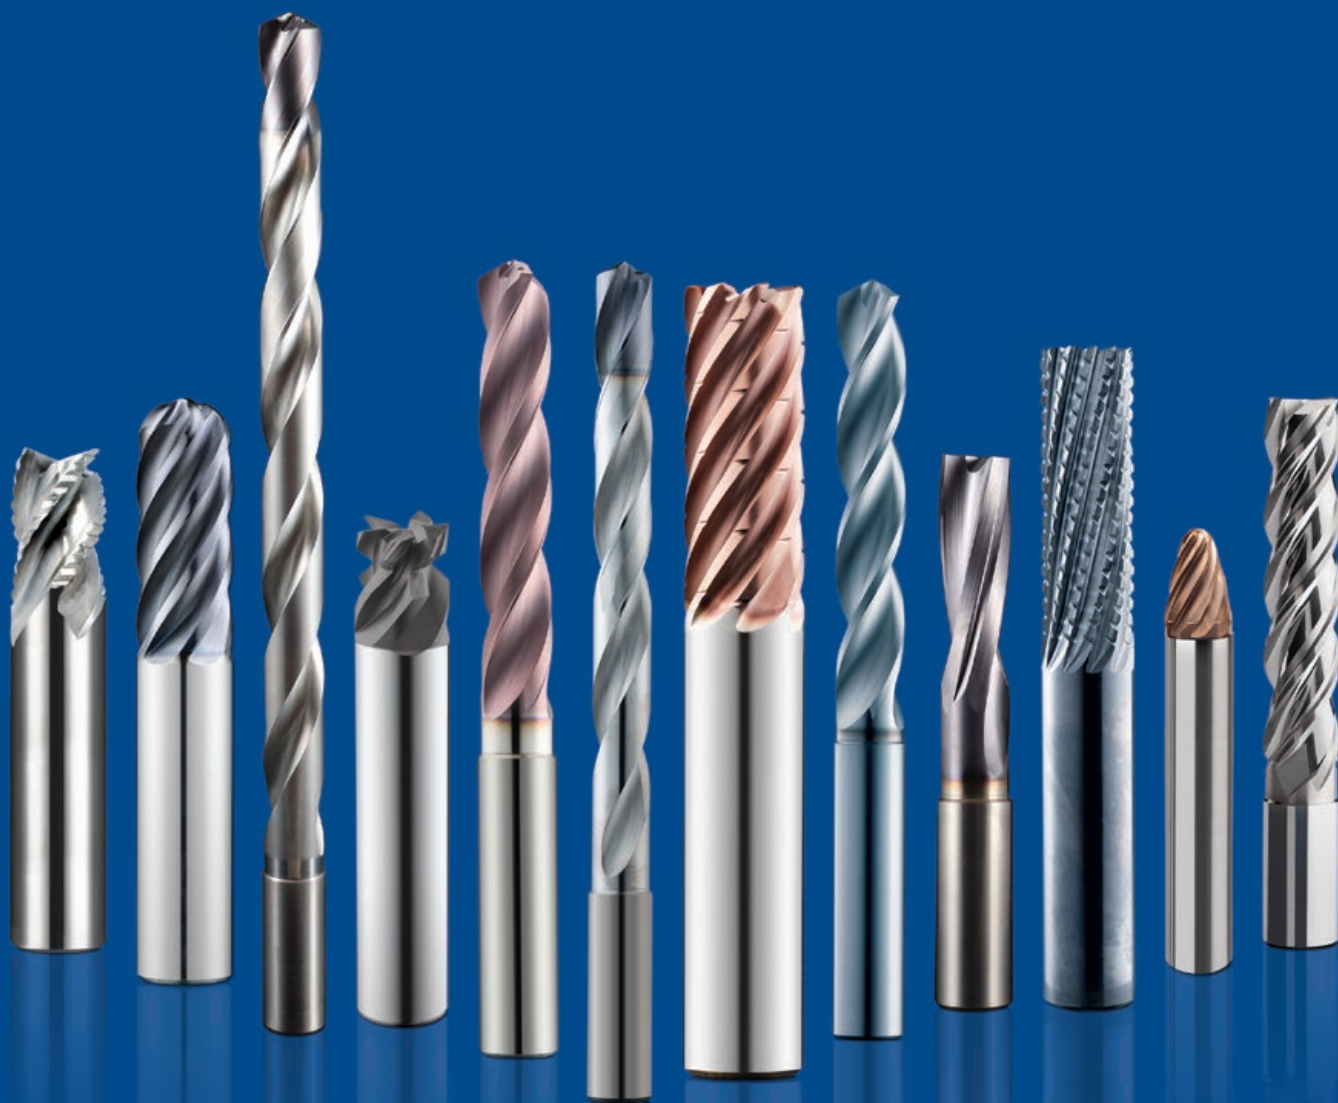

VALUE AT THE SPINDLE®

KYOCERA SGS Precision Tools (KSPT) is an ISO 9001:2015 Certified manufacturer of industry leading round solid carbide cutting tools. State of the art manufacturing and warehouse facilities have the capacity and processes to meet the quality and delivery demands of customers in all markets around the world. Complete inspections performed within its metallurgical lab and manufacturing quality departments ensure the use of high quality carbide and reliable manufacturing consistency regardless of when a cutting tool is produced.

KSPT is proud to have pioneered some of the world's most advanced cutting technologies due to rigorous testing of tools, coatings, and materials within its Global Innovation Center. It is this commitment to innovation that has launched patented products and technologies like the Z-Carb with its variable geometry and cutting edge preparation, Series 43 APR® and APF® ultra high performance aluminum cutting tools, and the JetStream coolant technology.

SGS has become an important part of the KYOCERA Precision Tools family, and while the name has changed, one thing has not. Its dedicated people and their relentless commitment to the customer. KSPT Technical Sales Engineers, Application Specialists, and Distribution Partners blanket the globe, delivering reliable service and support to all market segments. It is these people and products that drive innovative application strategies and cutting tool technologies into the end user, continually exceeding expectations and providing the most Value at the Spindle®.



Table of Contents

KYOCERA SGS Precision Tools	2
KYOCERA SGS Precision Tools Europe Ltd. . .	4
Global Innovation Center	5
Tooling Services.....	6
Tech Hub	7
Medical Division	8
Tool Wizard®	9

OVERVIEW

Common Legend.....	10
End Mill Legend.....	12
Drill Legend.....	13
Router Legend	14

COATINGS	15

MILLING

High Performance End Mills.....	16
End Mill Matrix.....	22
High Performance Aluminum End Mills . . .	128
General Application End Mills	272

HOLE MAKING

High Performance Drills	178
Drill Matrix	182
General Application Drills.....	332
General Application Countersinks	358
General Application Reamers	374

ROUTING

High Performance Routers.....	386
General Application Routers	396

TECHNICAL INFORMATION

EDP Index	400
KSPT Reference Information	421
Decimal Equivalent Chart	422
Hardness Conversion Chart	423





MORE THAN JUST ANOTHER CUTTING TOOL SUPPLIER

KYOCERA SGS PRECISION TOOLS EUROPE, LTD.

The state of the art KYOCERA SGS Precision Tools Europe facility is located in Wokingham, England and is focused on the manufacture of special cutting tools, high accuracy form tools, tool modifications and regrinds. A highly skilled team of professionals specialize in the supply and support of high performance tools for the Aerospace, Medical, Power Generation and Motorsport markets.



KYOCERA SGS Precision Tools Europe also offers a full range of end mill and drill products as follows:

- Multi-Million Euro Warehouse Stocking Full Range of Catalog Products
- Same Day Shipment on Stock Items
- Multi-Lingual Sales and Technical Support
- Online Portal for Stock Availability
- High Performance Product and Application Training, Including the New KYOCERA SGS Tool Clinic

Additional services provided at this facility include:

- A Fast Track for Special Tools Via Our Rapid Response Centre
- Inhouse PVD coating facility and R&D Centre
- Product Research and Development
- Product Engineering and Tool Application Support
- CAD/CAM Software Support





GLOBAL INNOVATION CENTER

CUTTING TOOL INNOVATION

One of the main goals of the KSPT Global Innovation Center is to bring value to the customer's spindle; one of the ways this is achieved is by producing innovative cutting tool geometries. Using the most advanced technology and techniques available in today's market, KSPT is dedicated to developing new products that will take the industry to the next level.

- State of the art cutting tool measuring and monitoring technology
- Continuous market research and training to stay up to date
- Unique and complex tool designs

TECHNICAL TRAINING & EDUCATION

The KSPT Global Innovation Center sets out to involve our trainees in engaging and challenging training regardless of where they are at in their career with a balance of demonstrations, presentations, and hands-on challenges.

- Our own KSPT team members go through the same core training we provide to our valued distribution partners
- Two levels of KSPT Campus tool clinics available
- On-site and online customer training

APPLICATION SUPPORT AND TESTING

At the KSPT Global Innovation Center, we understand that every application comes with its own challenges and at the end of the day, the customer wants to minimize the cost. This is where our R&D lab, engineers, and range of machining elements come into play. We can closely replicate the customer's application and provide feedback on how we suggest approaching it, all without the need to halt production in their own shop.

- A wide range of tool holding, fixturing, material, coolants/delivery methods, and machines
- Technical support and troubleshooting by phone, email, or web call
- Research and development



TOOLING SERVICES

KSPT is committed to providing superior tooling services in the areas of Reconditioning, Recoating, Regrinding, Specials and Alterations. These services are offered to provide unique solutions and enhanced tool life with involvement from the KSPT Technical Support Team.

KSPT proudly offers Tooling Services in North America and Europe.



KSPT TOOLING SERVICES FACILITIES

UNITED STATES OF AMERICA KSPT

150 Marc Drive
Cuyahoga Falls, Ohio 44223 U.S.A.
customer service -
US and Canada: (330) 686-5700
fax - US & Canada: (800) 447-4017
international fax: (330) 686-2146

KYOCERA SGS Precision Tools West Coast Service Center


1832 W. Collins Ave.
Orange, California 92867
phone: (714) 363-3701
fax: (714) 363-3711
email: sgswest@kyocera-sgstool.com

EUROPE KSPTE

10 Ashville Way
Wokingham, Berkshire
RG41 2PL England
phone: (44) 1189-795-200
fax: (44) 1189-795-295
e-mail: SalesEU@kyocera-sgstool.com

KYOCERA SGS Precision Tools Tech Hub

149 Slayton Avenue
Danville, Virginia 24540
US and Canada: (434) 791-2020
Fax US & Canada: (434) 791-2044
web: www.kyocera-techhub.com

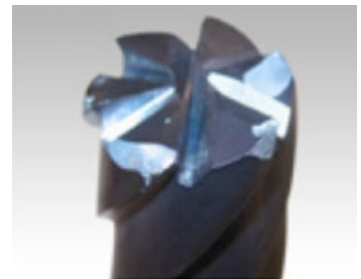

BEFORE





AFTER

KYOCERA SGS Tech Hub

The KYOCERA SGS Tech Hub (KSTH) is a purpose created division of KYOCERA SGS Precision Tools Inc. created to focus on designing custom high-performance cutting tool solutions to compliment the deep range of standard catalog tools KSPT provides. With KSTH having a sole focus and culture designed around prioritizing and understanding the unique challenges of special tailored tooling, KSPT is able to provide complete solutions that maximize your result.


CUSTOM CUTTING TOOL SOLUTIONS

- As part of the KSPT dedication to providing Value at the Spindle®, a multi-million dollar investment was made for a division solely focused on custom tailored special cutting tools
- The state of the art facility is completely designed, staffed, and committed to addressing blueprint special engineered solid carbide round tool solutions
- It was critical to build a facility with the culture built around agile capacity and know how to quote, build, and ship complex special tools with industry leading high performance tool designs
- Special tooling, the attention required and solutions needed, is not simply a department or isolated machines on the factory floor but rather a standalone division focused and prepared to react with effectiveness and efficiency

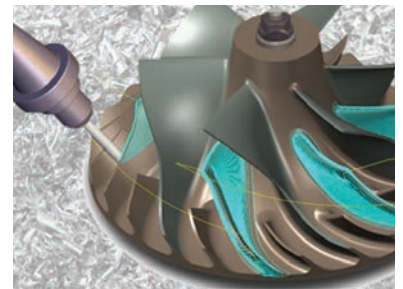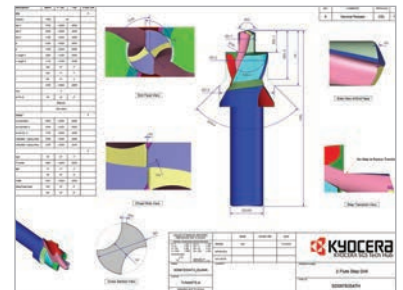

KYOCERA SGS Tech Hub

149 Slayton Avenue
Danville, Virginia 24540
US and Canada: (434) 791-2020
Fax US & Canada: (434) 791-2044
web: www.kyocera-techhub.com

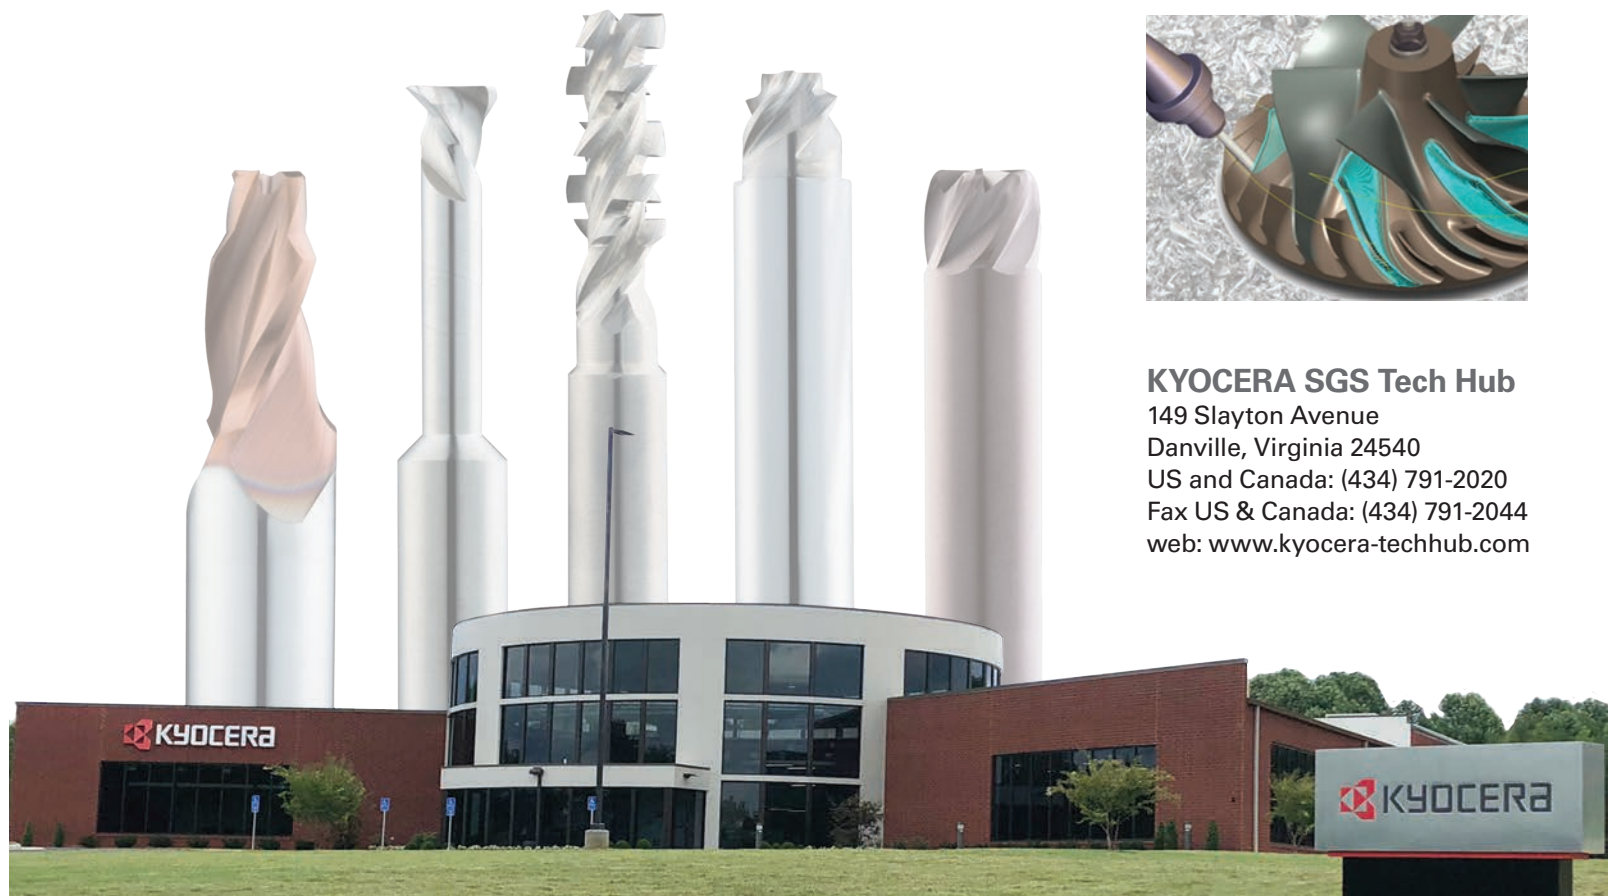



KYOCERA SGS Precision Tools Medical Division

WHO WE ARE

With over 20 years of industry experience, KSPT Medical produces unique, customer designed orthopedic devices using highly trained engineers dedicated to new technology. KSPT Medical is a division of KYOCERA SGS Precision Tools, who proudly pioneered some of the world's most advanced metal cutting technology and sells to more than 60 countries. With over 20 years of industry experience, KSPT Medical Division is ISO 13485:2016 Certified and is FDA Registered in the production of medical devices in the orthopedic marketplace.

ENGINEERING

We approach each opportunity as a project and manage it as such. We pride ourselves on engineering each project to the specific needs of our customers. Providing quotes often within 24 hours and following through with detailed drawings, solid models, process plans, and program simulations if needed. Our goal is to work hand in hand with the end user and maintain constant communication to customize our support to their needs.

MACHINING CAPABILITIES

- GRINDING
- MILLING
- TURNING
- PROFILING
- BENDING
- Services Offered; Welding, Various Coatings, Anodizing, Passivation, Electropolishing, Laser Etching and HeatTreating

KYOCERA SGS Precision Tools Medical Division

201 S. Towerview Dr.
Columbia City, Indiana 46725
phone: (260) 244-7677
fax: (260) 244-7466
www.ksptmedical.com

To Request a Quote:
rfq@kyocera-sgstool.com

Customer Service and Orders:
salesmd@kyocera-sgstool.com



REGISTERED ISO 13485:2016 Certified



VALUE AT THE SPINDLE®

An interactive and dynamic platform to help select the correct SGS tool for the operation and provide optimal machining parameters.

- A quick and reliable 3 step process:
 1. Choose the material
 2. Enter the application
 3. From the list of recommended results, choose the tool that best fits your machining needs
- Speed & Feed rates will be generated based on application parameters combined with the selected tool's capabilities in the desired material.

TO SIGN UP FOR THE TOOLWIZARD®:

1. Visit Toolwizard.kyocera-sgstool.com
2. Register for an account
3. Start calculating
4. Start saving!



 Common Legend
 Leyenda habitual
 Légende commune
 Gemeinsame Legende

TO ORDER: Please specify quantity and EDP number.

PARA SU PEDIDO: Por favor especifique cantidad y número de EDP.

POUR COMMANDER: Veuillez préciser la quantité et le code article EDP.

BESTELLEN: Bitte Menge und EDV-Nummer angeben.

RETURN POLICY: An RMA number must accompany all product returns.
Contact your Customer Service Representative for an RMA number.

DEVOLUCIONES: Todo material devuelto debe ir acompañado de un número de RMA correspondiente.
Para solicitarlo, póngase en contacto con su Representante de Atención al Cliente.

POLITIQUE DE RETOUR: Tous les produits retournés doivent être accompagnés d'un numéro RMA.
Contacter votre interlocuteur commercial pour obtenir un numéro RMA.

RÜCKNAHMEGARANTIE: Eine RMA-Nummer (Rücksendegenehmigung) muss bei allen Produktrücksendungen beiliegen.
Wenden Sie sich bitte an Ihren Kundendienstmitarbeiter für RMA-Nummer.

**REGULATION SAFETY GLASSES SHOULD ALWAYS BE WORN WHEN
USING HIGH-SPEED CUTTING EQUIPMENT**

**DEBEN USARSE GAFAS PROTECTORAS CUANDO SE UTILICEN EQUIPOS
DE ALTA VELOCIDAD**

**DES LUNETTES DE SÉCURITÉ DOIVENT ÊTRE IMPÉRATIVEMENT
PORTÉES LORS D'UTILISATION D'OUTILS À GRANDE VITESSE**

**BEI SCHNELL LAUFENDEN SPANABHEBENDEN MASCHINEN MÜSSEN IMMER
DIE VORGESCHRIEBENEN SICHERHEITSBRILLEN GETRAGEN WERDEN**



WARNING: This product can expose you to chemicals including Cobalt, which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov



ADVERTENCIA: Este producto puede exponerlo a químicos como el Cobalto, reconocido como cancerígeno en el estado de California. Para más información visite esta página web: www.p65warnings.ca.gov



ATTENTION: Ce produit vous expose aux produits chimiques incluant le Cobalt, qui est reconnu par l'Etat de Californie à être une cause de cancer. Pour plus d'information veuillez regarder sur: www.p65warnings.ca.gov



WARNUNG: Dieses Produkt kann Sie mit Chemikalien wie Kobalt aussetzen, das dem Staat Kalifornien als krebserregend bekannt ist. Für weitere Informationen, besuchen Sie: www.p65warnings.ca.gov

**INTELLECTUAL PROPERTY
PROPIEDAD INTELECTUAL
PROPRIÉTÉ INTELLECTUELLE
GEISTIGES EIGENTUM**

KYOCERA SGS Precision Tools holds more than 20 patents globally. Please visit our website at www.kyocera-sgstool.com to learn more.

KYOCERA SGS Precision Tools posee más de 20 patentes a nivel mundial. Para más información, visite nuestra página web www.kyocera-sgstool.com.

KYOCERA SGS Precision Tools possède plus de 20 brevets mondialement reconnus. Pour plus d'information, veuillez consulter notre site web www.kyocera-sgstool.com.

KYOCERA SGS Precision Tools besitzt mehr als 20 Patente weltweit. Bitte besuchen Sie unsere Webseite www.kyocera-sgstool.com für weitere Informationen.

Common Legend

Leyenda habitual

Légende commune

Gemeinsame Legende

MATERIALS MATERIALES MATÉRIAUX WERKSTOFFE



Steels (P)
Aceros
Aciers
Stähle



Stainless Steels (M)
Aceros Inoxidables
Aciers inoxydables
Nichtrostende Stähle



Cast Iron (K)
Acero de Fundición
Fonte
Grauguss



Non-Ferrous (N)
No Férricos
Non Ferreux
Nichteisenmetalle



High Temp Alloys (S)
Aleaciones Termorresistentes
Alliages hautes températures
Warmfeste Legierungen



Hardened Steels (H)
Aceros Endurecidos
Aciers Trempés
Gehärteter Stahl

TOOL LENGTH LONGITUDES DE HERRAMIENTAS LONGUEUR DE L'OUTIL WERKZEUGLÄNGE



Stub
Corta
Court
Kurze Bauform



Regular
Media
Moyen
Standard



Long
Larga
Long
Lang



Long Reach Neck
Larga con cuello
Détalonnage longue
portée
Freischliff



Extra Long
Extra-larga
Extra-long
Extra-Lang

FLUTES FILOS DENTS SCHNEIDEN



2 Flutes
2 Filos
2 Dents
2 Schneiden



3 Flutes
3 Filos
3 Dents
3 Schneiden



4 Flutes
4 Filos
4 Dents
4 Schneiden



5 Flutes
5 Filos
5 Dents
5 Schneiden



6 Flutes
6 Filos
6 Dents
6 Schneiden



7 Flutes
7 Filos
7 Dents
7 Schneiden



8 Flutes
8 Filos
8 Dents
8 Schneiden



9 Flutes
9 Filos
9 Dents
9 Schneiden



10 Flutes
10 Filos
10 Dents
10 Schneiden



11 Flutes
11 Filos
11 Dents
11 Schneiden



12 Flutes
12 Filos
12 Dents
12 Schneiden

End Mill Legend **Leyenda fresas** **Légende fraise** **Fräser-Legende**

END CONFIGURATIONS CONFIGURACIONES DE LA PUNTA FORME DE L'OUTIL EN BOUT ENDENAUSFÜHRUNG



Ball
Esférica
Boule
Kugelkopf



Corner
Plana con
borde romo
Rayon
mit Eckenradius



Square
Plana
Non rayonné
Scharfkantig



Linear taper
Perfil Cónico
Conique Droit
Linear Kegel



Tapered Circle
Segment
Perfil Cónico de
Segmento Circular
Conique Segment
de Cercle
Tonnen Segment



Picatinny Recoil
Groove
Fresa Riel Picatinny
Rainure Décalée
Picatinny
Picatinny Rückstoss
Nut



Picatinny Dovetail
Form
Fresa de Forma
Picatinny Cola de
Milano
Queue d'aronde
Picatinny
Picatinny Schwal-
benschwanz Form

SHANK TYPE TIPO DE VÁSTAGO TYPE DE QUEUE SCHAFTART



Common
Normal
Dégagée
Standard



Straight
Recto
Cylindrique
Gerade



WELDON
Drive Flat
Plano en el zanco
Entrainement
méplat
Spannfläche



DIN6535 HB
Drive Flat
DIN 6535 HB
Plano en el zanco
DIN 6535 HB
Entrainement
méplat DIN 6535 HB
Spannfläche
DIN 6535 HB



Right Spiral
Hélice con corte
a la derecha
Hélice droite
Rechtsspirale



Left Spiral
Hélice con corte
a la izquierda
Hélice gauche
Linksspirale



Variable Right Spiral
Hélice con corte a
la derecha y ángulo
variable
Hélice droite variable
Rechtsspirale,
variabel

COOLANT OPTIONS OPCIONES DE REFRIGERACIÓN OPTIONS DE REFOUILLISSEMENT KÜHLSCHMIERMittel-Optionen



Internal Coolant
Refrigeración interna
Refrigidissement
interne
Innenkühlung



JetStream Coolant
Slots
Ranuras de refrigeración
JetStream
Fentes de refroidissement
JetStream
JetStream-
Kühlmittelschlitze



Positive
Positivo
Positif
Positiv



Neutral
Neutro
Neutre
Neutral



Negative
Negativo
Négatif
Negativ



Variable
Variable
Variable
Variabel



Flute Spacing
Unequal
Espaciado
desigual de los
filos
Denture décalée
Nutenabstand
Ungleich



Chip Breaker
Rompevirutas
Brise-copeaux
Spanteiler

RAKE ANGLE ANGULO DE DESPRENDIMIENTO ANGLE DE COUPE SPANWINKEL

COOLANT OPTIONS OPCIONES DE REFRIGERACIÓN OPTIONS DE REFOUILLISSEMENT KÜHLSCHMIERMittel-Optionen

Internal Coolant
Refrigeración interna
Refrigidissement
interne
Innenkühlung

JetStream Coolant
Slots
Ranuras de refrigeración
JetStream
Fentes de refroidissement
JetStream
JetStream-
Kühlmittelschlitze

Positive
Positivo
Positif
Positiv

Neutral
Neutro
Neutre
Neutral

Negative
Negativo
Négatif
Negativ

Variable
Variable
Variable
Variabel

Flute Spacing
Unequal
Espaciado
desigual de los
filos
Denture décalée
Nutenabstand
Ungleich

Chip Breaker
Rompevirutas
Brise-copeaux
Spanteiler

All tools are in Right Cut Direction unless noted
Todas las herramientas son con corte a la derecha a menos que se indique lo contrario
Tous les outils ont une coupe à droite, sauf indications contraires
Alle Werkzeuge sind rechtsschneidend, soweit nicht anders angegeben

All tools are straight or non-tapered unless noted
Todas las herramientas son rectas o no cónicas a menos que se indique lo contrario
Tous les outils sont droits ou non coniques, sauf indication contraire
Alle Werkzeuge sind gerade oder nicht konisch, sofern nicht anders angegeben

Drill Legend

Leyenda brocas

Légende perçage

Bohrer-Legende

SHANK TYPE TIPO DE VÁSTAGO TYPE DE TIGE SCHAFTART



Common
Normal
Dégagée
Standard



Straight
Recto
Cylindrique
Gerade

REACH ALCANCE LONGUEUR NUTZLÄNGE

3xD

3xD Reach
Alcance 3xD
Longueur 3xD
3xD Nutzlänge

5xD

5xD Reach
Alcance 5xD
Longueur 5xD
5xD Nutzlänge

8xD

8xD Reach
Alcance 8xD
Longueur 8xD
8xD Nutzlänge

12xD

12xD Reach
Alcance 12xD
Longueur 12xD
12xD Nutzlänge

HELIX ANGLES ANGULOS DE LAS HELICES ANGLES DE L'HÉLICE SPANWINKEL



Right Spiral
Hélice con corte
a la derecha
Hélice à droite
Rechtsspirale



None
Ninguno
Aucun
gerade genutet

COOLANT OPTIONS OPCIONES DE REFRIGERACIÓN OPTIONS DE REFROIDISSEMENT KÜHLSCHMIERMITTEL-OPTIONEN



Internal Coolant
Refrigeración interna
Refroidissement interne
Innenkühlung



External Coolant
Refrigeración externa
Refroidissement externe
Auskühlung

POINT ANGLE ÁNGULO DE PUNTA POINT D'ANGLE SPITZENWINKEL



Point Angle
Angulo de la Punta
Angle de pointe
Spitzenwinkel



Point Angles
Ángulos de punta
Angles de pointe
Spitzenwinkel

CHAMFER ANGLE ÁNGULO DE CHAFLÁN ANGLE DE CHANFREIN FASENWINKEL



Chamfer Angle
Ángulo de chaflán
Angle de chanfrein
Fasenwinkel

NUMBER OF MARGINS NÚMERO DE MÁRGENES NOMBRE DE MARGES ANZAHL DER RÄNDER



2 Margins
2 Márgenes
2 Marges
2 Ränder



3 Margins
3 Márgenes
3 Marges
3 Ränder



4 Margins
4 Márgenes
4 Marges
4 Ränder

NUMBER OF FLUTES FILOS DENTS SCHNEIDEN



1 Flute
1 Filo
1 Dent
1 Schneiden



2 Flutes
2 Filos
2 Dents
2 Schneiden



3 Flutes
3 Filos
3 Dents
3 Schneiden

Router Legend Leyenda ranuradores Légende détourage Konturenfräser-Legende

SHANK TYPE TIPO DE VÁSTAGO TYPE DE TIGE SCHAFTART



Straight
 Recto
 Cylindrique
 Gerade

RAKE ANGLE ANGULO DE DESPRENDIMIENTO ANGLE DE PENTE SPANWINKEL



Positive
 Positivo
 Positif
 Positiv



Neutral
 Neutro
 Neutre
 Neutral



Negative
 Negativo
 Négatif
 Negativ



Variable
 Variable
 Variable
 Variabel

HELIX ANGLES ANGULOS DE LAS HELICES ANGLES DE L'HELICE SPANWINKEL



Right Spiral
 Hélice con corte
 a la derecha
 Hélice à droite
 Rechtsspirale



Left Spiral
 Hélice con corte
 a la izquierda
 Hélice à gauche
 Linksspirale

ADDITIONAL GEOMETRY GEOMETRÍAS ADICIONALES GÉOMÉTRIE SUPPLÉMENTAIRE WEITERE BAUFORMEN



Left Hand Cut Direction
 Fresado sentido izquierda
 Coupe vers la gauche
 Rechtsschneidend



Right Hand Cut Direction
 Fresado sentido derecha
 Coupe vers la droite
 Linksschneidend



Chip Breaker
 Rompevirutas
 Brise-copeaux
 Spanbrecher

Ti-NAMITE® and Di-NAMITE® Tool Coatings are specifically engineered for KSPT solid carbide rotary tools. The coating lineup includes proprietary processes that result in optimized tool life and increased speed and feed rates in a variety of applications.



	Coating	Identifying Color	Layer Structure	Thickness	Hardness (HV)	Coefficient of Friction (Fretting)	Thermal Stability	General Information
	Titanium Nitride (TiN)	gold	Multilayer	1–5 microns	2200	0.40–0.65	600°C / 1112°F	A general purpose coating with good adhesion and abrasion resistant properties. Suitable for a wide variety of materials.
	Aluminum Titanium Nitride (AlTiN)	dark grey	Nano structure	1–5 microns	3700	0.30	1100°C / 2010°F	Excellent thermal and chemical resistance allows for dry cutting and improvements in performance of carbide. The coating has a high hardness giving great protection against abrasive wear and erosion.
	Titanium DiBoride (TiB2)	light grey-silver	Monolayer	1–2 microns	4000	0.10–0.20	850°C / 1562°F	This ceramic based coating ensures a smooth surface and a low affinity to cold welding or edge build up, which makes it optimal for aluminum, copper, and other non-ferrous applications. It has high toughness and high hardness.
	Titanium Carbonitride (TiCN)	pink-red	Multilayer	1–5 microns	3000	0.30–0.45	400°C / 752°F	A very wear resistant coating with high toughness and shock resistance. Good in interrupted cuts found in applications like milling.
	Proprietary (TX)	black	Nano Composite	1–5 microns	3600	0.45	1150°C / 2100°F	The structural design of Ti-Namite-X is adapted to meet a diverse range of applications; everything from high- and low-alloy steels to hardened materials (up to 65 HRC core hardness). Ti-Namite-X is suitable for operations which require high cutting speeds, high temperatures at the cutting edge, and high metal removal rates.
	Crystalline Diamond (Diamond)	black	Monolayer	6–20 microns	>8000	0.15–0.20	800°C / 1470°F	This is the hardest coating available with the best abrasion resistance. Diamond coating is suitable for machining highly abrasive, non-ferrous materials such as CFRP and graphite.
	Proprietary (TM)	copper	Nano Composite	1–5 microns	3600	0.45	1150°C / 2100°F	Features include high wear resistance, reduced friction, and excellent prevention of edge build up. This coating provides superior material removal rates and tool life when used in high performance operations with difficult to machine materials like titanium.
	Proprietary (TH)	copper	Nano Composite	1–5 microns	3800	0.30	1100°C / 2010°F	This coating demonstrates a superior combination of hardness and adhesion in hard machining of molds and dies and machining high-alloy stainless steels for high temperature applications such as turbines. The smooth surface ensures optimum surface quality and decreases the temperature in the cutting zone by reducing friction.

Other coatings available upon request.

High Performance End Mills



Milling

HIGH PERFORMANCE END MILLS	SERIES	DESCRIPTION	PAGE	S&F PAGE
Z-Carb-HPR	Z5	5 Flute Rougher Square End Fractional	30	35
	Z5CR	5 Flute Rougher Corner Radius Fractional	30	35
	Z5MCR	5 Flute Rougher Corner Radius Metric	37	39
Z-Carb-AP	Z1PCR	4 Flute Variable Rake Corner Radius Fractional	41	46
	Z1PLC	4 Flute Variable Rake Long Reach Corner Radius Fractional	44	46
	Z1PLB	4 Flute Variable Rake Ball End Long Reach Fractional	45	46
	Z1MPCR	4 Flute Variable Rake Corner Radius Metric	48	51
	Z1MPIC	4 Flute Variable Rake Intermediate Reach Corner Radius Metric	50	51
	Z1MPLC	4 Flute Variable Rake Long Reach Corner Radius Metric	50	51
Z-Carb	Z1	4 Flute Variable Geometry Square End Fractional	41	46
	Z16CR	4 Flute Variable Geometry Corner Radius Fractional	41	46
	Z1B	4 Flute Variable Geometry Ball End Fractional	53	54
	Z1M	4 Flute Variable Geometry Square End Metric	48	51
	Z1MB	4 Flute Variable Geometry Ball End Metric	56	57
Z-Carb-HTA	ZH1CR	4 Flute Variable Geometry High Temp Alloys Corner Radius Fractional	59	60
	ZH1MCR	4 Flute Variable Geometry High Temp Alloys Corner Radius Metric	61	62
	ZH1MCRS	4 Flute Variable Geometry High Temp Alloys Stub Corner Radius Metric	61	62
Z-Carb-MD	ZD1CR	4 Flute Variable Geometry Hard Materials Long Reach Corner Radius Fractional	63	64
	ZD1MCR	4 Flute Variable Geometry Hard Materials Long Reach Corner Radius Metric	63	64
V-Carb	55	5 Flute Finisher & Semi-Finisher Square End Fractional	65	68
	55CR	5 Flute Finisher & Semi-Finisher Corner Radius Fractional	65	68
	55M	5 Flute Finisher & Semi-Finisher Square End Metric	70	74
	55MCR	5 Flute Finisher & Semi-Finisher Corner Radius Metric	70	74
	55B	5 Flute Finisher & Semi-Finisher Ball End Fractional	67	68
	55MB	5 Flute Finisher & Semi-Finisher Ball End Metric	73	74
T-Carb®	51	6 Flute High Speed Machining Square End Fractional	76	79
	51CR	6 Flute High Speed Machining Corner Radius Fractional	76	79
	51L	6 Flute High Speed Machining Square End Long Reach Fractional	77	79
	51LC	6 Flute High Speed Machining Long Reach Corner Radius Fractional	77	79
	51B	6 Flute High Speed Machining Ball End Fractional	78	79
	51LB	6 Flute High Speed Machining Ball End Long Reach Fractional	78	79
	51M	6 Flute High Speed Machining Square End Metric	81	84
	51MCR	6 Flute High Speed Machining Corner Radius Metric	81	84
	51ML	6 Flute High Speed Machining Square End Long Reach Metric	82	84
	51MLC	6 Flute High Speed Machining Long Reach Corner Radius Metric	82	84

Speed & Feed Recommendations listed after each series

HIGH PERFORMANCE END MILLS	SERIES	DESCRIPTION	PAGE	S&F PAGE
H-Carb	51MB	6 Flute High Speed Machining Ball End Metric	83	84
	51MLB	6 Flute High Speed Machining Ball End Long Reach Metric	83	84
	77	7 Flute High Efficiency Square End Fractional	86	88
	77CR	7 Flute High Efficiency Corner Radius Fractional	86	88
	77M	7 Flute High Efficiency Square End Metric	90	92
	77MCR	7 Flute High Efficiency Corner Radius Metric	90	92
Multi-Carb	66	Multi-Flute Finisher Square End Fractional	94	95
	66CR	Multi-Flute Finisher Corner Radius Fractional	94	95
	66M	Multi-Flute Finisher Square End Metric	97	99
	66MCR	Multi-Flute Finisher Corner Radius Metric	97	99
Series 33	67B	Multi-Flute Finisher Tapered Circle Segment Barrel Tool Metric	101	102
	33CR	3 Flute Difficult to Machine Materials Corner Radius Fractional	103	104
	33MCR	3 Flute Difficult to Machine Materials Corner Radius Metric	106	107
Series 7	7	4 Flute Variable Geometry Long Length Square End Fractional	109	111
	7M	4 Flute Variable Geometry Long Length Square End Metric	112	113
	7B	4 Flute Variable Geometry Long Length Ball End Fractional	110	111
	7MB	4 Flute Variable Geometry Long Length Ball End Metric	112	113
Turbo-Carb	56B	2 Flute Contouring Long Reach Ball End Fractional	114	115
	56MB	2 Flute Contouring Long Reach Ball End Metric	114	115
Power-Carb®	57	6 Flute Finisher Square End Fractional	116	117
	57M	6 Flute Finisher Square End Metric	116	118
CFRP Slow Helix	27	4 Flute Slow Helix Square End Fractional	119	120
	27M	4 Flute Slow Helix Square End Metric	119	121
Picatinny Rail Tools	PRT	3 Flute Non-Ferrous Recoil Groove Tool Fractional	122	124
	PRT	5 Flute Non-Ferrous Dovetail Form Tool Fractional	125	127
	PRT	3 Flute Ferrous Recoil Groove Tool Fractional	122	123
	PRT	5 Flute Ferrous Dovetail Form Tool Fractional	125	126

Speed & Feed Recommendations listed after each series

FRESAS DE ALTO RENDIMIENTO	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
Z-Carb-HPR	Z5	5 filos, desbastador, punta cuadrada, fraccional	30	35
	Z5CR	5 filos, desbastador, radio angulado, fraccional	30	35
	Z5MCR	5 filos, desbastador, radio angulado, métrico	37	39
Z-Carb-AP	Z1PCR	4 filos, inclinación variable, radio angulado, fraccional	41	46
	Z1PLC	4 filos, inclinación variable, largo alcance, radio angulado, fraccional	44	46
	Z1PLB	4 filos, inclinación variable, punta esférica, largo alcance, fraccional	45	46
	Z1MPCR	4 filos, inclinación variable, radio angulado, métrico	48	51
	Z1MPIC	4 filos, inclinación variable, medio alcance, radio angulado, métrico	50	51
	Z1MPLC	4 filos, inclinación variable, largo alcance, radio angulado, métrico	50	51
	Z1	4 filos, geometría variable, punta cuadrada, fraccional	41	46
	Z16CR	4 filos, geometría variable, radio angulado, fraccional	41	46
Z-Carb	Z1B	4 filos, geometría variable, punta esférica, fraccional	53	54
	Z1M	4 filos, geometría variable, punta cuadrada, métrico	48	51
	Z1MB	4 filos, geometría variable, punta esférica, métrico	56	57
Z-Carb-HTA	ZH1CR	4 filos, geometría variable, aleaciones termorresistentes, radio angulado, fraccional	59	60
	ZH1MCR	4 filos, geometría variable, aleaciones termorresistentes, radio angulado, métrico	61	62
	ZH1MCRS	4 filos, geometría variable, aleaciones termorresistentes, versión corta, radio angulado, métrico	61	62
Z-Carb-MD	ZD1CR	4 filos, geometría variable, materiales duros, largo alcance, radio angulado, fraccional	63	64
	ZD1MCR	4 filos, geometría variable, materiales duros, largo alcance, radio angulado, métrico	63	64
V-Carb	55	5 filos, acabador y semiacabador, punta cuadrada, fraccional	65	68
	55CR	5 filos, acabador y semiacabador, radio angulado, fraccional	65	68
	55M	5 filos, acabador y semiacabador, punta cuadrada, métrico	70	74
	55MCR	5 filos, acabador y semiacabador, radio angulado, métrico	70	74
	55B	5 filos, acabador y semiacabador, punta esférica, fraccional	67	68
	55MB	5 filos, acabador y semiacabador, punta esférica, métrico	73	74
T-Carb®	51	6 filos, mecanizado de alta velocidad, punta cuadrada, fraccional	76	79
	51CR	6 filos mecanizado de alta velocidad, radio angulado, fraccional	76	79
	51L	6 filos, mecanizado de alta velocidad, punta cuadrada, largo alcance, fraccional	77	79
	51LC	6 filos mecanizado de alta velocidad, largo alcance, radio angulado, fraccional	77	79
	51B	6 filos, fresa esférica para mecanizados de alta velocidad, fraccional	78	79
	51LB	6 filos, fresa esférica larga para mecanizados de alta velocidad, fraccional	78	79
	51M	6 filos, mecanizado de alta velocidad, punta cuadrada, métrico	81	84
	51MCR	6 filos mecanizado de alta velocidad, radio angulado, métrico	81	84
	51ML	6 filos, mecanizado de alta velocidad, punta cuadrada, largo alcance, métrico	82	84
	51MLC	6 filos mecanizado de alta velocidad, largo alcance, radio angulado, métrico	82	84
	51MB	6 filos, fresa esférica para mecanizados de alta velocidad, métrico	83	84
	51MLB	6 filos, fresa esférica larga para mecanizados de alta velocidad, métrico	83	84
H-Carb	77	7 filos de alta eficiencia, punta cuadrada, fraccional	86	88
	77CR	7 filos de alta eficiencia, radio angulado, fraccional	86	88
	77M	7 filos métrica de alta eficiencia, punta cuadrada, métrico	90	92
	77MCR	7 filos métrica de alta eficiencia, radio angulado, métrico	90	92
Multi-Carb	66	Filo múltiple, acabador, punta cuadrada, fraccional	94	95
	66CR	Filo múltiple, acabador, radio angulado, fraccional	94	95
	66M	Filo múltiple, acabador, punta cuadrada, métrico	97	99
	66MCR	Filo múltiple, acabador, radio angulado, métrico	97	99
	67B	Fresa cónica circular multi-filos tipo barril, métrica	101	102
Serie 33	33CR	3 filos, materiales difíciles de mecanizar, radio angulado, fraccional	103	104
	33MCR	3 filos, materiales difíciles de mecanizar, radio angulado, métrico	106	107
Serie 7	7	4 filos, geometría variable, longitud larga, punta cuadrada, fraccional	109	111
	7M	4 filos, geometría variable, longitud larga, punta cuadrada, métrico	112	113
	7B	4 filos, geometría variable, longitud larga, punta esférica, fraccional	110	111
	7MB	4 filos, geometría variable, longitud larga, punta esférica, métrico	112	113
Turbo-Carb	56B	2 filos, contorneado, largo alcance, punta esférica, fraccional	114	115
	56MB	2 filos, contorneado, largo alcance, punta esférica, métrico	114	115
Power-Carb®	57	6 filos, acabador, punta cuadrada, fraccional	116	117
	57M	6 filos, acabador, punta cuadrada, métrico	116	118
Helicoidal de avance lento CFRP	27	4 filos, helicoidal de avance lento, punta cuadrada, fraccional	119	120
	27M	4 filos, helicoidal de avance lento, punta cuadrada, métrico	119	121
Herramientas de riel Picatinny	PRT	Herramienta de ranura de retroceso no ferrosa de 3 filos fraccional	122	124
	PRT	Herramienta de forma de cola de milano no ferrosa de 5 filos fraccional	125	127
	PRT	Herramienta de ranura de retroceso ferrosa de 3 filos fraccional	122	123
	PRT	Herramienta de cola de milano ferrosa de 5 filos fraccional	125	126

Recomendaciones de velocidades y avances mostradas tras cada serie


FRAISES A DETOURER UNIVERSELLES	SÉRIES	DESCRIPTION	PAGE	S&F PAGE
Z-Carb-HPR	Z5	5 dents non rayonné pour l'ébauche (fractionnel)	30	35
	Z5CR	5 dents rayonnée pour l'ébauche (fractionnel)	30	35
	Z5MCR	5 dents rayonnée pour l'ébauche (métrique)	37	39
Z-Carb-AP	Z1PCR	4 dents pas décalé et hélice variable rayonnés (fractionnel)	41	46
	Z1PLC	4 dents pas décalé et hélice variable rayonnés (fractionnel)	44	46
	Z1PLB	4 dents à vague de coupe variable longue portée à bout hémisphérique (fractionnel)	45	46
	Z1MPCR	4 dents pas décalé et hélice variable rayonnés (métrique)	48	51
	Z1MPIC	4 dents pas décalé, hélice variable, détalonné, rayonnés (métrique)	50	51
	Z1MPLC	4 dents pas décalé et hélice variable rayonnés (métrique)	50	51
	Z1	4 dents géométrie variable non rayonné (fractionnel)	41	46
	Z16CR	4 dents géométrie variable rayonné (fractionnel)	41	46
Z-Carb	Z1B	4 dents géométrie variable à bout hémisphérique (fractionnel)	53	54
	Z1M	4 dents géométrie variable non rayonné (métrique)	48	51
	Z1MB	4 dents géométrie variable à bout hémisphérique (métrique)	56	57
Z-Carb-HTA	ZH1CR	4 dents géométrie variable alliages haute température rayonné (fractionnel)	59	60
	ZH1MCR	4 dents géométrie variable alliages haute température rayonné (métrique)	61	62
	ZH1MCRS	4 dents géométrie variable, alliages haute température, longueur de l'outil court, rayonné (métrique)	61	62
Z-Carb-MD	ZD1CR	4 dents géométrie variable matériaux durs longue portée rayonné (fractionnel)	63	64
	ZD1MCR	4 dents géométrie variable matériaux durs longue portée rayonné (métrique)	63	64
V-Carb	55	5 dents en bout de finition et semi-finition plat (fractionnel)	65	68
	55CR	5 dents en bout finition et semi-finition rayonné (fractionnel)	65	68
	55M	5 dents en bout de finition et semi-finition plat (métrique)	70	74
	55MCR	5 dents en bout finition et semi-finition rayonné (métrique)	70	74
	55B	5 dents en bout de finition et semi-finition hémisphérique (fractionnel)	67	68
	55MB	5 dents en bout de finition et semi-finition hémisphérique (métrique)	73	74
T-Carb®	51	6 dents pour usinage grande vitesse non rayonné (fractionnel)	76	79
	51CR	6 dents pour usinage grande vitesse rayonné (fractionnel)	76	79
	51L	6 dents pour usinage grande vitesse non rayonné extra longue (fractionnel)	77	79
	51LC	6 dents pour usinage grande vitesse extra longue rayonné (fractionnel)	77	79
	51B	6 dents hémisphérique UGV dimensions cotes (fractionnel)	78	79
	51LB	6 dents hémisphérique détalonnée UGV dimensions cotes (fractionnel)	78	79
	51M	6 dents pour usinage grande vitesse non rayonné (métrique)	81	84
	51MCR	6 dents pour usinage grande vitesse rayonné (métrique)	81	84
	51ML	6 dents pour usinage grande vitesse non rayonné extra longue (métrique)	82	84
	51MLC	6 dents pour usinage grande vitesse extra longue rayonné (métrique)	82	84
	51MB	6 dents hémisphérique UGV dimensions cotes (métrique)	83	84
	51MLB	6 dents hémisphérique détalonnée UGV dimensions cotes (métrique)	83	84
H-Carb	77	7 dents hautes performances droite côtes (fractionnel)	86	88
	77CR	7 dents hautes performances torique côtes (fractionnel)	86	88
	77M	7 dents hautes performances droite côtes (métrique)	90	92
	77MCR	7 dents hautes performances torique côtes (métrique)	90	92
Multi-Carb	66	Multi-dents non rayonné pour finition (fractionnel)	94	95
	66CR	Multi-dents rayonné pour finition (fractionnel)	94	95
	66M	Multi-dents non rayonné pour finition (métrique)	97	99
	66MCR	Multi-dents rayonné pour finition (métrique)	97	99
	67B	Fraise tonneau à segments de cercle cotes (métrique)	101	102
Série 33	33CR	3 dents rayonné pour l'ébauche dans tous les matériaux sauf non-ferreux (fractionnel)	103	104
	33MCR	3 dents rayonné pour l'ébauche dans tous les matériaux sauf non-ferreux (métrique)	106	107
Série 7	7	4 dents géométrie variable à queue longue non rayonné (fractionnel)	109	111
	7M	4 dents géométrie variable à queue longue non rayonné (métrique)	112	113
	7B	4 dents géométrie variable à queue longue à bout hémisphérique (fractionnel)	110	111
	7MB	4 dents géométrie variable à queue longue à bout hémisphérique (métrique)	112	113
Turbo-Carb	56B	2 dents contournage longue portée à bout hémisphérique (fractionnel)	114	115
	56MB	2 dents contournage longue portée à bout hémisphérique (métrique)	114	115
Power-Carb®	57	6 dents en bout de finition plat (fractionnel)	116	117
	57M	6 dents en bout de finition plat (métrique)	116	118
CFRP hélice lente	27	4 dents hélice lente non rayonné (fractionnel)	119	120
	27M	4 dents hélice lente non rayonné (métrique)	119	121
Outils de rail Picatinny	PRT	Outil de rainure de recul non ferreux à 3 dents (fractionnel)	122	124
	PRT	Outil de forme en queue d'aronde non ferreux à 5 dents (fractionnel)	125	127
	PRT	Outil de rainure de recul ferreux à 3 dents (fractionnel)	122	123
	PRT	Outil en queue d'aronde ferreux à 5 dents (fractionnel)	125	126

Recommandations de vitesse et avance indiquées après chaque série






HOCHLEISTUNGS-SCHAFTFRÄSER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
Z-Carb-HPR	Z5	Zölliger Schrappfräser mit 5 Schneiden ohne Eckenradien	30	35
	Z5CR	Zölliger Schrappfräser mit 5 Schneiden und Eckenradien	30	35
	Z5MCR	Schrappfräser mit 5 Schneiden und Eckenradien	37	39
Z-Carb-AP	Z1PCR	Zölliger Fräser mit 4 variablen Schneiden und Eckenradien	41	46
	Z1PLC	Zölliger Langlochfräser mit 4 variablen Schneiden und Eckenradien	44	46
	Z1PLB	Zölliger Radiuschaftfräser mit 4 Schneiden und variablem Spanwinkel	45	46
	Z1MPCR	Fräser mit 4 Schneiden und variablen Spanwinkel	48	51
	Z1MPIC	Fräser mittlerer Länge mit 4 variablen Schneiden und Eckenradien	50	51
	Z1MPLC	Langlochfräser mit 4 variablen Schneiden und Eckenradien	50	51
	Z1	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	41	46
	Z16CR	Zölliger Fräser mit 4 variablen Schneiden und Eckenradien	41	46
Z-Carb	Z1B	Zölliger Radiuschaftfräser mit 4 Schneiden und variabler Form	53	54
	Z1M	Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	48	51
	Z1MB	Radiuschaftfräser mit 4 Schneiden und variabler Form	56	57
Z-Carb-HTA	ZH1CR	Hochwarmfester zölliger Fräser mit 4 variablen Schneiden und Eckenradien	59	60
	ZH1MCR	Hochwarmfester Fräser mit 4 variablen Schneiden und Eckenradien	61	62
	ZH1MCRS	Hochwarmfester Fräser mit 4 variablen Schneiden und Eckenradien	61	62
Z-Carb-MD	ZD1CR	Zölliger Langlochfräser mit 4 variablen Schneiden, Eckenradien und Form aus Hartmetall	63	64
	ZD1MCR	Langlochfräser mit 4 variablen Schneiden, Eckenradien und Form aus Hartmetall	63	64
V-Carb	55	Zölliger Schlicht- und Halbschlichtfräser mit 5 Schneiden ohne Eckenradien und variabler Form	65	68
	55CR	Zölliger Schlicht- und Halbschlichtfräser mit 5 Schneiden ohne Eckenradien	65	68
	55M	Schlicht- und Halbschlichtfräser mit 5 Schneiden ohne Eckenradien und variabler Form	70	74
	55MCR	Schlicht- und Halbschlichtfräser mit 5 Schneiden und Eckenradien	70	74
	55B	Schlicht- und Halbschlicht-Radiuschaftfräser mit 5 Schneiden ohne Eckenradien	67	68
	55MB	Schlicht- und Halbschlicht-Radiuschaftfräser mit 5 Schneiden und variabler Form	73	74
T-Carb®	51	Zölliger Schaftfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden ohne Eckenradien	76	79
	51CR	Zölliger Fräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien	76	79
	51L	Zölliger Langloch-Schaftfräser aus Schnellstahl mit 6 Schneiden ohne Eckenradien	77	79
	51B	6-Schneider Vollradiusfräser für Hochgeschwindigkeitsbearbeitung	77	79
	51LB	6-Schneider Vollradiusfräser mit Freischliff für Hochgeschwindigkeitsbearbeitung	78	79
	51ML	Langloch-Schaftfräser aus Schnellstahl mit 6 Schneiden ohne Eckenradien	78	79
	51M	Schaftfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden ohne Eckenradien	81	84
	51MCR	Fräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien aus Schnellstahl	81	84
	51LC	Zölliger Langlochfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien	82	84
	51MLC	Langlochfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien	82	84
	51MB	6-Schneider Vollradiusfräser für Hochgeschwindigkeitsbearbeitung	83	84
H-Carb	51MLB	6-Schneider Vollradiusfräser mit Freischliff für Hochgeschwindigkeitsbearbeitung	83	84
	77	Zölliger Hocheffizienter mit 7 Schneiden ohne Eckenradien	86	88
	77CR	Zölliger Hocheffizienter mit 7 Schneiden und Eckenradien	86	88
	77M	Hocheffizienter mit 7 Schneiden ohne Eckenradien	90	92
	77MCR	Hocheffizienter mit 7 Schneiden und Eckenradien	90	92
Multi-Carb	66	Zölliger mehrschneidiger Schlichtfräser ohne Eckenradien	94	95
	66CR	Zölliger mehrschneidiger Schlichtfräser mit Eckenradien	94	95
	66M	mehrschneidiger Schlichtfräser ohne Eckenradien	97	99
	66MCR	mehrschneidiger Schlichtfräser mit Eckenradien	97	99
	67B	Metrischer mehrschneidiger Schlichtfräser, Tonnenfräser	101	102
Serie 33	33CR	Zölliger Fräser mit 3 Schneiden und Eckenradien für schwerspanbare Werkstoffe	103	104
	33MCR	Fräser mit 3 Schneiden und Eckenradien für schwerspanbare Werkstoffe	106	107
Serie 7	7	Zölliger Langloch-Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	109	111
	7M	Langloch-Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	112	113
	7B	Zölliger Langloch-Radiuschaftfräser mit 4 Schneiden und variabler Form	110	111
	7MB	Langloch-Radiuschaftfräser mit 4 Schneiden und variabler Form	112	113
Turbo-Carb	56B	Zölliger Langloch-Profil-Radiuschaftfräser mit 2 Schneiden	114	115
	56MB	Langloch-Profil-Radiuschaftfräser mit 2 Schneiden	114	115
Power-Carb®	57	Zölliger Schlichtfräser mit 6 Schneiden ohne Eckenradien	116	117
	57M	Schlichtfräser mit 6 Schneiden ohne Eckenradien	116	118
CFRP Slow Helix	27	Zölliger Schaftfräser mit 4 steilen Schneiden ohne Eckenradien	119	120
	27M	Schaftfräser mit 4 steilen Schneiden ohne Eckenradien	119	121
Picatinny	PRT	3 Flöte Nichteisen-Rückstoßnut Nut Grove Bruchteil	122	124
Schienenwerkzeuge	PRT	5 Flöte Nichteisen-Schwalbenschwanzform-Werkzeug Bruchteil	125	127
	PRT	3 Rillen-Eisenrückstoß-Nutwerkzeug fraktioniert	122	123
	PRT	5 Flöte Eisen Schwalbenschwanz Werkzeug gebrochen	125	126

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

End Mill Matrix

Preferred materials for each Series are designated below.			Coolant required in these materials Plunging not recommended in these materials																		
Cut depths (Ae & Ap) are based on a percentage of the cutter diameter (DC)  Material hardness and machinability affect speed, feed, and cut depths. Long flute or long reach tools require reduced rates and cut depths.			Material																		
						 								 							
			Low Carbon ≤ 20 HRC	Medium Carbon, Alloy 20 to 35 HRC	High Carbon, Alloy 35 to 45 HRC	Ferritic & Martensitic ≤ 45 HRC	Austenitic & Duplex ≤ 25 HRC	Precipitation Hardened ≤ 45 HRC	Low Alloy, Grey, Ductile ≤ 25 HRC	Med-High Alloy, Nodular 25 to 35 HRC	High Alloy, Nodular ≥ 35 HRC	Aluminum Alloys	Copper Alloys	Plastics, Composites	Titanium Alloys ≤ 45 HRC	Iron, Nickel, Cobalt Alloys ≤ 45 HRC	Refractory Alloys, Mo, Ta, W ≤ 35 HRC	High Carbon, Med Alloy 45 to 50 HRC	Tool, Mold & Die 45 to 55 HRC	Tool, Mold & Die 55 to 65 HRC	
Name	Series	Page	Steel			Stainless Steel			Cast Iron			Non Ferrous			HRSA			Hard Steel			
Series 33	33	103	★	★	★	★	★	☆	★	★	☆				★	☆	☆	○	○		
Z-Carb-AP	Z1P	41	★	★	★	★	★	★	★	★	★				★	★	★	☆	○		
Z-Carb-HTA	ZH1	59	★	★	★	★	★	★	★	★	★				★	★	★	☆	○		
Series 7	7	109	★	★	★	★	★	★	★	★	★				★	★	☆	☆	○		
Z-Carb HPR	Z5	30	★	★	★	★	★	★	★	★	★				★	★	★	☆	○		
V-Carb	55	65	★	★	★	★	★	★	★	★	★				★	★	☆	○	○		
T-Carb®	51	76	★	★	★	★	★	★	★	★	★				★	★	★	☆	○		
H-Carb	77	86	★	★	★	★	★	★	★	★	★				★	★	★	☆	○		
Multi Carb	66	94	★	★	★	★	☆	★	★	★	★				★	★	★	☆	○		
Multi Carb-B	67B	101	★	★	★	★	★	★	★	★	★				★	★	★	☆	○		
Picatinny Groove F	PRT	122	★	★	★	★	★	★							★						
Picatinny Dovetail F	PRT	125	★	★	★	★	★	★							★						
Turbo Carb	56B	114	★	★	★				★	★	★							★	★	★	
Z-Carb-MD	ZD1	63			☆					☆	★							★	★	★	
Power-Carb®	57	116									☆							★	★	★	
Ski-Carb	44	173										★	☆	○							
S-Carb® 2 Flute	47	166										★	★	○							
S-Carb® 3 Flute	43	144										★	★	○							
S-Carb® APR-3	43APR-3	133										★	★	○							
S-Carb® APR-4	43APR-4	136										★	★	○							
S-Carb® APF	43APF	138										★	★	○							
S-Carb® APF-B	43APF-B	142										★	★	☆							
Picatinny Groove NF	PRT	122										★									
Picatinny Dovetail NF	PRT	125										★									
Slow Helix	27	119											☆	★							
CCR	20-CCR	386												★							
CCR Coarse	31-CCR	390												★							
Compression Router	25	393												★							
Up Cut Router	21	396										☆	○	★							
Down Cut Router	22	397										☆	○	★							

End Mill Matrix

	Preferred Cut Type for Series ★ Best ☆ Better ○ Good (blank) Not Recommended						Preferred Entry Method for Series			Preferred Tool Path for Series	
	Heavy	Moderate	Light	Fine	Finish-Wall	Finish - Floor	Plunge	Straight Ramp	Helical Ramp	Standard Path	HEM Path
	Unless blank, a high quality wall or floor finish can be achieved with any Series with adjusted speed & feed.						Speed & Feed are based on ramp angle.			For rough milling, HEM tool paths are usually preferred in most situations, however, Standard paths may be more efficient using suitable tools with moderate to heavy cut types.	
	Ae = 1 to .4 x DC Ap ≤ 1 x DC	Ae = .4 to .25 x DC Ap ≤ 1.5 x DC	Ae = .25 to .1 x DC Ap ≤ 2.5 x DC	Ae = .1 to .02 x DC Ap ≤ 4.5 x DC	Ae ≤ .02 x DC any Ap	Ae ≥ .5 x DC Ap ≤ .02 x DC	Ap ≤ 1 x DC lower feed rates	Ap ≤ 2 x DC medium feed rates	Ap ≤ 4 x DC higher feed rates	Standard Path	HEM Path
											
★	★	☆	☆	○	☆	☆	☆	★	★	★	☆
★	★	☆	☆	○	☆	☆	☆	★	★	★	☆
★	★	☆	☆	○	☆	☆	☆	★	★	★	☆
○	○	○	★	★	☆			○	☆	○	☆
☆	★	★	☆	☆	★			★	★	★	★
○	☆	★	★	★	★			○	☆	☆	★
○	○	☆	★	★	★			○	★	○	★
○	○	○	★	★	★			○	★	○	★
○	○	○	☆	★	★			○	★	○	★
			★	★				○	○	★	
★	★	★	★	★	★					★	
★	★	★	★	★	★					★	
○	○	☆	★	★			○	○	★	★	★
★	★	☆	☆	☆	☆			☆	★	☆	★
○	○	☆	★	★	★			○	☆	☆	★
☆	☆	☆	★	★	☆		☆	★	★	★	☆
★	★	☆	☆	○	☆		☆	★	★	★	☆
★	★	☆	☆	☆	★		☆	★	★	★	☆
★	★	☆	☆		★		☆	★	★	★	☆
★	★	☆	☆		★		☆	★	★	★	☆
○	○	☆	★	★	★		○	☆	★	☆	★
			★	★	☆		○	○		★	
★	★	★	★	★	★					★	
★	★	★	★	★	★					★	
○	○	☆	★	★	☆		○	☆	★	★	☆
★	★	☆	☆		☆		○	☆	★	★	☆
★	★	☆	☆		☆		○	☆	★	★	☆
○	○	☆	☆	★	☆		○	☆	★	★	☆
★	★	☆	☆	○	☆		○	☆	★	★	☆
○	○	☆	☆	☆	☆					★	☆

End Mill Matrix

Name	Series	Page	Flute Count	Cut Diameter Range inch mm	Cut Length Availability (x DC) **	Reach Option (x DC) **	End Styles Square Radius Ball	
Series 33	33	103	3	0.125 to 1 3 to 20	2.25 to 3	—	R	
Z-Carb-AP	Z1P	41	4	0.0156 to 1 1 to 25	1 to 3.25	2.5 to 8.5	S, R, B	
Z-Carb-HTA	ZH1	59	4	0.250 to 1 6 to 20	1.25 to 3	—	R	
Series 7	7	109	4	0.125 to 1 3 to 25	2.25 to 8.25	—	S, B	
Z-Carb HPR	Z5	30	5	0.125 – 1 6 – 25	1 to 3	—	S, R	
V-Carb	55	65	5	0.125 to 1 6 to 20	1.25 to 5	—	S, R, B	
T-Carb®	51	76	6	0.250 to 1 6 to 20	1.25 to 3	3.25 to 5.5	S, R	
H-Carb	77	86	7	0.250 to 1 6 to 25	2.5 to 4	—	S, R	
Multi Carb	66	94	7, 9, 11	0.188 to 1 6 to 25	1.5 to 3.25	—	S, R	
Multi Carb-B	67	101	4, 6, 8	— 6 to 16	1.2 to 1.9	—	B	
Picatinny Groove F	PRT	122	3	0.2100 —	0.56	—	S	
Picatinny Dovetail F	PRT	125	5	0.6050 —	0.68	—	S	
Turbo Carb	56B	114	2	0.031 to 0.750 1 to 20	1	2 to 2.25	B	
Z-Carb-MD	ZD1	63	4	0.118 to 0.750 5 to 20	1 to 1.25	2.25 to 5	R	
Power-Carb®	57	116	6	0.250 to 0.500 6 to 20	2 to 2.25	—	S	
Ski-Carb	44	173	2	0.250 to 1 3 to 20	1.25 to 7	—	S, R	
S-Carb® 2 Flute	47	166	2	0.125 to 1 3 to 25	1 to 3	3 to 9	S, B	
S-Carb® 3 Flute	43	144	3	0.125 to 1 3 to 25	1 to 7	2.25 to 8.5	S, R, B	
S-Carb® APR-3	43APR-3	133	3	0.750 to 1 12 to 26	1.25 to 1.75	3 to 4	S, R	
S-Carb® APR-4	43APR-4	136	4	20 to 25	1.25 to 1.75	2.25 to 3.5	S, R	
S-Carb® APF	43APF	138	4	0.500 to 0.750 6 to 25	2.5 to 4	3 to 5	S, R	
S-Carb® APF-B	43APF-B	142	3, 4	— 6 to 16	1.2 to 1.9	—	B	
Picatinny Groove NF	PRT	122	3	0.2100 —	0.56	—	S	
Picatinny Dovetail NF	PRT	125	3	0.6050 —	0.68	—	S	
Slow Helix	27	119	4	0.250 to 0.750 6 to 16	1.75 to 4	—	S	
CCR	20-CCR	386	5, 8, 10, 12	0.250 to 0.500 2 to 12	2.75 to 4	—	S	
CCR Coarse	31-CCR	390	5, 7, 8, 10	0.250 to 0.500 6 to 12	2.75 to 4	—	S	
Compression Router	25	393	4, 6, 8	0.250 to 0.500 6 to 12	2.75 to 4	—	S	
Up Cut Router	21	396	2	0.125 to 0.750 3 to 12	2.5 to 4.25	—	S	
Down Cut Router	22	397	2	0.125 to 0.750 3 to 12	2.5 to 4.25	—	S	

End Mill Matrix

	Chipbreaker Option	Shank Option Solid Round Weldon Flat Jet Stream Coolant Hole	Center Cutting	Helix Angle	Flute Index	Coating	Maximum Recommended Ramp Angle ***
	By Request	SR, WF	Yes	32 / 48	Unequal	Ti-NAMITE®-A	90
	By Request	SR, WF, JS	Yes	35 / 38	Unequal	Ti-NAMITE®-X	90
	By Request	SR, WF	Yes	38 / 41	Unequal	Ti-NAMITE®-A	20
	By Request	SR	Yes	38	Unequal	Ti-NAMITE®-A	1
	By Request	SR, WF, CH	No	37	Unequal	Ti-NAMITE®-M Ti-NAMITE®-A	7
	By Request	SR, WF	Yes	45	Unequal	Ti-NAMITE®-A	5
	By Request	SR	Yes	41	Unequal	Ti-NAMITE®-X	3
	In Stock Available	SR	No	37	Unequal	Ti-NAMITE®-M Ti-NAMITE®-A	1
	By Request	SR	No	35	Equal	Ti-NAMITE®-X	1
	By Request	SR	Yes	varies	Equal	Ti-NAMITE®-H	1
	Not Available	SR	Yes	35	Unequal	Ti-NAMITE®-M	–
	Not Available	SR	No	37	Unequal	Ti-NAMITE®-M	–
	By Request	SR	Yes	30	Equal	Ti-NAMITE®-X	25
	By Request	SR	Yes	42 / 45	Unequal	Ti-NAMITE®-X	2
	By Request	SR	Yes	45	Equal	Ti-NAMITE®-X	1
	By Request	SR, WF	Yes	45	Equal	uncoated or Ti-NAMITE®-B	90
	By Request	SR	Yes	35	Equal	uncoated or Ti-NAMITE®-B	90
	In Stock Available	SR	Yes	38	Equal	uncoated or Ti-NAMITE®-B	90
	Standard	CH	Yes	38	Unequal	Ti-NAMITE®-B	90
	Standard	CH	Yes	38 / 41	Unequal	Ti-NAMITE®-B	90
	By Request	CH	Yes	38 / 41	Unequal	Ti-NAMITE®-B	25
	By Request	SR	Yes	varies	Equal	Ti-NAMITE®-B	1
	Not Available	SR	Yes	38	Equal	Ti-NAMITE®-B	–
	Not Available	SR	No	38	Equal	Ti-NAMITE®-B	–
	By Request	SR	Yes	10, 12	Unequal	uncoated or Di-NAMITE®	5
	Standard	SR	Based upon end style	15	Equal	uncoated or Di-NAMITE®	5 (for end cut styles)
	Standard	SR	Based upon end style	15	Equal	uncoated or Di-NAMITE®	5 (for end cut styles)
	By Request	SR	Yes	30	Equal	uncoated or Di-NAMITE®	5
	By Request	SR	Yes	35	Equal	various optional	90
	By Request	SR	Yes	35	Equal	various optional	–

Application Tips

Tool	- Whenever possible, select an end mill with the largest diameter, shortest flute length, and shortest overall length for the best rigidity - Long flute tools are not intended for pocketing, slotting, or heavy profiling – limit Ae to .02D - High Performance tools minimize cycle time and extend tool life
Tool Holders	- Holders with adequate gripping pressure and TIR are required - Stub holders or zero length collet style holders are recommended for heavy stock removal - When using solid holders, hand ground screw flats are not recommended
Workpiece	Secure clamping of the workpiece will reduce chatter and deflection
Machine	- Spindle must be in optimum condition for precise TIR and maximum tool life - Sufficient horsepower is required to perform at recommended speeds and feeds - Reduce rates for low power machines to prevent workpiece and / or tool damage
Coolant	- Avoid re-milling chips through use of air blast or liquid coolant as necessary - Maintain clean coolant with appropriate concentration - General recommendations: —Water Soluble Oil or Air Blast: Tool Steels, Mold & Die Steels, Carbon or Alloy Steels —Water Soluble Oil: Stainless Steels, Titanium, High Temperature Alloys, Non-Ferrous Alloys
Methods	- Climb milling is generally preferred - Attention to programming details, tool holders, TIR, balance, fixturing, etc. improve cutting tool performance and extend tool life

END MILLING GUIDELINE

DC = cutting diameter APMX = flute length

Speeds and Feeds for Cut Types are based on Radial Width ($\overline{Ae}$) and Axial Depth ($\overline{Ap}$)

Reductions to Speeds and Feeds may be necessary when:

- Ae and Ap exceed recommendations
- Using long flute or extended reach tools
- Using long tool holders
- Machining materials harder than listed

ENTRY METHODS

Pre-Drilled Hole




Pre-drilling is the preferred entry method for most applications.

Helical Ramp



Straight Ramp



Alternative methods are helical and straight ramping. High ramp angles require reduced feed. Lower ramp angles will allow higher feed rates and extend tool life. Use slotting speeds and feeds for ramp angles of 1° to 2°. Reduce feed to 25% when ramp angles approach 6°. General purpose tools and/or difficult to machine materials will require lower ramp angles and reduced feed.

Plunge



Plunge only in non-ferrous and short-chipping materials using slotting speeds and 25% slotting feeds.

Herramientas	• Siempre que sea posible, seleccione la herramienta de mayor diámetro y menor longitud total y de filo para obtener una mayor rigidez. • Las herramientas con filos largos no son recomendadas para operaciones de apertura de cajas en el maquinado, operación de ranurado o perfilado pesado – limitar la profundidad radial (Ae) a .02D • Las herramientas de alto desempeño minimizan el tiempo de ciclo del maquinado y extienden la vida útil de la herramienta
Portaherramientas	• Los Portaherramientas deberán tener buena presión de amarre para la sujeción de la herramienta y una concentricidad máxima indicada (TIR) • Se recomienda usar portaherramientas de amarre directo cortos, o de boquilla con longitud cero para lograr un máximo arranque de viruta • Cuando se utilicen portaherramientas de amarre directo, no se recomienda hacer manualmente el plano para la sujeción del tornillo en el zanco de la herramienta
Pieza a maquinar	• La buena sujeción de la pieza a maquinar reducirá la vibración y la desviación de la herramienta
Máquina	• El husillo de la maquina debe estar en condiciones optimas, para asegurar la concentricidad de giro (TIR) y asegurar el máximo rendimiento de la herramienta • Para lograr los avances y velocidades recomendados, se necesita suficiente potencia (HP) en la maquina • Reducir los parámetros de corte en maquinas de baja potencia (HP) para prevenir el daño en la herramienta o pieza de trabajo
Refrigeración	• Evite el re-maquinado de virutas usando aire a presión o líquido refrigeración según sea necesario • Mantener limpio la refrigeración con su concentración adecuada • Recomendaciones generales: –Para el maquinado de aceros de herramienta, para Moldes y Dados o Aleaciones de Bajo Carbón, utilice Aceite Soluble en Agua o aire a presión –Para el maquinado de Aleaciones Inoxidables, Aleaciones Termorresistentes, Titanio y Aleaciones No Ferrosas, utilice solamente Aceite Soluble en Agua
Métodos	• Se recomienda el maquinado en sentido ascendente o trepado • El cuidado en los detalles de la programación, la concentricidad de giro (TIR) el balance de los portaherramientas, la sujeción de la pieza a maquinar, etc. son factores que contribuyen a prolongar la vida de la herramienta

GUÍAS DE FRESADO

DC = diámetro de corte APMX = largo de filo

Las velocidades y avances para cortes están basados en la profundidad radial ($-\overrightarrow{Ae}-$), y profundidad axial ($\overrightarrow{Ap}$)

Reducciones en velocidades y avances serán necesarias cuando:

- Ae y Ap exceda las recomendaciones
- Se utilicen filos largos o herramientas de largo alcance
- Se utilicen portaherramientas largos
- Se maquinen materiales más duros que los recomendados

MÉTODOS DE ENTRADA

Barreno previo



Preferentemente usar un barreno previo como método de entrada para la mayor parte de las aplicaciones.

Rampa helicoidal



Rampa recta



Los métodos alternativos son las rampas helicoidales y rectas. Un ángulo elevado de rampa necesita un avance reducido. Un ángulo de rampa inferior permitirá tasas de avance más elevadas y una mayor duración de la herramienta. Usar velocidades y alcances de ranurado para ángulos de rampa de 1° a 2°. Disminuir el avance un 25% cuando los ángulos de rampa se aproximan a 6°. Las herramientas de uso general y/o materiales difíciles de mecanizar precisarán ángulos de rampa inferiores y un avance reducido.

Agujero o Barrenado



Este método se puede utilizar únicamente en materiales no ferrosos y materiales de formación de virutas cortas, usando la velocidad de ranurado y el 25% de su avance.

Conseils relatifs à l'application

Outil	• Chaque fois que possible, choisissez une fraise de plus grand diamètre possible, la plus courte possible, elle garantira la meilleure rigidité • Les outils longs ne sont pas optimum pour l'ébauche, le pocketing, le rainurage – Ae limité à 0,02 D • Les outils Haute performance optimisent les temps de cycle et de augmentent la durée de vie
Porte-outils	• Des attachements à serrage puissant et à faux rond précis sont recommandés • Attachements à méplats ou pinces à serrage nominale sont recommandées pour les ébauches • Lorsque vous utilisez des attachement rigides, les serrage de l'outil par vis ne sont pas recommandés
Pièce	• Le système de fixation et de bridage de la pièce devra permettre de réduire les vibrations et la déformation
Machine	• Broche doit être en bon état optimal au niveau de son faux rond • Suffisamment puissance est nécessaire pour effectuer à des vitesses recommandées et se nourrit • Réduire les efforts pour les machines de faible puissance pour éviter l'endommagement de la pièce et / ou de l'outil
Liquide de refroidissement	• Évitez les recyclage de copeaux par l'utilisation de soufflage d'air comprimé ou de liquide de refroidissement. • Maintenir le lubrifiant propre à la concentration appropriée • Recommandations générales – –Huile soluble ou Air comprimé: aciers à outils, aciers pour moules, aciers au carbone ou alliés –Huile soluble: aciers inoxydables, titane, alliages à haute température, alliages non ferreux
Méthodes	• L'usinage en avalant est généralement préconisé • Attention à la programmation, porte-outils, faux rond, équilibrage, fixation, etc améliorent les performances de l'outil en coupe et prolonge la durée de vie

GUIDE DU FRAISAGE

DC = diamètre de coupe APMX = longueur de coupe

Vitesses & avances pour ces cas d'usinage sont basées sur l'engagement radial ($\overline{Ae}$), et axial ($\overline{Ap}$)

La réduction de la vitesse et de l'avance doit être nécessaire quand:

- Les engagements Ae et Ap sont importants
- Des dentures longues ou des séries longues sont utilisées
- Des attachement longs sont utilisés
- Lors d'usinage de matériaux durs

TYPES D'ENTREE MATIERE

Preperçage




Le préperçage est la méthode préférable dans la plupart de applications.

Ramping hélicoïdal



Ramping droit



Les autres méthodes sont un ramping hélicoïdal et un ramping droit. Les angles de ramping élevés exigent une avance inférieure. Les angles de ramping inférieurs permettent les taux d'avance supérieurs et prolongeront la vie de l'outil. Utilisez des avances et vitesses de mortaisage pour les angles de ramping de 1° à 2°. Réduisez l'avance à 25 % lorsque les angles de ramping avoisinent 6°. Les outils tout usage et/ou les matériaux difficiles à usiner exigeront des angles de ramping inférieurs et une charge réduite.

Plongée



Plongée uniquement dans les non ferreux. Vitesse rainurage et avances réduites de 25%.

Werkzeug	• Wählen Sie möglichst immer den Schafffräser mit dem größten Durchmesser, der kürzesten Schneide und Gesamtlänge, um eine hohe Steifigkeit zu erhalten • Langlochschaftfräser sind nicht zum Taschen-, Schlitz- oder Profilfräsen bestimmt – die Dehnung auf $A_e 0,2$ der Streckgrenze nicht überschreiten • Hochleistungswerkzeuge minimieren die Bearbeitungszeit und verlängern die Werkzeugstandzeit
Werkzeughalter	• Es werden Spannzangen mit genauem Rundlauf benötigt • Steilkegel oder bündige Spannfutter werden bei hohem Materialabtrag empfohlen • Von der Verwendung fester handverschraubter Halterungen wird abgeraten
Werkstück	• Sicheres Werkzeugspannen verringert Vibrationen und das Auswandern aus der Spannvorrichtung
Werkzeugmaschine	• Die Spindel muss in optimalem Zustand sein, um einen genauen Rundlauf und maximale Standzeit zu erzielen • Für die empfohlenen Drehzahlen und Vorschubgeschwindigkeiten ist genügend Leistung bereitzustellen • Bei leistungsschwachen Antrieben sind die Werte zu verringern, um Beschädigungen am Werkstück und/oder Werkzeug zu vermeiden
Kühlmittel	• Das Stauen der Späne durch Luftstrahl oder flüssige Kühlmittel möglichst verhindern • Kühlmittel in geeigneter Konzentration verwenden • Allgemeine Empfehlungen: – Wasser-Öl-Emulsionen oder Luftstrahl: Werkzeugstähle, Form- und Schneidstähle, unlegierte oder legierte Stähle – Wasser-Öl-Emulsion: Nichtrostender Stahl, Titan, Warmfeste Legierungen, Nichteisenlegierungen
Verfahren	• Vorzugsweise Gleichlaufräsen anwenden • Das Beachten der Fräsparemeter, Werkzeughalter, Rundlauf, Auswuchten, Einspannen, usw. verbessert die Schnittleistung und verlängert die Standzeit

RICHTWERTE ZUM FRÄSEN

DC = Fräsdurchmesser APMX = Schnittlänge

Drehzahl und Vorschub für Fräsarbeiten hängen von Radialbreite (A_e) und Frästiefe (A_p) ab

Drehzahl und Vorschub müssen ggfs. verringert werden wenn:

- die empfohlenen Werte für A_e und A_p überschritten werden
- lange Schneiden oder Langschaftfräser verwendet werden
- lange Werkzeughalter verwendet werden
- die Werkstoffe härter als vorgesehen sind

VORBEREITUNGEN

Vorbohrung



Vorbohren ist in den meisten Fällen ratsam.

Zirkulareintauchfräsen



Schrägeintauchfräsen




Alternative Verfahren sind Zirkulareintauchen und Schrägeintauchen. Starke Tauchwinkel erfordern verringerte Vorschubgeschwindigkeiten. Geringe Tauchwinkel ermöglichen höhere Vorschubgeschwindigkeiten und verlängern die Standzeit. Verwenden Sie die Drehzahlen und Vorschübe zum Schlitzfräsen für Tauchwinkel von 1° bis 2° . Den Vorschub auf 25 % verringern, wenn der Tauchwinkel 6° erreicht. Standardwerkzeuge und / oder schwer zu bearbeitende Werkstoffe verlangen kleine Tauchwinkel und verringerte Vorschubgeschwindigkeiten.

Stechen




Stechen Sie in Nichteisenmetalle und kurzspanende Werkstoffe nur mit Schlitzfräsdrehzahl und 25 % der Schlitzvorschubgeschwindigkeit ein.

FRACTIONAL Z-Carb-HPR



Z5 • Z5CR FRACTIONAL SERIES

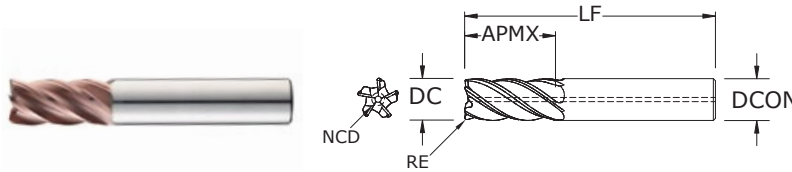

TOLERANCES (inch)

1/8–1/4 DIAMETER
DC = +0.0000/–0.0012
DCON = h_6
RE = +0.0000/–0.0020
>1/4–3/8 DIAMETER
DC = +0.0000/–0.0016
DCON = h_6
RE = +0.0000/–0.0020
>3/8–1 DIAMETER
DC = +0.0000/–0.0020
DCON = h_6
RE = +0.0000/–0.0020

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

inch						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
1/8	1/4	1-1/2	1/8	—	0.0440	38500	—	—	37000	—	—
1/8	1/4	1-1/2	1/8	0.010	0.0440	38771	—	—	38770	—	—
1/8	1/4	1-1/2	1/8	0.015	0.0440	38525	—	—	37001	—	—
1/8	1/4	1-1/2	1/8	0.030	0.0290	38773	—	—	38772	—	—
1/8	3/8	1-1/2	1/8	—	0.0440	37180	—	—	37002	—	—
1/8	3/8	1-1/2	1/8	0.010	0.0440	38775	—	—	38774	—	—
1/8	3/8	1-1/2	1/8	0.015	0.0440	37181	—	—	37003	—	—
1/8	3/8	1-1/2	1/8	0.030	0.0290	38777	—	—	38776	—	—
3/16	5/16	2	3/16	—	0.0660	38501	—	—	37004	—	—
3/16	5/16	2	3/16	0.010	0.0660	38779	—	—	38778	—	—
3/16	5/16	2	3/16	0.015	0.0660	38526	—	—	37005	—	—
3/16	5/16	2	3/16	0.030	0.0660	38781	—	—	38780	—	—
3/16	1/2	2	3/16	—	0.0660	37182	—	—	37006	—	—
3/16	1/2	2	3/16	0.010	0.0660	38783	—	—	38782	—	—
3/16	1/2	2	3/16	0.015	0.0660	37183	—	—	37007	—	—
3/16	1/2	2	3/16	0.030	0.0660	38785	—	—	38784	—	—
1/4	3/8	2-1/2	1/4	—	0.0880	38502	—	—	37008	—	—
1/4	3/8	2-1/2	1/4	0.010	0.0880	38787	—	—	38786	—	—
1/4	3/8	2-1/2	1/4	0.015	0.0880	38527	—	—	37009	—	—
1/4	3/8	2-1/2	1/4	0.030	0.0880	38528	—	—	37010	—	—
1/4	3/8	2-1/2	1/4	0.060	0.0880	38789	—	—	38788	—	—
1/4	1/2	2-1/2	1/4	—	0.0880	37184	—	—	37011	—	—
1/4	1/2	2-1/2	1/4	0.010	0.0880	38793	—	—	38792	—	—
1/4	1/2	2-1/2	1/4	0.015	0.0880	37185	—	—	37012	—	—
1/4	1/2	2-1/2	1/4	0.030	0.0880	37186	—	—	37013	—	—
1/4	1/2	2-1/2	1/4	0.060	0.0880	38795	—	—	38794	—	—
5/16	7/16	2-1/2	5/16	—	0.1090	38503	—	—	37014	—	—
5/16	7/16	2-1/2	5/16	0.010	0.1090	38799	—	—	38798	—	—

continued on next page

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0020

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6



RE = +0.0000/–0.0020

>3/8–1 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0020

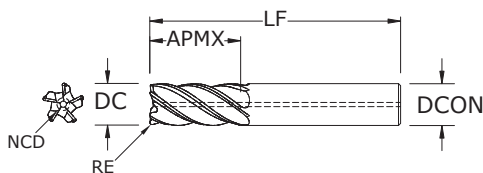


**Z5 •
Z5CR**
FRACTIONAL SERIES


inch						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
5/16	7/16	2-1/2	5/16	0.015	0.1090	38529	—	—	37015	—	—
5/16	7/16	2-1/2	5/16	0.030	0.1090	38801	—	—	38800	—	—
5/16	7/16	2-1/2	5/16	0.060	0.1090	38803	—	—	38802	—	—
5/16	7/16	2-1/2	5/16	0.090	0.0640	38805	—	—	38804	—	—
5/16	5/8	2-1/2	5/16	—	0.1090	38504	—	—	37016	—	—
5/16	5/8	2-1/2	5/16	0.010	0.1090	38807	—	—	38806	—	—
5/16	5/8	2-1/2	5/16	0.015	0.1090	38530	—	—	37017	—	—
5/16	5/8	2-1/2	5/16	0.030	0.1090	38809	—	—	38808	—	—
5/16	5/8	2-1/2	5/16	0.060	0.1090	38811	—	—	38810	—	—
5/16	5/8	2-1/2	5/16	0.090	0.0640	38813	—	—	38812	—	—
3/8	1/2	2-1/2	3/8	—	0.1310	38505	—	—	37018	—	—
3/8	1/2	2-1/2	3/8	0.010	0.1310	38815	—	—	38814	—	—
3/8	1/2	2-1/2	3/8	0.015	0.1310	38531	—	—	37019	—	—
3/8	1/2	2-1/2	3/8	0.030	0.1310	38532	—	—	37020	—	—
3/8	1/2	2-1/2	3/8	0.060	0.1310	38817	—	—	38816	—	—
3/8	1/2	2-1/2	3/8	0.090	0.0830	38819	—	—	38818	—	—
3/8	3/4	2-1/2	3/8	—	0.1310	37187	—	—	37021	—	—
3/8	3/4	2-1/2	3/8	0.010	0.1310	38821	—	—	38820	—	—
3/8	3/4	2-1/2	3/8	0.015	0.1310	37188	—	—	37022	—	—
3/8	3/4	2-1/2	3/8	0.030	0.1310	37189	37174	—	37023	—	—
3/8	3/4	2-1/2	3/8	0.060	0.1310	38823	—	—	38822	—	—
3/8	3/4	2-1/2	3/8	0.090	0.0830	38825	—	—	38824	—	—
7/16	5/8	2-1/2	7/16	0.015	0.1530	37164	—	—	37160	—	—
7/16	5/8	2-1/2	7/16	0.030	0.1530	37165	—	—	37161	—	—
7/16	7/8	2-3/4	7/16	0.015	0.1530	37166	—	—	37162	—	—
7/16	7/8	2-3/4	7/16	0.030	0.1530	37167	—	—	37163	—	—
1/2	5/8	3	1/2	—	0.1750	38506	38512	37320	37024	37030	37321
1/2	5/8	3	1/2	0.010	0.1750	38827	38829	38831	38826	38828	38830

continued on next page

FRACTIONAL Z-Carb-HPR



Z5 • Z5CR FRACTIONAL SERIES

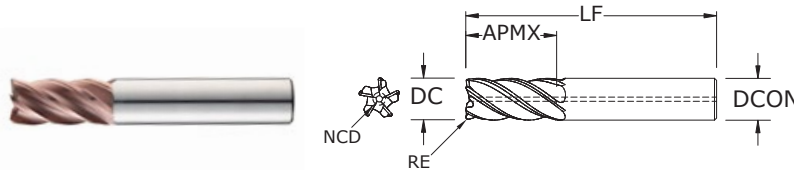

TOLERANCES (inch)

1/8–1/4 DIAMETER	
DC	= +0.0000/–0.0012
DCON = h ₆	
RE	= +0.0000/–0.0020
>1/4–3/8 DIAMETER	
DC	= +0.0000/–0.0016
DCON = h ₆	
RE	= +0.0000/–0.0020
>3/8–1 DIAMETER	
DC	= +0.0000/–0.0020
DCON = h ₆	
RE	= +0.0000/–0.0020

CONTINUED

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
1/2	5/8	3	1/2	0.015	0.1750	38533	38578	37330	37025	37031	37331
1/2	5/8	3	1/2	0.030	0.1750	38534	38579	37332	37026	37032	37333
1/2	5/8	3	1/2	0.060	0.1750	38535	38580	37334	37027	37033	37335
1/2	5/8	3	1/2	0.090	0.1750	38536	38581	37337	37028	37034	37338
1/2	5/8	3	1/2	0.120	0.1750	38537	38582	37339	37029	37035	37340
1/2	1	3	1/2	—	0.1750	38507	38513	37322	37036	37042	37323
1/2	1	3	1/2	0.010	0.1750	38833	38835	38837	38832	38834	38836
1/2	1	3	1/2	0.015	0.1750	38538	38583	37341	37037	37043	37342
1/2	1	3	1/2	0.030	0.1750	38539	38584	37343	37038	37044	37344
1/2	1	3	1/2	0.060	0.1750	38540	38585	37345	37039	37045	37346
1/2	1	3	1/2	0.090	0.1750	38541	38586	37348	37040	37046	37349
1/2	1	3	1/2	0.120	0.1750	38542	38587	37350	37041	37047	37351
1/2	1-1/4	3-1/4	1/2	—	0.1750	37190	37194	37325	37048	37054	37324
1/2	1-1/4	3-1/4	1/2	0.010	0.1750	38839	38841	38843	38838	38840	38842
1/2	1-1/4	3-1/4	1/2	0.015	0.1750	37191	37195	37352	37049	37055	37353
1/2	1-1/4	3-1/4	1/2	0.030	0.1750	37192	37196	37354	37050	37056	37355
1/2	1-1/4	3-1/4	1/2	0.060	0.1750	37193	37197	37356	37051	37057	37357
1/2	1-1/4	3-1/4	1/2	0.090	0.1750	38543	38588	37359	37052	37058	37360
1/2	1-1/4	3-1/4	1/2	0.120	0.1750	38544	38589	37361	37053	37059	37362
5/8	3/4	3-1/2	5/8	—	0.2190	38508	38514	38518	37060	37067	37260
5/8	3/4	3-1/2	5/8	0.010	0.2190	38845	38847	38849	38844	38846	38848
5/8	3/4	3-1/2	5/8	0.015	0.2190	38545	38590	38623	37061	37068	37261
5/8	3/4	3-1/2	5/8	0.030	0.2190	38546	38591	38624	37062	37069	37262
5/8	3/4	3-1/2	5/8	0.060	0.2190	38547	38592	38625	37063	37070	37263
5/8	3/4	3-1/2	5/8	0.090	0.2190	38548	38593	38626	37064	37071	37264
5/8	3/4	3-1/2	5/8	0.120	0.2190	38549	38594	38627	37065	37072	37265
5/8	3/4	3-1/2	5/8	0.190	0.2190	38550	38595	38628	37066	37073	37266
5/8	1-1/4	3-1/2	5/8	—	0.2190	37198	37202	38519	37074	37081	37267
5/8	1-1/4	3-1/2	5/8	0.010	0.2190	38851	38853	38855	38850	38852	38854
5/8	1-1/4	3-1/2	5/8	0.015	0.2190	37199	37203	38629	37075	37082	37268

continued on next page

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0020

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6



RE = +0.0000/–0.0020

>3/8–1 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0020

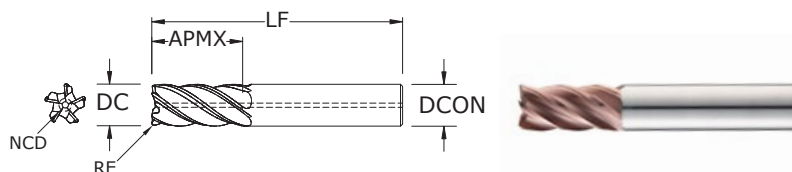


**Z5 •
Z5CR**
FRACTIONAL SERIES


inch						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
5/8	1-1/4	3-1/2	5/8	0.030	0.2190	37200	37204	38630	37076	37083	37269
5/8	1-1/4	3-1/2	5/8	0.060	0.2190	37201	37205	38631	37077	37084	37270
5/8	1-1/4	3-1/2	5/8	0.090	0.2190	38551	38596	38632	37078	37085	37271
5/8	1-1/4	3-1/2	5/8	0.120	0.2190	38552	38597	38633	37079	37086	37272
5/8	1-1/4	3-1/2	5/8	0.190	0.2190	38553	38598	38634	37080	37087	37273
3/4	7/8	4	3/4	—	0.2630	38509	38515	38520	37088	37095	37274
3/4	7/8	4	3/4	0.010	0.2630	38857	38859	38861	38856	38858	38860
3/4	7/8	4	3/4	0.030	0.2630	38554	38599	38635	37089	37096	37275
3/4	7/8	4	3/4	0.060	0.2630	38555	38600	38636	37090	37097	37276
3/4	7/8	4	3/4	0.090	0.2630	38556	38601	38637	37091	37098	37277
3/4	7/8	4	3/4	0.120	0.2630	38557	38602	38638	37092	37099	37278
3/4	7/8	4	3/4	0.190	0.2630	38558	38603	38639	37093	37100	37279
3/4	7/8	4	3/4	0.250	0.2630	38559	38604	38640	37094	37101	37280
3/4	1-1/2	4	3/4	—	0.2630	37206	37210	38521	37102	37109	37281
3/4	1-1/2	4	3/4	0.010	0.2630	38863	38865	38867	38862	38864	38866
3/4	1-1/2	4	3/4	0.030	0.2630	37207	37211	38641	37103	37110	37282
3/4	1-1/2	4	3/4	0.060	0.2630	37208	37212	38642	37104	37111	37283
3/4	1-1/2	4	3/4	0.090	0.2630	38560	38605	38643	37105	37112	37284
3/4	1-1/2	4	3/4	0.120	0.2630	37209	37213	38644	37106	37113	37285
3/4	1-1/2	4	3/4	0.190	0.2630	38561	38606	38645	37107	37114	37286
3/4	1-1/2	4	3/4	0.250	0.2630	38562	38607	38646	37108	37115	37287
3/4	1-5/8	4	3/4	0.030	0.2630	37222	—	—	37223	—	—
3/4	1-5/8	4	3/4	0.060	0.2630	37224	—	—	37225	—	—
3/4	1-5/8	4	3/4	0.090	0.2630	37226	—	—	37227	—	—
3/4	1-5/8	4	3/4	0.120	0.2630	37228	—	—	37229	—	—
3/4	2	4-1/2	3/4	0.030	0.2630	37230	—	—	37231	—	—
3/4	2	4-1/2	3/4	0.060	0.2630	37232	—	—	37233	—	—
3/4	2	4-1/2	3/4	0.090	0.2630	37234	—	—	37235	—	—
3/4	2	4-1/2	3/4	0.120	0.2630	37236	—	—	37237	—	—
1	1-1/8	4	1	—	0.3500	38510	38516	38522	37116	37123	37288

continued on next page

FRACTIONAL Z-Carb-HPR



Z5 • Z5CR FRACTIONAL SERIES

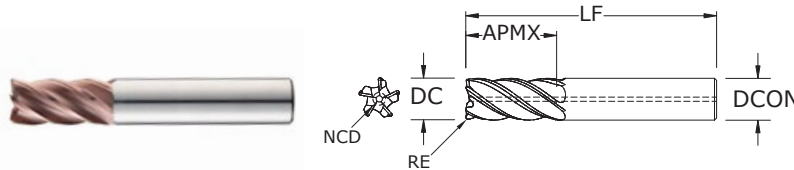

TOLERANCES (inch)

1/8–1/4 DIAMETER	
DC	= +0.0000/–0.0012
DCON = h ₆	
RE	= +0.0000/–0.0020
>1/4–3/8 DIAMETER	
DC	= +0.0000/–0.0016
DCON = h ₆	
RE	= +0.0000/–0.0020
>3/8–1 DIAMETER	
DC	= +0.0000/–0.0020
DCON = h ₆	
RE	= +0.0000/–0.0020


CONTINUED

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

inch						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
1	1-1/8	4	1	0.010	0.3500	38869	38871	38873	38868	38870	38872
1	1-1/8	4	1	0.030	0.3500	38563	38608	38647	37117	37124	37289
1	1-1/8	4	1	0.060	0.3500	38564	38609	38648	37118	37125	37290
1	1-1/8	4	1	0.090	0.3500	38565	38610	38649	37119	37126	37291
1	1-1/8	4	1	0.120	0.3500	38566	38611	38650	37120	37127	37292
1	1-1/8	4	1	0.190	0.3500	38567	38612	38651	37121	37128	37293
1	1-1/8	4	1	0.250	0.3500	38568	38613	38652	37122	37129	37294
1	1-1/2	4	1	—	0.3500	37214	37218	38523	37130	37137	37295
1	1-1/2	4	1	0.010	0.3500	38875	38877	38879	38874	38876	38878
1	1-1/2	4	1	0.030	0.3500	37215	37219	38653	37131	37138	37296
1	1-1/2	4	1	0.060	0.3500	37216	37220	38654	37132	37139	37297
1	1-1/2	4	1	0.090	0.3500	38569	38614	38655	37133	37140	37298
1	1-1/2	4	1	0.120	0.3500	37217	37221	38656	37134	37141	37299
1	1-1/2	4	1	0.190	0.3500	38570	38615	38657	37135	37142	37300
1	1-1/2	4	1	0.250	0.3500	38571	38616	38658	37136	37143	37301
1	2	4-1/2	1	—	0.3500	38511	38517	38524	37144	37151	37302
1	2	4-1/2	1	0.010	0.3500	38881	38883	38885	38880	38882	38884
1	2	4-1/2	1	0.030	0.3500	38572	38617	38659	37145	37152	37303
1	2	4-1/2	1	0.060	0.3500	38573	38618	38660	37146	37153	37304
1	2	4-1/2	1	0.090	0.3500	38574	38619	38661	37147	37154	37305
1	2	4-1/2	1	0.120	0.3500	38575	38620	38662	37148	37155	37306
1	2	4-1/2	1	0.190	0.3500	38576	38621	38663	37149	37156	37307
1	2	4-1/2	1	0.250	0.3500	38577	38622	38664	37150	37157	37308

Series Z5, Z5CR Fractional		Hardness			Vc (sfm)	DC • in								
			Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	555 (444-666)	RPM	16961	8480	5654	4240	3392	2827	2120
			Slot 	1	≤ 1	440 (352-528)	Fz	0.00046	0.0012	0.0023	0.0031	0.0034	0.0037	0.0043
							Feed (ipm)	39.0	50.9	65.0	65.7	57.7	52.3	45.6
		RPM					13446	6723	4482	3362	2689	2241	1681	
		Fz	0.00046	0.0012	0.0023	0.0031	0.0034	0.0037	0.0043					
		Feed (ipm)	30.9	40.3	51.5	52.1	45.7	41.5	36.1					
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	315 (252-378)	RPM	9626	4813	3209	2407	1925	1604	1203
			Slot 	1	≤ 1	250 (200-300)	Fz	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032
							Feed (ipm)	16.4	21.7	27.3	27.7	25.0	22.5	19.3
		RPM					7640	3820	2547	1910	1528	1273	955	
		Fz	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032					
		Feed (ipm)	13.0	17.2	21.6	22.0	19.9	17.8	15.3					
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	185 (148-222)	RPM	5654	2827	1885	1413	1131	942	707	
		Slot 	1	≤ 1	145 (116-174)	Fz	0.00028	0.0007	0.0014	0.0018	0.0020	0.0022	0.0026	
						Feed (ipm)	7.9	9.9	13.2	12.7	11.3	10.4	9.2	
	RPM					4431	2216	1477	1108	886	739	554		
	Fz	0.00028	0.0007	0.0014	0.0018	0.0020	0.0022	0.0026						
	Feed (ipm)	6.2	7.8	10.3	10.0	8.9	8.1	7.2						
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	490 (392-588)	RPM	14974	7487	4991	3744	2995	2496	1872
			Slot 	1	≤ 1	390 (312-468)	Fz	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032
							Feed (ipm)	25.5	33.7	42.4	43.1	38.9	34.9	29.9
		RPM					11918	5959	3973	2980	2384	1986	1490	
		Fz	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032					
		Feed (ipm)	20.3	26.8	33.8	34.3	31.0	27.8	23.8					
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	340 (272-408)	RPM	10390	5195	3463	2598	2078	1732	1299
			Slot 	1	≤ 1	270 (216-324)	Fz	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025
							Feed (ipm)	14.0	18.2	24.2	23.4	20.8	19.0	16.2
		RPM					8251	4126	2750	2063	1650	1375	1031	
		Fz	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025					
		Feed (ipm)	11.1	14.4	19.3	18.6	16.5	15.1	12.9					
STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.5	≤ 1.5	310 (248-372)	RPM	9474	4737	3158	2368	1895	1579	1184	
		Slot 	1	≤ 1	250 (200-300)	Fz	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
						Feed (ipm)	12.8	16.6	22.1	21.3	18.9	17.4	14.8	
	RPM					7640	3820	2547	1910	1528	1273	955		
	Fz	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025						
	Feed (ipm)	10.3	13.4	17.8	17.2	15.3	14.0	11.9						
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile 	≤ 0.5	≤ 1.5	445 (356-534)	RPM	13599	6800	4533	3400	2720	2267	1700
			Slot 	1	≤ 1	355 (284-426)	Fz	0.00042	0.0011	0.0021	0.0028	0.0031	0.0034	0.0039
							Feed (ipm)	28.6	37.4	47.6	47.6	42.2	38.5	33.1
		RPM					10849	5424	3616	2712	2170	1808	1356	
		Fz	0.00042	0.0011	0.0021	0.0028	0.0031	0.0034	0.0039					
		Feed (ipm)	22.8	29.8	38.0	38.0	33.6	30.7	26.4					
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Profile 	≤ 0.5	≤ 1.5	340 (272-408)	RPM	10390	5195	3463	2598	2078	1732	1299
			Slot 	1	≤ 1	270 (216-324)	Fz	0.00031	0.0008	0.0016	0.0021	0.0023	0.0025	0.0029
							Feed (ipm)	16.1	21.8	27.7	27.3	23.9	21.6	18.8
		RPM					8251	4126	2750	2063	1650	1375	1031	
		Fz	0.00031	0.0008	0.0016	0.0021	0.0023	0.0025	0.0029					
		Feed (ipm)	12.8	17.3	22.0	21.7	19.0	17.2	15.0					

continued on next page

FRACTIONAL Z-Carb-HPR



Series Z5, Z5CR Fractional	Hardness		Ae x DC	Ap x DC	Vc (sfm)	DC • in								
						1/8	1/4	3/8	1/2	5/8	3/4	1		
S	HIGH TEMP ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile	≤ 0.5	≤ 1.5	80 (64-96)	RPM	2445	1222	815	611	489	407	306
				1	≤ 1	65 (52-78)	Fz	0.00025	0.00068	0.00128	0.00170	0.00187	0.00204	0.00238
							Feed (ipm)	3.1	4.2	5.2	5.2	4.6	4.2	3.6
		Slot	1	≤ 1	65 (52-78)	RPM	1986	993	662	497	397	331	248	
						Fz	0.00025	0.00068	0.00128	0.00170	0.00187	0.00204	0.00238	
						Feed (ipm)	2.5	3.4	4.2	4.2	3.7	3.4	3.0	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile	≤ 0.5	≤ 1.5	62 (50-74)	RPM	1895	947	632	474	379	316	237
				1	≤ 1	50 (40-60)	Fz	0.00018	0.00048	0.00090	0.00120	0.00130	0.00140	0.00170
							Feed (ipm)	1.7	2.3	2.8	2.8	2.5	2.2	2.0
		Slot	1	≤ 1	50 (40-60)	RPM	1528	764	509	382	306	255	191	
						Fz	0.00018	0.00048	0.00090	0.00120	0.00130	0.00140	0.00170	
						Feed (ipm)	1.4	1.8	2.3	2.3	2.0	1.8	1.6	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile	≤ 0.5	≤ 1.5	215 (172-258)	RPM	6570	3285	2190	1643	1314	1095	821
				1	≤ 1	170 (136-204)	Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
							Feed (ipm)	9.9	13.1	16.4	16.4	14.5	13.1	11.5
		Slot	1	≤ 1	170 (136-204)	RPM	5195	2598	1732	1299	1039	866	649	
						Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
						Feed (ipm)	7.8	10.4	13.0	13.0	11.4	10.4	9.1	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Profile	≤ 0.5	≤ 1.5	75 (60-90)	RPM	2292	1146	764	573	458	382	287
				1	≤ 1	60 (48-72)	Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
							Feed (ipm)	3.4	4.6	5.7	5.7	5.0	4.6	4.0
		Slot	1	≤ 1	60 (48-72)	RPM	1834	917	611	458	367	306	229	
						Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
						Feed (ipm)	2.8	3.7	4.6	4.6	4.0	3.7	3.2	

Bhn (Brinell) HRC (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fz x 5 x rpm

ramp up to 5 degrees using slotting speed and feed rates. Do not plunge.

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgsgstool.com)

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6


RE = +0,000/-0,050

>10-25 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

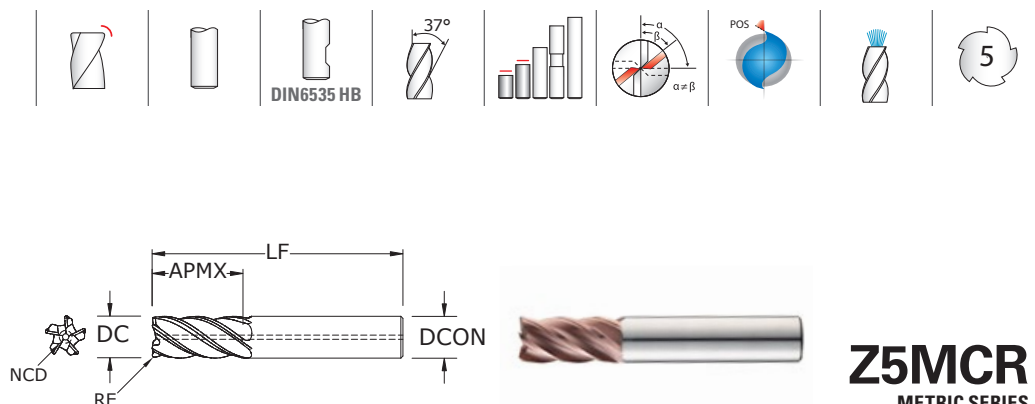


Z5MCR
METRIC SERIES

mm						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
6,0	9,0	54,0	6,0	0,5	2,11	48000	—	—	47000	—	—
6,0	13,0	57,0	6,0	0,3	2,11	48001	—	—	47001	—	—
6,0	13,0	57,0	6,0	0,5	2,11	47120	—	—	47002	—	—
6,0	13,0	57,0	6,0	1,0	2,11	48002	—	—	47003	—	—
6,0	13,0	57,0	6,0	1,5	2,11	48003	—	—	47004	—	—
8,0	11,0	58,0	8,0	0,5	2,79	48004	—	—	47005	—	—
8,0	18,0	63,0	8,0	0,5	2,79	47121	—	—	47006	—	—
8,0	18,0	63,0	8,0	1,0	2,79	47122	—	—	47007	—	—
8,0	18,0	63,0	8,0	1,5	2,79	48005	—	—	47008	—	—
8,0	18,0	63,0	8,0	2,0	2,79	48006	—	—	47009	—	—
10,0	13,0	66,0	10,0	1,0	3,51	48007	—	—	47010	—	—
10,0	22,0	72,0	10,0	0,5	3,51	47123	—	—	47011	—	—
10,0	22,0	72,0	10,0	1,0	3,51	47124	—	—	47012	—	—
10,0	22,0	72,0	10,0	1,5	3,51	48008	—	—	47013	—	—
10,0	22,0	72,0	10,0	2,0	3,51	48009	—	—	47014	—	—
10,0	22,0	72,0	10,0	2,5	3,51	48010	—	—	47015	—	—
12,0	15,0	73,0	12,0	1,0	4,19	48011	48029	—	47016	47024	—
12,0	26,0	83,0	12,0	0,5	4,19	47125	47128	47160	47017	47025	47161
12,0	26,0	83,0	12,0	0,76	4,19	47126	47129	47162	47018	47026	47163
12,0	26,0	83,0	12,0	1,0	4,19	47127	47130	47164	47019	47027	47165
12,0	26,0	83,0	12,0	1,5	4,19	48012	48030	47166	47020	47028	47167
12,0	26,0	83,0	12,0	2,0	4,19	48013	48031	47168	47021	47029	47169
12,0	26,0	83,0	12,0	2,5	4,19	48014	48032	47170	47022	47030	47171
12,0	26,0	83,0	12,0	3,0	4,19	48015	48033	47172	47023	47031	47173
16,0	19,0	82,0	16,0	1,0	5,59	48016	48034	48056	47032	47039	47046
16,0	19,0	82,0	16,0	1,5	5,59	48070	—	—	48071	—	—
16,0	35,0	92,0	16,0	1,0	5,59	47131	48035	47134	47033	47040	47047
16,0	35,0	92,0	16,0	1,5	5,59	48017	48036	48057	47034	47041	47048


continued on next page

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Enhanced corner geometry with tight tolerance corner radii
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)




For patent
information visit
www.ksptpatents.com

METRIC Z-Carb-HPR



Z5MCR METRIC SERIES

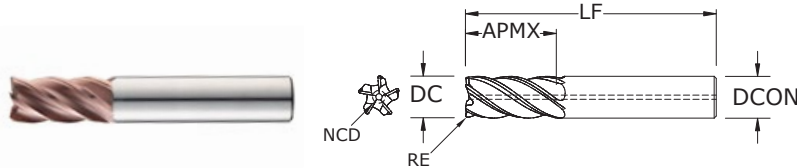

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000/-0,050

>10-25 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050


CONTINUED

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Enhanced corner geometry with tight tolerance corner radii
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

mm						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
16,0	35,0	92,0	16,0	2,0	5,59	47132	48037	47135	47035	47042	47049
16,0	35,0	92,0	16,0	2,5	5,59	48018	48038	48058	47036	47043	47050
16,0	35,0	92,0	16,0	3,0	5,59	47133	48039	47136	47037	47044	47051
16,0	35,0	92,0	16,0	4,0	5,59	48019	48040	48059	47038	47045	47052
20,0	23,0	92,0	20,0	1,0	7,01	48020	48041	48060	47053	47061	47069
20,0	43,0	104,0	20,0	1,0	7,01	47137	48042	47140	47054	47062	47070
20,0	43,0	104,0	20,0	1,5	7,01	48021	48043	48061	47055	47063	47071
20,0	43,0	104,0	20,0	2,0	7,01	47138	48044	47141	47056	47064	47072
20,0	43,0	104,0	20,0	2,5	7,01	48022	48045	48062	47057	47065	47073
20,0	43,0	104,0	20,0	3,0	7,01	47139	48046	47142	47058	47066	47074
20,0	43,0	104,0	20,0	4,0	7,01	48023	48047	48063	47059	47067	47075
20,0	43,0	104,0	20,0	5,0	7,01	48024	48048	48064	47060	47068	47076
25,0	28,0	100,0	25,0	1,0	8,76	48025	48049	48065	47077	47084	47091
25,0	53,0	121,0	25,0	1,0	8,76	47143	48050	47146	47078	47085	47092
25,0	53,0	121,0	25,0	2,0	8,76	47144	48051	47147	47079	47086	47093
25,0	53,0	121,0	25,0	2,5	8,76	48026	48052	48066	47080	47087	47094
25,0	53,0	121,0	25,0	3,0	8,76	47145	48053	47148	47081	47088	47095
25,0	53,0	121,0	25,0	4,0	8,76	48027	48054	48067	47082	47089	47096
25,0	53,0	121,0	25,0	5,0	8,76	48028	48055	48068	47083	47090	47097

Series Z5MCR Metric		Hardness			Vc (m/min)	DC • mm								
			Ae x DC	Ap x DC		6	8	10	12	16	20	25		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	169 (135-203)	RPM	8967	6725	5380	4484	3363	2690	2152
						Fz	0.029	0.049	0.061	0.074	0.087	0.099	0.108	
						Feed (mm/min)	1291	1650	1650	1668	1463	1327	1157	
		Slot 	1	≤ 1	134 (107-161)	RPM	7109	5332	4265	3555	2666	2133	1706	
						Fz	0.029	0.049	0.061	0.074	0.087	0.099	0.108	
						Feed (mm/min)	1024	1308	1308	1322	1160	1052	917	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	96 (77-115)	RPM	5089	3817	3054	2545	1909	1527	1221
						Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
						Feed (mm/min)	550	692	692	702	635	570	489	
		Slot 	1	≤ 1	76 (61-91)	RPM	4039	3029	2424	2020	1515	1212	969	
						Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
						Feed (mm/min)	436	549	549	557	504	452	388	
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	56 (45-68)	RPM	2989	2242	1793	1495	1121	897	717	
					Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.065		
					Feed (mm/min)	251	335	335	323	287	263	233		
	Slot 	1	≤ 1	44 (35-53)	RPM	2343	1757	1406	1171	879	703	562		
					Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.065		
					Feed (mm/min)	197	262	262	253	225	206	183		
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	149 (119-179)	RPM	7917	5938	4750	3958	2969	2375	1900
						Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
						Feed (mm/min)	855	1077	1077	1092	988	887	760	
		Slot 	1	≤ 1	119 (95-143)	RPM	6301	4726	3781	3151	2363	1890	1512	
						Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
						Feed (mm/min)	680	857	857	869	786	706	605	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	104 (83-124)	RPM	5493	4120	3296	2747	2060	1648	1318
						Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063	
						Feed (mm/min)	461	615	615	593	527	483	412	
		Slot 	1	≤ 1	82 (66-99)	RPM	4362	3272	2617	2181	1636	1309	1047	
						Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063	
						Feed (mm/min)	366	489	489	471	419	384	327	
STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.5	≤ 1.5	94 (76-113)	RPM	5009	3756	3005	2504	1878	1503	1202	
					Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063		
					Feed (mm/min)	421	561	561	541	481	441	376		
	Slot 	1	≤ 1	76 (61-91)	RPM	4039	3029	2424	2020	1515	1212	969		
					Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063		
					Feed (mm/min)	339	452	452	436	388	355	303		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile 	≤ 0.5	≤ 1.5	136 (109-163)	RPM	7190	5392	4314	3595	2696	2157	1726
						Fz	0.026	0.045	0.056	0.067	0.079	0.091	0.098	
						Feed (mm/min)	949	1208	1208	1208	1070	978	841	
		Slot 	1	≤ 1	108 (87-130)	RPM	5736	4302	3441	2868	2151	1721	1377	
						Fz	0.026	0.045	0.056	0.067	0.079	0.091	0.098	
						Feed (mm/min)	757	964	964	964	853	780	671	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Profile 	≤ 0.5	≤ 1.5	104 (83-124)	RPM	5493	4120	3296	2747	2060	1648	1318
						Fz	0.020	0.034	0.043	0.050	0.059	0.067	0.073	
						Feed (mm/min)	554	703	703	692	606	549	478	
		Slot 	1	≤ 1	82 (66-99)	RPM	4362	3272	2617	2181	1636	1309	1047	
						Fz	0.020	0.034	0.043	0.050	0.059	0.067	0.073	
						Feed (mm/min)	440	558	558	550	482	436	380	

continued on next page

Z-Carb-HPR

Series Z5MCR Metric	Hardness			Vc (m/min)	DC • mm									
		Ae x DC	Ap x DC		6	8	10	12	16	20	25			
S	HIGH TEMP ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	 ≤ 300 Bhn or ≤ 32 HRc	Profile	≤ 0.5	≤ 1.5	24 (20-29)	RPM	1293	969	776	646	485	388	310
						Fz	0.0160	0.0272	0.0340	0.0409	0.0478	0.0531	0.0599	
						Feed (mm/min)	103	132	132	132	116	103	93	
		 ≤ 32 HRc	Slot	1	≤ 1	20 (16-24)	RPM	1050	788	630	525	394	315	252
						Fz	0.0160	0.0272	0.0340	0.0409	0.0478	0.0531	0.0599	
						Feed (mm/min)	84	107	107	107	94	84	75	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	 ≤ 400 Bhn or ≤ 43 HRc	Profile	≤ 0.5	≤ 1.5	19 (15-23)	RPM	1002	751	601	501	376	301	240
						Fz	0.0112	0.0192	0.0239	0.0284	0.0333	0.0371	0.0420	
						Feed (mm/min)	56	72	72	71	63	56	50	
		 ≤ 43 HRc	Slot	1	≤ 1	15 (12-18)	RPM	808	606	485	404	303	242	194
						Fz	0.0112	0.0192	0.0239	0.0284	0.0333	0.0371	0.0420	
						Feed (mm/min)	45	58	58	57	50	45	41	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	 ≤ 350 Bhn or ≤ 38 HRc	Profile	≤ 0.5	≤ 1.5	66 (52-79)	RPM	3474	2605	2084	1737	1303	1042	834
						Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.070	
						Feed (mm/min)	333	417	417	417	367	333	292	
		 ≤ 38 HRc	Slot	1	≤ 1	52 (41-62)	RPM	2747	2060	1648	1373	1030	824	659
						Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.070	
						Feed (mm/min)	264	330	330	330	290	264	231	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	 ≤ 420 Bhn or ≤ 45 HRc	Profile	≤ 0.5	≤ 1.5	23 (18-27)	RPM	1212	909	727	606	454	364	291
						Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.071	
						Feed (mm/min)	116	145	145	145	128	116	103	
		 ≤ 45 HRc	Slot	1	≤ 1	18 (15-22)	RPM	969	727	582	485	364	291	233
						Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.071	
						Feed (mm/min)	93	116	116	116	102	93	83	

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x 5 x rpm

ramp up to 5 degrees using slotting speed and feed rates. Do not plunge.

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



FRACTIONAL Z-Carb-AP • Z-Carb



TOLERANCES (inch)

≤1/8 DIAMETER

DC = +0.0005/-0.0005

DCON = h_6

RE = +0.000/-0.0010

>1/8-1/4 DIAMETER

DC = +0.000/-0.0012

DCON = h_6

RE = +0.000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.000/-0.0016

DCON = h_6

RE = +0.000/-0.0020

>3/8-1 DIAMETER

DC = +0.000/-0.0020

DCON = h_6

RE = +0.000/-0.0020


STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

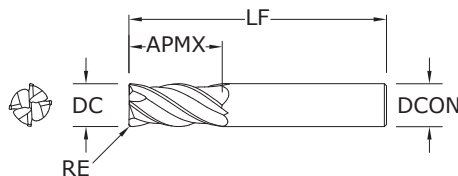

Z1PCR • Z1 • Z16CR FRACTIONAL SERIES


inch					EDP NO.			SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-X (TX)	Ti-NAMITE®-X (TX) W/FLAT	JetStream	
1/64	1/32	1-1/2	1/8	0.002	36874*	—	—	Z1PCR
1/32	5/64	1-1/2	1/8	0.005	36875*	—	—	Z1PCR
3/64	7/64	1-1/2	1/8	0.005	36876*	—	—	Z1PCR
1/16	3/16	1-1/2	1/8	0.005	36872*	—	—	Z1PCR
5/64	3/16	1-1/2	1/8	0.005	36877*	—	—	Z1PCR
3/32	9/32	1-1/2	1/8	0.010	36873*	—	—	Z1PCR
7/64	3/8	1-1/2	1/8	0.010	36878*	—	—	Z1PCR
1/8	1/4	1-1/2	1/8	0.015	36505	—	—	Z16CR
1/8	3/8	1-1/2	1/8	—	36404	—	—	Z1
1/8	3/8	1-1/2	1/8	0.010	36370	—	—	Z1PCR
1/8	3/8	1-1/2	1/8	0.015	36851	—	—	Z1PCR
5/32	5/16	2	3/16	0.015	36506	—	—	Z16CR
5/32	7/16	2	3/16	—	36406	—	—	Z1
3/16	3/8	2	3/16	0.015	36507	—	—	Z16CR
3/16	7/16	2	3/16	—	36408	—	—	Z1
3/16	7/16	2	3/16	0.010	36371	—	—	Z1PCR
3/16	7/16	2	3/16	0.015	36852	—	—	Z1PCR
3/16	7/16	2	3/16	0.030	36722	—	—	Z1PCR
7/32	3/8	2	1/4	0.020	36508	—	—	Z16CR
7/32	7/16	2-1/2	1/4	—	36410	—	—	Z1
1/4	7/16	2	1/4	0.020	36509	—	—	Z16CR
1/4	1/2	2-1/2	1/4	—	36416	—	—	Z1
1/4	1/2	2-1/2	1/4	0.010	36372	—	—	Z1PCR
1/4	1/2	2-1/2	1/4	0.015	36723	—	—	Z1PCR
1/4	1/2	2-1/2	1/4	0.020	36853	—	—	Z1PCR
1/4	1/2	2-1/2	1/4	0.030	36373	—	—	Z1PCR
1/4	3/4	2-1/2	1/4	—	36596	—	—	Z1
1/4	3/4	2-1/2	1/4	0.010	36599	—	—	Z1PCR
1/4	3/4	2-1/2	1/4	0.015	36600	—	—	Z1PCR
1/4	3/4	2-1/2	1/4	0.020	36854	—	—	Z1PCR
1/4	3/4	2-1/2	1/4	0.030	36601	—	—	Z1PCR
9/32	5/8	2-1/2	5/16	—	36418	—	—	Z1

*Variable flute spacing. Helix and rake do not vary.

continued on next page

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

Z-Carb-AP • Z-Carb

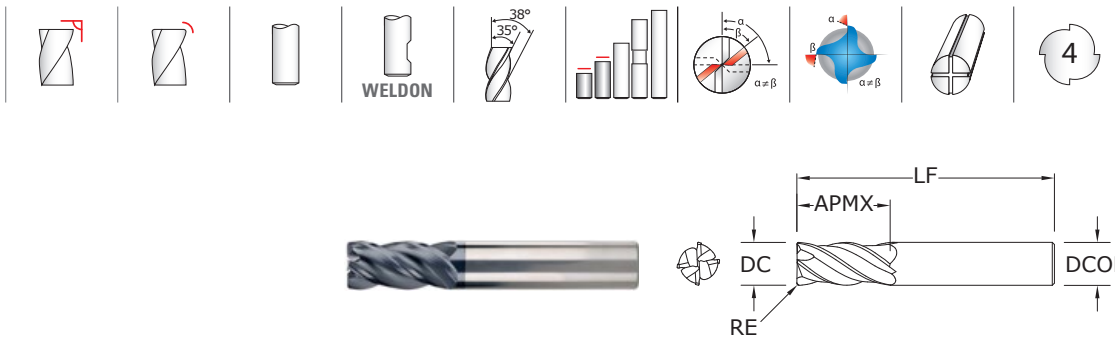

Z1PCR • Z1 • Z16CR

FRACTIONAL SERIES

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.			SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-X (TX)	Ti-NAMITE®-X (TX) W/FLAT	JetStream	
5/16	1/2	2	5/16	0.020	36511	—	—	Z16CR
5/16	13/16	2-1/2	5/16	—	36420	—	—	Z1
5/16	13/16	2-1/2	5/16	0.015	36724	—	—	Z1PCR
5/16	13/16	2-1/2	5/16	0.020	36855	—	—	Z1PCR
5/16	13/16	2-1/2	5/16	0.030	36374	—	—	Z1PCR
11/32	13/16	2-1/2	3/8	—	36422	—	—	Z1
3/8	5/8	2	3/8	0.020	36513	—	—	Z16CR
3/8	7/8	2-1/2	3/8	—	36424	36530	—	Z1
3/8	7/8	2-1/2	3/8	0.010	36375	36701	—	Z1PCR
3/8	7/8	2-1/2	3/8	0.015	36725	36736	—	Z1PCR
3/8	7/8	2-1/2	3/8	0.020	36856	36864	—	Z1PCR
3/8	7/8	2-1/2	3/8	0.030	36376	36702	—	Z1PCR
3/8	7/8	2-1/2	3/8	0.060	36727	36738	—	Z1PCR
13/32	15/16	2-3/4	7/16	—	36426	36531	—	Z1
7/16	5/8	2-1/2	7/16	0.020	36515	—	—	Z16CR
7/16	1	2-3/4	7/16	—	36428	36532	—	Z1
7/16	1	2-3/4	7/16	0.020	36857	36865	—	Z1PCR
15/32	1	3	1/2	—	36430	36533	—	Z1
1/2	5/8	2-1/2	1/2	0.030	36517	—	—	Z16CR
1/2	1	3	1/2	—	36432	36534	36826	Z1
1/2	1	3	1/2	0.010	36378	36704	36804	Z1PCR
1/2	1	3	1/2	0.015	36729	36740	36810	Z1PCR
1/2	1	3	1/2	0.030	36858	36866	36805	Z1PCR
1/2	1	3	1/2	0.060	36380	36706	36811	Z1PCR
1/2	1	3	1/2	0.090	36381	36707	36812	Z1PCR
1/2	1	3	1/2	0.125	36731	36742	36813	Z1PCR
1/2	1-1/4	3-1/4	1/2	—	36597	36598	—	Z1
1/2	1-1/4	3-1/4	1/2	0.010	36602	36603	—	Z1PCR
1/2	1-1/4	3-1/4	1/2	0.015	36604	36605	—	Z1PCR
1/2	1-1/4	3-1/4	1/2	0.030	36859	36867	—	Z1PCR
1/2	1-1/4	3-1/4	1/2	0.060	36610	36611	—	Z1PCR
1/2	1-1/4	3-1/4	1/2	0.090	36612	36613	—	Z1PCR
1/2	1-1/4	3-1/4	1/2	0.125	36614	36615	—	Z1PCR
9/16	1-1/8	3-1/2	9/16	—	36436	36535	36827	Z1

TOLERANCES (inch)

≤1/8 DIAMETER

DC = +0.0005/-0.0005

DCON = h₆

RE = +0.000/-0.0010

>1/8-1/4 DIAMETER

DC = +0.000/-0.0012

DCON = h₆

RE = +0.000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.000/-0.0016

DCON = h₆

RE = +0.000/-0.0020

>3/8-1 DIAMETER

DC = +0.000/-0.0020

DCON = h₆

RE = +0.000/-0.0020

STEELS

STAINLESS STEELS

CAST IRON



HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

continued on next page



FRACTIONAL Z-Carb-AP • Z-Carb

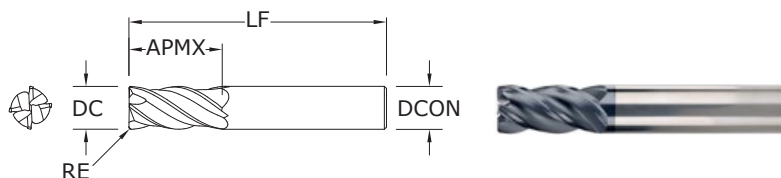

Z1PCR • Z1 • Z16CR FRACTIONAL SERIES

TOLERANCES (inch)

≤1/8 DIAMETER

DC = +0.0005/-0.0005

DCON = h_6

RE = +0.000/-0.0010

>1/8-1/4 DIAMETER

DC = +0.000/-0.0012

DCON = h_6

RE = +0.000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.000/-0.0016

DCON = h_6

RE = +0.000/-0.0020

>3/8-1 DIAMETER

DC = +0.000/-0.0020

DCON = h_6

RE = +0.000/-0.0020

STEELS

STAINLESS STEELS

CAST IRON


HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com


inch						EDP NO.		SERIES	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE		Ti-NAMITE®-X (TX)	Ti-NAMITE®-X (TX) W/FLAT	JetStream	
9/16	1-1/8	3-1/2	9/16	0.030		36860	36868	36806	Z1PCR
5/8	3/4	3	5/8	0.040		36519	—	—	Z16CR
5/8	1-1/4	3-1/2	5/8	—		36440	36536	36828	Z1
5/8	1-1/4	3-1/2	5/8	0.030		36383	36709	36814	Z1PCR
5/8	1-1/4	3-1/2	5/8	0.040		36861	36869	36807	Z1PCR
5/8	1-1/4	3-1/2	5/8	0.060		36384	36710	36815	Z1PCR
5/8	1-1/4	3-1/2	5/8	0.090		36385	36711	36816	Z1PCR
5/8	1-1/4	3-1/2	5/8	0.125		36733	36744	36817	Z1PCR
3/4	1	3	3/4	0.040		36520	—	—	Z16CR
3/4	1-1/2	4	3/4	—		36442	36537	36829	Z1
3/4	1-1/2	4	3/4	0.030		36386	36712	36818	Z1PCR
3/4	1-1/2	4	3/4	0.040		36862	36870	36808	Z1PCR
3/4	1-1/2	4	3/4	0.060		36387	36713	36819	Z1PCR
3/4	1-1/2	4	3/4	0.090		36388	36714	36820	Z1PCR
3/4	1-1/2	4	3/4	0.125		36389	36715	36821	Z1PCR
1	1-1/2	4	1	—		36444	36538	36830	Z1
1	1-1/2	4	1	0.030		36390	36716	36822	Z1PCR
1	1-1/2	4	1	0.040		36863	36871	36809	Z1PCR
1	1-1/2	4	1	0.060		36391	36717	36823	Z1PCR
1	1-1/2	4	1	0.090		36392	36718	36824	Z1PCR
1	1-1/2	4	1	0.125		36393	36719	36825	Z1PCR

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

FRACTIONAL Z-Carb-AP



Z1PLC FRACTIONAL SERIES

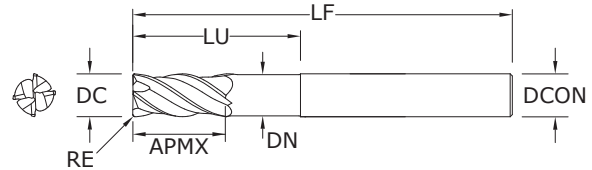

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Long reach design allows for deeper and faster cuts
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch		REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	EDP NO.
			SHANK DIAMETER DCON					Ti-NAMITE®-X (TX)
1/4	1/2	2-1/2	1/4		1-1/8	.230	.020	36447
1/4	1/2	3-1/2	1/4		1-5/8	.230	.020	36448
1/4	1/2	4	1/4		1-1/4	.230	.020	36450
1/4	1/2	4	1/4		2-1/8	.230	.020	36449
5/16	13/16	3	5/16		1-3/8	.293	.020	36453
5/16	13/16	4	5/16		2	.293	.020	36454
5/16	13/16	4	5/16		1-5/8	.293	.020	36452
3/8	7/8	3	3/8		1-5/8	.355	.020	36457
3/8	7/8	5	3/8		1-7/8	.355	.020	36456
3/8	7/8	4	3/8		2-3/8	.355	.020	36458
7/16	1	6	7/16		2	.418	.020	36460
1/2	1	4	1/2		2	.480	.030	36463
1/2	1	5	1/2		3	.480	.030	36464
1/2	1	6	1/2		2-1/4	.480	.030	36462
9/16	1-1/8	6	9/16		2-1/2	.543	.030	36466
5/8	1-1/4	5	5/8		2-1/2	.605	.040	36468
5/8	1-1/4	6	5/8		3-3/4	.605	.040	36469
5/8	1-1/4	6	5/8		3	.605	.040	36470
3/4	1-1/2	6	3/4		3-1/2	.730	.040	36472
1	1-1/2	6	1		3	.980	.040	36475
1	1-1/2	6	1		4	.980	.040	36474

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.000/-0.005

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6

RE = +0.000/-0.005

>3/8-1 DIAMETER



DC = +0.0000/-0.0020

DCON = h_6

RE = +0.000/-0.005

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

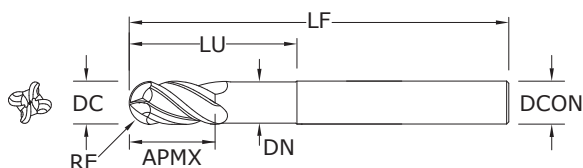

Z1PLB
FRACTIONAL SERIES

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.0000/-0.0006

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6

RE = +0.0000/-0.0008

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0010

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

inch						EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	Ti-NAMITE®-X (TX)
1/4	1/2	4	1/4	1-1/4	.230	36480
5/16	13/16	4	5/16	1-5/8	.293	36482
3/8	7/8	5	3/8	1-7/8	.355	36486
7/16	1	6	7/16	2	.418	38490
1/2	1	6	1/2	2-1/4	.480	38492
9/16	1-1/8	6	9/16	2-1/2	.543	38496
5/8	1-1/4	6	5/8	3	.605	36500
3/4	1-1/2	6	3/4	3-1/2	.730	36502
1	1-1/2	6	1	4	.980	36504

RE = 1/2 Cutting Diameter (DC)


- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Long reach design allows for deeper and faster cuts
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

FRACTIONAL Z-Carb-AP



Series Z1, Z16CR, Z1PCR, Z1PLC, Z1PLB Fractional		Hardness		Ae x DC		Ap x DC		Vc (sfm)		DC • in							
										1/64	1/8	1/4	3/8	1/2	5/8	3/4	1
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5			555 (444-666)	RPM	135904	16961	8480	5654	4240	3392	2827	2120
									Fz	0.00005	0.00046	0.0012	0.0023	0.0031	0.0034	0.0037	0.0043
									Feed (ipm)	27.2	31.2	40.7	52.0	52.6	46.1	41.8	36.5
		≤ 275 Bhn or ≤ 28 HRc	Slot 	1	≤ 1			440 (352-528)	RPM	107744	13446	6723	4482	3362	2689	2241	1681
									Fz	0.00005	0.00046	0.0012	0.0023	0.0031	0.0034	0.0037	0.0043
									Feed (ipm)	21.5	24.7	32.3	41.2	41.7	36.6	33.2	28.9
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5			315 (252-378)	RPM	77135	9626	4813	3209	2407	1925	1604	1203
									Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032
									Feed (ipm)	12.3	13.1	17.3	21.8	22.1	20.0	18.0	15.4
		≤ 375 Bhn or ≤ 40 HRc	Slot 	1	≤ 1			250 (200-300)	RPM	61218	7640	3820	2547	1910	1528	1273	955
									Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032
									Feed (ipm)	9.8	10.4	13.8	17.3	17.6	15.9	14.3	12.2
M	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5			185 (148-222)	RPM	45301	5654	2827	1885	1413	1131	942	707
									Fz	0.00003	0.00028	0.0007	0.0014	0.0018	0.0020	0.0022	0.0026
									Feed (ipm)	5.4	6.3	7.9	10.6	10.2	9.0	8.3	7.3
		≤ 375 Bhn or ≤ 40 HRc	Slot 	1	≤ 1			145 (116-174)	RPM	35506	4431	2216	1477	1108	886	739	554
									Fz	0.00003	0.00028	0.0007	0.0014	0.0018	0.0020	0.0022	0.0026
									Feed (ipm)	4.3	5.0	6.2	8.3	8.0	7.1	6.5	5.8
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5			490 (392-588)	RPM	119987	14974	7487	4991	3744	2995	2496	1872
									Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032
									Feed (ipm)	19.2	20.4	27.0	33.9	34.4	31.1	28.0	24.0
		≤ 275 Bhn or ≤ 28 HRc	Slot 	1	≤ 1			390 (312-468)	RPM	95500	11918	5959	3973	2980	2384	1986	1490
									Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032
									Feed (ipm)	15.3	16.2	21.5	27.0	27.4	24.8	22.2	19.1
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5			340 (272-408)	RPM	83256	10390	5195	3463	2598	2078	1732	1299
									Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025
									Feed (ipm)	10.0	11.2	14.5	19.4	18.7	16.6	15.2	13.0
		≤ 275 Bhn or ≤ 28 HRc	Slot 	1	≤ 1			270 (216-324)	RPM	66115	8251	4126	2750	2063	1650	1375	1031
									Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025
									Feed (ipm)	7.9	8.9	11.6	15.4	14.9	13.2	12.1	10.3
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.5	≤ 1.5			310 (248-372)	RPM	75910	9474	4737	3158	2368	1895	1579	1184
									Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025
									Feed (ipm)	9.1	10.2	13.3	17.7	17.1	15.2	13.9	11.8
		≤ 325 Bhn or ≤ 35 HRc	Slot 	1	≤ 1			250 (200-300)	RPM	61218	7640	3820	2547	1910	1528	1273	955
									Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025
									Feed (ipm)	7.3	8.3	10.7	14.3	13.8	12.2	11.2	9.6

continued on next page

Series Z1, Z16CR, Z1PCR, Z1PLC, Z1PLB Fractional		Hardness			Vc (sfm)	DC • in									
			Ae x DC	Ap x DC		1/64	1/8	1/4	3/8	1/2	5/8	3/4	1		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	 Profile	≤ 0.5	≤ 1.5	445	RPM	108968	13599	6800	4533	3400	2720	2267	1700
						(356-534)	Fz	0.00005	0.00042	0.0011	0.0021	0.0028	0.0031	0.0034	0.0039
						Feed (ipm)	21.8	22.8	29.9	38.1	38.1	33.7	30.8	26.5	
			 Slot	1	≤ 1	355	RPM	86929	10849	5424	3616	2712	2170	1808	1356
						(284-426)	Fz	0.00005	0.00042	0.0011	0.0021	0.0028	0.0031	0.0034	0.0039
						Feed (ipm)	17.4	18.2	23.9	30.4	30.4	26.9	24.6	21.2	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	 Profile	≤ 0.5	≤ 1.5	340	RPM	83256	10390	5195	3463	2598	2078	1732	1299
						(272-408)	Fz	0.00004	0.00031	0.0008	0.0016	0.0021	0.0023	0.0025	0.0029
						Feed (ipm)	13.3	12.9	17.5	22.2	21.8	19.1	17.3	15.1	
			 Slot	1	≤ 1	270	RPM	66115	8251	4126	2750	2063	1650	1375	1031
						(216-324)	Fz	0.00004	0.00031	0.0008	0.0016	0.0021	0.0023	0.0025	0.0029
						Feed (ipm)	10.6	10.2	13.9	17.6	17.3	15.2	13.8	12.0	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	 Profile	≤ 0.5	≤ 1.5	80	RPM	19590	2445	1222	815	611	489	407	306
						(64-96)	Fz	0.00003	0.00025	0.0007	0.0013	0.0017	0.0019	0.0020	0.0024
						Feed (ipm)	2.4	2.4	3.3	4.2	4.2	3.7	3.3	2.9	
			 Slot	1	≤ 1	65	RPM	15917	1986	993	662	497	397	331	248
						(52-78)	Fz	0.00003	0.00025	0.0007	0.0013	0.0017	0.0019	0.0020	0.0024
						Feed (ipm)	1.9	2.0	2.7	3.4	3.4	3.0	2.7	2.4	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Rene	≤ 400 Bhn or ≤ 43 HRc	 Profile	≤ 0.5	≤ 1.5	62	RPM	15182	1895	947	632	474	379	316	237
						(50-74)	Fz	0.00002	0.00018	0.0005	0.0009	0.0012	0.0013	0.0014	0.0017
						Feed (ipm)	1.2	1.4	1.8	2.3	2.3	2.0	1.8	1.6	
			 Slot	1	≤ 1	50	RPM	12244	1528	764	509	382	306	255	191
						(40-60)	Fz	0.00002	0.00018	0.0005	0.0009	0.0012	0.0013	0.0014	0.0017
						Feed (ipm)	1.0	1.1	1.5	1.8	1.8	1.6	1.4	1.3	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	 Profile	≤ 0.5	≤ 1.5	215	RPM	52647	6570	3285	2190	1643	1314	1095	821
						(172-258)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
						Feed (ipm)	6.3	7.9	10.5	13.1	13.1	11.6	10.5	9.2	
			 Slot	1	≤ 1	170	RPM	41628	5195	2598	1732	1299	1039	866	649
						(136-204)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
						Feed (ipm)	5.0	6.2	8.3	10.4	10.4	9.1	8.3	7.3	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	 Profile	≤ 0.5	≤ 1.5	75	RPM	18365	2292	1146	764	573	458	382	287
						(60-90)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
						Feed (ipm)	2.2	2.8	3.7	4.6	4.6	4.0	3.7	3.2	
			 Slot	1	≤ 1	60	RPM	14692	1834	917	611	458	367	306	229
						(48-72)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
						Feed (ipm)	1.8	2.2	2.9	3.7	3.7	3.2	2.9	2.6	

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fz x 4 x rpm

maximum Slotting Ap for Z1PCR <1/8 diameter and all Z1PLC / Z1PLB is .25 x DC

maximum Profile Ae for Z1PCR <1/8 diameter and all Z1PLC / Z1PLB is .20 x DC


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

Z-Carb-AP • Z-Carb



Z1MPCR • Z1M

METRIC SERIES

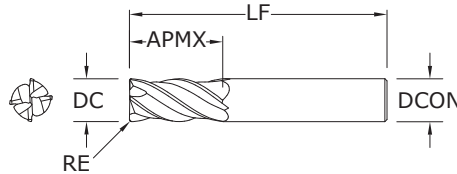

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			CORNER RADIUS RE	EDP NO.			SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON			Ti-NAMITE®-X (TX)	Ti-NAMITE®-X (TX) W/FLAT	JetStream	
1,0	3,0	57,0	6,0	0,1		46873*	—	—	Z1MPCR
1,5	4,5	57,0	6,0	0,1		46849*	—	—	Z1MPCR
2,0	6,0	57,0	6,0	0,2		46850*	—	—	Z1MPCR
2,5	7,0	57,0	6,0	0,2		46874*	—	—	Z1MPCR
3,0	8,0	57,0	6,0	—		46357	—	—	Z1M
3,0	8,0	57,0	6,0	0,3		46851	—	—	Z1MPCR
3,0	8,0	57,0	6,0	0,5		46880	—	—	Z1MPCR
4,0	11,0	57,0	6,0	—		46358	—	—	Z1M
4,0	11,0	57,0	6,0	0,3		46852	—	—	Z1MPCR
4,0	11,0	57,0	6,0	0,5		46881	—	—	Z1MPCR
5,0	13,0	57,0	6,0	—		46359	—	—	Z1M
5,0	13,0	57,0	6,0	0,3		46853	—	—	Z1MPCR
6,0	13,0	57,0	6,0	—		46360	—	—	Z1M
6,0	13,0	57,0	6,0	0,25		46882	—	—	Z1MPCR
6,0	13,0	57,0	6,0	0,5		46854	—	—	Z1MPCR
6,0	13,0	57,0	6,0	1,0		46855	—	—	Z1MPCR
6,0	13,0	57,0	6,0	1,5		46884	—	—	Z1MPCR
8,0	19,0	63,0	8,0	—		46362	—	—	Z1M
8,0	19,0	63,0	8,0	0,5		46856	—	—	Z1MPCR
8,0	19,0	63,0	8,0	1,0		46857	—	—	Z1MPCR
8,0	19,0	63,0	8,0	1,5		46886	—	—	Z1MPCR
8,0	19,0	63,0	8,0	2,0		46887	—	—	Z1MPCR
10,0	22,0	72,0	10,0	—		46364	—	—	Z1M
10,0	22,0	72,0	10,0	0,5		46858	—	—	Z1MPCR
10,0	22,0	72,0	10,0	1,0		46859	—	—	Z1MPCR
10,0	22,0	72,0	10,0	1,5		46889	—	—	Z1MPCR
10,0	22,0	72,0	10,0	2,0		46890	—	—	Z1MPCR
10,0	22,0	72,0	10,0	2,5		46891	—	—	Z1MPCR
12,0	26,0	83,0	12,0	—		46366	—	—	Z1M
12,0	26,0	83,0	12,0	0,5		46860	46909	—	Z1MPCR
12,0	26,0	83,0	12,0	0,75		46861	46910	46493	Z1MPCR
12,0	26,0	83,0	12,0	1,0		46893	46911	—	Z1MPCR

*Variable flute spacing. Helix and rake do not vary.

continued on next page

TOLERANCES (mm)

<3 DIAMETER

DC = $+0,012/-0,012$

DCON = h_6

RE = $+0,000/-0,025$

>3–6 DIAMETER

DC = $+0,000/-0,030$

DCON = h_6

RE = $+0,000/-0,050$

>6–10 DIAMETER

DC = $+0,000/-0,040$

DCON = h_6

RE = $+0,000/-0,050$

>10–25 DIAMETER

DC = $+0,000/-0,050$

DCON = h_6



RE = $+0,000/-0,050$

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com



METRIC Z-Carb-AP • Z-Carb

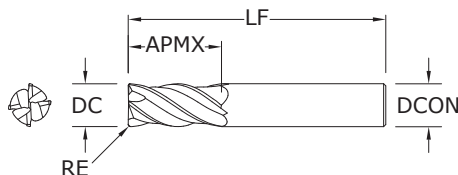

Z1MPCR • Z1M METRIC SERIES

TOLERANCES (mm)

<3 DIAMETER

DC = +0,012/-0,012

DCON = h_6

RE = +0,000/-0,025

>3-6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000/-0,050

>10-25 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com


mm					EDP NO.		SERIES	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-X (TX)	Ti-NAMITE®-X (TX) W/FLAT	JetStream	
12,0	26,0	83,0	12,0	1,5	46894	46912	—	Z1MPCR
12,0	26,0	83,0	12,0	2,0	46895	46913	—	Z1MPCR
12,0	26,0	83,0	12,0	2,5	46896	46914	—	Z1MPCR
12,0	26,0	83,0	12,0	3,0	42718	46915	42719	Z1MPCR
14,0	26,0	83,0	14,0	—	46368	46506	—	Z1M
14,0	26,0	83,0	14,0	1,0	46862	46916	46494	Z1MPCR
16,0	32,0	92,0	16,0	—	46370	46507	—	Z1M
16,0	32,0	92,0	16,0	1,0	46863	46917	46495	Z1MPCR
16,0	32,0	92,0	16,0	1,5	46898	46918	—	Z1MPCR
16,0	32,0	92,0	16,0	2,0	46899	46919	—	Z1MPCR
16,0	32,0	92,0	16,0	2,5	46900	46920	—	Z1MPCR
16,0	32,0	92,0	16,0	3,0	46864	46921	42721	Z1MPCR
16,0	32,0	92,0	16,0	4,0	46867	46944	—	Z1MPCR
18,0	32,0	92,0	18,0	—	46372	46508	—	Z1M
20,0	38,0	104,0	20,0	—	46374	46509	—	Z1M
20,0	38,0	104,0	20,0	1,0	46865	46922	46497	Z1MPCR
20,0	38,0	104,0	20,0	1,5	46903	46923	—	Z1MPCR
20,0	38,0	104,0	20,0	2,0	46904	46924	—	Z1MPCR
20,0	38,0	104,0	20,0	2,5	46905	46925	—	Z1MPCR
20,0	38,0	104,0	20,0	3,0	42722	46926	42723	Z1MPCR
20,0	38,0	104,0	20,0	4,0	46868	46945	—	Z1MPCR
20,0	38,0	104,0	20,0	5,0	46869	46946	—	Z1MPCR
25,0	38,0	104,0	25,0	—	46376	46510	—	Z1M
25,0	38,0	104,0	25,0	1,0	46866	46927	46498	Z1MPCR

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



Z1MPIC • Z1MPLC

METRIC SERIES

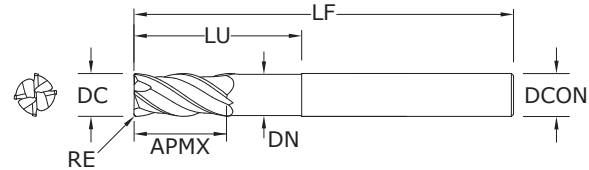

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Long reach design allows for deeper and faster cuts
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	mm				EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-X (TX)	Ti-NAMITE®-X (TX) W/FLAT
6,0	8,0	75,0	6,0	24,0	5,49	0,5	46821	—
8,0	10,0	75,0	8,0	32,0	7,49	1,0	46822	—
8,0	10,0	75,0	8,0	32,0	7,49	2,0	46823	—
10,0	12,0	100,0	10,0	40,0	9,50	1,0	46824	—
10,0	12,0	100,0	10,0	40,0	9,50	2,0	46825	—
12,0	15,0	100,0	12,0	48,0	11,48	1,0	46826	46928
12,0	15,0	100,0	12,0	48,0	11,48	1,5	46827	46929
12,0	15,0	100,0	12,0	48,0	11,48	2,0	46828	46930
12,0	15,0	100,0	12,0	48,0	11,48	3,0	46829	46931
12,0	26,0	83,0	12,0	36,0	11,48	2,5	—	42731
12,0	26,0	83,0	12,0	36,0	11,48	3,0	—	42732
12,0	26,0	83,0	12,0	36,0	11,48	4,0	—	42733
16,0	32,0	92,0	16,0	42,0	15,49	2,5	—	42734
16,0	32,0	92,0	16,0	42,0	15,49	4,0	—	42735
16,0	32,0	92,0	16,0	42,0	15,49	6,0	—	42736
16,0	20,0	115,0	16,0	65,0	15,49	1,0	46830	46932
16,0	20,0	115,0	16,0	65,0	15,49	1,5	46831	46933
16,0	20,0	115,0	16,0	65,0	15,49	2,0	46832	46934
16,0	20,0	115,0	16,0	65,0	15,49	3,0	46833	46935
16,0	20,0	115,0	16,0	65,0	15,49	4,0	46834	46936
16,0	20,0	115,0	16,0	65,0	15,49	5,0	46835	46937
20,0	24,0	140,0	20,0	80,0	19,48	1,0	46836	46938
20,0	24,0	140,0	20,0	80,0	19,48	1,5	46837	46939
20,0	24,0	140,0	20,0	80,0	19,48	2,0	46838	46940
20,0	24,0	140,0	20,0	80,0	19,48	3,0	46839	46941
20,0	24,0	140,0	20,0	80,0	19,48	4,0	46840	46942
20,0	24,0	140,0	20,0	80,0	19,48	5,0	46841	46943
20,0	38,0	104,0	20,0	52,0	19,48	2,5	—	42737
20,0	38,0	104,0	20,0	52,0	19,48	4,0	—	42738
20,0	38,0	104,0	20,0	52,0	19,48	6,0	—	42739

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000/-0,050

>10-20 DIAMETER


DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050


STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

Series Z1M, Z1MPCR, Z1MPIC, Z1MPLC Metric				Vc (m/min)	DC • mm										
Hardness	Ae x DC	Ap x DC	1		3	6	8	10	12	16	20	25			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	 Profile	≤ 0.5	≤ 1.5	169	RPM	53803	17934	8967	6725	5380	4484	3363	2690	2152
					(135-203)	Fz	0.0030	0.0109	0.029	0.049	0.061	0.074	0.087	0.099	0.108
					Feed (mm/min)	646	782	1040	1318	1313	1327	1170	1065	930	
		 Slot	1	≤ 1	134	RPM	42654	14218	7109	5332	4265	3555	2666	2133	1706
					(107-161)	Fz	0.0030	0.0109	0.029	0.049	0.061	0.074	0.087	0.099	0.108
					Feed (mm/min)	512	620	825	1045	1041	1052	928	845	737	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	 Profile	≤ 0.5	≤ 1.5	96	RPM	30537	10179	5089	3817	3054	2545	1909	1527	1221
					(77-115)	Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080
					Feed (mm/min)	281	330	448	550	550	560	511	458	391	
		 Slot	1	≤ 1	76	RPM	24235	8078	4039	3029	2424	2020	1515	1212	969
					(61-91)	Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080
					Feed (mm/min)	223	262	355	436	436	444	406	364	310	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	 Profile	≤ 0.5	≤ 1.5	56	RPM	17934	5978	2989	2242	1793	1495	1121	897	717
					(45-68)	Fz	0.0018	0.0066	0.017	0.030	0.037	0.043	0.051	0.059	0.065
					Feed (mm/min)	129	158	203	269	265	257	229	212	187	
		 Slot	1	≤ 1	44	RPM	14057	4686	2343	1757	1406	1171	879	703	562
					(35-53)	Fz	0.0018	0.0066	0.017	0.030	0.037	0.043	0.051	0.059	0.065
					Feed (mm/min)	101	124	159	211	208	201	179	166	146	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	 Profile	≤ 0.5	≤ 1.5	149	RPM	47501	15834	7917	5938	4750	3958	2969	2375	1900
					(119-179)	Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080
					Feed (mm/min)	437	513	697	855	855	871	796	713	608	
		 Slot	1	≤ 1	119	RPM	37807	12602	6301	4726	3781	3151	2363	1890	1512
					(95-143)	Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080
					Feed (mm/min)	348	408	555	681	681	693	633	567	484	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	 Profile	≤ 0.5	≤ 1.5	104	RPM	32960	10987	5493	4120	3296	2747	2060	1648	1318
					(83-124)	Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063
					Feed (mm/min)	237	281	374	494	488	472	420	389	332	
		 Slot	1	≤ 1	82	RPM	26174	8725	4362	3272	2617	2181	1636	1309	1047
					(66-99)	Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063
					Feed (mm/min)	188	223	297	393	387	375	334	309	264	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	 Profile	≤ 0.5	≤ 1.5	94	RPM	30052	10017	5009	3756	3005	2504	1878	1503	1202
					(76-113)	Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063
					Feed (mm/min)	216	256	341	451	445	431	383	355	303	
		 Slot	1	≤ 1	76	RPM	24235	8078	4039	3029	2424	2020	1515	1212	969
					(61-91)	Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063
					Feed (mm/min)	174	207	275	364	359	347	309	286	244	

continued on next page

Z-Carb-AP

Series Z1M, Z1MPCR, Z1MPIC, Z1MPLC Metric				Vc (m/min)	DC • mm										
		Hardness	Ae x DC		Ap x DC	1	3	6	8	10	12	16	20	25	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	 Profile	≤ 0.5	≤ 1.5	136	RPM	43139	14380	7190	5392	4314	3595	2696	2157	1726
					(109-163)	Fz	0.0028	0.0099	0.026	0.045	0.056	0.067	0.079	0.091	0.098
					Feed (mm/min)	483	569	748	971	966	963	852	785	676	
		 Slot	1	≤ 1	108	RPM	34414	11471	5736	4302	3441	2868	2151	1721	1377
					(87-130)	Fz	0.0028	0.0099	0.026	0.045	0.056	0.067	0.079	0.091	0.098
					Feed (mm/min)	385	454	597	774	771	769	680	626	540	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	 Profile	≤ 0.5	≤ 1.5	104	RPM	32960	10987	5493	4120	3296	2747	2060	1648	1318
					(83-124)	Fz	0.0020	0.0074	0.020	0.034	0.043	0.050	0.059	0.067	0.074
					Feed (mm/min)	264	325	439	560	567	549	486	442	390	
		 Slot	1	≤ 1	82	RPM	26174	8725	4362	3272	2617	2181	1636	1309	1047
					(66-99)	Fz	0.0020	0.0074	0.020	0.034	0.043	0.050	0.059	0.067	0.074
					Feed (mm/min)	209	258	349	445	450	436	386	351	310	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	 Profile	≤ 0.5	≤ 1.5	24	RPM	7755	2585	1293	969	776	646	485	388	310
					(20-29)	Fz	0.0018	0.0061	0.016	0.027	0.034	0.041	0.048	0.053	0.060
					Feed (mm/min)	56	63	83	105	105	106	93	82	74	
		 Slot	1	≤ 1	20	RPM	6301	2100	1050	788	630	525	394	315	252
					(16-24)	Fz	0.0018	0.0061	0.016	0.027	0.034	0.041	0.048	0.053	0.060
					Feed (mm/min)	45	51	67	85	86	86	76	67	60	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	 Profile	≤ 0.5	≤ 1.5	19	RPM	6010	2003	1002	751	601	501	376	301	240
					(15-23)	Fz	0.0013	0.0043	0.011	0.019	0.024	0.028	0.033	0.037	0.042
					Feed (mm/min)	31	34	44	57	58	56	50	44	40	
		 Slot	1	≤ 1	15	RPM	4847	1616	808	606	485	404	303	242	194
					(12-18)	Fz	0.0013	0.0043	0.011	0.019	0.024	0.028	0.033	0.037	0.042
					Feed (mm/min)	25	28	36	46	47	45	40	36	33	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	 Profile	≤ 0.5	≤ 1.5	66	RPM	20842	6947	3474	2605	2084	1737	1303	1042	834
					(52-79)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070
					Feed (mm/min)	167	197	264	333	333	333	292	267	233	
		 Slot	1	≤ 1	52	RPM	16480	5493	2747	2060	1648	1373	1030	824	659
					(41-62)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070
					Feed (mm/min)	132	156	209	264	264	264	231	211	185	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	 Profile	≤ 0.5	≤ 1.5	23	RPM	7271	2424	1212	909	727	606	454	364	291
					(18-27)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070
					Feed (mm/min)	58	69	92	116	116	116	102	93	81	
		 Slot	1	≤ 1	18	RPM	5816	1939	969	727	582	485	364	291	233
					(15-22)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070
					Feed (mm/min)	47	55	74	93	93	93	81	74	65	

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x 4 x rpm

maximum Slotting Ap for Z1PCR <3mm diameter and all Z1MPLC / Z1MPLB is .25 x DC


maximum Profile Ae for Z1PCR <3mm diameter and all Z1MPLC / Z1MPLB is .20 x DC

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

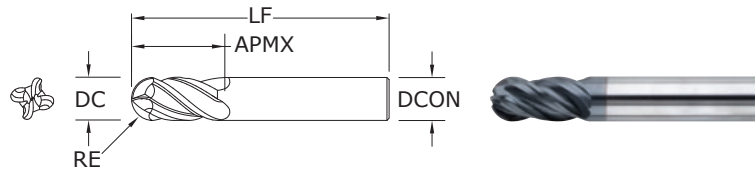

Z1B
FRACTIONAL SERIES

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0006

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6

RE = +0.0000/–0.0008

>3/8–1 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0010

STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)	Ti-NAMITE®-X (TX) W/FLAT	JetStream
1/8	3/8	1-1/2	1/8	36358	—	—
5/32	7/16	2	3/16	36357	—	—
3/16	7/16	2	3/16	36359	—	—
7/32	7/16	2-1/2	1/4	36361	—	—
1/4	1/2	2-1/2	1/4	36344	—	—
1/4	3/4	2-1/2	1/4	36590	—	—
9/32	5/8	2-1/2	5/16	36353	—	—
5/16	13/16	2-1/2	5/16	36345	—	—
11/32	13/16	2-1/2	3/8	36354	—	—
3/8	7/8	2-1/2	3/8	36346	36539	—
13/32	15/16	2-3/4	7/16	36355	36540	—
7/16	1	2-3/4	7/16	36347	36541	—
15/32	1	3	1/2	36356	36542	—
1/2	1	3	1/2	36348	36543	36846
1/2	1-1/4	3-1/4	1/2	36591	36592	—
9/16	1-1/8	3-1/2	9/16	36349	36544	36847
5/8	1-1/4	3-1/2	5/8	36350	36545	36848
3/4	1-1/2	4	3/4	36351	36546	36849
1	1-1/2	4	1	36352	36547	36850


RE = 1/2 Cutting Diameter (DC)

- Unequal helix design reduces damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)




Series Z1B	Fractional	Hardness		Ae x DC	Ap x DC	Vc (sfm)	DC • in							
							1/8	1/4	3/8	1/2	5/8	3/4	1	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	555	RPM	16961	8480	5654	4240	3392	2827	2120
						(444-666)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
							Feed (ipm)	25.8	33.9	43.0	42.4	42.1	36.5	29.7
		≤ 375 Bhn or ≤ 40 HRc	Slot 	1	≤ 1	440	RPM	13446	6723	4482	3362	2689	2241	1681
						(352-528)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
							Feed (ipm)	20.4	26.9	34.1	33.6	33.3	29.0	23.5
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	315	RPM	9626	4813	3209	2407	1925	1604	1203
						(252-378)	Fz	0.0003	0.0008	0.0014	0.0019	0.0024	0.0025	0.0027
							Feed (ipm)	10.8	15.4	18.0	18.3	18.5	16.0	13.0
		≤ 375 Bhn or ≤ 40 HRc	Slot 	1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
						(200-300)	Fz	0.0003	0.0008	0.0014	0.0019	0.0024	0.0025	0.0027
							Feed (ipm)	8.6	12.2	14.3	14.5	14.7	12.7	10.3
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	185	RPM	5654	2827	1885	1413	1131	942	707
						(148-222)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (ipm)	4.5	5.7	7.5	7.3	7.2	6.4	5.1
		≤ 375 Bhn or ≤ 40 HRc	Slot 	1	≤ 1	145	RPM	4431	2216	1477	1108	886	739	554
						(116-174)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (ipm)	3.5	4.4	5.9	5.8	5.7	5.0	4.0
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	490	RPM	14974	7487	4991	3744	2995	2496	1872
						(392-588)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
							Feed (ipm)	18.0	21.0	28.0	27.0	27.6	24.0	18.7
		≤ 275 Bhn or ≤ 28 HRc	Slot 	1	≤ 1	390	RPM	11918	5959	3973	2980	2384	1986	1490
						(312-468)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
							Feed (ipm)	14.3	16.7	22.2	21.5	21.9	19.1	14.9
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
						(272-408)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
							Feed (ipm)	8.3	12.5	15.2	14.5	15.0	13.2	10.4
		≤ 275 Bhn or ≤ 28 HRc	Slot 	1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031
						(216-324)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
							Feed (ipm)	6.6	9.9	12.1	11.6	11.9	10.5	8.3
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.5	≤ 1.5	310	RPM	9474	4737	3158	2368	1895	1579	1184
						(248-372)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
							Feed (ipm)	7.6	11.4	13.9	13.3	13.6	12.0	9.5
		≤ 325 Bhn or ≤ 35 HRc	Slot 	1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
						(200-300)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
							Feed (ipm)	6.1	9.2	11.2	10.7	11.0	9.7	7.6


continued on next page

Series	Z1B	Fractional	Hardness			Vc (sfm)	DC • in							
				Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4	1	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	 Profile	≤ 0.5	≤ 1.5	445	RPM	13599	6800	4533	3400	2720	2267	1700
						(356-534)	Fz	0.0004	0.0010	0.0018	0.0024	0.0030	0.0031	0.0034
							Feed (ipm)	19.0	27.2	32.6	32.6	28.1	23.1	
			 Slot	1	≤ 1	355	RPM	10849	5424	3616	2712	2170	1808	1356
						(284-426)	Fz	0.0004	0.0010	0.0018	0.0024	0.0030	0.0031	0.0034
							Feed (ipm)	15.2	21.7	26.0	26.0	22.4	18.4	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	 Profile	≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
						(272-408)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
							Feed (ipm)	12.5	14.5	19.4	18.7	19.1	16.6	13.0
			 Slot	1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031
						(216-324)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
							Feed (ipm)	9.9	11.6	15.4	14.9	15.2	13.2	10.3
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	 Profile	≤ 0.5	≤ 1.5	80	RPM	2445	1222	815	611	489	407	306
						(64-96)	Fz	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015
							Feed (ipm)	2.2	2.0	2.6	2.4	2.5	2.3	1.8
			 Slot	1	≤ 1	65	RPM	1986	993	662	497	397	331	248
						(52-78)	Fz	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015
							Feed (ipm)	1.6	1.6	2.1	2.0	2.1	1.9	1.5
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	 Profile	≤ 0.5	≤ 1.5	62	RPM	1895	947	632	474	379	316	237
						(50-74)	Fz	0.0001	0.0003	0.0005	0.0007	0.0008	0.0009	0.0010
							Feed (ipm)	0.8	1.1	1.3	1.3	1.2	1.1	0.9
			 Slot	1	≤ 1	50	RPM	1497	749	499	374	299	250	187
						(40-60)	Fz	0.0001	0.0003	0.0005	0.0007	0.0008	0.0009	0.0010
							Feed (ipm)	0.6	0.9	1.0	1.0	0.9	0.7	
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	 Profile	≤ 0.5	≤ 1.5	215	RPM	6570	3285	2190	1643	1314	1095	821	
					(172-258)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
						Feed (ipm)	5.3	6.6	8.8	8.5	8.4	7.4	5.9	
		 Slot	1	≤ 1	170	RPM	5195	2598	1732	1299	1039	866	649	
					(136-204)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
						Feed (ipm)	4.2	5.2	6.9	6.8	6.6	5.9	4.7	
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	 Profile	≤ 0.5	≤ 1.5	75	RPM	2292	1146	764	573	458	382	287	
					(60-90)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
						Feed (ipm)	1.8	2.3	3.1	3.0	2.9	2.6	2.1	
		 Slot	1	≤ 1	60	RPM	1834	917	611	458	367	306	229	
					(48-72)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
						Feed (ipm)	1.5	1.8	2.4	2.4	2.3	2.1	1.7	

Bhn (Brinell) HRc (Rockwell C)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 4 x rpm
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



Z1MB
METRIC SERIES

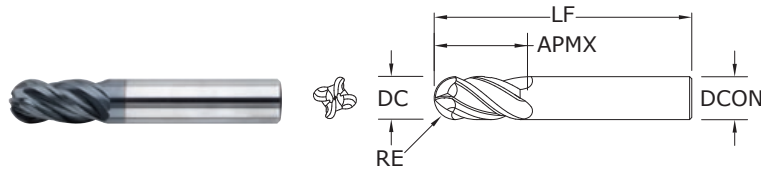

- Unequal helix design reduces damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials $\leq 45 \text{ HRc}$ ($\leq 420 \text{ Bhn}$)

mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)	JetStream
3,0	8,0	57,0	6,0	46354	—
4,0	11,0	57,0	6,0	46355	—
5,0	13,0	57,0	6,0	46356	—
6,0	13,0	57,0	6,0	46343	—
8,0	19,0	63,0	8,0	46344	—
10,0	22,0	72,0	10,0	46345	—
12,0	26,0	83,0	12,0	46346	—
14,0	26,0	83,0	14,0	46347	46518
16,0	32,0	92,0	16,0	46348	46519
18,0	32,0	92,0	18,0	46349	46520
20,0	38,0	104,0	20,0	46350	46521
25,0	38,0	104,0	25,0	46351	46522

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (mm)

3–6 DIAMETER

DC = $+0,000/-0,030$
DCON = h_6

RE = $+0,000/-0,015$

>6–10 DIAMETER

DC = $+0,000/-0,040$

DCON = h_6

RE = $+0,000/-0,020$

>10–25 DIAMETER


DC = $+0,000/-0,050$

DCON = h_6

RE = $+0,000/-0,025$

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com



Series Z1MB Metric	Hardness			Vc (m/min)	DC • mm									
		Ae x DC	Ap x DC		3	6	8	10	12	16	20	25		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	 Profile	≤ 0.5	≤ 1.5	169	RPM	17934	8967	6725	5380	4484	3363	2690	2152
					(135-203)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.086	0.088
					Feed (mm/min)	654	861	1091	1090	1076	1067	927	753	
		 Slot	1	≤ 1	134	RPM	14218	7109	5332	4265	3555	2666	2133	1706
					(107-161)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.086	0.088
					Feed (mm/min)	519	682	865	864	853	846	735	597	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	 Profile	≤ 0.5	≤ 1.5	96	RPM	10179	5089	3817	3054	2545	1909	1527	1221
					(77-115)	Fz	0.007	0.019	0.030	0.037	0.046	0.061	0.067	0.068
					Feed (mm/min)	274	391	456	456	464	469	407	330	
		 Slot	1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	969
					(61-91)	Fz	0.007	0.019	0.030	0.037	0.046	0.061	0.067	0.068
					Feed (mm/min)	217	310	362	362	368	372	323	262	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	 Profile	≤ 0.5	≤ 1.5	56	RPM	5978	2989	2242	1793	1495	1121	897	717
					(45-68)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
					Feed (mm/min)	115	143	191	191	186	184	163	129	
		 Slot	1	≤ 1	44	RPM	4686	2343	1757	1406	1171	879	703	562
					(35-53)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
					Feed (mm/min)	90	112	150	150	146	144	127	101	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	 Profile	≤ 0.5	≤ 1.5	149	RPM	15834	7917	5938	4750	3958	2969	2375	1900
					(119-179)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
					Feed (mm/min)	456	532	709	709	684	699	608	475	
		 Slot	1	≤ 1	119	RPM	12602	6301	4726	3781	3151	2363	1890	1512
					(95-143)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
					Feed (mm/min)	363	423	565	565	544	557	484	378	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	 Profile	≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	1318
					(83-124)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
					Feed (mm/min)	211	316	387	387	369	380	334	264	
		 Slot	1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	1047
					(66-99)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
					Feed (mm/min)	168	251	307	307	293	302	265	209	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	 Profile	≤ 0.5	≤ 1.5	94	RPM	10017	5009	3756	3005	2504	1878	1503	1202
					(76-113)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
					Feed (mm/min)	192	288	353	353	337	346	305	240	
		 Slot	1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	969
					(61-91)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
					Feed (mm/min)	155	233	284	284	271	279	246	194	


continued on next page

METRIC Z-Carb



Series Z1MB Metric	Hardness		Ae x DC	Ap x DC	Vc (m/min)	DC • mm								
						3	6	8	10	12	16	20	25	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	Profile 	≤ 0.5	≤ 1.5	136	RPM	14380	7190	5392	4314	3595	2696	2157	1726
					(109-163)	Fz	0.008	0.024	0.038	0.048	0.058	0.077	0.083	0.085
						Feed (mm/min)	483	690	828	828	828	828	713	587
		Slot 	1	≤ 1	108	RPM	11471	5736	4302	3441	2868	2151	1721	1377
					(87-130)	Fz	0.008	0.024	0.038	0.048	0.058	0.077	0.083	0.085
						Feed (mm/min)	385	551	661	661	661	661	569	468
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	Profile 	≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	1318
					(83-124)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
						Feed (mm/min)	316	369	492	492	475	485	422	330
		Slot 	1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	1047
					(66-99)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
						Feed (mm/min)	251	293	391	391	377	385	335	262
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	Profile 	≤ 0.5	≤ 1.5	24	RPM	2585	1293	969	776	646	485	388	310
					(20-29)	Fz	0.005	0.010	0.017	0.021	0.024	0.033	0.037	0.038
						Feed (mm/min)	55	50	66	53	62	65	58	47
		Slot 	1	≤ 1	20	RPM	2100	1050	788	630	525	394	315	252
					(16-24)	Fz	0.005	0.010	0.017	0.021	0.024	0.033	0.037	0.038
						Feed (mm/min)	40	40	54	54	50	52	47	38
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	Profile 	≤ 0.5	≤ 1.5	19	RPM	2003	1002	751	601	501	376	301	240
					(15-23)	Fz	0.002	0.007	0.011	0.013	0.017	0.020	0.024	0.025
						Feed (mm/min)	19	29	32	32	34	31	29	24
		Slot 	1	≤ 1	15	RPM	1583	792	594	475	396	297	238	190
					(12-18)	Fz	0.002	0.007	0.011	0.013	0.017	0.020	0.024	0.025
						Feed (mm/min)	15	23	25	25	27	24	23	19
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	Profile 	≤ 0.5	≤ 1.5	66	RPM	6947	3474	2605	2084	1737	1303	1042	834	
				(52-79)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
					Feed (mm/min)	133	167	222	222	217	213	189	150	
	Slot 	1	≤ 1	52	RPM	5493	2747	2060	1648	1373	1030	824	659	
				(41-62)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
					Feed (mm/min)	105	132	176	176	171	169	149	119	
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	Profile 	≤ 0.5	≤ 1.5	23	RPM	2424	1212	909	727	606	454	364	291	
				(18-27)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
					Feed (mm/min)	47	58	78	78	76	74	66	52	
	Slot 	1	≤ 1	18	RPM	1939	969	727	582	485	364	291	233	
				(15-22)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
					Feed (mm/min)	37	47	62	62	60	60	53	42	

Bhn (Brinell) HRc (Rockwell C)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fz} \times 4 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

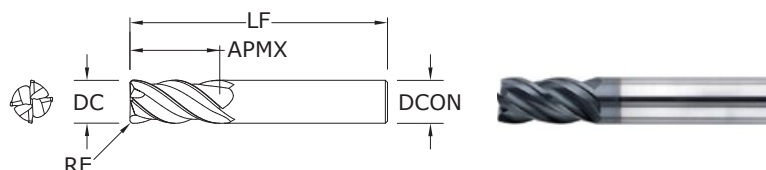

ZH1CR
FRACTIONAL SERIES

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.0000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6

RE = +0.0000/-0.0020

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0020


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
1/4	1/2	2-1/2	1/4	.020	36570	—
1/4	3/4	2-1/2	1/4	.020	36616	—
5/16	13/16	2-1/2	5/16	.020	36571	—
3/8	7/8	2-1/2	3/8	.020	36572	36555
7/16	1	2-3/4	7/16	.020	36573	36556
1/2	1	3	1/2	.030	36574	36557
1/2	1-1/4	3-1/4	1/2	.030	36618	36617
9/16	1-1/8	3-1/2	9/16	.030	36575	36558
5/8	1-1/4	3-1/2	5/8	.040	36576	36559
3/4	1-1/2	4	3/4	.040	36577	36560
1	1-1/2	4	1	.040	36578	36561

- The original Z-Carb design with an enhanced core and higher helix suited for the demands of high temperature alloys
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut for difficult to machine materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

FRACTIONAL Z-Carb-HTA

Series ZH1CR Fractional	Hardness			Vc (sfm)	Diameter (DC) (inch)						
		Ae x DC	Ap x DC		1/4	3/8	1/2	3/4	1		
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	 Profile	≤ 0.5	≤ 1.5	85	RPM	1299	866	649	433	325
					(68-102)	Fz	0.0007	0.0012	0.0017	0.0020	0.0023
						Feed (ipm)	3.6	4.2	4.4	3.5	3.0
		 Slot	1	≤ 1	70	RPM	1070	713	535	357	267
					(56-84)	Fz	0.0007	0.0012	0.0017	0.0020	0.0023
						Feed (ipm)	3.0	3.4	3.6	2.9	2.5
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	 Profile	≤ 0.5	≤ 1.5	70	RPM	1070	713	535	357	267
					(56-84)	Fz	0.0005	0.0009	0.0012	0.0014	0.0016
						Feed (ipm)	2.1	2.6	2.6	2.0	1.7
		 Slot	1	≤ 1	55	RPM	840	560	420	280	210
					(44-66)	Fz	0.0005	0.0009	0.0012	0.0014	0.0016
						Feed (ipm)	1.7	2.0	2.0	1.6	1.3
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	 Profile	≤ 0.5	≤ 1.5	215	RPM	3285	2190	1643	1095	821
					(172-258)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028
						Feed (ipm)	10.5	13.1	13.1	10.5	9.2
		 Slot	1	≤ 1	170	RPM	2598	1732	1299	866	649
					(136-204)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028
						Feed (ipm)	8.3	10.4	10.4	8.3	7.3
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	 Profile	≤ 0.5	≤ 1.5	75	RPM	1146	764	573	382	287	
				(60-90)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028	
					Feed (ipm)	3.7	4.6	4.6	3.7	3.2	
	 Slot	1	≤ 1	60	RPM	917	611	458	306	229	
				(48-72)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028	
					Feed (ipm)	2.9	3.7	3.7	2.9	2.6	

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC



ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

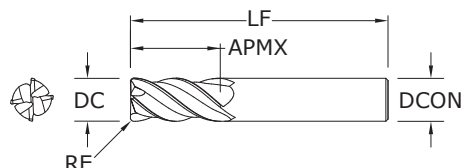

ZH1MCRS •
ZH1MCR
METRIC SERIES

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000/-0,050

>10-20 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm					EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
6,0	10,0	54,0	6,0	0,5	—	42712
6,0	13,0	57,0	6,0	0,5	46450	—
6,0	13,0	57,0	6,0	1,0	46451	—
6,0	13,0	57,0	6,0	1,5	46452	—
8,0	12,0	58,0	8,0	0,5	—	42713
8,0	19,0	63,0	8,0	0,5	46453	—
8,0	19,0	63,0	8,0	1,0	46454	—
8,0	19,0	63,0	8,0	1,5	46455	—
10,0	14,0	66,0	10,0	0,5	—	42714
10,0	22,0	72,0	10,0	0,5	46456	—
10,0	22,0	72,0	10,0	1,0	46457	—
10,0	22,0	72,0	10,0	1,5	46458	—
10,0	22,0	72,0	10,0	2,0	46459	—
12,0	16,0	73,0	12,0	0,7	—	42715
12,0	26,0	83,0	12,0	0,5	46460	46471
12,0	26,0	83,0	12,0	1,0	46461	46472
12,0	26,0	83,0	12,0	1,5	46462	46473
12,0	26,0	83,0	12,0	2,0	46463	46474
12,0	26,0	83,0	12,0	3,0	46464	46475
16,0	22,0	82,0	16,0	1,0	—	42716
16,0	32,0	92,0	16,0	1,5	46465	46476
16,0	32,0	92,0	16,0	2,0	46466	46477
16,0	32,0	92,0	16,0	3,0	46467	46478
16,0	32,0	92,0	16,0	4,0	46482	46483
20,0	26,0	92,0	20,0	1,0	—	42717
20,0	38,0	104,0	20,0	3,0	46468	46479
20,0	38,0	104,0	20,0	4,0	46469	46480
20,0	38,0	104,0	20,0	5,0	46470	46481

- The original Z-Carb design with an enhanced core and higher helix suited for the demands of high temperature alloys
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut for difficult to machine materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

Z-Carb-HTA

Series ZH1MCRS, ZH1MCR Metric	Hardness			Vc (m/min)	DC • mm					
		Ae x DC	Ap x DC		6	10	12	20		
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	 Profile	≤ 0.5	≤ 1.5	26	RPM	1373	824	687	412
					(21-31)	Fz	0.017	0.032	0.041	0.053
					Feed (mm/min)	93	105	113	87	
		 Slot	1	≤ 1	21	RPM	1131	679	565	339
					(17-26)	Fz	0.017	0.032	0.041	0.053
					Feed (mm/min)	77	87	93	72	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	 Profile	≤ 0.5	≤ 1.5	21	RPM	1131	679	565	339
					(17-26)	Fz	0.012	0.024	0.029	0.037
					Feed (mm/min)	54	65	66	50	
		 Slot	1	≤ 1	17	RPM	889	533	444	267
					(13-20)	Fz	0.012	0.024	0.029	0.037
					Feed (mm/min)	43	51	52	39	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	 Profile	≤ 0.5	≤ 1.5	66	RPM	3474	2084	1737	1042
					(52-79)	Fz	0.019	0.041	0.049	0.057
					Feed (mm/min)	264	342	340	238	
		 Slot	1	≤ 1	52	RPM	2747	1648	1373	824
					(41-62)	Fz	0.019	0.041	0.049	0.057
					Feed (mm/min)	209	270	269	188	
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	 Profile	≤ 0.5	≤ 1.5	23	RPM	1212	727	606	364	
				(18-27)	Fz	0.019	0.041	0.049	0.057	
				Feed (mm/min)	92	119	119	83		
	 Slot	1	≤ 1	18	RPM	969	582	485	291	
				(15-22)	Fz	0.019	0.041	0.049	0.057	
				Feed (mm/min)	74	95	95	66		

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)



ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

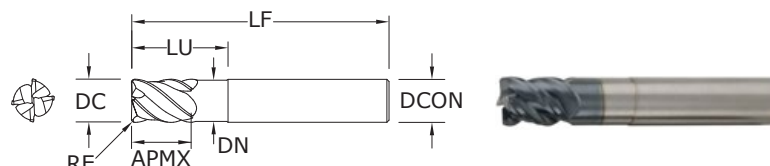

ZD1CR

FRACTIONAL SERIES

TOLERANCES (inch)

1/8-1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.0000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6

RE = +0.0000/-0.0020

>3/8-3/4 DIAMETER

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0020


STEELS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

inch							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-X (TX)
1/8	5/32	2-1/2	1/4	1/2	.110	.010	36780
3/16	7/32	2-1/2	1/4	3/4	.172	.020	36781
1/4	9/32	2-1/2	1/4	3/4	.235	.020	36782
5/16	13/32	2-1/2	5/16	1	.297	.040	36783
3/8	15/32	2-1/2	3/8	1	.360	.040	36784
7/16	9/16	2-3/4	7/16	1	.422	.040	36785
1/2	5/8	3	1/2	1-1/4	.485	.040	36786
1/2	5/8	4-1/2	1/2	2-1/4	.485	.040	36787
5/8	3/4	3-1/2	5/8	1-1/2	.610	.040	36788
5/8	3/4	4-1/2	5/8	2-1/4	.610	.040	36789
5/8	3/4	5-1/2	5/8	3-1/4	.610	.040	36790
3/4	15/16	4	3/4	1-3/4	.735	.060	36791
3/4	15/16	4-1/2	3/4	2-1/4	.735	.060	36792
3/4	15/16	5-1/2	3/4	3-1/4	.735	.060	36793

- The original Z-Carb design with negative rake, heavy core, and higher helix for strength and shearing of hard mold & die materials
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials 35-60HRC (327 to 654 Bhn)

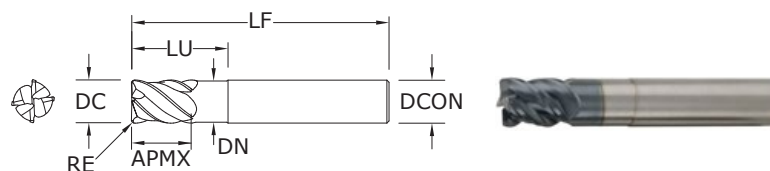

ZD1MCR

METRIC SERIES

TOLERANCES (mm)

3-6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000/-0,050

>10-20 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

STEELS


HARDENED STEELS

For patent
information visit
www.ksptpatents.com

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-X (TX)
3,0	4,0	57,0	6,0	15,0	2,62	0,2	46560
4,0	5,0	57,0	6,0	15,0	3,61	0,3	46561
5,0	6,0	57,0	6,0	15,0	4,60	0,5	46562
6,0	7,0	57,0	6,0	15,0	5,61	1,0	46563
8,0	10,0	63,0	8,0	25,0	7,62	1,0	46564
10,0	12,0	72,0	10,0	30,0	9,60	1,0	46565
12,0	15,0	83,0	12,0	35,0	11,61	1,0	46566
16,0	20,0	92,0	16,0	45,0	15,60	1,5	46567
20,0	24,0	104,0	20,0	55,0	19,61	2,0	46568

- The original Z-Carb design with negative rake, heavy core, and higher helix for strength and shearing of hard mold & die materials
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials 35-60HRC (327 to 654 Bhn)

Z-Carb-MD

Series ZD1CR Fractional		Hardness			Vc (sfm)	Diameter (DC) (inch)							
			Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4		
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRC	Profile	≤ 0.4	≤ 1	405	RPM	12377	6188	4126	3094	2475	2063
						(324-486)	Fz	0.0005	0.0012	0.0023	0.0030	0.0039	0.0042
						Feed (ipm)	24.8	29.7	38.0	37.1	38.6	34.7	
		≤ 475 Bhn or ≤ 50 HRC	Slot	1	≤ 0.4	320	RPM	9779	4890	3260	2445	1956	1630
						(256-384)	Fz	0.0005	0.0012	0.0023	0.0030	0.0039	0.0042
						Feed (ipm)	19.6	23.5	30.0	29.3	30.5	27.4	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRC	Profile	≤ 0.4	≤ 1	210	RPM	6418	3209	2139	1604	1284	1070
						(168-252)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0035
						Feed (ipm)	10.3	12.8	16.3	16.0	16.4	15.0	
		≤ 655 Bhn or ≤ 60 HRC	Slot	1	≤ 0.4	170	RPM	5195	2598	1732	1299	1039	866
						(136-204)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0035
						Feed (ipm)	8.3	10.4	13.2	13.0	13.3	12.1	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 655 Bhn or ≤ 60 HRC	Profile	≤ 0.4	≤ 1	90	RPM	2750	1375	917	688	550	458
						(72-108)	Fz	0.0002	0.0005	0.0010	0.0013	0.0017	0.0018
						Feed (ipm)	2.2	2.8	3.7	3.6	3.7	3.3	
		≤ 655 Bhn or ≤ 60 HRC	Slot	1	≤ 0.4	70	RPM	2139	1070	713	535	428	357
						(56-84)	Fz	0.0002	0.0005	0.0010	0.0013	0.0017	0.0018
						Feed (ipm)	1.7	2.1	2.9	2.8	2.9	2.6	

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC


ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series ZD1MCR Metric		Hardness			Vc (m/min)	Diameter (DC) (mm)								
			Ae x DC	Ap x DC		3	6	8	10	12	16	20		
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc		≤ 0.4	≤ 1	123	RPM	13087	6544	4908	3926	3272	2454	1963
						(99-148)	Fz	0.012	0.029	0.049	0.061	0.072	0.083	0.112
						Feed (mm/min)	628	754	963	963	942	817	879	
		≤ 40 HRc		1	≤ 0.4	98	RPM	10340	5170	3878	3102	2585	1939	1551
						(78-117)	Fz	0.012	0.029	0.049	0.061	0.072	0.083	0.112
						Feed (mm/min)	496	596	761	761	744	645	695	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc		≤ 0.4	≤ 1	64	RPM	6786	3393	2545	2036	1696	1272	1018
						(51-77)	Fz	0.010	0.024	0.041	0.051	0.060	0.068	0.093
						Feed (mm/min)	261	326	413	413	407	347	380	
		≤ 50 HRc		1	≤ 0.4	52	RPM	5493	2747	2060	1648	1373	1030	824
						(41-62)	Fz	0.010	0.024	0.041	0.051	0.060	0.068	0.093
						Feed (mm/min)	211	264	334	334	330	281	308	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 655 Bhn or ≤ 60 HRc		≤ 0.4	≤ 1	27	RPM	2908	1454	1091	872	727	545	436
						(22-33)	Fz	0.005	0.012	0.021	0.027	0.031	0.036	0.048
						Feed (mm/min)	56	70	93	93	91	79	84	
		≤ 60 HRc		1	≤ 0.4	21	RPM	2262	1131	848	679	565	424	339
						(17-26)	Fz	0.005	0.012	0.021	0.027	0.031	0.036	0.048
						Feed (mm/min)	43	54	72	72	71	62	65	

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)



ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

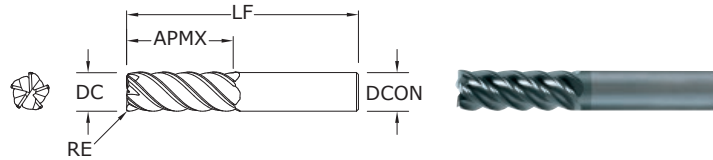

**55 •
55CR**
FRACTIONAL SERIES

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0020


STEELS
STAINLESS STEELS
CAST IRON
HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com


CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AITIN)	Ti-NAMITE®-A (AITIN) W/FLAT
1/8	1/4	1-1/2	1/8	—	32672	—
1/8	1/4	1-1/2	1/8	.010	32606	—
1/8	1/2	1-1/2	1/8	—	32655	—
1/8	1/2	1-1/2	1/8	.010	32607	—
5/32	5/16	2	3/16	.010	32608	—
5/32	9/16	2	3/16	—	32656	—
5/32	9/16	2	3/16	.010	32609	—
3/16	5/16	2	3/16	—	32673	—
3/16	5/16	2	3/16	.010	32610	—
3/16	5/8	2	3/16	—	32657	—
3/16	5/8	2	3/16	.010	32611	—
7/32	3/8	2	1/4	.015	32612	—
7/32	3/4	2-1/2	1/4	.015	32613	—
7/32	3/4	2-1/2	1/4	—	32658	—
1/4	3/8	2	1/4	.015	32614	—
1/4	3/8	2	1/4	—	32674	—
1/4	3/4	2-1/2	1/4	—	32659	—
1/4	3/4	2-1/2	1/4	.015	32615	—
1/4	1-1/4	4	1/4	.015	32616	—
5/16	7/16	2	5/16	—	32675	—
5/16	7/16	2	5/16	.015	32619	—
5/16	13/16	2-1/2	5/16	—	32660	—
5/16	13/16	2-1/2	5/16	.015	32620	—
5/16	1-1/4	4	5/16	.015	32621	—
3/8	1/2	2	3/8	—	32676	32677
3/8	1/2	2	3/8	.015	32625	32591
3/8	1/2	2	3/8	.030	32592	32593
3/8	1	2-1/2	3/8	—	32661	32662
3/8	1	2-1/2	3/8	.015	32626	32628
3/8	1	2-1/2	3/8	.030	32573	32574
3/8	1-1/2	4	3/8	.015	32627	—
3/8	1-1/2	4	3/8	.030	32569	—

continued on next page

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



**55 •
55CR**
FRACTIONAL SERIES

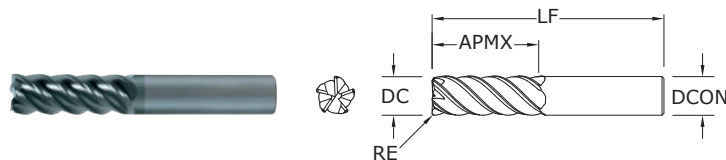

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
7/16	1	2-3/4	7/16	—	32663	—
7/16	1	2-3/4	7/16	.015	32632	—
7/16	2	4	7/16	.015	32633	—
1/2	5/8	2-1/2	1/2	—	32678	32679
1/2	5/8	2-1/2	1/2	.030	32594	32595
1/2	5/8	2-1/2	1/2	.060	32596	32597
1/2	1-1/4	3	1/2	—	32664	32665
1/2	1-1/4	3	1/2	.030	32575	32576
1/2	1-1/4	3	1/2	.060	32577	32578
1/2	2	4	1/2	.030	32685	—
1/2	2	4	1/2	.060	32686	—
5/8	3/4	3	5/8	—	32680	32681
5/8	3/4	3	5/8	.030	32598	32599
5/8	3/4	3	5/8	.060	32600	32601
5/8	1-5/8	3-1/2	5/8	—	32666	32667
5/8	1-5/8	3-1/2	5/8	.030	32579	32580
5/8	1-5/8	3-1/2	5/8	.060	32581	32582
5/8	2-1/2	5	5/8	.030	32570	—
5/8	2-1/2	5	5/8	.060	32687	—
3/4	1	3	3/4	—	32682	32683
3/4	1	3	3/4	.030	32602	32603
3/4	1	3	3/4	.060	32604	32605
3/4	1-5/8	4	3/4	—	32668	32669
3/4	1-5/8	4	3/4	.030	32583	32584
3/4	1-5/8	4	3/4	.060	32585	32586
3/4	3-1/4	6	3/4	.030	32571	—
3/4	3-1/4	6	3/4	.060	32688	—
1	1-1/2	4	1	—	32670	32671
1	1-1/2	4	1	.030	32587	32588
1	1-1/2	4	1	.060	32589	32590
1	2-5/8	6	1	.030	32572	—
1	2-5/8	6	1	.060	32689	—

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h₆

RE = +0.0000/-0.0020


STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

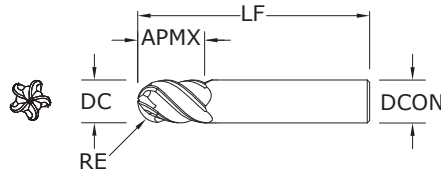

55B
FRACTIONAL SERIES

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0005/-0.0010

STEELS

STAINLESS STEELS

CAST IRON


HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-A (AlTiN)
1/4	3/4	2-1/2	1/4	32500
5/16	13/16	2-1/2	5/16	32501
3/8	1	2-1/2	3/8	32502
1/2	1-1/4	3	1/2	32503
5/8	1-5/8	3-1/2	5/8	32504
3/4	1-5/8	4	3/4	32505
1	1-1/2	4	1	32506


RE = 1/2 Cutting Diameter (DC)

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)




Series 55, 55CR, 55B Fractional		Hardness			Vc (sfm)		DC • in								
			1/8	1/4			3/8	1/2	5/8	3/4	1				
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	 Profile	≤ 0.25	≤ 1.5	385	RPM	11766	5883	3922	2941	2353	1961	1471	
						(308-462)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0028	0.0032	
							Feed (ipm)	20.6	26.5	33.3	33.8	34.1	27.5	23.5	
		≤ 275 Bhn or ≤ 28 HRc	 HSM	≤ 0.05	≤ 2	630	RPM	19253	9626	6418	4813	3851	3209	2407	
						(504-756)	Fz	0.0007	0.0018	0.0034	0.0046	0.0057	0.0055	0.0064	
							Feed (ipm)	67.4	86.6	109.1	110.7	109.7	88.2	77.0	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	 Profile	≤ 0.25	≤ 1.5	325	RPM	9932	4966	3311	2483	1986	1655	1242	
						(260-390)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0021	0.0024	
							Feed (ipm)	12.9	17.4	21.5	21.1	21.9	17.4	14.9	
		≤ 375 Bhn or ≤ 40 HRc	 HSM	≤ 0.05	≤ 2	530	RPM	16197	8098	5399	4049	3239	2699	2025	
						(424-636)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0041	0.0048	
							Feed (ipm)	42.1	56.7	70.2	68.8	69.6	55.3	48.6	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	 Profile	≤ 0.25	≤ 1.5	175	RPM	5348	2674	1783	1337	1070	891	669	
						(140-210)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
							Feed (ipm)	5.3	6.7	8.9	8.7	8.6	7.6	6.0	
		≤ 375 Bhn or ≤ 40 HRc	 HSM	≤ 0.05	≤ 2	290	RPM	8862	4431	2954	2216	1772	1477	1108	
						(232-348)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035	
							Feed (ipm)	17.7	22.2	28.1	27.7	28.4	24.4	19.4	
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	 Profile	≤ 0.25	≤ 1.5	370	RPM	11307	5654	3769	2827	2261	1885	1413
							(296-444)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0023	0.0024
								Feed (ipm)	14.7	19.8	24.5	24.0	24.9	21.7	17.0
			≤ 275 Bhn or ≤ 28 HRc	 HSM	≤ 0.05	≤ 2	560	RPM	17114	8557	5705	4278	3423	2852	2139
							(448-672)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0044	0.0048
								Feed (ipm)	44.5	59.9	74.2	72.7	73.6	62.7	51.3
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 275 Bhn or ≤ 28 HRc	 Profile	≤ 0.25	≤ 1.5	255	RPM	7793	3896	2598	1948	1559	1299	974	
						(204-306)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023	
							Feed (ipm)	9.4	11.7	15.6	15.6	15.6	13.6	11.2	
		≤ 275 Bhn or ≤ 28 HRc	 HSM	≤ 0.05	≤ 2	385	RPM	11766	5883	3922	2941	2353	1961	1471	
						(308-462)	Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0041	0.0045	
							Feed (ipm)	28.2	38.2	47.1	47.1	47.1	40.2	33.1	
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450		≤ 325 Bhn or ≤ 35 HRc	 Profile	≤ 0.25	≤ 1.5	235	RPM	7182	3591	2394	1795	1436	1197	898	
						(188-282)	Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019	
							Feed (ipm)	7.5	10.8	12.0	12.6	12.2	10.8	8.5	
		≤ 325 Bhn or ≤ 35 HRc	 HSM	≤ 0.05	≤ 2	355	RPM	10849	5424	3616	2712	2170	1808	1356	
						(284-426)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039	
							Feed (ipm)	22.2	29.8	38.0	38.0	36.9	32.5	26.4	

continued on next page


	Series 55, 55CR, 55B Fractional	Hardness			Vc (sfm)	DC • in								
			Ae x DC	Ap x DC										
						1/8	1/4	3/8	1/2	5/8	3/4	1		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc		≤ 0.25	≤ 1.5	470	RPM	14363	7182	4788	3591	2873	2394	1795
						(376-564)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
							Feed (ipm)	25.1	32.3	40.7	41.3	41.7	35.9	28.7
				≤ 0.05	≤ 2	705	RPM	21545	10772	7182	5386	4309	3591	2693
						(564-846)	Fz	0.0007	0.0018	0.0034	0.0046	0.0057	0.0059	0.0064
							Feed (ipm)	75.4	97.0	122.1	123.9	122.8	105.9	86.2
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc		≤ 0.25	≤ 1.5	360	RPM	11002	5501	3667	2750	2200	1834	1375
						(288-432)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0023	0.0024
							Feed (ipm)	14.3	19.3	23.8	23.4	24.2	21.1	16.5
				≤ 0.05	≤ 2	540	RPM	16502	8251	5501	4126	3300	2750	2063
						(432-648)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0044	0.0048
							Feed (ipm)	42.9	57.8	71.5	70.1	71.0	60.5	49.5
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc		≤ 0.25	≤ 1.5	70	RPM	2139	1070	713	535	428	357	267
						(56-84)	Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019
							Feed (ipm)	2.2	3.2	3.6	3.7	3.6	3.2	2.5
				≤ 0.05	≤ 2	107	RPM	3270	1635	1090	817	654	545	409
						(86-128)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
							Feed (ipm)	6.7	9.0	11.4	11.4	11.1	9.8	8.0
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc		≤ 0.25	≤ 1.5	55	RPM	1681	840	560	420	336	280	210
						(44-66)	Fz	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015
							Feed (ipm)	1.3	1.7	2.2	2.1	2.2	2.0	1.6
				≤ 0.05	≤ 2	85	RPM	2598	1299	866	649	520	433	325
						(68-102)	Fz	0.0003	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029
							Feed (ipm)	4.0	5.2	6.5	6.8	6.8	5.8	4.7
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc		≤ 0.25	≤ 1.5	235	RPM	7182	3591	2394	1795	1436	1197	898
						(188-282)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023
							Feed (ipm)	7.2	10.8	14.4	14.4	14.4	12.6	10.3
				≤ 0.05	≤ 2	390	RPM	11918	5959	3973	2980	2384	1986	1490
						(312-468)	Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0041	0.0045
							Feed (ipm)	29.8	38.7	47.7	47.7	47.7	40.7	33.5
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc		≤ 0.25	≤ 1.5	85	RPM	2598	1299	866	649	520	433	325
						(68-102)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023
							Feed (ipm)	2.6	3.9	5.2	5.2	5.2	4.5	3.7
				≤ 0.05	≤ 2	140	RPM	4278	2139	1426	1070	856	713	535
						(112-168)	Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0042	0.0045
							Feed (ipm)	10.7	13.9	17.1	17.1	17.1	15.0	12.0

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fz} \times 5 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 reduce Ap to 1 x DC (maximum) when profile milling with long or extra long flute length tools
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



55M • 55MCR

METRIC SERIES

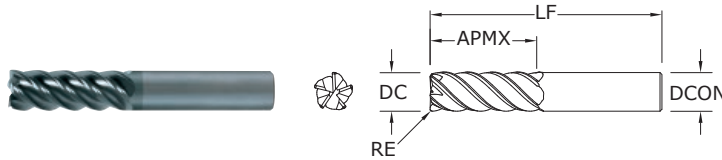

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)


CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
6,0	12,0	50,0	6,0	—	42606	—
6,0	12,0	50,0	6,0	0,5	42660	—
6,0	19,0	63,0	6,0	—	42607	—
6,0	19,0	63,0	6,0	0,25	42661	—
6,0	19,0	63,0	6,0	0,5	42662	—
6,0	19,0	63,0	6,0	1,0	42663	—
6,0	19,0	63,0	6,0	1,5	42664	—
6,0	25,0	75,0	6,0	—	42608	—
6,0	25,0	75,0	6,0	0,5	42665	—
8,0	12,0	50,0	8,0	—	42609	—
8,0	12,0	50,0	8,0	0,5	42666	—
8,0	20,0	63,0	8,0	—	42610	—
8,0	20,0	63,0	8,0	0,5	42667	—
8,0	20,0	63,0	8,0	1,0	42668	—
8,0	20,0	63,0	8,0	1,5	42669	—
8,0	20,0	63,0	8,0	2,0	42670	—
8,0	25,0	75,0	8,0	—	42611	—
8,0	25,0	75,0	8,0	0,5	42671	—
10,0	16,0	50,0	10,0	—	42612	—
10,0	16,0	50,0	10,0	0,5	42672	—
10,0	22,0	75,0	10,0	—	42622	42613
10,0	22,0	75,0	10,0	0,5	42673	—
10,0	22,0	75,0	10,0	1,0	42674	—
10,0	22,0	75,0	10,0	1,5	42675	—
10,0	22,0	75,0	10,0	2,0	42676	—
10,0	22,0	75,0	10,0	2,5	42677	—
10,0	38,0	100,0	10,0	—	42614	—
10,0	38,0	100,0	10,0	0,5	42678	—
12,0	19,0	63,0	12,0	—	42615	—
12,0	19,0	63,0	12,0	0,5	42679	—
12,0	25,0	75,0	12,0	—	42616	42623
12,0	25,0	75,0	12,0	0,5	42680	—
12,0	25,0	75,0	12,0	1,0	42681	—
12,0	25,0	75,0	12,0	1,5	42682	—
12,0	25,0	75,0	12,0	2,0	42683	—
12,0	25,0	75,0	12,0	2,5	42684	—

TOLERANCES (inch)

DC = $+0.0000/-0.0020$



DCON = h_6

RE = $+0.0000/-0.0020$



For patent information visit
www.ksptpatents.com

continued on next page

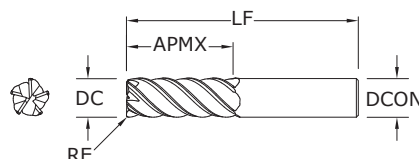

55M • 55MCR METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050


STEELS
STAINLESS STEELS
CAST IRON
HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
12,0	25,0	75,0	12,0	3,0	42685	—
12,0	50,0	100,0	12,0	—	42617	—
12,0	50,0	100,0	12,0	0,5	42686	—
12,0	50,0	100,0	12,0	3,0	42630	—
12,0	50,0	100,0	12,0	4,0	42631	—
16,0	32,0	89,0	16,0	—	42618	42624
16,0	32,0	89,0	16,0	1,0	42687	—
16,0	32,0	89,0	16,0	1,5	42688	—
16,0	32,0	89,0	16,0	2,0	42689	—
16,0	32,0	89,0	16,0	2,5	42690	—
16,0	32,0	89,0	16,0	3,0	42691	—
16,0	32,0	89,0	16,0	4,0	42692	—
16,0	50,0	100,0	16,0	—	42626	—
16,0	50,0	100,0	16,0	2,0	42656	—
16,0	50,0	100,0	16,0	2,5	42657	—
16,0	50,0	100,0	16,0	3,0	42658	—
16,0	50,0	100,0	16,0	4,0	42659	—
16,0	50,0	100,0	16,0	5,0	42628	—
16,0	75,0	150,0	16,0	—	42619	—
16,0	75,0	150,0	16,0	1,0	42693	—
16,0	75,0	150,0	16,0	3,0	42632	—
16,0	75,0	150,0	16,0	4,0	42633	—
20,0	38,0	100,0	20,0	—	42620	42625
20,0	38,0	100,0	20,0	1,0	42694	—
20,0	38,0	100,0	20,0	1,5	42695	—
20,0	38,0	100,0	20,0	2,0	42696	—
20,0	38,0	100,0	20,0	2,5	42697	—
20,0	38,0	100,0	20,0	3,0	42698	—
20,0	38,0	100,0	20,0	4,0	42699	—
20,0	38,0	100,0	20,0	5,0	42700	—
20,0	38,0	100,0	20,0	6,0	42648	—
20,0	50,0	100,0	20,0	—	42627	—
20,0	50,0	100,0	20,0	2,0	42649	—
20,0	50,0	100,0	20,0	2,5	42650	—
20,0	50,0	100,0	20,0	3,0	42651	—
20,0	50,0	100,0	20,0	4,0	42652	—


- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

continued on next page



55M • 55MCR

METRIC SERIES

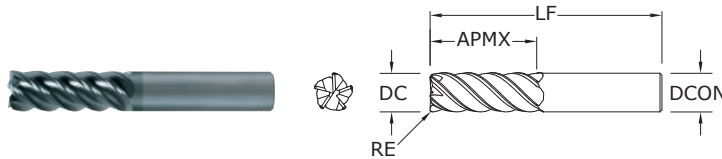


- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)


CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
20,0	50,0	100,0	20,0	5,0	42653	—
20,0	50,0	100,0	20,0	6,0	42654	—
20,0	75,0	150,0	20,0	—	42621	—
20,0	75,0	150,0	20,0	1,0	42701	—
20,0	75,0	150,0	20,0	2,0	42702	—
20,0	75,0	150,0	20,0	3,0	42703	—
20,0	75,0	150,0	20,0	4,0	42704	—
20,0	75,0	150,0	20,0	5,0	42705	—
20,0	75,0	150,0	20,0	6,0	42655	—

TOLERANCES (mm)

DC = $+0,000/-0,050$
 DCON = h_6
 RE = $+0,000/-0,050$



For patent
information visit
www.ksptpatents.com

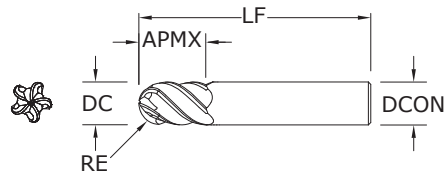

55MB
METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

STEELS

STAINLESS STEELS

CAST IRON


HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-A (AlTiN)
6,0	13,0	57,0	6,0	42750
8,0	19,0	63,0	8,0	42751
10,0	22,0	72,0	10,0	42752
12,0	26,0	83,0	12,0	42753
16,0	32,0	92,0	16,0	42754
20,0	38,0	104,0	20,0	42755


RE = 1/2 Cutting Diameter (DC)

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)




Series 55M, 55MCR, 55MB				Vc (m/min)		DC • mm								
Metric	Hardness	Ae x DC	Ap x DC			6	8	10	12	16	20			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	 Profile	≤ 275 Bhn or ≤ 28 HRc	≤ 0.25	≤ 1.5	117	RPM	6220	4665	3732	3110	2333	1866	
						(94-141)	Fz	0.022	0.036	0.061	0.070	0.072	0.085	
						Feed (mm/min)	672	846	1145	1082	836	796		
		 HSM		≤ 0.05	≤ 2	192	RPM	10179	7634	6107	5089	3817	3054	
						(154-230)	Fz	0.043	0.073	0.123	0.137	0.141	0.154	
						Feed (mm/min)	2198	2769	3746	3481	2687	2345		
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	 Profile	≤ 375 Bhn or ≤ 40 HRc	≤ 0.25	≤ 1.5	99	RPM	5251	3938	3151	2626	1969	1575	
						(79-119)	Fz	0.017	0.028	0.045	0.053	0.054	0.064	
						Feed (mm/min)	441	546	571	693	529	504		
		 HSM		≤ 0.05	≤ 2	162	RPM	8563	6422	5138	4282	3211	2569	
						(129-194)	Fz	0.034	0.055	0.091	0.103	0.105	0.128	
						Feed (mm/min)	1438	1781	2329	2209	1685	1644		
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	 Profile	≤ 375 Bhn or ≤ 40 HRc	≤ 0.25	≤ 1.5	53	RPM	2827	2121	1696	1414	1060	848	
						(43-64)	Fz	0.012	0.021	0.035	0.038	0.044	0.048	
						Feed (mm/min)	170	226	294	271	231	204		
		 HSM		≤ 0.05	≤ 2	88	RPM	4686	3514	2811	2343	1757	1406	
						(71-106)	Fz	0.024	0.041	0.067	0.077	0.084	0.093	
						Feed (mm/min)	562	712	937	900	742	656		
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	 Profile	≤ 275 Bhn or ≤ 28 HRc	≤ 0.25	≤ 1.5	113	RPM	5978	4484	3587	2989	2242	1793
							(90-135)	Fz	0.017	0.028	0.045	0.053	0.059	0.064
							Feed (mm/min)	502	622	813	789	660	574	
			 HSM		≤ 0.05	≤ 2	171	RPM	9048	6786	5429	4524	3393	2714
							(137-205)	Fz	0.034	0.055	0.091	0.103	0.113	0.128
							Feed (mm/min)	1520	1882	2461	2334	1911	1737	
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		 Profile	≤ 275 Bhn or ≤ 28 HRc	≤ 0.25	≤ 1.5	78	RPM	4120	3090	2472	2060	1545	1236	
						(62-93)	Fz	0.014	0.026	0.043	0.048	0.054	0.061	
						Feed (mm/min)	297	396	527	494	415	379		
		 HSM		≤ 0.05	≤ 2	117	RPM	6220	4665	3732	3110	2333	1866	
						(94-141)	Fz	0.031	0.051	0.085	0.096	0.105	0.120	
						Feed (mm/min)	970	1194	1592	1493	1224	1120		
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450		 Profile	≤ 325 Bhn or ≤ 35 HRc	≤ 0.25	≤ 1.5	72	RPM	3797	2848	2278	1898	1424	1139	
						(57-86)	Fz	0.014	0.021	0.037	0.041	0.046	0.051	
						Feed (mm/min)	273	304	425	387	328	289		
		 HSM		≤ 0.05	≤ 2	108	RPM	5736	4302	3441	2868	2151	1721	
						(87-130)	Fz	0.026	0.045	0.075	0.082	0.092	0.104	
						Feed (mm/min)	757	964	1285	1170	991	895		

continued on next page




Series 55M, 55MCR, 55MB Metric		Ae Ap		Vc (m/min)	DC • mm								
Hardness	Ae x DC	Ap x DC	6		8	10	12	16	20				
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile 	≤ 0.25	≤ 1.5	143	RPM	7594	5695	4556	3797	2848	2278
						(115-172)	Fz	0.022	0.036	0.061	0.070	0.077	0.085
						Feed (mm/min)	820	1033	1397	1321	1093	972	
		HSM 	≤ 0.05	≤ 2	215	RPM	11391	8543	6834	5695	4271	3417	
					(172-258)	Fz	0.043	0.073	0.123	0.137	0.151	0.171	
					Feed (mm/min)	2460	3099	4192	3895	3226	2916		
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Profile 	≤ 0.25	≤ 1.5	110	RPM	5816	4362	3490	2908	2181	1745
						(88-132)	Fz	0.017	0.028	0.045	0.053	0.059	0.064
						Feed (mm/min)	489	605	791	768	642	558	
		HSM 	≤ 0.05	≤ 2	165	RPM	8725	6544	5235	4362	3272	2617	
					(132-198)	Fz	0.034	0.055	0.091	0.103	0.113	0.128	
					Feed (mm/min)	1466	1815	2373	2251	1843	1675		
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.25	≤ 1.5	21	RPM	1131	848	679	565	424	339
						(17-26)	Fz	0.014	0.021	0.037	0.041	0.046	0.051
						Feed (mm/min)	81	90	127	115	98	86	
		HSM 	≤ 0.05	≤ 2	33	RPM	1729	1297	1037	864	648	519	
					(26-39)	Fz	0.026	0.045	0.075	0.082	0.092	0.104	
					Feed (mm/min)	228	290	387	353	299	270		
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ 0.25	≤ 1.5	17	RPM	889	666	533	444	333	267
						(13-20)	Fz	0.010	0.017	0.027	0.031	0.036	0.040
						Feed (mm/min)	43	57	71	69	60	53	
		HSM 	≤ 0.05	≤ 2	26	RPM	1373	1030	824	687	515	412	
					(21-31)	Fz	0.019	0.032	0.056	0.062	0.069	0.077	
					Feed (mm/min)	132	165	231	214	178	159		
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.25	≤ 1.5	72	RPM	3797	2848	2278	1898	1424	1139
						(57-86)	Fz	0.014	0.026	0.043	0.048	0.054	0.061
						Feed (mm/min)	273	365	486	456	383	349	
		HSM 	≤ 0.05	≤ 2	119	RPM	6301	4726	3781	3151	2363	1890	
					(95-143)	Fz	0.031	0.051	0.085	0.096	0.105	0.120	
					Feed (mm/min)	983	1210	1613	1512	1240	1134		
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Profile 	≤ 0.25	≤ 1.5	26	RPM	1373	1030	824	687	515	412
						(21-31)	Fz	0.014	0.026	0.043	0.048	0.054	0.061
						Feed (mm/min)	99	132	176	165	138	126	
		HSM 	≤ 0.05	≤ 2	43	RPM	2262	1696	1357	1131	848	679	
					(34-51)	Fz	0.031	0.051	0.085	0.096	0.108	0.120	
					Feed (mm/min)	353	434	579	543	456	407		

Bhn (Brinell) HRC (Rockwell C) HSM (High Speed Machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fz} \times 5 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 reduce Ap to 1 x DC (maximum) when profile milling with long or extra long flute length tools
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



51 • 51CR

FRACTIONAL SERIES

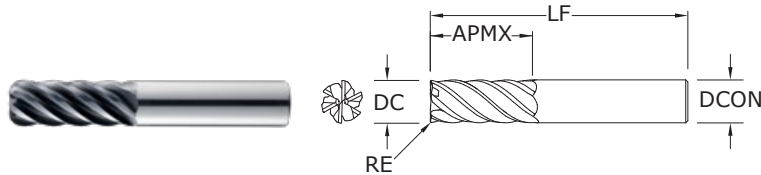

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

		inch			EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-X (TX)
1/4	3/4	2-1/2	1/4	—	35100
1/4	3/4	2-1/2	1/4	.015	35112
1/4	3/4	2-1/2	1/4	.030	35150
3/8	1	2-1/2	3/8	—	35101
3/8	1	2-1/2	3/8	.015	35113
3/8	1	2-1/2	3/8	.030	35114
1/2	1-1/4	3	1/2	—	35102
1/2	1-1/4	3	1/2	.015	35151
1/2	1-1/4	3	1/2	.030	35115
1/2	1-1/4	3	1/2	.060	35152
1/2	1-1/4	3	1/2	.090	35116
1/2	1-1/4	3	1/2	.120	35117
5/8	1-5/8	3-1/2	5/8	—	35103
5/8	1-5/8	3-1/2	5/8	.015	35153
5/8	1-5/8	3-1/2	5/8	.030	35118
5/8	1-5/8	3-1/2	5/8	.060	35154
5/8	1-5/8	3-1/2	5/8	.090	35119
5/8	1-5/8	3-1/2	5/8	.120	35120
5/8	1-5/8	3-1/2	5/8	.190	35155
3/4	1-5/8	4	3/4	—	35104
3/4	1-5/8	4	3/4	.030	35121
3/4	1-5/8	4	3/4	.060	35156
3/4	1-5/8	4	3/4	.090	35122
3/4	1-5/8	4	3/4	.120	35123
3/4	1-5/8	4	3/4	.190	35157
3/4	1-5/8	4	3/4	.250	35158
1	2-5/8	6	1	—	35105
1	2-5/8	6	1	.030	35124
1	2-5/8	6	1	.060	35159
1	2-5/8	6	1	.090	35125
1	2-5/8	6	1	.120	35126
1	2-5/8	6	1	.190	35160
1	2-5/8	6	1	.250	35161

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0020



STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

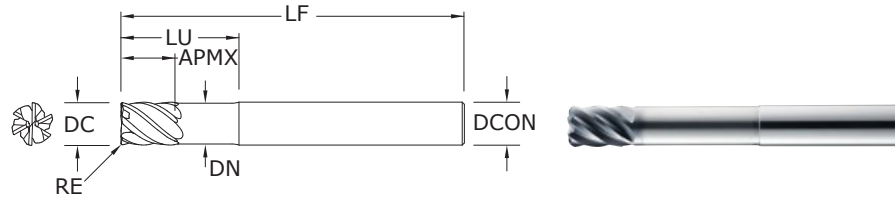

51L • 51LC

FRACTIONAL SERIES

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h_6


RE = +0.0000/-0.0020

STEELS
STAINLESS STEELS
CAST IRON
HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-X (TX)
1/4	3/8	4	1/4	1-1/8	.237	—	35106
1/4	3/8	4	1/4	1-1/8	.237	.015	35127
1/4	3/8	4	1/4	1-1/8	.237	.030	35180
3/8	1/2	4	3/8	2-1/8	.356	—	35107
3/8	1/2	4	3/8	2-1/8	.356	.015	35128
3/8	1/2	4	3/8	2-1/8	.356	.030	35129
1/2	5/8	4	1/2	2-1/4	.475	—	35108
1/2	5/8	4	1/2	2-1/4	.475	.015	35181
1/2	5/8	4	1/2	2-1/4	.475	.030	35130
1/2	5/8	4	1/2	2-1/4	.475	.060	35182
1/2	5/8	4	1/2	2-1/4	.475	.090	35131
1/2	5/8	4	1/2	2-1/4	.475	.120	35132
5/8	3/4	5	5/8	2-1/2	.594	—	35109
5/8	3/4	5	5/8	2-1/2	.594	.015	35183
5/8	3/4	5	5/8	2-1/2	.594	.030	35133
5/8	3/4	5	5/8	2-1/2	.594	.060	35184
5/8	3/4	5	5/8	2-1/2	.594	.090	35134
5/8	3/4	5	5/8	2-1/2	.594	.120	35135
5/8	3/4	5	5/8	2-1/2	.594	.190	35185
3/4	1	6	3/4	3-3/8	.712	—	35110
3/4	1	6	3/4	3-3/8	.712	.030	35136
3/4	1	6	3/4	3-3/8	.712	.060	35186
3/4	1	6	3/4	3-3/8	.712	.090	35137
3/4	1	6	3/4	3-3/8	.712	.120	35138
3/4	1	6	3/4	3-3/8	.712	.190	35187
3/4	1	6	3/4	3-3/8	.712	.250	35188
1	1-1/4	6	1	3-3/8	.950	—	35111
1	1-1/4	6	1	3-3/8	.950	.030	35139
1	1-1/4	6	1	3-3/8	.950	.060	35189
1	1-1/4	6	1	3-3/8	.950	.090	35140
1	1-1/4	6	1	3-3/8	.950	.120	35141
1	1-1/4	6	1	3-3/8	.950	.190	35190
1	1-1/4	6	1	3-3/8	.950	.250	35191


- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



51B

FRACTIONAL SERIES

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Faceted relief provides superior strength and smoother surface finish
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

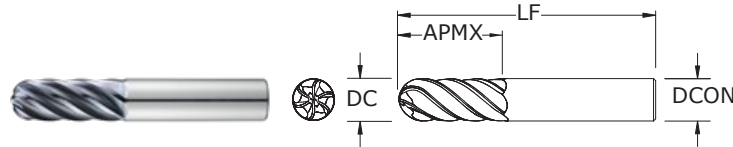

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
1/4	3/4	2-1/2	1/4	35220
3/8	1	2-1/2	3/8	35222
1/2	1-1/4	3	1/2	35224
5/8	1-5/8	3-1/2	5/8	35226
3/4	1-5/8	4	3/4	35228
1	2-5/8	6	1	35230

RE=1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6


RE = +0.0000/–0.0010

1/2–1 DIAMETER

DC = +0.000/–0.0020

DCON = h_6

RE = +0.0000/–0.0010




For patent information visit
www.ksptpatents.com

51LB

FRACTIONAL SERIES

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Faceted relief provides superior strength and smoother surface finish
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

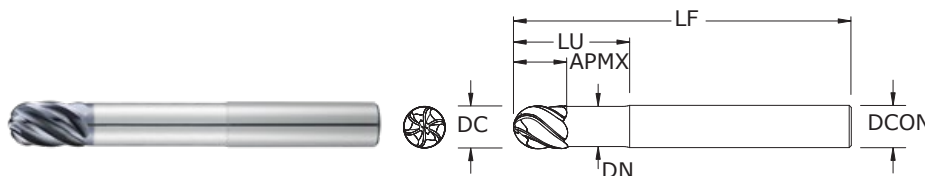

inch						EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	Ti-NAMITE®-X (TX)
1/4	3/8	4	1/4	1-1/8	.237	35221
3/8	1/2	4	3/8	2-1/8	.356	35223
1/2	5/8	4	1/2	2-1/4	.475	35225
5/8	3/4	5	5/8	2-1/2	.594	35227
3/4	1	6	3/4	3-3/8	.712	35229
1	1-1/4	6	1	3-3/4	.950	35231

RE=1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6


RE = +0.0000/–0.0010

1/2–1 DIAMETER


DC = +0.000/–0.0020


DCON = h_6

RE = +0.0000/–0.0010




For patent information visit
www.ksptpatents.com



Series 51, 51CR, 51L, 51LC, 51B, 51LB Fractional		Hardness			Vc (sfm)		DC • in						
							1/4	3/8	1/2	5/8	3/4	1	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc		≤ 0.1	≤ 1	720	RPM	11002	7334	5501	4401	3667	2750
						(576-864)	Fz	0.0020	0.0035	0.0050	0.0055	0.0061	0.0071
							Feed (ipm)	132	154	165	145	134	117
		≤ 275 Bhn or ≤ 28 HRc		≤ 0.05	≤ 2	915	RPM	13981	9321	6991	5592	4660	3495
						(732-1098)	Fz	0.0028	0.0053	0.0070	0.0077	0.0085	0.0100
							Feed (ipm)	235	296	294	258	238	210
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc		≤ 0.1	≤ 1	490	RPM	7487	4991	3744	2995	2496	1872
						(392-588)	Fz	0.0015	0.0029	0.0038	0.0042	0.0046	0.0054
							Feed (ipm)	67	87	85	75	69	61
		≤ 375 Bhn or ≤ 40 HRc		≤ 0.05	≤ 2	620	RPM	9474	6316	4737	3789	3158	2368
						(496-744)	Fz	0.0021	0.0039	0.0052	0.0057	0.0062	0.0073
							Feed (ipm)	119	148	148	130	117	104
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc		≤ 0.1	≤ 1	240	RPM	3667	2445	1834	1467	1222	917
						(192-288)	Fz	0.0012	0.0023	0.0030	0.0034	0.0037	0.0043
							Feed (ipm)	26	34	33	30	27	24
		≤ 375 Bhn or ≤ 40 HRc		≤ 0.05	≤ 2	305	RPM	4660	3107	2330	1864	1553	1165
						(244-366)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059
							Feed (ipm)	48	60	59	51	47	41
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc		≤ 0.1	≤ 1	510	RPM	7793	5195	3896	3117	2598	1948
						(459-561)	Fz	0.0015	0.0028	0.0038	0.0041	0.0045	0.0053
							Feed (ipm)	70	87	89	77	70	62
		≤ 275 Bhn or ≤ 28 HRc		≤ 0.05	≤ 2	650	RPM	9932	6621	4966	3973	3311	2483
						(585-715)	Fz	0.0021	0.0038	0.0051	0.0056	0.0061	0.0072
							Feed (ipm)	125	151	152	133	121	107
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc		≤ 0.1	≤ 1	350	RPM	5348	3565	2674	2139	1783	1337
						(315-385)	Fz	0.0012	0.0023	0.0030	0.0033	0.0036	0.0042
							Feed (ipm)	39	49	48	42	39	34
		≤ 275 Bhn or ≤ 28 HRc		≤ 0.05	≤ 2	450	RPM	6876	4584	3438	2750	2292	1719
						(405-495)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059
							Feed (ipm)	70	88	87	76	69	61
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc		≤ 0.1	≤ 1	325	RPM	4966	3311	2483	1986	1655	1242
						(293-358)	Fz	0.0012	0.0023	0.0030	0.0033	0.0036	0.0042
							Feed (ipm)	36	46	45	39	36	31
		≤ 325 Bhn or ≤ 35 HRc		≤ 0.05	≤ 2	410	RPM	6265	4177	3132	2506	2088	1566
						(369-451)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059
							Feed (ipm)	64	80	79	69	63	55

continued on next page



Series
51, 51CR, 51L,
51LC, 51B, 51LB
Fractional

Hardness

Ae x DC

Ap x DC

Vc
(sfm)

DC • in

1/4 3/8 1/2 5/8 3/4 1

						DC • in							
						1/4	3/8	1/2	5/8	3/4	1		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRC		≤ 0.25	≤ 1.5	575	RPM	8786	5857	4393	3514	2929	2197
						(460-690)	Fz	0.0018	0.0035	0.0045	0.0050	0.0055	0.0064
						Feed (ipm)	94.9	123.0	118.6	105.4	96.6	84.3	
		≤ 260 Bhn or ≤ 26 HRC		≤ 0.05	≤ 2	730	RPM	11154	7436	5577	4462	3718	2789
						(584-876)	Fz	0.0025	0.0047	0.0064	0.0070	0.0076	0.0089
						Feed (ipm)	167.3	209.7	214.2	187.4	169.5	148.9	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRC		≤ 0.25	≤ 1.5	430	RPM	6570	4380	3285	2628	2190	1643
						(344-516)	Fz	0.0018	0.0035	0.0045	0.0050	0.0055	0.0064
						Feed (ipm)	71.0	92.0	88.7	78.8	72.3	63.1	
		≤ 300 Bhn or ≤ 32 HRC		≤ 0.05	≤ 2	545	RPM	8328	5552	4164	3331	2776	2082
						(436-654)	Fz	0.0025	0.0047	0.0064	0.0070	0.0076	0.0089
						Feed (ipm)	124.9	156.6	159.9	139.9	126.6	111.2	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRC		≤ 0.1	≤ 1	105	RPM	1604	1070	802	642	535	401
						(84-126)	Fz	0.0014	0.0027	0.0036	0.0039	0.0043	0.0050
						Feed (ipm)	13	17	17	15	14	12	
		≤ 400 Bhn or ≤ 43 HRC		≤ 0.05	≤ 2	130	RPM	1986	1324	993	795	662	497
						(104-156)	Fz	0.0016	0.0036	0.0048	0.0053	0.0058	0.0067
						Feed (ipm)	19	29	29	25	23	20	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRC		≤ 0.1	≤ 1	80	RPM	1222	815	611	489	407	306
						(64-96)	Fz	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034
						Feed (ipm)	7	9	9	8	7	6	
		≤ 350 Bhn or ≤ 38 HRC		≤ 0.05	≤ 2	100	RPM	1528	1019	764	611	509	382
						(80-120)	Fz	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047
						Feed (ipm)	12	15	16	14	13	11	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRC		≤ 0.1	≤ 1	280	RPM	4278	2852	2139	1711	1426	1070
						(224-336)	Fz	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034
						Feed (ipm)	26	31	32	28	25	22	
		≤ 420 Bhn or ≤ 45 HRC		≤ 0.05	≤ 2	355	RPM	5424	3616	2712	2170	1808	1356
						(284-426)	Fz	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047
						Feed (ipm)	42	54	55	48	44	38	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRC		≤ 0.1	≤ 1	155	RPM	2368	1579	1184	947	789	592
						(124-186)	Fz	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034
						Feed (ipm)	14	17	18	15	14	12	
		≤ 420 Bhn or ≤ 45 HRC		≤ 0.05	≤ 2	200	RPM	3056	2037	1528	1222	1019	764
						(160-240)	Fz	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047
						Feed (ipm)	24	31	31	27	25	22	

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)

rpm = Vc x 3.82 / DC



ipm = Fz x 6 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

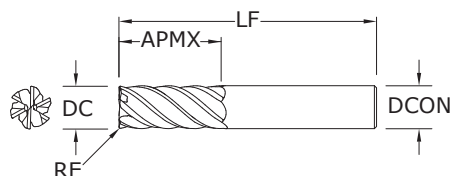

51M • 51MCR

METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h₆

RE = +0,000/-0,050

STEELS

STAINLESS STEELS


CAST IRON

HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

	mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-X (TX)
6,0	19,0	63,0	6,0	—	45100
6,0	19,0	63,0	6,0	0,5	45112
6,0	19,0	63,0	6,0	1,0	45170
6,0	19,0	63,0	6,0	1,5	45171
8,0	20,0	63,0	8,0	—	45101
8,0	20,0	63,0	8,0	0,5	45113
8,0	20,0	63,0	8,0	1,0	45114
8,0	20,0	63,0	8,0	1,2	45150
8,0	20,0	63,0	8,0	1,5	45172
8,0	20,0	63,0	8,0	2,0	45173
10,0	22,0	75,0	10,0	—	45102
10,0	22,0	75,0	10,0	0,5	45174
10,0	22,0	75,0	10,0	1,0	45115
10,0	22,0	75,0	10,0	1,5	45116
10,0	22,0	75,0	10,0	2,0	45117
10,0	22,0	75,0	10,0	2,5	45175
12,0	26,0	83,0	12,0	—	45103
12,0	26,0	83,0	12,0	0,5	45176
12,0	26,0	83,0	12,0	0,76	45177
12,0	26,0	83,0	12,0	1,0	45118
12,0	26,0	83,0	12,0	1,5	45119
12,0	26,0	83,0	12,0	2,0	45120
12,0	26,0	83,0	12,0	2,5	45178
12,0	26,0	83,0	12,0	3,0	45179
16,0	32,0	92,0	16,0	—	45104
16,0	32,0	92,0	16,0	1,0	45121
16,0	32,0	92,0	16,0	1,5	45122
16,0	32,0	92,0	16,0	2,0	45123
16,0	32,0	92,0	16,0	2,5	45180
16,0	32,0	92,0	16,0	3,0	45181
16,0	32,0	92,0	16,0	4,0	45182
20,0	38,0	104,0	20,0	—	45105
20,0	38,0	104,0	20,0	1,0	45124
20,0	38,0	104,0	20,0	1,5	45125
20,0	38,0	104,0	20,0	2,0	45126
20,0	38,0	104,0	20,0	2,5	45183
20,0	38,0	104,0	20,0	3,0	45184
20,0	38,0	104,0	20,0	4,0	45185
20,0	38,0	104,0	20,0	5,0	45186


- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



51ML • 51MLC

METRIC SERIES


- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

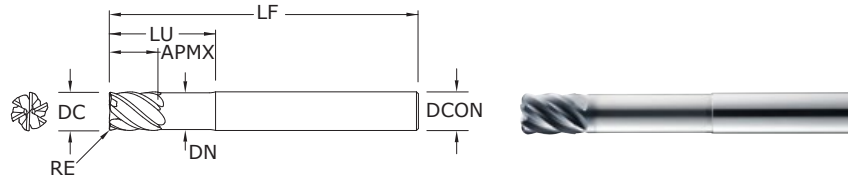



mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-X (TX)
6,0	8,0	75,0	6,0	32,0	5,69	—	45106
6,0	8,0	75,0	6,0	32,0	5,69	0,5	45127
6,0	8,0	75,0	6,0	32,0	5,69	1,0	45187
6,0	8,0	75,0	6,0	32,0	5,69	1,5	45188
8,0	10,0	75,0	8,0	32,0	7,59	—	45107
8,0	10,0	75,0	8,0	32,0	7,59	0,5	45128
8,0	10,0	75,0	8,0	32,0	7,59	1,0	45129
8,0	10,0	75,0	8,0	32,0	7,59	1,5	45189
8,0	10,0	75,0	8,0	32,0	7,59	2,0	45190
10,0	12,0	100,0	10,0	40,0	9,50	—	45108
10,0	12,0	100,0	10,0	40,0	9,50	0,5	45191
10,0	12,0	100,0	10,0	40,0	9,50	1,0	45130
10,0	12,0	100,0	10,0	40,0	9,50	1,5	45131
10,0	12,0	100,0	10,0	40,0	9,50	2,0	45132
10,0	12,0	100,0	10,0	40,0	9,50	2,5	45192
12,0	15,0	100,0	12,0	48,0	11,38	—	45109
12,0	15,0	100,0	12,0	48,0	11,38	0,5	45193
12,0	15,0	100,0	12,0	48,0	11,38	0,76	45194
12,0	15,0	100,0	12,0	48,0	11,38	1,0	45133
12,0	15,0	100,0	12,0	48,0	11,38	1,5	45134
12,0	15,0	100,0	12,0	48,0	11,38	2,0	45135
12,0	15,0	100,0	12,0	48,0	11,38	2,5	45195
12,0	15,0	100,0	12,0	48,0	11,38	3,0	45196
16,0	20,0	115,0	16,0	65,0	15,19	—	45110
16,0	20,0	115,0	16,0	65,0	15,19	1,0	45136
16,0	20,0	115,0	16,0	65,0	15,19	1,5	45137
16,0	20,0	115,0	16,0	65,0	15,19	2,0	45138
16,0	20,0	115,0	16,0	65,0	15,19	2,5	45197
16,0	20,0	115,0	16,0	65,0	15,19	3,0	45198
16,0	20,0	115,0	16,0	65,0	15,19	4,0	45199
20,0	24,0	150,0	20,0	80,0	19,00	—	45111
20,0	24,0	150,0	20,0	80,0	19,00	1,0	45139
20,0	24,0	150,0	20,0	80,0	19,00	1,5	45140
20,0	24,0	150,0	20,0	80,0	19,00	2,0	45141
20,0	24,0	150,0	20,0	80,0	19,00	2,5	45200
20,0	24,0	150,0	20,0	80,0	19,00	3,0	45201
20,0	24,0	150,0	20,0	80,0	19,00	4,0	45202
20,0	24,0	150,0	20,0	80,0	19,00	5,0	45203

TOLERANCES (mm)

DC = +0,000/−0,050
DCON = h₆
RE = +0,000/−0,050



For patent information visit
www.ksptpatents.com

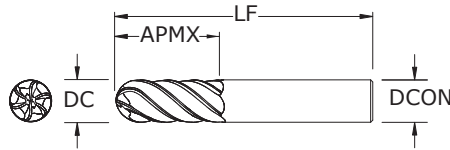

51MB

METRIC SERIES

TOLERANCES (mm)

6,0–10,0 DIAMETER
 DC = +0,000/–0,040
 DCON = h₆
 RE = +0,000/–0,025

12,0–20,0 DIAMETER
 DC = +0,000/–0,050
 DCON = h₆
 RE = +0,000/–0,025


STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent
 information visit
www.ksptpatents.com

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
6,0	19,0	63,0	6,0	45204
8,0	20,0	63,0	8,0	45206
10,0	22,0	75,0	10,0	45208
12,0	26,0	83,0	12,0	45210
16,0	32,0	92,0	16,0	45212
20,0	38,0	104,0	20,0	45214

RE=1/2 Cutting Diameter (DC)

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Faceted relief provides superior strength and smoother surface finish
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

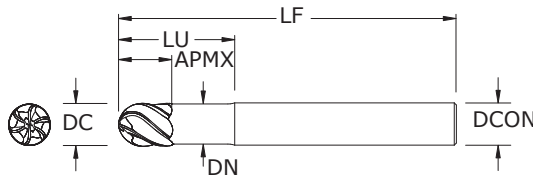

51MLB

METRIC SERIES

TOLERANCES (mm)

6,0–10,0 DIAMETER
 DC = +0,000/–0,040
 DCON = h₆
 RE = +0,000/–0,025

12,0–20,0 DIAMETER
 DC = +0,000/–0,050
 DCON = h₆
 RE = +0,000/–0,025

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS


For patent
 information visit
www.ksptpatents.com

mm						EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	Ti-NAMITE®-X (TX)
6,0	8,0	75,0	6,0	32,0	5,68	45205
8,0	10,0	75,0	8,0	32,0	7,58	45207
10,0	12,0	100,0	10,0	40,0	9,49	45209
12,0	15,0	100,0	12,0	48,0	11,37	45211
16,0	20,0	115,0	16,0	65,0	15,18	45213
20,0	24,0	150,0	20,0	80,0	18,99	45215

RE=1/2 Cutting Diameter (DC)

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Faceted relief provides superior strength and smoother surface finish
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)


Series
51M, 51MCR,
51ML, 51MLC,
51MB, 51MLB
Metric



51ML, 51MLC, 51MB, 51MLB				Vc (m/min)		DC • mm								
Metric	Hardness	Ae x DC	Ap x DC			6	8	10	12	16	20			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.1	≤ 1	219	RPM	11633	8725	6980	5816	4362	3490	
						(176-263)	Fz	0.048	0.075	0.093	0.120	0.141	0.163	
						Feed (mm/min)	3350	3909	3909	4188	3685	3406		
		≤ 275 Bhn or ≤ 28 HRc	HSM 	≤ 0.05	≤ 2	279	RPM	14784	11088	8870	7392	5544	4435	
						(223-335)	Fz	0.067	0.113	0.141	0.168	0.197	0.227	
						Feed (mm/min)	5960	7523	7522	7450	6557	6032		
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.1	≤ 1	149	RPM	7917	5938	4750	3958	2969	2375	
						(119-179)	Fz	0.036	0.062	0.077	0.091	0.108	0.123	
						Feed (mm/min)	1710	2204	2204	2166	1915	1748		
		≤ 375 Bhn or ≤ 40 HRc	HSM 	≤ 0.05	≤ 2	189	RPM	10017	7513	6010	5009	3756	3005	
						(151-227)	Fz	0.050	0.083	0.104	0.125	0.146	0.165	
						Feed (mm/min)	3029	3751	3750	3750	3289	2981		
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.1	≤ 1	73	RPM	3878	2908	2327	1939	1454	1163	
						(59-88)	Fz	0.029	0.049	0.061	0.072	0.087	0.099	
						Feed (mm/min)	670	856	856	838	759	689		
		≤ 375 Bhn or ≤ 40 HRc	HSM 	≤ 0.05	≤ 2	93	RPM	4928	3696	2957	2464	1848	1478	
						(74-112)	Fz	0.041	0.068	0.085	0.101	0.118	0.133	
						Feed (mm/min)	1206	1514	1514	1490	1306	1183		
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.1	≤ 1	155	RPM	8240	6180	4944	4120	3090	2472
							(140-171)	Fz	0.036	0.060	0.075	0.091	0.105	0.120
							Feed (mm/min)	1780	2215	2215	2254	1946	1780	
			≤ 275 Bhn or ≤ 28 HRc	HSM 	≤ 0.05	≤ 2	198	RPM	10502	7877	6301	5251	3938	3151
							(178-218)	Fz	0.050	0.081	0.101	0.122	0.143	0.163
							Feed (mm/min)	3176	3832	3831	3856	3387	3075	
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.1	≤ 1	107	RPM	5655	4241	3393	2827	2121	1696	
						(96-117)	Fz	0.029	0.049	0.061	0.072	0.084	0.096	
						Feed (mm/min)	977	1249	1249	1221	1075	977		
		≤ 275 Bhn or ≤ 28 HRc	HSM 	≤ 0.05	≤ 2	137	RPM	7271	5453	4362	3635	2726	2181	
						(123-151)	Fz	0.041	0.068	0.085	0.101	0.118	0.133	
						Feed (mm/min)	1780	2234	2234	2198	1926	1745		
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450		≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.1	≤ 1	99	RPM	5251	3938	3151	2626	1969	1575	
						(89-109)	Fz	0.029	0.049	0.061	0.072	0.084	0.096	
						Feed (mm/min)	907	1160	1159	1134	998	907		
		≤ 325 Bhn or ≤ 35 HRc	HSM 	≤ 0.05	≤ 2	125	RPM	6624	4968	3975	3312	2484	1987	
						(112-137)	Fz	0.041	0.068	0.085	0.101	0.118	0.133	
						Feed (mm/min)	1621	2035	2035	2003	1755	1590		

continued on next page

Series
51M, 51MCR,
51ML, 51MLC,
51MB, 51MLB
Metric



51ML, 51MLC, 51MB, 51MLB Metric				Vc (m/min)		DC • mm						
Hardness		Ae x DC	Ap x DC			6	8	10	12	16	20	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	 Profile	≤ 0.25	≤ 1.5	575	RPM	9290	6968	5574	4645	3484	2787
					(460-690)	Fz	0.043	0.075	0.093	0.108	0.128	0.147
						Feed (mm/min)	2408	3122	3122	3010	2675	2453
		 HSM	≤ 0.05	≤ 2	730	RPM	11795	8846	7077	5897	4423	3538
					(584-876)	Fz	0.060	0.100	0.125	0.154	0.179	0.203
						Feed (mm/min)	4246	5322	5322	5434	4755	4303
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	 Profile	≤ 0.25	≤ 1.5	430	RPM	6947	5211	4168	3474	2605	2084
					(344-516)	Fz	0.043	0.075	0.093	0.108	0.128	0.147
						Feed (mm/min)	1801	2335	2334	2251	2001	1834
		 HSM	≤ 0.05	≤ 2	545	RPM	8806	6604	5283	4403	3302	2642
					(436-654)	Fz	0.060	0.100	0.125	0.154	0.179	0.203
						Feed (mm/min)	3170	3974	3973	4057	3550	3212
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	 Profile	≤ 0.1	≤ 1	32	RPM	1696	1272	1018	848	636	509
					(26-38)	Fz	0.034	0.058	0.072	0.086	0.100	0.115
						Feed (mm/min)	342	440	440	440	381	350
		 HSM	≤ 0.05	≤ 2	40	RPM	2100	1575	1260	1050	788	630
					(32-48)	Fz	0.038	0.077	0.096	0.115	0.136	0.155
						Feed (mm/min)	484	726	726	726	641	585
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	 Profile	≤ 0.1	≤ 1	24	RPM	1293	969	776	646	485	388
					(20-29)	Fz	0.024	0.038	0.048	0.060	0.069	0.077
						Feed (mm/min)	186	223	223	233	201	180
		 HSM	≤ 0.05	≤ 2	30	RPM	1616	1212	969	808	606	485
					(24-37)	Fz	0.031	0.053	0.067	0.082	0.095	0.109
						Feed (mm/min)	302	388	388	395	344	318
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	 Profile	≤ 0.1	≤ 1	85	RPM	4524	3393	2714	2262	1696	1357
					(68-102)	Fz	0.024	0.038	0.048	0.060	0.069	0.077
						Feed (mm/min)	651	782	782	814	704	630
		 HSM	≤ 0.05	≤ 2	108	RPM	5736	4302	3441	2868	2151	1721
					(87-130)	Fz	0.031	0.053	0.067	0.082	0.095	0.109
						Feed (mm/min)	1074	1377	1377	1404	1222	1129
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	 Profile	≤ 0.1	≤ 1	47	RPM	2504	1878	1503	1252	939	751	
				(38-57)	Fz	0.024	0.038	0.048	0.060	0.069	0.077	
					Feed (mm/min)	361	433	433	451	389	349	
	 HSM	≤ 0.05	≤ 2	61	RPM	3231	2424	1939	1616	1212	969	
				(49-73)	Fz	0.031	0.053	0.067	0.082	0.095	0.109	
					Feed (mm/min)	605	776	776	791	689	636	


Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fz} \times 6 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



77 • 77CR

FRACTIONAL SERIES

- Specializes in deep axial trochoidal and high-speed milling applications
- Optimized core improves rigidity, chip flow and reduces deflection
- Chip Breaker design breaks up chips from the long flute length allowing for better chip flow and evacuation in deep pocketing operations
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

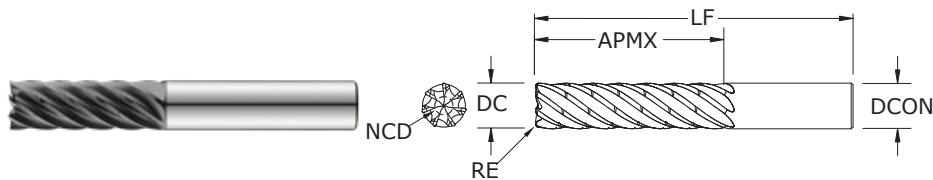

inch						EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA) EDP NO.	Ti-NAMITE®-A (TA) EDP NO. CHIP BREAKER	Ti-NAMITE®-M (TM) EDP NO.	Ti-NAMITE®-M (TM) EDP NO. CHIP BREAKER
1/4	5/8	2-1/2	1/4	—	0.0845	77100	77102	77101	77103
1/4	5/8	2-1/2	1/4	.015	0.0845	77104	77106	77105	77107
1/4	5/8	2-1/2	1/4	.030	0.0845	77108	77110	77109	77111
1/4	3/4	2-1/2	1/4	—	0.0845	77112	77114	77113	77115
1/4	3/4	2-1/2	1/4	.015	0.0845	77116	77118	77117	77119
1/4	3/4	2-1/2	1/4	.030	0.0845	77120	77122	77121	77123
1/4	1	3	1/4	—	0.0845	77124	77126	77125	77127
1/4	1	3	1/4	.015	0.0845	77128	77130	77129	77131
1/4	1	3	1/4	.030	0.0845	77132	77134	77133	77135
3/8	15/16	3	3/8	—	0.1268	77136	77138	77137	77139
3/8	15/16	3	3/8	.015	0.1268	77140	77142	77141	77143
3/8	15/16	3	3/8	.030	0.1268	77144	77146	77145	77147
3/8	1-1/8	3-1/4	3/8	—	0.1268	77148	77150	77149	77151
3/8	1-1/8	3-1/4	3/8	.015	0.1268	77152	77154	77153	77155
3/8	1-1/8	3-1/4	3/8	.030	0.1268	77156	77158	77157	77159
3/8	1-1/2	3-1/2	3/8	—	0.1268	77160	77162	77161	77163
3/8	1-1/2	3-1/2	3/8	.015	0.1268	77164	77166	77165	77167
3/8	1-1/2	3-1/2	3/8	.030	0.1268	77168	77170	77169	77171
1/2	1-1/4	3-1/4	1/2	—	0.1690	77172	77174	77173	77175
1/2	1-1/4	3-1/4	1/2	.030	0.1690	77176	77178	77177	77179
1/2	1-1/4	3-1/4	1/2	.060	0.1690	77180	77182	77181	77183
1/2	1-1/2	3-1/2	1/2	—	0.1690	77184	77186	77185	77187
1/2	1-1/2	3-1/2	1/2	.030	0.1690	77188	77190	77189	77191
1/2	1-1/2	3-1/2	1/2	.060	0.1690	77192	77194	77193	77195
1/2	2	4	1/2	—	0.1690	77196	77198	77197	77199
1/2	2	4	1/2	.030	0.1690	77200	77202	77201	77203
1/2	2	4	1/2	.060	0.1690	77204	77206	77205	77207
5/8	1-9/16	3-3/4	5/8	—	0.2113	77208	77210	77209	77211
5/8	1-9/16	3-3/4	5/8	.030	0.2113	77212	77214	77213	77215
5/8	1-9/16	3-3/4	5/8	.060	0.2113	77216	77218	77217	77219

continued on next page

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h₆

RE = +0.000 / -0.002

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆

RE = +0.000 / -0.002

>3/8-1 DIAMETER


DC = +0.0000/-0.0020

DCON = h₆

RE = +0.000 / -0.002

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

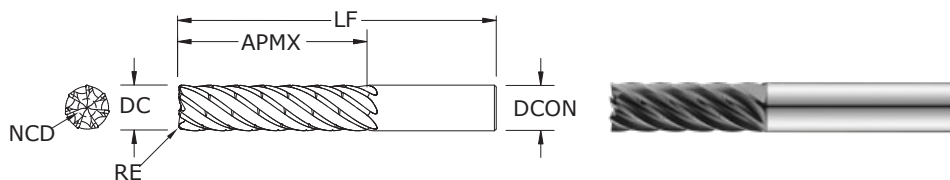

**77 •
77CR**
FRACTIONAL SERIES

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.000 / -0.002

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6

RE = +0.000 / -0.002

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.000 / -0.002

STEELS

STAINLESS STEELS


CAST IRON

HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com


inch						EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA) EDP NO.	Ti-NAMITE®-A (TA) EDP NO. CHIP BREAKER	Ti-NAMITE®-M (TM) EDP NO.	Ti-NAMITE®-M (TM) EDP NO. CHIP BREAKER
5/8	1-7/8	4	5/8	—	0.2113	77220	77222	77221	77223
5/8	1-7/8	4	5/8	.030	0.2113	77224	77226	77225	77227
5/8	1-7/8	4	5/8	.060	0.2113	77228	77230	77229	77231
5/8	2-1/2	4-1/2	5/8	—	0.2113	77232	77234	77233	77235
5/8	2-1/2	4-1/2	5/8	.030	0.2113	77236	77238	77237	77239
5/8	2-1/2	4-1/2	5/8	.060	0.2113	77240	77242	77241	77243
3/4	1-7/8	4	3/4	—	0.2535	77244	77246	77245	77247
3/4	1-7/8	4	3/4	.030	0.2535	77248	77250	77249	77251
3/4	1-7/8	4	3/4	.060	0.2535	77252	77254	77253	77255
3/4	1-7/8	4	3/4	.120	0.2535	77256	77258	77257	77259
3/4	2-1/4	4-1/2	3/4	—	0.2535	77260	77262	77261	77263
3/4	2-1/4	4-1/2	3/4	.030	0.2535	77264	77266	77265	77267
3/4	2-1/4	4-1/2	3/4	.060	0.2535	77268	77270	77269	77271
3/4	2-1/4	4-1/2	3/4	.120	0.2535	77272	77274	77273	77275
3/4	3	5-1/4	3/4	—	0.2535	77276	77278	77277	77279
3/4	3	5-1/4	3/4	.030	0.2535	77280	77282	77281	77283
3/4	3	5-1/4	3/4	.060	0.2535	77284	77286	77285	77287
3/4	3	5-1/4	3/4	.120	0.2535	77288	77290	77289	77291
1	2-1/2	5-1/2	1	—	0.3380	77292	77294	77293	77295
1	2-1/2	5-1/2	1	.030	0.3380	77296	77298	77297	77299
1	2-1/2	5-1/2	1	.060	0.3380	77300	77302	77301	77303
1	2-1/2	5-1/2	1	.120	0.3380	77304	77306	77305	77307
1	3	6	1	—	0.3380	77308	77310	77309	77311
1	3	6	1	.030	0.3380	77312	77314	77313	77315
1	3	6	1	.060	0.3380	77316	77318	77317	77319
1	3	6	1	.120	0.3380	77320	77322	77321	77323
1	4	7	1	—	0.3380	77324	77326	77325	77327
1	4	7	1	.030	0.3380	77328	77330	77329	77331
1	4	7	1	.060	0.3380	77332	77334	77333	77335
1	4	7	1	.120	0.3380	77336	77338	77337	77339

CONTINUED



Series 77, 77CR		Ae x DC		Vc		DC • inch									
Fractional	Hardness		Ap x DC	(sfm)		1/4	3/8	1/2	5/8	3/4	1				
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	 HSM	2.5xD	816	RPM	11552	7701	5776	4621	3851	2888			
				≤ 0.2	≤ APMX	(653-979)	Fz	0.0015	0.0024	0.0031	0.0035	0.0038	0.0042		
			 HSM	3xD	845	Fz	0.0017	0.0027	0.0035	0.0040	0.0043	0.0047			
				≤ 0.15	≤ APMX	(676-1014)	Feed (ipm)	121	129	125	113	102	85		
			 HSM	4xD	756	Fz	0.0018	0.0028	0.0036	0.0041	0.0044	0.0049			
				≤ 0.1	≤ APMX	(605-907)	Feed (ipm)	136	146	140	129	116	95		
		ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	 HSM	2.5xD	595	RPM	8419	5613	4210	3368	2806	2105		
					≤ 0.2	≤ APMX	(476-714)	Fz	0.0009	0.0019	0.0026	0.0028	0.0031	0.0035	
				 HSM	3xD	616	Fz	0.0010	0.0021	0.0030	0.0033	0.0035	0.0039		
					≤ 0.15	≤ APMX	(493-739)	Feed (ipm)	53	75	77	66	61	52	
	 HSM			4xD	551	Fz	0.0011	0.0022	0.0031	0.0034	0.0036	0.0041			
				≤ 0.1	≤ APMX	(441-661)	Feed (ipm)	59	83	88	78	69	57		
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	 HSM	2.5xD	272	RPM	3851	2567	1925	1540	1284	963			
				≤ 0.2	≤ APMX	(218-326)	Fz	0.0006	0.0011	0.0014	0.0017	0.0020	0.0024		
			 HSM	3xD	282	Fz	0.0007	0.0012	0.0016	0.0019	0.0022	0.0027			
				≤ 0.15	≤ APMX	(226-338)	Feed (ipm)	16	20	19	18	18	16		
			 HSM	4xD	252	Fz	0.0007	0.0013	0.0017	0.0020	0.0023	0.0028			
				≤ 0.1	≤ APMX	(202-302)	Feed (ipm)	19	22	22	20	20	18		
			M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	 HSM	2.5xD	646	RPM	9137	6092	4569	3655	3046	2284
							≤ 0.2	≤ APMX	(517-775)	Fz	0.0009	0.0017	0.0023	0.0025	0.0028
	 HSM	3xD				669	Fz	0.0010	0.0019	0.0026	0.0029	0.0031	0.0036		
		≤ 0.15				≤ APMX	(535-803)	Feed (ipm)	58	72	74	64	60	51	
	 HSM	4xD				598	Fz	0.0011	0.0020	0.0027	0.0030	0.0033	0.0037		
		≤ 0.1				≤ APMX	(478-718)	Feed (ipm)	64	81	83	74	66	58	
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	 HSM				2.5xD	425	RPM	6020	4014	3010	2408	2007	1505	
						≤ 0.2	≤ APMX	(340-510)	Fz	0.0007	0.0014	0.0019	0.0023	0.0026	0.0030
		 HSM		3xD	440	Fz	0.0008	0.0016	0.0021	0.0025	0.0029	0.0034			
				≤ 0.15	≤ APMX	(352-528)	Feed (ipm)	29	39	40	39	37	32		
		 HSM		4xD	394	Fz	0.0008	0.0016	0.0022	0.0026	0.0030	0.0035			
				≤ 0.1	≤ APMX	(315-473)	Feed (ipm)	34	45	44	42	41	36		
		STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450		≤ 325 Bhn or ≤ 35 HRc	 HSM	2.5xD	408	RPM	5776	3851	2888	2310	1925	1444	
						≤ 0.2	≤ APMX	(326-490)	Fz	0.0007	0.0014	0.0019	0.0023	0.0026	0.0030
 HSM	3xD				422	Fz	0.0008	0.0016	0.0021	0.0025	0.0029	0.0034			
	≤ 0.15				≤ APMX	(338-506)	Feed (ipm)	28	38	38	37	35	30		
 HSM	4xD				378	Fz	0.0008	0.0016	0.0022	0.0026	0.0030	0.0035			
	≤ 0.1				≤ APMX	(302-454)	Feed (ipm)	32	43	42	40	39	34		

continued on next page




Series 77, 77CR						DC • inch							
Fractional	Hardness			Vc (sfm)		1/4	3/8	1/2	5/8	3/4	1		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	 HSM	2.5xD		714	RPM	10100	6733	5050	4040	3367	2525
				≤ 0.2 ≤ APMX		(571-857)	Fz	0.0010	0.0018	0.0024	0.0028	0.0033	0.0037
			 HSM	3xD		739	Feed (ipm)	71	85	85	79	78	65
				≤ 0.15 ≤ APMX		(591-887)	Fz	0.0011	0.0020	0.0027	0.0033	0.0037	0.0042
			 HSM	4xD		661	Feed (ipm)	78	94	95	93	87	73
				≤ 0.1 ≤ APMX		(529-793)	Fz	0.0012	0.0021	0.0028	0.0034	0.0039	0.0043
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	 HSM	2.5xD		425	RPM	6020	4014	3010	2408	2007	1505
				≤ 0.2 ≤ APMX		(340-510)	Fz	0.0007	0.0014	0.0019	0.0023	0.0026	0.0030
			 HSM	3xD		440	Feed (ipm)	29	39	40	39	37	32
				≤ 0.15 ≤ APMX		(352-528)	Fz	0.0008	0.0016	0.0021	0.0025	0.0029	0.0037
			 HSM	4xD		394	Feed (ipm)	34	45	44	42	41	39
				≤ 0.1 ≤ APMX		(315-473)	Fz	0.0008	0.0016	0.0022	0.0026	0.0030	0.0035
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	 HSM	2.5xD		136	RPM	1925	1284	963	770	642	481
				≤ 0.2 ≤ APMX		(109-163)	Fz	0.0006	0.0011	0.0016	0.0018	0.0021	0.0025
			 HSM	3xD		141	Feed (ipm)	8	10	11	10	9	8
				≤ 0.15 ≤ APMX		(113-169)	Fz	0.0007	0.0012	0.0018	0.0021	0.0024	0.0028
			 HSM	4xD		126	Feed (ipm)	9	11	12	11	11	9
				≤ 0.1 ≤ APMX		(101-151)	Fz	0.0007	0.0013	0.0018	0.0022	0.0025	0.0029
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	 HSM	2.5xD		85	RPM	1207	805	604	483	402	302
				≤ 0.2 ≤ APMX		(68-102)	Fz	0.0005	0.0009	0.0013	0.0015	0.0018	0.0022
			 HSM	3xD		88	Feed (ipm)	4	5	5	5	5	5
				≤ 0.15 ≤ APMX		(70-106)	Fz	0.0005	0.0010	0.0015	0.0018	0.0020	0.0025
			 HSM	4xD		79	Feed (ipm)	4	6	6	6	6	5
				≤ 0.1 ≤ APMX		(63-95)	Fz	0.0006	0.0011	0.0015	0.0018	0.0021	0.0026
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	 HSM	2.5xD		289	RPM	4095	2730	2048	1638	1365	1024	
			≤ 0.2 ≤ APMX		(231-347)	Fz	0.0008	0.0015	0.0021	0.0024	0.0028	0.0032	
		 HSM	3xD		299	Feed (ipm)	23	29	30	28	27	23	
			≤ 0.15 ≤ APMX		(239-359)	Fz	0.0009	0.0017	0.0023	0.0025	0.0028	0.0036	
		 HSM	4xD		268	Feed (ipm)	26	32	33	29	27	26	
			≤ 0.1 ≤ APMX		(214-322)	Fz	0.0009	0.0018	0.0024	0.0029	0.0033	0.0037	
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	 HSM	2.5xD		170	RPM	2399	1599	1199	960	800	600	
			≤ 0.2 ≤ APMX		(136-204)	Fz	0.0008	0.0015	0.0021	0.0024	0.0028	0.0032	
		 HSM	3xD		176	Feed (ipm)	13	17	18	16	16	13	
			≤ 0.15 ≤ APMX		(141-211)	Fz	0.0009	0.0017	0.0023	0.0025	0.0028	0.0036	
		 HSM	4xD		157	Feed (ipm)	15	19	19	17	16	15	
			≤ 0.1 ≤ APMX		(126-188)	Fz	0.0009	0.0018	0.0024	0.0029	0.0033	0.0037	

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 7 x rpm
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



77M • 77MCR
METRIC SERIES

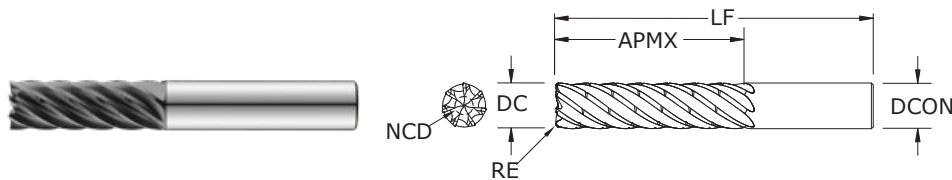

- Specializes in deep axial trochoidal and high-speed milling applications
- Optimized core improves rigidity, chip flow and reduces deflection
- Chip Breaker design breaks up chips from the long flute length allowing for better chip flow and evacuation in deep pocketing operations
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

mm						EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA) EDP NO.	Ti-NAMITE®-A (TA) EDP NO. CHIP BREAKER	Ti-NAMITE®-M (TM) EDP NO.	Ti-NAMITE®-M (TM) EDP NO. CHIP BREAKER
6,0	15,0	63,0	6,0	—	2,03	74300	74302	74301	74303
6,0	15,0	63,0	6,0	0,3	2,03	74304	74306	74305	74307
6,0	15,0	63,0	6,0	0,5	2,03	74308	74310	74309	74311
6,0	18,0	63,0	6,0	—	2,03	74316	74318	74317	74319
6,0	18,0	63,0	6,0	0,3	2,03	74320	74322	74321	74323
6,0	18,0	63,0	6,0	0,5	2,03	74324	74326	74325	74327
6,0	24,0	75,0	6,0	—	2,03	74332	74334	74333	74335
6,0	24,0	75,0	6,0	0,3	2,03	74336	74338	74337	74339
6,0	24,0	75,0	6,0	0,5	2,03	74340	74342	74341	74343
8,0	20,0	75,0	8,0	—	2,71	74348	74350	74349	74351
8,0	20,0	75,0	8,0	0,5	2,71	74352	74354	74353	74355
8,0	20,0	75,0	8,0	1,0	2,71	74356	74358	74357	74359
8,0	20,0	75,0	8,0	2,0	2,71	74360	74362	74361	74363
8,0	24,0	75,0	8,0	—	2,71	74364	74366	74365	74367
8,0	24,0	75,0	8,0	0,5	2,71	74368	74370	74369	74371
8,0	24,0	75,0	8,0	1,0	2,71	74372	74374	74373	74375
8,0	24,0	75,0	8,0	2,0	2,71	74376	74378	74377	74379
8,0	32,0	85,0	8,0	—	2,71	74380	74382	74381	74383
8,0	32,0	85,0	8,0	0,5	2,71	74384	74386	74385	74387
8,0	32,0	85,0	8,0	1,0	2,71	74388	74390	74389	74391
8,0	32,0	85,0	8,0	2,0	2,71	74392	74394	74393	74395
10,0	25,0	75,0	10,0	—	3,38	74396	74398	74397	74399
10,0	25,0	75,0	10,0	0,5	3,38	74400	74402	74401	74403
10,0	25,0	75,0	10,0	1,0	3,38	74404	74406	74405	74407
10,0	30,0	80,0	10,0	—	3,38	74408	74410	74409	74411
10,0	30,0	80,0	10,0	0,5	3,38	74412	74414	74413	74415
10,0	30,0	80,0	10,0	1,0	3,38	74416	74418	74417	74419
10,0	40,0	100,0	10,0	—	3,38	74420	74422	74421	74423
10,0	40,0	100,0	10,0	0,5	3,38	74424	74426	74425	74427
10,0	40,0	100,0	10,0	1,0	3,38	74428	74430	74429	74431
12,0	30,0	83,0	12,0	—	4,06	74432	74434	74433	74435
12,0	30,0	83,0	12,0	0,5	4,06	74436	74438	74437	74439
12,0	30,0	83,0	12,0	1,0	4,06	74440	74442	74441	74443
12,0	30,0	83,0	12,0	2,0	4,06	74600	74601	74602	74603
12,0	30,0	83,0	12,0	3,0	4,06	74604	74605	74606	74607
12,0	36,0	83,0	12,0	—	4,06	74444	74446	74445	74447
12,0	36,0	83,0	12,0	0,5	4,06	74448	74450	74449	74451
12,0	36,0	83,0	12,0	1,0	4,06	74452	74454	74453	74455
12,0	36,0	83,0	12,0	2,0	4,06	74608	74609	74610	74611
12,0	36,0	83,0	12,0	3,0	4,06	74612	74613	74614	74615
12,0	48,0	100,0	12,0	—	4,06	74456	74458	74457	74459
12,0	48,0	100,0	12,0	0,5	4,06	74460	74462	74461	74463
12,0	48,0	100,0	12,0	1,0	4,06	74464	74466	74465	74467
12,0	48,0	100,0	12,0	2,0	4,06	74616	74617	74618	74619
12,0	48,0	100,0	12,0	3,0	4,06	74620	74621	74622	74623
16,0	40,0	92,0	16,0	—	5,41	74468	74470	74469	74471

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000 / -0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000 / -0,050

>10-25 DIAMETER

DC = +0,000/-0,050


DCON = h_6

RE = +0,000 / -0,050

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

continued on next page

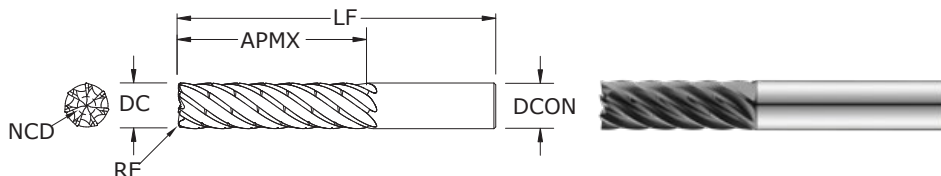

**77M •
77MCR**
METRIC SERIES

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000 / -0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000 / -0,050

>10-25 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000 / -0,050

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com


mm						EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA) EDP NO.	Ti-NAMITE®-A (TA) EDP NO. CHIP BREAKER	Ti-NAMITE®-M (TM) EDP NO.	Ti-NAMITE®-M (TM) EDP NO. CHIP BREAKER
16,0	40,0	92,0	16,0	0,5	5,41	74472	74474	74473	74475
16,0	40,0	92,0	16,0	1,0	5,41	74476	74478	74477	74479
16,0	40,0	92,0	16,0	2,0	5,41	74624	74625	74626	74627
16,0	40,0	92,0	16,0	3,0	5,41	74628	74629	74630	74631
16,0	48,0	100,0	16,0	—	5,41	74480	74482	74481	74483
16,0	48,0	100,0	16,0	0,5	5,41	74484	74486	74485	74487
16,0	48,0	100,0	16,0	1,0	5,41	74488	74490	74489	74491
16,0	48,0	100,0	16,0	2,0	5,41	74632	74633	74634	74635
16,0	48,0	100,0	16,0	3,0	5,41	74636	74637	74638	74639
16,0	64,0	115,0	16,0	—	5,41	74492	74494	74493	74495
16,0	64,0	115,0	16,0	0,5	5,41	74496	74498	74497	74499
16,0	64,0	115,0	16,0	1,0	5,41	74500	74502	74501	74503
16,0	64,0	115,0	16,0	2,0	5,41	74640	74641	74642	74643
16,0	64,0	115,0	16,0	3,0	5,41	74644	74645	74646	74647
20,0	50,0	100,0	20,0	—	6,76	74504	74506	74505	74507
20,0	50,0	100,0	20,0	0,5	6,76	74508	74510	74509	74511
20,0	50,0	100,0	20,0	1,0	6,76	74512	74514	74513	74515
20,0	50,0	100,0	20,0	2,0	6,76	74516	74518	74517	74519
20,0	50,0	100,0	20,0	3,0	6,76	74648	74649	74650	74651
20,0	50,0	100,0	20,0	4,0	6,76	74652	74653	74654	74655
20,0	60,0	115,0	20,0	—	6,76	74520	74522	74521	74523
20,0	60,0	115,0	20,0	0,5	6,76	74524	74526	74525	74527
20,0	60,0	115,0	20,0	1,0	6,76	74528	74530	74529	74531
20,0	60,0	115,0	20,0	2,0	6,76	74532	74534	74533	74535
20,0	60,0	115,0	20,0	3,0	6,76	74656	74657	74658	74659
20,0	60,0	115,0	20,0	4,0	6,76	74660	74661	74662	74663
20,0	80,0	140,0	20,0	—	6,76	74536	74538	74537	74539
20,0	80,0	140,0	20,0	0,5	6,76	74540	74542	74541	74543
20,0	80,0	140,0	20,0	1,0	6,76	74544	74546	74545	74547
20,0	80,0	140,0	20,0	2,0	6,76	74548	74550	74549	74551
20,0	80,0	140,0	20,0	3,0	6,76	74664	74665	74666	74667
20,0	80,0	140,0	20,0	4,0	6,76	74668	74669	74670	74671
25,0	63,0	135,0	25,0	—	8,45	74552	74554	74553	74555
25,0	63,0	135,0	25,0	1,0	8,45	74556	74558	74557	74559
25,0	63,0	135,0	25,0	2,0	8,45	74560	74562	74561	74563
25,0	63,0	135,0	25,0	3,0	8,45	74564	74566	74565	74567
25,0	75,0	150,0	25,0	—	8,45	74568	74570	74569	74571
25,0	75,0	150,0	25,0	1,0	8,45	74572	74574	74573	74575
25,0	75,0	150,0	25,0	2,0	8,45	74576	74578	74577	74579
25,0	75,0	150,0	25,0	3,0	8,45	74580	74582	74581	74583
25,0	100,0	170,0	25,0	—	8,45	74584	74586	74585	74587
25,0	100,0	170,0	25,0	1,0	8,45	74588	74590	74589	74591
25,0	100,0	170,0	25,0	2,0	8,45	74592	74594	74593	74595
25,0	100,0	170,0	25,0	3,0	8,45	74596	74598	74597	74599

CONTINUED




Series 77M, 77MCR Metric		Hardness	Ae Ap		Vc (m/min)	DC • mm										
			Ae x DC	Ap x DC		6	8	10	12	16	20	25				
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc		HSM		284	RPM	12208	9156	7325	6104	4578	3662	2930		
				2.5xD		(227-341)	Fz	0.0413	0.0411	0.0640	0.0711	0.0889	0.1013	0.1050		
				≤ 0.2 ≤ APMX		Feed (mm/min)	3529	2634	3282	3038	2849	2597	2154			
				HSM		257	Fz	0.0347	0.0461	0.0717	0.0797	0.0996	0.1135	0.1176		
				3xD		(206-308)	Feed (mm/min)	2965	2955	3676	3405	3192	2910	2412		
				≤ 0.15 ≤ APMX												
			HSM		230	Fz	0.0362	0.0480	0.0747	0.0830	0.1037	0.1182	0.0919			
			4xD		(184-276)	Feed (mm/min)	3094	3076	3830	3546	3323	3030	1885			
			≤ 0.1 ≤ APMX													
			ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc		HSM		132	RPM	8068	6051	4841	4034	3025	2420	1936
						2.5xD		(106-159)	Fz	0.0213	0.0285	0.0512	0.0610	0.0711	0.0827	0.0875
						≤ 0.2 ≤ APMX		Feed (mm/min)	1203	1207	1735	1723	1506	1401	1186	
		HSM			138	Fz	0.0239	0.0319	0.0574	0.0683	0.0797	0.0926	0.0980			
		3xD			(111-166)	Feed (mm/min)	1350	1351	1945	1929	1688	1569	1328			
		≤ 0.15 ≤ APMX														
		HSM		152	Fz	0.0249	0.0332	0.0597	0.0711	0.0830	0.0964	0.1021				
		4xD		(122-182)	Feed (mm/min)	1406	1406	2023	2008	1758	1633	1384				
		≤ 0.1 ≤ APMX														
		TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		≤ 375 Bhn or ≤ 40 HRc		HSM		83	RPM	4087	3065	2452	2044	1533	1226	981
						2.5xD		(66-100)	Fz	0.0140	0.0183	0.0294	0.0356	0.0457	0.0560	0.0625
						≤ 0.2 ≤ APMX		Feed (mm/min)	401	393	505	509	490	481	429	
			HSM		86	Fz	0.0157	0.0205	0.0330	0.0398	0.0512	0.0627	0.0700			
			3xD		(69-103)	Feed (mm/min)	449	440	566	569	549	538	481			
			≤ 0.15 ≤ APMX													
	HSM		77	Fz	0.0163	0.0213	0.0344	0.0415	0.0533	0.0653	0.0729					
	4xD		(62-92)	Feed (mm/min)	466	457	590	594	572	560	501					
	≤ 0.1 ≤ APMX															
	M		STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc		HSM		197	RPM	9660	7245	5796	4830	3623	2898	2318
						2.5xD		(158-236)	Fz	0.0216	0.0285	0.0448	0.0533	0.0635	0.0747	0.0800
						≤ 0.2 ≤ APMX		Feed (mm/min)	1461	1445	1818	1803	1610	1515	1298	
		HSM			204	Fz	0.0242	0.0319	0.0502	0.0598	0.0711	0.0837	0.0896			
		3xD			(163-245)	Feed (mm/min)	1636	1618	2037	2022	1803	1698	1454			
		≤ 0.15 ≤ APMX														
		HSM		182	Fz	0.0252	0.0332	0.0523	0.0622	0.0741	0.0871	0.0933				
		4xD		(146-218)	Feed (mm/min)	1704	1684	2122	2104	1879	1767	1514				
		≤ 0.1 ≤ APMX														
		STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 275 Bhn or ≤ 28 HRc		HSM		130	RPM	6369	4777	3822	3185	2389	1911	1529
						2.5xD		(104-156)	Fz	0.0168	0.0221	0.0371	0.0432	0.0584	0.0693	0.0750
						≤ 0.2 ≤ APMX		Feed (mm/min)	749	739	993	963	976	927	803	
			HSM		134	Fz	0.0188	0.0248	0.0416	0.0484	0.0655	0.0777	0.0840			
			3xD		(107-161)	Feed (mm/min)	838	829	1113	1079	1095	1039	899			
			≤ 0.15 ≤ APMX													
			HSM		120	Fz	0.0196	0.0258	0.0433	0.0504	0.0682	0.0809	0.0875			
			4xD		(96-144)	Feed (mm/min)	874	863	1158	1124	1140	1082	936			
			≤ 0.1 ≤ APMX													
			STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450	≤ 325 Bhn or ≤ 35 HRc		HSM		124	RPM	6104	4578	3662	3052	2289	1831	1465
						2.5xD		(99-149)	Fz	0.0168	0.0221	0.0371	0.0432	0.0584	0.0693	0.0750
						≤ 0.2 ≤ APMX		Feed (mm/min)	718	708	952	923	936	888	769	
		HSM			129	Fz	0.0188	0.0248	0.0416	0.0484	0.0655	0.0777	0.0840			
		3xD			(103-155)	Feed (mm/min)	803	795	1066	1034	1050	996	861			
		≤ 0.15 ≤ APMX														
	HSM			115	Fz	0.0196	0.0258	0.0433	0.0504	0.0682	0.0809	0.0875				
	4xD			(92-138)	Feed (mm/min)	837	827	1110	1077	1093	1037	897				
	≤ 0.1 ≤ APMX															

continued on next page




Series 77M, 77MCR		Ae x DC		Vc (m/min)		DC • mm								
Metric	Hardness	Ae x DC	Ap x DC			6	8	10	12	16	20	25		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	 HSM	2.5xD		218	RPM	10722	8041	6433	5361	4021	3217	2573
				≤ 0.2 ≤ APMX		(174-262)	Fz	0.0239	0.0315	0.0474	0.0559	0.0762	0.0880	0.0925
							Feed (mm/min)	1794	1773	2135	2098	2145	1981	1666
			 HSM	3xD		225	Fz	0.0268	0.0353	0.0531	0.0626	0.0854	0.0986	0.1036
				≤ 0.15 ≤ APMX		(180-270)	Feed (mm/min)	2011	1987	2391	2349	2404	2220	1866
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	 HSM	4xD		202	Fz	0.0279	0.0368	0.0553	0.0652	0.0889	0.1027	0.1079
				≤ 0.1 ≤ APMX		(162-242)	Feed (mm/min)	2094	2071	2490	2447	2502	2312	1944
			 HSM	2.5xD		130	RPM	6369	4777	3822	3185	2389	1911	1529
				≤ 0.2 ≤ APMX		(104-156)	Fz	0.0168	0.0221	0.0371	0.0432	0.0584	0.0693	0.0750
							Feed (mm/min)	749	739	993	963	976	927	803
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	 HSM	3xD		134	Fz	0.0188	0.0248	0.0416	0.0484	0.0655	0.0777	0.0840
				≤ 0.15 ≤ APMX		(107-161)	Feed (mm/min)	838	829	1113	1079	1095	1039	899
			 HSM	4xD		120	Fz	0.0196	0.0258	0.0433	0.0504	0.0682	0.0809	0.0875
				≤ 0.1 ≤ APMX		(96-144)	Feed (mm/min)	874	863	1158	1124	1140	1082	936
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	 HSM	2.5xD		41	RPM	2017	1513	1210	1008	756	605	484
				≤ 0.2 ≤ APMX		(33-49)	Fz	0.0140	0.0183	0.0294	0.0356	0.0457	0.0560	0.0625
							Feed (mm/min)	198	194	249	251	242	237	212
			 HSM	3xD		43	Fz	0.0157	0.0205	0.0330	0.0398	0.0512	0.0627	0.0700
				≤ 0.15 ≤ APMX		(34-52)	Feed (mm/min)	222	217	280	281	271	266	237
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	 HSM	4xD		38	Fz	0.0163	0.0213	0.0344	0.0415	0.0533	0.0653	0.0729	
			≤ 0.1 ≤ APMX		(30-46)	Feed (mm/min)	230	226	291	293	282	277	247	
		 HSM	2.5xD		26	RPM	1274	955	764	637	478	382	306	
			≤ 0.2 ≤ APMX		(21-31)	Fz	0.0114	0.0152	0.0243	0.0305	0.0381	0.0480	0.0550	
						Feed (mm/min)	102	102	130	136	127	128	118	
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	 HSM	3xD		27	Fz	0.0128	0.0171	0.0273	0.0342	0.0427	0.0538	0.0616	
			≤ 0.15 ≤ APMX		(22-32)	Feed (mm/min)	114	114	146	152	143	144	132	
		 HSM	4xD		24	Fz	0.0133	0.0178	0.0284	0.0356	0.0445	0.0560	0.0642	
			≤ 0.1 ≤ APMX		(19-29)	Feed (mm/min)	119	119	152	159	149	150	137	
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	 HSM	2.5xD		88	RPM	4352	3264	2611	2176	1632	1306	1045
				≤ 0.2 ≤ APMX		(70-106)	Fz	0.0191	0.0254	0.0397	0.0483	0.0635	0.0747	0.0800
							Feed (mm/min)	582	580	726	736	725	683	585
			 HSM	3xD		91	Fz	0.0213	0.0285	0.0445	0.0541	0.0711	0.0837	0.0896
				≤ 0.15 ≤ APMX		(73-109)	Feed (mm/min)	649	651	813	824	812	765	655
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	 HSM	4xD		82	Fz	0.0222	0.0296	0.0463	0.0563	0.0741	0.0871	0.0933
				≤ 0.1 ≤ APMX		(66-98)	Feed (mm/min)	676	676	846	858	847	796	682
			 HSM	2.5xD		52	RPM	2548	1911	1529	1274	955	764	611
				≤ 0.2 ≤ APMX		(42-62)	Fz	0.0163	0.0254	0.0397	0.0483	0.0635	0.0747	0.0800
							Feed (mm/min)	291	340	425	431	425	400	342
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	 HSM	3xD		54	Fz	0.0182	0.0285	0.0445	0.0541	0.0711	0.0837	0.0896	
			≤ 0.15 ≤ APMX		(43-65)	Feed (mm/min)	325	381	476	482	476	448	384	
		 HSM	4xD		48	Fz	0.0190	0.0296	0.0463	0.0563	0.0741	0.0871	0.0933	
			≤ 0.1 ≤ APMX		(38-58)	Feed (mm/min)	339	396	495	502	496	466	399	

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 rpm = (Vc x 1000) / (DC x 3.14)
 mm/min = Fz x 7 x rpm
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



**66 •
66CR**
FRACTIONAL SERIES

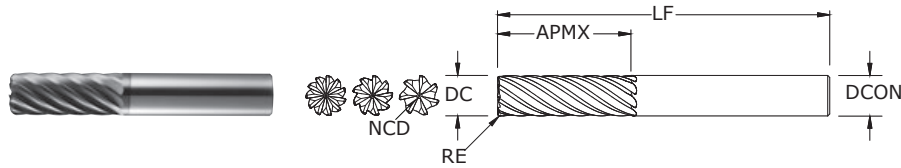


- Heavy core and rigid design allow for straight walls
- High flute count design results in smoother cutting performance and enhanced tool life in precise finishing applications
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

inch							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	NO. OF FLUTES	Ti-NAMITE®-X (TX)
3/16	5/8	2	3/16	—	0.0550	7	36620
3/16	5/8	2	3/16	.010	0.0550	7	36627
1/4	3/4	2-1/2	1/4	—	0.0650	7	36621
1/4	3/4	2-1/2	1/4	.015	0.0650	7	36628
3/8	1	3	3/8	—	0.0810	7	36622
3/8	1	3	3/8	.015	0.0810	7	36629
1/2	1-1/4	3	1/2	—	0.1340	9	36623
1/2	1-1/4	3	1/2	.030	0.1340	9	36630
1/2	1-1/4	3	1/2	.090	0.1340	9	36631
1/2	1-1/4	3	1/2	.120	0.1340	9	36632
5/8	1-5/8	3-1/2	5/8	—	0.1150	9	36624
5/8	1-5/8	3-1/2	5/8	.030	0.1150	9	36633
5/8	1-5/8	3-1/2	5/8	.090	0.1150	9	36634
5/8	1-5/8	3-1/2	5/8	.120	0.1150	9	36635
3/4	1-5/8	4	3/4	—	0.1750	11	36625
3/4	1-5/8	4	3/4	.030	0.1750	11	36636
3/4	1-5/8	4	3/4	.090	0.1750	11	36637
3/4	1-5/8	4	3/4	.120	0.1750	11	36638
1	2	6	1	—	0.3000	11	36626
1	2	6	1	.030	0.3000	11	36639
1	2	6	1	.090	0.3000	11	36640
1	2	6	1	.120	0.3000	11	36641


Neck Option Available

TOLERANCES (inch)

DC = +0.0000/–0.0020
DCON = h_6
RE = +0.0000/–0.0020




For patent information visit
www.ksptpatents.com



	Series 66, 66CR Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in						
						3/16	1/4	3/8	1/2	5/8	3/4	1
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile ≤ 0.05	≤ 1	635	RPM	12937	9703	6469	4851	3881	2426
					(508-762)	Fz	0.0008	0.0012	0.0022	0.0030	0.0037	0.0038
						Feed (ipm)	72.4	81.5	99.6	131.0	129.2	135.2
		≤ 28 HRc	Finish ≤ 0.02	≤ 2	762	RPM	15524	11643	7762	5822	4657	3881
					(610-914)	Fz	0.0006	0.0010	0.0018	0.0024	0.0030	0.0030
						Feed (ipm)	69.5	78.2	95.6	125.7	124.1	129.8
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile ≤ 0.05	≤ 1	360	RPM	7334	5501	3667	2750	2200	1834
					(288-432)	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030
						Feed (ipm)	30.8	34.7	43.6	56.9	57.4	60.5
		≤ 40 HRc	Finish ≤ 0.02	≤ 2	432	RPM	8801	6601	4401	3300	2640	2200
					(346-518)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024
						Feed (ipm)	29.6	33.3	41.9	54.7	55.1	58.1
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile ≤ 0.05	≤ 1	290	RPM	5908	4431	2954	2216	1772	1477
					(232-348)	Fz	0.0004	0.0006	0.0012	0.0016	0.0020	0.0021
						Feed (ipm)	16.5	18.6	24.8	31.9	31.9	34.1
		≤ 40 HRc	Finish ≤ 0.02	≤ 2	348	RPM	7090	5317	3545	2659	2127	1772
					(278-418)	Fz	0.0003	0.0005	0.0010	0.0013	0.0016	0.0017
						Feed (ipm)	15.9	17.9	23.8	30.6	30.6	32.8
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile ≤ 0.05	≤ 1	560	RPM	11409	8557	5705	4278	3423	2852
					(448-672)	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030
						Feed (ipm)	47.9	53.9	67.9	88.6	89.3	94.1
		≤ 28 HRc	Finish ≤ 0.02	≤ 2	448	RPM	9127	6845	4564	3423	2738	2282
					(358-538)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024
						Feed (ipm)	30.7	34.5	43.4	56.7	57.2	60.2
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile ≤ 0.05	≤ 1	385	RPM	7844	5883	3922	2941	2353	1961
					(308-462)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024
						Feed (ipm)	27.5	28.8	38.4	47.7	48.7	51.8
		≤ 28 HRc	Finish ≤ 0.02	≤ 2	462	RPM	9412	7059	4706	3530	2824	2353
					(370-554)	Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019
						Feed (ipm)	26.4	27.7	36.9	45.7	46.8	49.7
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile ≤ 0.05	≤ 1	355	RPM	7233	5424	3616	2712	2170	1808
					(284-426)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024
						Feed (ipm)	25.3	26.6	35.4	43.9	44.9	47.7
		≤ 35 HRc	Finish ≤ 0.02	≤ 2	426	RPM	8679	6509	4340	3255	2604	2170
					(341-511)	Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019
						Feed (ipm)	24.3	25.5	34.0	42.2	43.1	45.8

continued on next page

Multi-Carb



Series 66, 66CR Fractional	Hardness			Vc (sfm)	DC • in								
		Ae x DC	Ap x DC		3/16	1/4	3/8	1/2	5/8	3/4	1		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	Profile 	≤ 0.05	≤ 1	705	RPM	14363	10772	7182	5386	4309	3591	2693
					(564-846)	Fz	0.0008	0.0012	0.0022	0.0030	0.0037	0.0038	0.0042
						Feed (ipm)	80.4	90.5	110.6	145.4	143.5	150.1	124.4
		Finish 	≤ 0.02	≤ 2	846	RPM	17236	12927	8618	6463	5171	4309	3232
					(677-1015)	Fz	0.0006	0.0010	0.0018	0.0024	0.0030	0.0030	0.0034
						Feed (ipm)	77.2	86.9	106.2	139.6	137.7	144.1	119.4
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	Profile 	≤ 0.05	≤ 1	540	RPM	11002	8251	5501	4126	3300	2750	2063
					(432-648)	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
						Feed (ipm)	46.2	52.0	65.5	85.4	86.1	90.8	72.6
		Finish 	≤ 0.02	≤ 2	648	RPM	13202	9901	6601	4951	3961	3300	2475
					(518-778)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
						Feed (ipm)	44.4	49.9	62.8	82.0	82.7	87.1	69.7
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	Profile 	≤ 0.05	≤ 1	105	RPM	2139	1604	1070	802	642	535	401
					(84-126)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
						Feed (ipm)	7.5	7.9	10.5	13.0	13.3	14.1	11.5
		Finish 	≤ 0.02	≤ 2	126	RPM	2567	1925	1284	963	770	642	481
					(101-151)	Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019	0.0021
						Feed (ipm)	7.2	7.5	10.1	12.5	12.8	13.6	11.0
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	Profile 	≤ 0.05	≤ 1	85	RPM	1732	1299	866	649	520	433	325
					(68-102)	Fz	0.0003	0.0005	0.0009	0.0011	0.0014	0.0015	0.0016
						Feed (ipm)	3.6	4.5	5.5	6.4	6.5	7.1	5.7
		Finish 	≤ 0.02	≤ 2	102	RPM	2078	1559	1039	779	623	520	390
					(82-122)	Fz	0.0002	0.0004	0.0007	0.0009	0.0011	0.0012	0.0013
						Feed (ipm)	3.5	4.4	5.2	6.2	6.3	6.9	5.5
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	Profile 	≤ 0.05	≤ 1	390	RPM	7946	5959	3973	2980	2384	1986	1490
					(312-468)	Fz	0.0005	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029
						Feed (ipm)	27.8	33.4	41.7	56.3	55.8	59.0	47.5
		Finish 	≤ 0.02	≤ 2	468	RPM	9535	7151	4767	3576	2860	2384	1788
					(374-562)	Fz	0.0004	0.0006	0.0012	0.0017	0.0021	0.0022	0.0023
						Feed (ipm)	26.7	32.0	40.0	54.1	53.5	56.6	45.6
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	Profile 	≤ 0.05	≤ 1	140	RPM	2852	2139	1426	1070	856	713	535	
				(112-168)	Fz	0.0005	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029	
					Feed (ipm)	10.0	12.0	15.0	20.2	20.0	21.2	17.1	
	Finish 	≤ 0.02	≤ 2	168	RPM	3423	2567	1711	1284	1027	856	642	
				(134-202)	Fz	0.0004	0.0006	0.0012	0.0017	0.0021	0.0022	0.0023	
					Feed (ipm)	9.6	11.5	14.4	19.4	19.2	20.3	16.4	

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



**66M •
66MCR**
METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	NO. OF FLUTES	Ti-NAMITE®-X (TX)
6,0	19,0	63,0	6,0	—	1,63	7	46620
6,0	19,0	63,0	8,0	0,5	1,63	7	46627
6,0	19,0	63,0	6,0	1,0	1,63	7	46628
8,0	20,0	63,0	8,0	—	1,78	7	46621
8,0	20,0	63,0	8,0	0,5	1,78	7	46629
8,0	20,0	63,0	8,0	1,0	1,78	7	46630
8,0	20,0	63,0	8,0	1,5	1,78	7	46631
10,0	22,0	75,0	10,0	—	2,03	7	46622
10,0	22,0	75,0	10,0	0,5	2,03	7	46632
10,0	22,0	75,0	10,0	1,0	2,03	7	46633
10,0	22,0	75,0	10,0	1,5	2,03	7	46634
10,0	22,0	75,0	10,0	2,0	2,03	7	46635
12,0	26,0	83,0	12,0	—	3,45	9	46623
12,0	26,0	83,0	12,0	1,0	3,45	9	46636
12,0	26,0	83,0	12,0	1,5	3,45	9	46637
12,0	26,0	83,0	12,0	2,0	3,45	9	46638
12,0	26,0	83,0	12,0	2,5	3,45	9	46639
12,0	26,0	83,0	12,0	3,0	3,45	9	46640
16,0	32,0	92,0	16,0	—	2,92	9	46624
16,0	32,0	92,0	16,0	1,0	2,92	9	46641
16,0	32,0	92,0	16,0	1,5	2,92	9	46642
16,0	32,0	92,0	16,0	2,0	2,92	9	46643
16,0	32,0	92,0	16,0	2,5	2,92	9	46644
16,0	32,0	92,0	16,0	3,0	2,92	9	46645
16,0	32,0	92,0	16,0	4,0	2,92	9	46646
20,0	38,0	104,0	20,0	—	4,57	11	46625
20,0	38,0	104,0	20,0	1,0	4,57	11	46647
20,0	38,0	104,0	20,0	1,5	4,57	11	46648
20,0	38,0	104,0	20,0	2,0	4,57	11	46649
20,0	38,0	104,0	20,0	2,5	4,57	11	46650
20,0	38,0	104,0	20,0	3,0	4,57	11	46651
20,0	38,0	104,0	20,0	4,0	4,57	11	46652


continued on next page

Neck Option Available

- Heavy core and rigid design allow for straight walls
- High flute count design results in smoother cutting performance and enhanced tool life in precise finishing applications
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



**66M •
66MCR**
METRIC SERIES

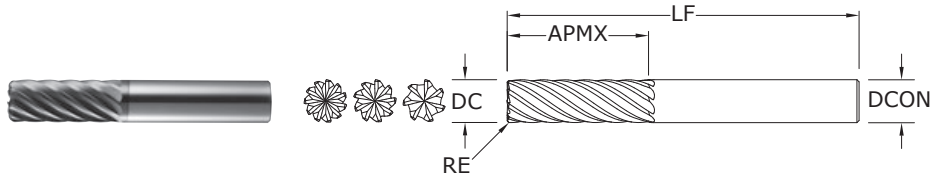

CONTINUED

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	NO. OF FLUTES	Ti-NAMITE®-X (TX)
20,0	38,0	104,0	20,0	5,0	4,57	11	46653
25,0	38,0	104,0	25,0	—	7,49	11	46626
25,0	38,0	104,0	25,0	1,0	7,49	11	46654
25,0	38,0	104,0	25,0	1,5	7,49	11	46655
25,0	38,0	104,0	25,0	2,0	7,49	11	46656
25,0	38,0	104,0	25,0	2,5	7,49	11	46657
25,0	38,0	104,0	25,0	3,0	7,49	11	46658
25,0	38,0	104,0	25,0	4,0	7,49	11	46659
25,0	38,0	104,0	25,0	5,0	7,49	11	46660

Neck Option Available

TOLERANCES (mm)

DC = +0,000/–0,050

DCON = h₆

RE = +0,000/–0,050


STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

Series 66M, 66MCR Metric		Hardness			Vc (m/min)	DC • mm							
			Ae x DC	Ap x DC		6	8	10	12	16	20	25	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	 Profile ≤ 0.05	≤ 1	194	RPM	10260	7695	6156	5130	3847	3078	2462
					(155-232)	Fz	0.029	0.047	0.059	0.072	0.095	0.101	0.105
					Feed (mm/min)	2068	2528	2528	3324	3280	3431	2844	
		≤ 275 Bhn or ≤ 28 HRc	 Finish ≤ 0.02	≤ 2	232	RPM	12312	9234	7387	6156	4617	3693	2955
					(186-279)	Fz	0.023	0.038	0.047	0.058	0.076	0.081	0.084
					Feed (mm/min)	1985	2427	2427	3191	3149	3294	2730	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	 Profile ≤ 0.05	≤ 1	110	RPM	5816	4362	3490	2908	2181	1745	1396
					(88-132)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080
					Feed (mm/min)	879	1108	1107	1445	1457	1536	1229	
		≤ 375 Bhn or ≤ 40 HRc	 Finish ≤ 0.02	≤ 2	132	RPM	6980	5235	4188	3490	2617	2094	1675
					(105-158)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064
					Feed (mm/min)	844	1063	1063	1387	1399	1474	1179	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	 Profile ≤ 0.05	≤ 1	88	RPM	4686	3514	2811	2343	1757	1406	1125
					(71-106)	Fz	0.014	0.026	0.032	0.038	0.051	0.056	0.055
					Feed (mm/min)	472	630	630	810	810	866	680	
		≤ 375 Bhn or ≤ 40 HRc	 Finish ≤ 0.02	≤ 2	106	RPM	5623	4217	3374	2811	2108	1687	1349
					(85-127)	Fz	0.012	0.020	0.026	0.031	0.041	0.045	0.044
					Feed (mm/min)	453	605	605	777	777	831	653	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	 Profile ≤ 0.05	≤ 1	171	RPM	9048	6786	5429	4524	3393	2714	2171
					(137-205)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080
					Feed (mm/min)	1368	1723	1723	2247	2267	2389	1911	
		≤ 275 Bhn or ≤ 28 HRc	 Finish ≤ 0.02	≤ 2	137	RPM	7238	5429	4343	3619	2714	2171	1737
					(109-164)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064
					Feed (mm/min)	875	1103	1103	1438	1451	1529	1223	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	 Profile ≤ 0.05	≤ 1	117	RPM	6220	4665	3732	3110	2333	1866	1493
					(94-141)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
					Feed (mm/min)	731	975	975	1209	1236	1314	1067	
		≤ 275 Bhn or ≤ 28 HRc	 Finish ≤ 0.02	≤ 2	141	RPM	7465	5598	4479	3732	2799	2239	1791
					(113-169)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
					Feed (mm/min)	702	17	936	1161	1187	1261	1025	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	 Profile ≤ 0.05	≤ 1	108	RPM	5736	4302	3441	2868	2151	1721	1377
					(87-130)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
					Feed (mm/min)	674	899	899	1115	1140	1211	984	
		≤ 325 Bhn or ≤ 35 HRc	 Finish ≤ 0.02	≤ 2	130	RPM	6883	5162	4130	3441	2581	2065	1652
					(104-156)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
					Feed (mm/min)	647	863	863	1070	1094	1163	945	

continued on next page

Multi-Carb



Series 66M, 66MCR	Metric	Hardness			Vc (m/min)	DC • mm								
			Ae x DC	Ap x DC		6	8	10	12	16	20	25		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc		≤ 0.05	≤ 1	215	RPM	11391	8543	6834	5695	4271	3417	2734
						(172-258)	Fz	0.029	0.047	0.059	0.072	0.095	0.101	0.105
						Feed (mm/min)	2296	2807	2807	3690	3641	3809	3158	
				≤ 0.02	≤ 2	258	RPM	13669	10252	8201	6834	5126	4101	3281
						(206-309)	Fz	0.023	0.038	0.047	0.058	0.076	0.081	0.084
						Feed (mm/min)	2204	2695	2694	3543	3496	3657	3031	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc		≤ 0.05	≤ 1	165	RPM	8725	6544	5235	4362	3272	2617	2094
						(132-198)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080
						Feed (mm/min)	1319	1661	1661	2167	2186	2303	1843	
				≤ 0.02	≤ 2	198	RPM	10470	7852	6282	5235	3926	3141	2513
						(158-237)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064
						Feed (mm/min)	1266	1595	1595	2080	2099	2211	1769	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc		≤ 0.05	≤ 1	32	RPM	1696	1272	1018	848	636	509	407
						(26-38)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
						Feed (mm/min)	199	266	213	330	337	358	291	
				≤ 0.02	≤ 2	38	RPM	2036	1527	1221	1018	763	611	489
						(31-46)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
						Feed (mm/min)	192	255	255	317	324	344	279	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc		≤ 0.05	≤ 1	26	RPM	1373	1030	824	687	515	412	330
						(21-31)	Fz	0.012	0.019	0.024	0.026	0.036	0.040	0.040
						Feed (mm/min)	115	138	138	163	166	181	145	
				≤ 0.02	≤ 2	31	RPM	1648	1236	989	824	618	494	396
						(25-37)	Fz	0.010	0.015	0.019	0.021	0.029	0.032	0.032
						Feed (mm/min)	111	133	133	157	159	174	139	
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc		≤ 0.05	≤ 1	119	RPM	6301	4726	3781	3151	2363	1890	1512	
					(95-143)	Fz	0.019	0.032	0.040	0.050	0.067	0.072	0.073	
					Feed (mm/min)	847	1059	1059	1429	1415	1497	1206		
			≤ 0.02	≤ 2	143	RPM	7561	5671	4537	3781	2836	2268	1815	
					(114-171)	Fz	0.015	0.026	0.032	0.040	0.053	0.058	0.058	
					Feed (mm/min)	813	1016	1016	1372	1359	1437	1158		
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc		≤ 0.05	≤ 1	43	RPM	2262	1696	1357	1131	848	679	543	
					(34-51)	Fz	0.019	0.032	0.040	0.050	0.067	0.072	0.073	
					Feed (mm/min)	304	380	380	513	508	537	433		
			≤ 0.02	≤ 2	51	RPM	2714	2036	1629	1357	1018	814	651	
					(41-61)	Fz	0.015	0.026	0.032	0.040	0.053	0.058	0.058	
					Feed (mm/min)	292	365	365	492	488	516	416		

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x number of flutes x rpm



reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



METRIC Multi-Carb

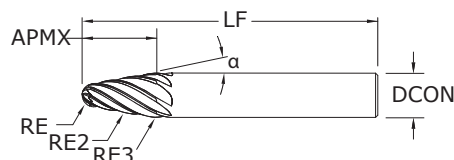

67B METRIC SERIES

TOLERANCES (mm)

DCON = h_6

RE = $+0,010/-0,010$

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm								EDP NO.
SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	CENTERLINE ANGLE α	TIP RADIUS RE	TAPERED RADIUS RE2	BLENDED RADIUS RE3	NO. OF FLUTES	Ti-NAMITE®-H (TH)
6,0	9,5	58,0	17.5°	1,0	250,0	3,0	4	45700
6,0	8,0	58,0	17.5°	1,5	250,0	3,0	4	45701
8,0	10,5	80,0	20.0°	1,5	250,0	4,0	4	45702
8,0	9,5	80,0	20.0°	2,0	250,0	4,0	4	45703
10,0	12,5	89,0	20.0°	2,0	250,0	5,0	6	45704
10,0	11,5	89,0	20.0°	2,5	250,0	5,0	6	45705
12,0	13,5	100,0	20.0°	3,0	250,0	6,0	8	45706
12,0	14,4	100,0	20.0°	2,5	250,0	6,0	8	45707
12,0	20,0	100,0	14.0°	2,0	60,0	6,0	6	45708
16,0	31,0	109,0	12.5°	2,0	1000,0	5,0	6	45709
16,0	27,5	109,0	12.5°	3,0	1000,0	5,0	8	45710
16,0	24,0	109,0	12.5°	4,0	1000,0	5,0	8	45711
16,0	21,0	109,0	15.0°	4,0	1000,0	5,0	8	45712
16,0	18,5	109,0	20.0°	4,0	1500,0	8,0	8	45713
16,0	28,5	109,0	10.0°	4,0	1000,0	5,0	8	45714
16,0	19,0	109,0	20.0°	3,0	750,0	5,0	8	45715
16,0	15,0	109,0	30.0°	2,0	750,0	3,0	6	45716
16,0	18,5	109,0	20.0°	3,0	60,0	5,0	8	45717

- Designed to significantly improve traditional ball end applications
- Highly efficient at finishing and semi-finishing profiling
- Main application areas include profiling and pocket milling
- Especially suited to machining deep pockets and hard-to-reach areas without using long-reach tools
- Their versatility also allows for machining profiles and blends with one tool
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

Multi-Carb

			DCON	6		8		10		12		16	
			Ae max	0,20	0,45	0,25	0,55	0,30	0,60	0,35	0,65	0,40	0,70
			Diameter	3,0	6,0	4,0	8,0	5,0	10,0	6,0	12,0	8,0	16,0
													
Metric	Hardness (HRC)	Vc (m/min)	Cut Zone	RE	RE2	RE	RE2	RE	RE2	RE	RE2	RE	RE2
P Alloy Steels	≤28 (155-232)	194	RPM	20583	10292	15438	7719	12350	6175	10292	5146	7719	3859
			Fz	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060	0,033	0,080
			Feed (mm/min)	1029	1235	1029	1235	1544	1853	1544	1853	1544	1853
	≤40 (88-132)	110	RPM	11671	5836	8753	4377	7003	3501	5836	2918	4377	2188
			Fz	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050	0,029	0,070
			Feed (mm/min)	389	467	438	525	700	840	729	875	766	919
P Tool Steels	≤35 (69-118)	93	RPM	9867	4934	7400	3700	5920	2960	4934	2467	3700	1850
			Fz	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060	0,033	0,080
			Feed (mm/min)	493	592	493	592	740	888	740	888	740	888
	≤45 (51-77)	64	RPM	6790	3395	5093	2546	4074	2037	3395	1698	2546	1273
			Fz	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060
			Feed (mm/min)	226	272	255	306	407	489	424	509	382	458
M Stainless Steels	≤28 (94-141)	117	RPM	12414	6207	9310	4655	7448	3724	6207	3103	4655	2328
			Fz	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060	0,029	0,070
			Feed (mm/min)	621	745	621	745	931	1117	931	1117	815	978
	≤35 (87-130)	108	RPM	11459	5729	8594	4297	6875	3438	5729	2865	4297	2149
			Fz	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060
			Feed (mm/min)	382	458	430	516	688	825	716	859	645	773
S High Temperature Alloys	≤32 (26-38)	32	RPM	3395	1698	2546	1273	2037	1019	1698	849	1273	637
			Fz	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060
			Feed (mm/min)	113	136	127	153	204	244	212	255	191	229
	≤43 (21-31)	26	RPM	2759	1379	2069	1034	1655	828	1379	690	1034	517
			Fz	0,004	0,010	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050
			Feed (mm/min)	46	55	69	83	124	149	138	166	129	155
S Titanium Alloys	≤35 (85-133)	109	RPM	11565	5782	8674	4337	6939	3469	5782	2891	4337	2168
			Fz	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060	0,029	0,070
			Feed (mm/min)	578	694	578	694	867	1041	867	1041	759	911
	≤45 (44-61)	53	RPM	5623	2812	4217	2109	3374	1687	2812	1406	2109	1054
			Fz	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060
			Feed (mm/min)	187	225	211	253	337	405	351	422	316	380

$rpm = (Vc \times 1000) / (DC \times 3.14)$

$Feed = Fz \times \text{No. of teeth} \times rpm$

Adjust speed and feed according to material hardness

Consider rpm according to cutting area of tool being utilized


Avoid using tip of the tool where possible due to reduced chip space

Be aware of max cut Ae, especially on the lower portion of the tool

Medical applications:

- Titanium can be cut dry while keeping cut size to a minimum and providing good chip evacuation (air blast)
- For cobalt chrome applications, a surface speed of 45M/min is a guide (It can also be cut dry as per cobalt)

Refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

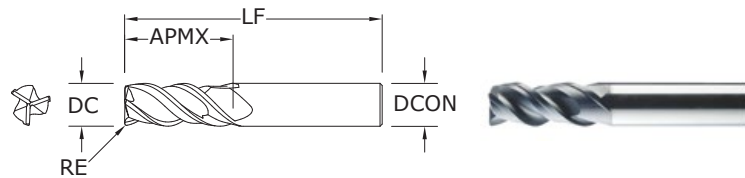

33CR

FRACTIONAL SERIES

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0020

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6

RE = +0.0000/–0.0020

>3/8–1 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0020

STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

	inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)
1/8	3/8	2-1/2	1/4	.015	33345
3/16	9/16	2-1/2	1/4	.015	33346
1/4	3/4	2-1/2	1/4	.020	33347
5/16	13/16	2-1/2	5/16	.020	33348
3/8	1	2-1/2	3/8	.020	33349
7/16	1-1/8	2-3/4	7/16	.020	33350
1/2	1-1/4	3-1/4	1/2	.030	33351
5/8	1-1/2	3-1/2	5/8	.040	33352
3/4	1-3/4	4	3/4	.040	33353
1	2-1/4	5	1	.040	33354


- Specially engineered step core design provides stability for aggressive ramping and rigidity when flutes are completely engaged
- Open design at axial end accommodates material flow and load reduction during machining operations
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

Series 33



Series 33CR Fractional	Hardness			Vc (sfm)	DC • in								
		Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	Profile 	≤ 0.5	≤ 1.5	550	RPM	16808	8404	5603	4202	3362	2801	2101
					(440-660)	Fz	0.0005	0.0012	0.0023	0.0031	0.0039	0.0040	0.0043
					Feed (ipm)	25.2	30.3	38.7	39.1	39.3	33.6	27.1	
		Slot 	1	≤ 1	440	RPM	13446	6723	4482	3362	2689	2241	1681
					(352-528)	Fz	0.0005	0.0012	0.0023	0.0031	0.0039	0.0040	0.0043
					Feed (ipm)	20.2	24.2	30.9	31.3	31.5	26.9	21.7	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	Profile 	≤ 0.5	≤ 1.5	315	RPM	9626	4813	3209	2407	1925	1604	1203
					(252-378)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
					Feed (ipm)	11.6	13.0	16.4	16.6	16.7	14.4	11.6	
		Slot 	1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
					(200-300)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
					Feed (ipm)	9.2	10.3	13.0	13.2	13.3	11.5	9.2	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	Profile 	≤ 0.5	≤ 1.5	185	RPM	5654	2827	1885	1413	1131	942	707
					(148-222)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
					Feed (ipm)	5.1	5.9	7.9	7.6	7.8	6.8	5.3	
		Slot 	1	≤ 1	145	RPM	4431	2216	1477	1108	886	739	554
					(116-174)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
					Feed (ipm)	4.0	4.7	6.2	6.0	6.1	5.3	4.2	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	Profile 	≤ 0.5	≤ 1.5	490	RPM	14974	7487	4991	3744	2995	2496	1872
					(392-588)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
					Feed (ipm)	17.1	22.5	28.5	28.1	27.9	24.0	19.7	
		Slot 	1	≤ 1	390	RPM	11918	5959	3973	2980	2384	1986	1490
					(312-468)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
					Feed (ipm)	13.6	17.9	22.6	22.3	22.2	19.1	15.6	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	Profile 	≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
					(272-408)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
					Feed (ipm)	9.4	12.5	15.6	15.6	15.6	13.5	10.9	
		Slot 	1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031
					(216-324)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
					Feed (ipm)	7.4	9.9	12.4	12.4	12.4	10.7	8.7	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	Profile 	≤ 0.5	≤ 1.5	310	RPM	9474	4737	3158	2368	1895	1579	1184
					(248-372)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
					Feed (ipm)	8.5	11.4	14.2	14.2	14.2	12.3	9.9	
		Slot 	1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
					(200-300)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
					Feed (ipm)	6.9	9.2	11.5	11.5	11.5	9.9	8.0	

continued on next page

Series 33CR Fractional		Hardness			Vc (sfm)	DC • in								
			Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4	1		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc		≤ 0.5	≤ 1.5	445	RPM	13599	6800	4533	3400	2267	1700	
						(356-534)	Fz	0.0004	0.0011	0.0021	0.0028	0.0035	0.0036	0.0039
							Feed (ipm)	14.3	22.4	28.6	28.6	24.5	19.9	
			1	≤ 1	355	RPM	10849	5424	3616	2712	2170	1808	1356	
					(284-426)	Fz	0.0004	0.0011	0.0021	0.0028	0.0035	0.0036	0.0039	
						Feed (ipm)	11.4	17.9	22.8	22.8	19.5	15.9		
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc		≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
						(272-408)	Fz	0.0003	0.0008	0.0016	0.0021	0.0026	0.0027	0.0029
							Feed (ipm)	9.4	12.5	16.6	16.4	14.0	11.3	
			1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031	
					(216-324)	Fz	0.0003	0.0008	0.0016	0.0021	0.0026	0.0027	0.0029	
						Feed (ipm)	7.4	9.9	13.2	13.0	12.9	11.1	9.0	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc		≤ 0.5	≤ 1.5	80	RPM	2445	1222	815	611	489	407	306
						(64-96)	Fz	0.0003	0.0007	0.0013	0.0017	0.0021	0.0022	0.0024
							Feed (ipm)	1.9	2.6	3.2	3.1	3.1	2.7	2.2
			1	≤ 1	65	RPM	1986	993	662	497	397	331	248	
					(52-78)	Fz	0.0003	0.0007	0.0013	0.0017	0.0021	0.0022	0.0024	
						Feed (ipm)	1.5	2.1	2.6	2.5	2.5	2.2	1.8	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc		≤ 0.5	≤ 1.5	62	RPM	1895	947	632	474	379	316	237
						(50-74)	Fz	0.0002	0.0005	0.0009	0.0012	0.0015	0.0016	0.0017
							Feed (ipm)	1.1	1.4	1.7	1.7	1.7	1.5	1.2
			1	≤ 1	49	RPM	1497	749	499	374	299	250	187	
					(39-59)	Fz	0.0002	0.0005	0.0009	0.0012	0.0015	0.0016	0.0017	
						Feed (ipm)	0.9	1.1	1.3	1.3	1.3	1.2	1.0	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc		≤ 0.5	≤ 1.5	215	RPM	6570	3285	2190	1643	1314	1095	821
						(172-258)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
							Feed (ipm)	5.9	7.9	9.9	9.9	9.9	8.5	6.9
			1	≤ 1	170	RPM	5195	2598	1732	1299	1039	866	649	
					(136-204)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	
						Feed (ipm)	4.7	6.2	7.8	7.8	7.8	6.8	5.5	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc		≤ 0.5	≤ 1.5	75	RPM	2292	1146	764	573	458	382	287
						(60-90)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
							Feed (ipm)	2.1	2.8	3.4	3.4	3.4	3.0	2.4
			1	≤ 1	60	RPM	1834	917	611	458	367	306	229	
					(48-72)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	
						Feed (ipm)	1.7	2.2	2.8	2.8	2.8	2.4	1.9	


Bhn (Brinell) HRC (Rockwell C)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 3 x rpm
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



33MCR

METRIC SERIES

- Specially engineered step core design provides stability for aggressive ramping and rigidity when flutes are completely engaged
- Open design at axial end accommodates material flow and load reduction during machining operations
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

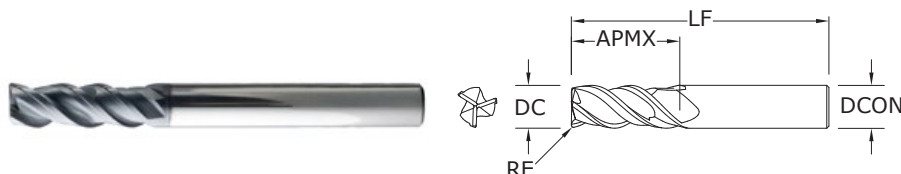

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm		SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.
		OVERALL LENGTH LF				Ti-NAMITE®-A (AlTiN)
3,0	9,0	57,0		6,0	0,3	43445
3,0	9,0	57,0		6,0	0,5	43470
4,0	12,0	57,0		6,0	0,3	43446
4,0	12,0	57,0		6,0	0,5	43471
5,0	15,0	57,0		6,0	0,3	43447
5,0	15,0	57,0		6,0	0,5	43472
6,0	18,0	57,0		6,0	0,5	43448
6,0	18,0	57,0		6,0	1,0	43473
6,0	18,0	57,0		6,0	1,5	43474
6,0	18,0	57,0		6,0	2,0	43475
8,0	20,0	63,0		8,0	0,5	43449
8,0	20,0	63,0		8,0	1,0	43476
8,0	20,0	63,0		8,0	1,5	43477
8,0	20,0	63,0		8,0	2,0	43478
10,0	27,0	72,0		10,0	0,5	43450
10,0	27,0	72,0		10,0	1,0	43479
10,0	27,0	72,0		10,0	1,5	43480
10,0	27,0	72,0		10,0	2,0	43481
10,0	27,0	72,0		10,0	2,5	43482
12,0	30,0	83,0		12,0	0,5	43451
12,0	30,0	83,0		12,0	1,0	43483
12,0	30,0	83,0		12,0	1,5	43484
12,0	30,0	83,0		12,0	2,0	43485
12,0	30,0	83,0		12,0	2,5	43486
12,0	30,0	83,0		12,0	3,0	43487
12,0	30,0	83,0		12,0	4,0	43488
16,0	38,0	92,0		16,0	1,0	43452
16,0	38,0	92,0		16,0	1,5	43489
16,0	38,0	92,0		16,0	2,0	43490
16,0	38,0	92,0		16,0	2,5	43491
16,0	38,0	92,0		16,0	3,0	43492
16,0	38,0	92,0		16,0	4,0	43493
20,0	46,0	104,0		20,0	1,0	43453
20,0	46,0	104,0		20,0	2,0	43494
20,0	46,0	104,0		20,0	2,5	43495
20,0	46,0	104,0		20,0	3,0	43496
20,0	46,0	104,0		20,0	4,0	43497

TOLERANCES (mm)

3-6 DIAMETER

DC = $+0,000/-0,030$ DCON = h_6 RE = $+0,000/-0,050$

>6-10 DIAMETER


DC = $+0,000/-0,040$ DCON = h_6 RE = $+0,000/-0,050$

>10-20 DIAMETER

DC = $+0,000/-0,050$ DCON = h_6 RE = $+0,000/-0,050$

	STEELS
	STAINLESS STEELS
	CAST IRON
	HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com



Series 33MCR Metric		Hardness			Vc (m/min)	DC • mm									
			3	6		8	10	12	16	20					
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	 Profile	≤ 0.5	≤ 1.5	168	RPM	17773	8886	6665	5332	4443	3332	2666	
						(134-201)	Fz	0.012	0.029	0.049	0.061	0.074	0.100	0.107	
						Feed (mm/min)	640	768	981	981	992	998	853		
			 Slot	1	≤ 1	134	RPM	14218	7109	5332	4265	3555	2666	2133	
						(107-161)	Fz	0.012	0.029	0.049	0.061	0.074	0.100	0.107	
						Feed (mm/min)	512	614	785	785	793	798	682		
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	 Profile	≤ 0.5	≤ 1.5	96	RPM	10179	5089	3817	3054	2545	1909	1527	
						(77-115)	Fz	0.010	0.022	0.036	0.045	0.055	0.074	0.080	
						Feed (mm/min)	293	330	415	415	421	425	366		
			 Slot	1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	
						(61-91)	Fz	0.010	0.022	0.036	0.045	0.055	0.074	0.080	
						Feed (mm/min)	233	262	330	330	334	337	291		
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	 Profile	≤ 0.5	≤ 1.5	56	RPM	5978	2989	2242	1793	1495	1121	897	
						(45-68)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	
						Feed (mm/min)	129	151	201	201	194	198	172		
			 Slot	1	≤ 1	44	RPM	4686	2343	1757	1406	1171	879	703	
						(35-53)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	
						Feed (mm/min)	101	118	157	157	152	155	135		
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	 Profile	≤ 0.5	≤ 1.5	149	RPM	15834	7917	5938	4750	3958	2969	2375
							(119-179)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.085
							Feed (mm/min)	433	570	722	722	712	707	608	
				 Slot	1	≤ 1	119	RPM	12602	6301	4726	3781	3151	2363	1890
							(95-143)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.085
							Feed (mm/min)	345	454	575	575	567	563	484	
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 275 Bhn or ≤ 28 HRc	 Profile	≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	
						(83-124)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
						Feed (mm/min)	237	316	396	396	395	396	343		
			 Slot	1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	
						(66-99)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
						Feed (mm/min)	188	251	314	314	314	314	272		
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	 Profile	≤ 0.5	≤ 1.5	94	RPM	10017	5009	3756	3005	2504	1878	1503		
					(76-113)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069		
					Feed (mm/min)	216	288	361	361	361	361	313			
		 Slot	1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212		
					(61-91)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069		
					Feed (mm/min)	174	233	291	291	291	291	252			

continued on next page

Series 33



Series 33MCR						Vc		DC • mm						
Metric	Hardness	Ae x DC	Ap x DC	(m/min)		3	6	8	10	12	16	20		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRC	Profile 	≤ 0.5	≤ 1.5	136	RPM	14380	7190	5392	4314	3595	2696	2157
						(109-163)	Fz	0.008	0.026	0.045	0.056	0.067	0.090	0.096
						Feed (mm/min)	362	569	725	725	725	725	621	
		≤ 260 Bhn or ≤ 26 HRC	Slot 	1	≤ 1	108	RPM	11471	5736	4302	3441	2868	2151	1721
						(87-130)	Fz	0.008	0.026	0.045	0.056	0.067	0.090	0.096
						Feed (mm/min)	289	454	578	578	578	578	496	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRC	Profile 	≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648
						(83-124)	Fz	0.007	0.019	0.034	0.043	0.050	0.067	0.072
						Feed (mm/min)	237	316	422	422	415	411	356	
		≤ 300 Bhn or ≤ 32 HRC	Slot 	1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309
						(66-99)	Fz	0.007	0.019	0.034	0.043	0.050	0.067	0.072
						Feed (mm/min)	188	251	335	335	330	327	283	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRC	Profile 	≤ 0.5	≤ 1.5	24	RPM	2585	1293	969	776	646	485	388
						(20-29)	Fz	0.006	0.017	0.028	0.035	0.041	0.054	0.059
						Feed (mm/min)	48	65	81	65	79	78	68	
		≤ 400 Bhn or ≤ 43 HRC	Slot 	1	≤ 1	20	RPM	2100	1050	788	630	525	394	315
						(16-24)	Fz	0.006	0.017	0.028	0.035	0.041	0.054	0.059
						Feed (mm/min)	39	53	66	66	64	64	55	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRC	Profile 	≤ 0.5	≤ 1.5	19	RPM	2003	1002	751	601	501	376	301
						(15-23)	Fz	0.005	0.012	0.019	0.024	0.029	0.038	0.043
						Feed (mm/min)	29	36	43	43	43	43	38	
		≤ 350 Bhn or ≤ 38 HRC	Slot 	1	≤ 1	15	RPM	1583	792	594	475	396	297	238
						(12-18)	Fz	0.005	0.012	0.019	0.024	0.029	0.038	0.043
						Feed (mm/min)	23	28	34	34	34	34	30	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 350 Bhn or ≤ 38 HRC	Profile 	≤ 0.5	≤ 1.5	66	RPM	6947	3474	2605	2084	1737	1303	1042
						(52-79)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
						Feed (mm/min)	150	200	250	250	250	250	217	
		≤ 420 Bhn or ≤ 45 HRC	Slot 	1	≤ 1	52	RPM	5493	2747	2060	1648	1373	1030	824
						(41-62)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
						Feed (mm/min)	119	158	198	198	198	198	171	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRC	Profile 	≤ 0.5	≤ 1.5	23	RPM	2424	1212	909	727	606	454	364
						(18-27)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
						Feed (mm/min)	52	70	87	87	87	87	76	
		≤ 420 Bhn or ≤ 45 HRC	Slot 	1	≤ 1	18	RPM	1939	969	727	582	485	364	291
						(15-22)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
						Feed (mm/min)	42	56	70	70	70	70	60	

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x 3 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



7
FRACTIONAL SERIES

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h₆

STEELS

STAINLESS STEELS


CAST IRON

HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
1/8	3/4	2-1/4	1/8	70470
1/8	1	3	1/8	70471
3/16	3/4	2-1/2	3/16	70472
3/16	1-1/8	3	3/16	70473
1/4	1-1/8	3	1/4	70474
1/4	1-1/2	4	1/4	70475
5/16	1-1/8	3	5/16	70476
5/16	1-5/8	4	5/16	70477
3/8	1-1/8	3	3/8	70478
3/8	1-3/4	4	3/8	70479
7/16	2	4-1/2	7/16	70480
7/16	3	6	7/16	70481
1/2	2	4-1/2	1/2	70482
1/2	3	6	1/2	70483
5/8	2-1/4	5	5/8	70484
5/8	3	6	5/8	70485
3/4	2-1/4	5	3/4	70486
3/4	3	6	3/4	70487
1	2-1/4	5	1	70488
1	3	6	1	70489

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)



7B

FRACTIONAL SERIES

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)




inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
1/8	3/4	2-1/4	1/8	70441
1/8	1	3	1/8	70442
3/16	3/4	2-1/2	3/16	70444
3/16	1-1/8	3	3/16	70445
1/4	1-1/8	3	1/4	70447
1/4	1-1/2	4	1/4	70448
5/16	1-1/8	3	5/16	70450
5/16	1-5/8	4	5/16	70451
3/8	1-1/8	3	3/8	70453
3/8	1-3/4	4	3/8	70454
7/16	2	4-1/2	7/16	70456
7/16	3	6	7/16	70457
1/2	2	4-1/2	1/2	70459
1/2	3	6	1/2	70460
5/8	2-1/4	5	5/8	70462
5/8	3	6	5/8	70463
3/4	2-1/4	5	3/4	70465
3/4	3	6	3/4	70466
1	2-1/4	5	1	70468
1	3	6	1	70469


RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

DC = $+0.0000/-0.0020$
 DCON = h_6
 RE = $+0.0000/-0.0010$



For patent information visit
www.ksptpatents.com



Series 7, 7B Fractional	Hardness	Finish	Ae x DC	Ap x DC	Vc (sfm)	DC • in								
						1/8	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	480	RPM	14669	7334	4890	3667	2934	2445	1834
						(384-576)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035
						Feed (ipm)	23.5	29.3	37.2	36.7	37.6	32.3	25.7	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Finish 	≤ 0.02	≤ 2	275	RPM	8404	4202	2801	2101	1681	1401	1051
						(220-330)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
						Feed (ipm)	10.1	11.8	15.7	15.1	15.5	13.4	10.9	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Finish 	≤ 0.02	≤ 2	230	RPM	7029	3514	2343	1757	1406	1171	879
						(184-276)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0022
						Feed (ipm)	5.6	8.4	11.2	11.2	11.2	9.8	7.7	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	420	RPM	12835	6418	4278	3209	2567	2139	1604
						(336-504)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035
						Feed (ipm)	20.5	25.7	32.5	32.1	32.9	28.2	22.5	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	290	RPM	8862	4431	2954	2216	1772	1477	1108
						(232-348)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
						Feed (ipm)	10.6	12.4	16.5	16.0	16.3	14.2	11.5	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Finish 	≤ 0.02	≤ 2	265	RPM	8098	4049	2699	2025	1620	1350	1012
						(212-318)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
						Feed (ipm)	9.7	11.3	15.1	14.6	14.9	13.0	10.5	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Finish 	≤ 0.02	≤ 2	605	RPM	18489	9244	6163	4622	3698	3081	2311
						(484-726)	Fz	0.0006	0.0015	0.0028	0.0037	0.0046	0.0047	0.0051
						Feed (ipm)	44.4	55.5	69.0	68.4	68.0	57.9	47.1	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Finish 	≤ 0.02	≤ 2	465	RPM	14210	7105	4737	3553	2842	2368	1776
						(372-558)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
						Feed (ipm)	22.7	31.3	39.8	39.8	38.7	34.1	27.7	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Finish 	≤ 0.02	≤ 2	80	RPM	2445	1222	815	611	489	407	306
						(64-96)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
						Feed (ipm)	2.9	3.4	4.6	4.4	4.5	3.9	3.2	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Finish 	≤ 0.02	≤ 2	65	RPM	1986	993	662	497	397	331	248
						(52-78)	Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019
						Feed (ipm)	1.6	2.4	2.6	2.8	2.7	2.4	1.9	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Finish 	≤ 0.02	≤ 2	300	RPM	9168	4584	3056	2292	1834	1528	1146
						(240-360)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
						Feed (ipm)	14.7	20.2	25.7	25.7	24.9	22.0	17.9	
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Finish 	≤ 0.02	≤ 2	105	RPM	3209	1604	1070	802	642	535	401	
					(84-126)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039	
					Feed (ipm)	5.1	7.1	9.0	9.0	8.7	7.7	6.3		

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC


ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

METRIC Series 7



7M METRIC SERIES


- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)




mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
3,0	25,0	75,0	3,0	70551
4,0	25,0	75,0	4,0	70552
5,0	25,0	75,0	5,0	70553
6,0	25,0	75,0	6,0	70554
8,0	25,0	75,0	8,0	70555
10,0	38,0	100,0	10,0	70556
12,0	50,0	100,0	12,0	70557
12,0	75,0	150,0	12,0	70558
14,0	75,0	150,0	14,0	70559
16,0	75,0	150,0	16,0	70560
18,0	75,0	150,0	18,0	70561
20,0	75,0	150,0	20,0	70562
25,0	75,0	150,0	25,0	70563

TOLERANCES (mm)

DC = $+0,000/+0,050$
DCON = h_6



For patent information visit www.ksptpatents.com



7MB METRIC SERIES

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)




mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
3,0	25,0	75,0	3,0	70527
4,0	25,0	75,0	4,0	70529
5,0	25,0	75,0	5,0	70531
6,0	25,0	75,0	6,0	70533
8,0	25,0	75,0	8,0	70535
10,0	38,0	100,0	10,0	70537
12,0	50,0	100,0	12,0	70539
12,0	75,0	150,0	12,0	70540
14,0	75,0	150,0	14,0	70542
16,0	75,0	150,0	16,0	70544
18,0	75,0	150,0	18,0	70546
20,0	75,0	150,0	20,0	70548
25,0	75,0	150,0	25,0	70550


RE = 1/2 Cutting Diameter (DC)

TOLERANCES (mm)

DC = $+0,000/+0,050$
DCON = h_6
RE = $+0,000/-0,025$



For patent information visit www.ksptpatents.com



Series 7M, 7MB Metric	Hardness				Vc (m/min)	DC • mm									
			Ae x DC	Ap x DC		3	6	8	10	12	16	20	25		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	146	RPM	15511	7755	5816	4653	3878	2908	2327	1861
						(117-176)	Fz	0.0166	0.043	0.075	0.093	0.110	0.125	0.147	0.160
							Feed (mm/min)	1030	1334	1745	1731	1706	1454	1368	1191
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Finish 	≤ 0.02	≤ 2	84	RPM	8886	4443	3332	2666	2222	1666	1333	1066
						(67-101)	Fz	0.0122	0.034	0.051	0.069	0.082	0.091	0.109	0.120
							Feed (mm/min)	434	604	680	736	729	606	581	512
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Finish 	≤ 0.02	≤ 2	70	RPM	7432	3716	2787	2230	1858	1394	1115	892
						(56-84)	Fz	0.0070	0.019	0.040	0.043	0.048	0.057	0.064	0.070
							Feed (mm/min)	208	282	446	384	357	318	285	250
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	128	RPM	13572	6786	5089	4072	3393	2545	2036	1629
						(102-154)	Fz	0.0086	0.024	0.040	0.048	0.058	0.065	0.077	0.087
							Feed (mm/min)	467	651	814	782	787	662	627	567
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	88	RPM	9371	4686	3514	2811	2343	1757	1406	1125
						(71-106)	Fz	0.0082	0.022	0.037	0.045	0.048	0.060	0.072	0.078
							Feed (mm/min)	307	412	520	506	450	422	405	351
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Finish 	≤ 0.02	≤ 2	81	RPM	8563	4282	3211	2569	2141	1606	1284	1028
						(65-97)	Fz	0.0070	0.019	0.029	0.040	0.048	0.055	0.064	0.070
							Feed (mm/min)	240	325	372	411	411	353	329	288
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Finish 	≤ 0.02	≤ 2	184	RPM	19550	9775	7331	5865	4887	3666	2932	2346
						(148-221)	Fz	0.0132	0.036	0.052	0.075	0.089	0.099	0.117	0.130
							Feed (mm/min)	1032	1408	1525	1759	1740	1452	1372	1220
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Finish 	≤ 0.02	≤ 2	142	RPM	15026	7513	5635	4508	3756	2817	2254	1803
						(113-170)	Fz	0.0132	0.036	0.052	0.075	0.089	0.099	0.117	0.130
							Feed (mm/min)	793	1082	1172	1352	1337	1116	1055	938
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Finish 	≤ 0.02	≤ 2	24	RPM	2585	1293	969	776	646	485	388	310
						(20-29)	Fz	0.0072	0.019	0.029	0.037	0.046	0.053	0.061	0.085
							Feed (mm/min)	74	98	112	90	119	103	95	105
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Finish 	≤ 0.02	≤ 2	20	RPM	2100	1050	788	630	525	394	315	252
						(16-24)	Fz	0.0075	0.016	0.021	0.030	0.038	0.044	0.051	0.070
							Feed (mm/min)	63	67	66	76	80	69	64	71
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Finish 	≤ 0.02	≤ 2	91	RPM	9694	4847	3635	2908	2424	1818	1454	1163
						(73-110)	Fz	0.0091	0.024	0.040	0.050	0.060	0.070	0.080	0.088
							Feed (mm/min)	353	465	51	59	582	509	465	409
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Finish 	≤ 0.02	≤ 2	32	RPM	3393	1696	1272	1018	848	636	509	407	
					(26-38)	Fz	0.0082	0.019	0.029	0.037	0.046	0.053	0.061	0.085	
						Feed (mm/min)	111	129	148	151	156	135	124	138	

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



56B

FRACTIONAL SERIES

- Short flute length and rigid design to reduce deflection
- S-Gash Ball geometry minimizes load and heat produced during the cutting process, ultimately enhancing tool life
- Ideal for machining complex contoured shapes in hardened steels
- Recommended for materials 35 to 60 HRc (327 to 654 Bhn)

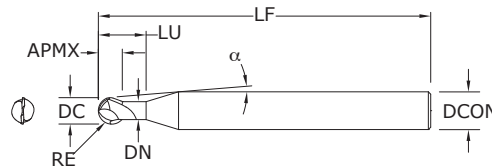

inch							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CENTER LINE ANGLE α	REACH LU	NECK DIAMETER DN	Ti-NAMITE [®] -X (TX)
1/32	1/32	3	1/4	8°20'	1/16	.025	93272
1/16	1/16	3	1/4	7°40'	1/8	.055	93273
3/32	3/32	3	1/4	6°50'	3/16	.085	93274
1/8	1/8	3	1/4	6°	1/4	.114	93275
3/16	3/16	3	1/4	3°35'	3/8	.171	93276
1/4	1/4	3-1/2	1/4	—	1/2	.230	93277
5/16	5/16	4	5/16	—	5/8	.292	93278
3/8	3/8	4	3/8	—	3/4	.355	93279
1/2	1/2	4-1/2	1/2	—	1	.480	93280
5/8	5/8	5-1/2	5/8	—	1-1/4	.610	93281
3/4	3/4	6-1/2	3/4	—	1-1/2	.735	93282

Extended Neck Option Available, contact your local KSPT representative for more information.
 RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/32–3/32 DIAMETER

DC = +0.0000/–0.0010

DCON = h_6

RE = +0.0000/–0.0005

>3/32–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0006

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6

RE = +0.0000/–0.0008

>3/8–3/4 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0010

STEELS


HARDENED STEELS

For patent information visit
www.ksptpatents.com

56MB

METRIC SERIES

- Short flute length and rigid design to reduce deflection
- S-Gash Ball geometry minimizes load and heat produced during the cutting process, ultimately enhancing tool life
- Ideal for machining complex contoured shapes in hardened steels
- Recommended for materials 35 to 60 HRc (327 to 654 Bhn)

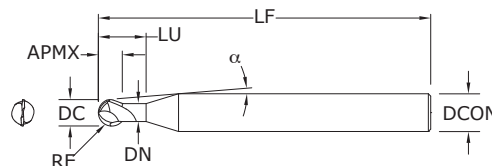

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CENTER LINE ANGLE α	REACH LU	NECK DIAMETER DN	Ti-NAMITE [®] -X (TX)
1,0	1,0	76,0	6,0	8°10'	2,0	0,91	91349
1,5	1,5	76,0	6,0	7°45'	3,0	1,37	91350
2,0	2,0	76,0	6,0	7°10'	4,0	1,83	91351
2,5	2,5	76,0	6,0	6°35'	5,0	2,29	91352
3,0	3,0	76,0	6,0	6°	6,0	2,72	91353
4,0	4,0	76,0	6,0	4°30'	8,0	3,63	91354
5,0	5,0	89,0	6,0	2°30'	10,0	4,55	91355
6,0	6,0	89,0	6,0	—	12,0	5,49	91356
8,0	8,0	102,0	8,0	—	16,0	7,49	91357
10,0	10,0	102,0	10,0	—	20,0	9,47	91358
12,0	12,0	114,0	12,0	—	24,0	11,48	91359
16,0	16,0	140,0	16,0	—	32,0	15,62	91360
20,0	20,0	165,0	20,0	—	40,0	19,61	91361

Extended Neck Option Available, contact your local KSPT representative for more information.
 RE = 1/2 Cutting Diameter (DC)

TOLERANCES (mm)

1–2,5 DIAMETER

DC = +0,000/–0,025

DCON = h_6

RE = +0,000/–0,0013

>2,5–6 DIAMETER

DC = +0,000/–0,030

DCON = h_6

RE = +0,000/–0,0013

>6–10 DIAMETER

DC = +0,000/–0,040

DCON = h_6

RE = +0,000/–0,0020

>10–20 DIAMETER

DC = +0,000/–0,050


DCON = h_6

RE = +0,000/–0,0025


STEELS

HARDENED STEELS


For patent information visit
www.ksptpatents.com

Series 56B Fractional		Hardness			Vc (sfm)	DC • in										
			Ae x DC	Ap x DC		1/32	1/16	1/8	3/16	1/4	3/8	1/2	3/4			
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	Rough 	≤ 0.4	≤ 0.1	625	RPM	76400	38200	19100	12733	9550	6367	4775	3183		
					(500-750)	Fz	0.0006	0.0015	0.0030	0.0040	0.0050	0.0080	0.0100	0.0120		
		HSM 	≤ 0.4	≤ 0.03	950	RPM	116128	58064	29032	19355	14516	9677	7258	4839		
					(760-1140)	Fz	0.0007	0.0017	0.0033	0.0044	0.0060	0.0088	0.0110	0.0130		
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	Rough 	≤ 0.4	≤ 0.05	750	RPM	91680	45840	22920	15280	11460	7640	5730	3820		
					(600-900)	Fz	0.0005	0.0011	0.0023	0.0030	0.0038	0.0060	0.0075	0.0085		
		HSM 	≤ 0.4	≤ 0.02	1150	RPM	140576	70288	35144	23429	17572	11715	8786	5857		
					(920-1380)	Fz	0.0006	0.0012	0.0025	0.0033	0.0042	0.0066	0.0082	0.0100		

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fz} \times 2 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

Series 56MB Metric		Hardness			Vc (m/min)	DC • mm									
			1	1.5		3	5	6	10	12	20				
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRC	Rough 	≤ 0.4	≤ 0.1	191	RPM	60748	40498	20249	12150	10125	6075	5062	3037
			HSM 	≤ 0.4	≤ 0.03	(153-229)	Fz	0.015	0.038	0.076	0.102	0.127	0.203	0.254	0.305
		290				RPM	92235	61490	46117	18447	15372	9223	7686	4612	
		(232-348)				Fz	0.018	0.043	0.084	0.112	0.117	0.224	0.279	0.330	
		Feed (mm/min)				1822	3078	3078	2479	2572	2466	2572	1853		
		H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRC	Rough 	≤ 0.4	≤ 0.05	229	RPM	72833	48556	24278	14567	12139	7283
HSM 	≤ 0.4				≤ 0.02	(183-275)	Fz	0.013	0.028	0.058	0.076	0.097	0.152	0.191	0.216
				351		RPM	111636	74424	37212	22327	18606	11164	9303	5582	
				(281-421)		Fz	0.015	0.030	0.064	0.084	0.107	0.168	0.208	0.254	
				Feed (mm/min)		1894	2719	2816	2214	2355	2214	2319	1573		
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2			≤ 655 Bhn or ≤ 60 HRC	Rough 	≤ 0.4	≤ 0.04	152	RPM	48344	32229	16115	9669	8057	4834
		HSM 	≤ 0.4		≤ 0.01	(122-182)	Fz	0.010	0.020	0.043	0.058	0.074	0.114	0.145	0.160
				305		RPM	97005	64670	32335	19401	16168	9701	8084	4850	
				(244-366)		Fz	0.013	0.023	0.048	0.064	0.081	0.127	0.160	0.180	
				Feed (mm/min)		967	1289	1386	1122	1192	1102	1168	773		


Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fz} \times 2 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



57

FRACTIONAL SERIES

- Ideal in Trochoidal milling applications in hardened steels and dry machining
- Short flute length and large core design to reduce deflection
- Unsurpassed edge strength with extreme negative rake and eccentric relief
- Recommended for materials 45 to 65 HRc (421 to 739 Bhn)

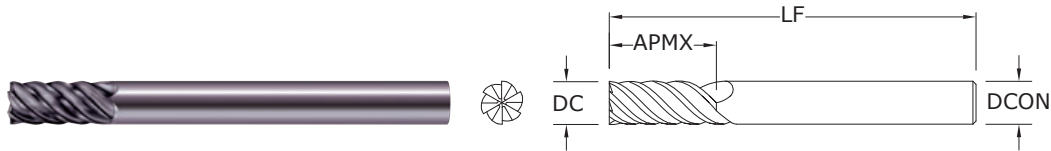

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
1/4	17/32	3-1/2	1/4	36140
5/16	11/16	4	5/16	36141
3/8	13/16	4	3/8	36142
1/2	1-3/32	4-1/2	1/2	36143

Neck Option Available

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h₆

5/16 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆

3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆

1/2 DIAMETER

DC = +0.0000/-0.0020

DCON = h₆

STEELS


HARDENED STEELS

For patent
information visit
www.ksptpatents.com

57M

METRIC SERIES

- Ideal in Trochoidal milling applications in hardened steels and dry machining
- Short flute length and large core design to reduce deflection
- Unsurpassed edge strength with extreme negative rake and eccentric relief
- Recommended for materials 45 to 65 HRc (421 to 739 Bhn)

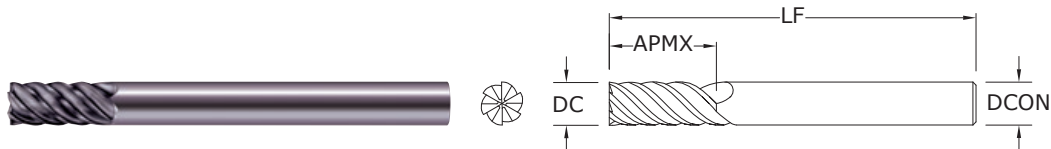

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
6,0	13,0	89,0	6,0	46140
8,0	18,0	102,0	8,0	46141
10,0	22,0	102,0	10,0	46142
12,0	26,0	114,0	12,0	46143
16,0	32,0	140,0	16,0	46145
20,0	38,0	165,0	20,0	46147

Neck Option Available

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h₆

8 DIAMETER

DC = +0,000/-0,040

DCON = h₆

10 DIAMETER

DC = +0,000/-0,040

DCON = h₆

12-20 DIAMETER


DC = +0,000/-0,050

DCON = h₆


STEELS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Series 57 Fractional		Hardness			Vc (sfm)	DC • in						
			Ae x DC	Ap x DC		1/4	5/16	3/8	1/2			
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 420 Bhn or ≤ 45 HRc		1	≤ 0.3	215	RPM	3285	2628	2190	1643	
						(172-258)	Fz	0.0013	0.0019	0.0025	0.0031	
							Feed (ipm)	26	30	33	31	
		≤ 560 Bhn or ≤ 55 HRc		≤ 0.1	≤ 1.5	265	RPM	4049	3239	2699	2025	
						(212-318)	Fz	0.0018	0.0026	0.0035	0.0044	
							Feed (ipm)	44	51	57	53	
		≤ 740 Bhn or ≤ 65 HRc		≤ 0.04	≤ 1.5	560	RPM	8557	6845	5705	4278	
						(448-672)	Fz	0.0022	0.0033	0.0044	0.0055	
							Feed (ipm)	113	136	151	141	
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 560 Bhn or ≤ 55 HRc		1	≤ 0.3	120	RPM	1834	1467	1222	917	
						(96-144)	Fz	0.0010	0.0015	0.0020	0.0025	
							Feed (ipm)	11	13	15	14	
		≤ 740 Bhn or ≤ 65 HRc		≤ 0.1	≤ 1.5	150	RPM	2292	1834	1528	1146	
						(120-180)	Fz	0.0014	0.0021	0.0028	0.0035	
							Feed (ipm)	19	23	26	24	
		≤ 740 Bhn or ≤ 65 HRc		≤ 0.04	≤ 1.5	490	RPM	7487	5990	4991	3744	
						(392-588)	Fz	0.0018	0.0026	0.0035	0.0044	
							Feed (ipm)	81	93	105	99	
		TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 740 Bhn or ≤ 65 HRc		1	≤ 0.3	65	RPM	993	795	662	497
							(52-78)	Fz	0.0008	0.0011	0.0015	0.0019
								Feed (ipm)	5	5	6	6
			≤ 740 Bhn or ≤ 65 HRc		≤ 0.1	≤ 1.5	80	RPM	1222	978	815	611
							(64-96)	Fz	0.0011	0.0016	0.0021	0.0026
								Feed (ipm)	8	9	10	10
≤ 740 Bhn or ≤ 65 HRc			≤ 0.04	≤ 1.5	250	RPM	3820	3056	2547	1910		
					(200-300)	Fz	0.0013	0.0019	0.0025	0.0031		
						Feed (ipm)	30	35	38	36		

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 rpm = $V_c \times 3.82 / DC$
 ipm = $F_z \times 6 \times rpm$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



Series 57M	Metric	Hardness			Vc (m/min)	DC • mm							
			Ae x DC	Ap x DC		6	8	10	12	16	20		
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 420 Bhn or ≤ 45 HRc		1	≤ 0.3	66	RPM	3499	2624	2099	1749	1312	1050
						(53-79)	Fz	0.032	0.048	0.064	0.079	0.094	0.109
						Feed (mm/min)	672	756	806	829	740	686	
				≤ 0.1	≤ 1.5	81	RPM	4294	3220	2576	2147	1610	1288
						(65-97)	Fz	0.046	0.066	0.089	0.112	0.132	0.152
						Feed (mm/min)	1185	1275	1376	1443	1275	1175	
			≤ 0.04	≤ 1.5	171	RPM	9064	6798	5439	4532	3399	2719	
					(137-205)	Fz	0.056	0.084	0.112	0.140	0.170	0.200	
					Feed (mm/min)	3046	3426	3655	3807	3467	3263		
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 560 Bhn or ≤ 55 HRc		1	≤ 0.3	37	RPM	1961	1471	1177	981	735	588
						(30-44)	Fz	0.025	0.038	0.051	0.064	0.077	0.090
						Feed (mm/min)	294	335	360	377	340	318	
				≤ 0.1	≤ 1.5	46	RPM	2438	1829	1463	1219	914	732
						(37-55)	Fz	0.036	0.053	0.071	0.089	0.107	0.125
						Feed (mm/min)	527	582	623	651	587	549	
			≤ 0.04	≤ 1.5	149	RPM	7898	5924	4739	3949	2962	2369	
					(119-179)	Fz	0.046	0.066	0.089	0.112	0.135	0.158	
					Feed (mm/min)	2180	2346	2531	2654	2399	2246		
		≤ 740 Bhn or ≤ 65 HRc		1	≤ 0.3	20	RPM	1060	795	636	530	398	318
						(16-24)	Fz	0.020	0.028	0.038	0.048	0.058	0.068
						Feed (mm/min)	127	134	145	153	138	130	
				≤ 0.1	≤ 1.5	24	RPM	1272	954	763	636	477	382
						(19-29)	Fz	0.028	0.041	0.053	0.066	0.078	0.090
						Feed (mm/min)	214	235	243	252	223	206	
			≤ 0.04	≤ 1.5	76	RPM	4029	3021	2417	2014	1511	1209	
					(61-91)	Fz	0.033	0.048	0.064	0.079	0.094	0.109	
					Feed (mm/min)	798	870	928	955	852	790		

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)

rpm = (Vc x 1000) / (DC x 3.14)



mm/min = Fz x 6 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

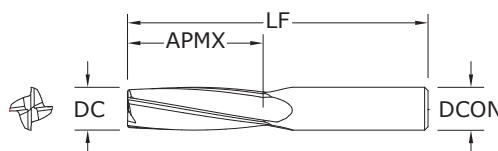

27
 FRACTIONAL SERIES

TOLERANCES (inch)
 $DC = +0.0000/-0.0030$
 $DCON = h_6$
NON-FERROUS

 For patent
 information visit
www.ksptpatents.com

inch				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	72978	72979
3/8	1-1/8	2-1/2	3/8	72980	72981
1/2	1-1/2	3-1/2	1/2	72982	72983
3/4	1-3/8	4	3/4	72984	72985

- Slow helix design adds strength to the edge allowing ease for milling highly abrasive materials
- Two levels of chatter suppression: variable helix and indexing
- Excels at roughing (slotting, profiling) and finishing in a variety of plastics and composites

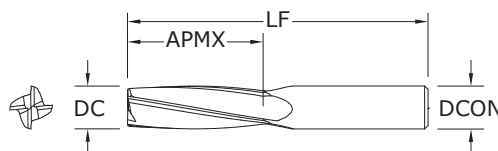
27M
 METRIC SERIES


TOLERANCES (mm)
 $DC = +0,000/-0,080$
 $DCON = h_6$
NON-FERROUS

 For patent
 information visit
www.ksptpatents.com

mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Di-NAMITE® (Diamond)
6,0	25,0	63,0	6,0	83056	83057
8,0	25,0	63,0	8,0	83058	83059
10,0	28,0	63,0	10,0	83060	83061
12,0	38,0	89,0	12,0	83062	83063
16,0	48,0	115,0	16,0	83064	83065

- Slow helix design adds strength to the edge allowing ease for milling highly abrasive materials
- Two levels of chatter suppression: variable helix and indexing
- Excels at roughing (slotting, profiling) and finishing in a variety of plastics and composites


FRACTIONAL Series 27



Series 27 Fractional			Vc (sfm)		DC • in			
	Ae x DC	Ap x DC			1/4	3/8	1/2	3/4
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	Slot 	1 ≤ 1	400	RPM	6112	4075	3056	2037
			(320-480)	Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	39	49	49	39
	Profile 	≤ 0.5 ≤ 1.5	500	RPM	7640	5093	3820	2547
			(400-600)	Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	49	61	61	49
	HSM 	≤ 0.5 ≤ 2	825	RPM	12606	8404	6303	4202
			(660-990)	Fz	0.0037	0.0069	0.0092	0.0110
				Feed (ipm)	187	232	232	185
GFRP (FIBERGLASS)	Slot 	1 ≤ 1	320	RPM	4890	3260	2445	1630
			(256-384)	Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	31	39	39	31
	Profile 	≤ 0.5 ≤ 1.5	400	RPM	6112	4075	3056	2037
			(320-480)	Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	39	49	49	39
	HSM 	≤ 0.5 ≤ 2	660	RPM	10085	6723	5042	3362
			(528-792)	Fz	0.0037	0.0069	0.0092	0.0110
				Feed (ipm)	149	186	186	148
N CARBON, GRAPHITE	Slot 	1 ≤ 1	480	RPM	7334	4890	3667	2445
			(384-576)	Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	59	74	73	59
	Profile 	≤ 0.5 ≤ 1.5	600	RPM	9168	6112	4584	3056
			(480-720)	Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	73	93	92	73
	HSM 	≤ 0.5 ≤ 2	990	RPM	15127	10085	7564	5042
			(792-1188)	Fz	0.0046	0.0086	0.0115	0.0138
				Feed (ipm)	278	347	348	278
PLASTICS	Slot 	1 ≤ 1	800	RPM	12224	8149	6112	4075
			(640-690)	Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	98	124	122	98
	Profile 	≤ 0.5 ≤ 1.5	1000	RPM	15280	10187	7640	5093
			(800-1200)	Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	122	155	153	122
	HSM 	≤ 0.5 ≤ 2	1650	RPM	25212	16808	12606	8404
			(1320-1980)	Fz	0.0046	0.0086	0.0115	0.0138
				Feed (ipm)	464	578	580	464
MACHINABLE CERAMICS MACHINABLE GLASS	Slot 	1 ≤ 1	40	RPM	611	407	306	204
			(32-48)	Fz	0.0008	0.0015	0.0020	0.0024
				Feed (ipm)	2.0	2.4	2.4	2.0
	Profile 	≤ 0.5 ≤ 1.5	50	RPM	764	509	382	255
			(40-60)	Fz	0.0008	0.0015	0.0020	0.0024
				Feed (ipm)	2.4	3.1	3.1	2.4
	HSM 	≤ 0.5 ≤ 2	85	RPM	1299	866	649	433
			(68-102)	Fz	0.0018	0.0034	0.0046	0.0055
				Feed (ipm)	9.4	11.8	11.9	9.5

HSM (High Speed Machining)
 $rpm = Vc \times 3.82 / DC$
 $ipm = Fz \times 4 \times rpm$
 adjust parameters based on resin type and fiber structure
 reduce speed when overheating causes melting or damage to resin
 reduce feed if delamination or fraying occur
 finish cuts typically required reduced feed and cutting depths



rates shown are for use without coolant; rates may be increased with coolant
 dust collection is vital when machining dry
 diamond coating will increase tool life in graphite and composite materials
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information
 (www.kyocera-sgstool.com)



Series 27M Metric				Vc (m/min)		DC • mm					
		Ae x DC	Ap x DC			6	8	10	12	16	
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)		1	≤ 1	120	RPM	6361	4771	3817	3181	2385	
				(96-164)	Fz	0.040	0.065	0.075	0.100	0.120	
					Feed (mm/min)	1018	1240	1145	1272	1145	
		≤ 0.5	≤ 1.5	150	RPM	7951	5963	4771	3976	2982	
				(120-180)	Fz	0.040	0.065	0.075	0.100	0.120	
					Feed (mm/min)	1272	1550	1431	1590	1431	
		≤ 0.5	≤ 2	250	RPM	13252	9939	7951	6626	4970	
				(200-300)	Fz	0.095	0.145	0.175	0.235	0.280	
					Feed (mm/min)	5036	5765	5566	6228	5566	
	GFRP (FIBERGLASS)		1	≤ 1	100	RPM	5301	3976	3181	2650	1988
					(80-120)	Fz	0.040	0.065	0.075	0.100	0.120
						Feed (mm/min)	848	1034	954	1060	954
		≤ 0.5	≤ 1.5	120	RPM	6361	4771	3817	3181	2385	
				(96-164)	Fz	0.040	0.065	0.075	0.100	0.120	
					Feed (mm/min)	1018	1240	1145	1272	1145	
		≤ 0.5	≤ 2	200	RPM	10602	7951	6361	5301	3976	
				(160-240)	Fz	0.095	0.145	0.175	0.235	0.280	
					Feed (mm/min)	4029	4612	4453	4983	4453	
CARBON, GRAPHITE			1	≤ 1	145	RPM	7686	5765	4612	3843	2882
					(116-174)	Fz	0.050	0.080	0.095	0.125	0.150
						Feed (mm/min)	1537	1845	1752	1922	1729
		≤ 0.5	≤ 1.5	185	RPM	9807	7355	5884	4903	3677	
				(148-222)	Fz	0.050	0.080	0.095	0.125	0.150	
					Feed (mm/min)	1961	2354	2236	2452	2206	
		≤ 0.5	≤ 2	300	RPM	15903	11927	9542	7951	5963	
				(240-360)	Fz	0.115	0.185	0.220	0.290	0.350	
					Feed (mm/min)	7315	8826	8397	9223	8349	
	PLASTICS		1	≤ 1	245	RPM	12987	9740	7792	6494	4870
					(196-294)	Fz	0.050	0.080	0.095	0.125	0.150
						Feed (mm/min)	2597	3117	2961	3247	2922
		≤ 0.5	≤ 1.5	305	RPM	16168	12126	9701	8084	6063	
				(244-366)	Fz	0.050	0.080	0.095	0.125	0.150	
					Feed (mm/min)	3234	3880	3686	4042	3638	
		≤ 0.5	≤ 2	505	RPM	26769	20077	16062	13385	10038	
				(404-606)	Fz	0.115	0.185	0.220	0.290	0.350	
					Feed (mm/min)	12314	14857	14134	15526	14054	
MACHINABLE CERAMICS MACHINABLE GLASS			1	≤ 1	10	RPM	530	398	318	265	199
					(8-12)	Fz	0.020	0.035	0.045	0.050	0.060
						Feed (mm/min)	42	56	57	53	48
		≤ 0.5	≤ 1.5	15	RPM	795	596	477	398	298	
				(12-18)	Fz	0.020	0.035	0.045	0.050	0.060	
					Feed (mm/min)	64	83	86	80	72	
		≤ 0.5	≤ 2	25	RPM	1325	994	795	663	497	
				(20-30)	Fz	0.045	0.075	0.085	0.115	0.140	
					Feed (mm/min)	239	298	270	305	278	

HSM (High Speed Machining)
 $\text{rpm} = Vc \times 3.82 / DC$
 $\text{mm/min} = Fz \times 4 \times \text{rpm}$
 adjust parameters based on resin type and fiber structure
 reduce speed when overheating causes melting or damage to resin
 reduce feed if delamination or fraying occur
 finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant
 dust collection is vital when machining dry
 diamond coating will increase tool life in graphite and composite materials
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information
 (www.kyocera-sgstool.com)

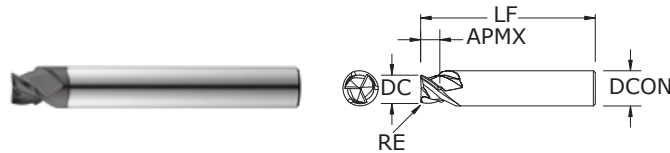

Ferrous Recoil Groove Tool

FRACTIONAL SERIES

- Open Flute design improves chip removal at high feed rates
- Specially engineered flute shape for improved chip control
- Circular land improves surface finish and chatter suppression
- Symmetrical end gashing improves balance in high speed operations
- Meets MIL-STD 1913

inch				EDP NO.	
CUTTING DIAMETER DC	SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	CORNER RADIUS RE	
0.2100	1/4	0.118	1-3/4	.010	
					Ti-NAMITE®-A (TA) Ti-NAMITE®-M (TM)
					33360 33361

TOLERANCES (inch)

DC = +0.0080/-0.0000

APMX = +0.0060/-0.0000

DCON = h₆

RE = +0.0000/-0.0005


STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com



Non-Ferrous Recoil Groove Tool

FRACTIONAL SERIES

- Open Flute design improves chip removal at high feed rates
- Circular land improves surface finish and chatter suppression
- Symmetrical end gashing improves balance in high speed operations
- 45 degree chamfer enables slot and deburr in one operation
- Meets MIL-STD 1913

inch				EDP NO.	
CUTTING DIAMETER DC	SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.2100	1/4	0.118	1-3/4	34760	34761

TOLERANCES (inch)

DC = +0.0080/-0.0000


APMX = +0.0060/-0.0000

DCON = h₆

NON-FERROUS

For patent information visit
www.ksptpatents.com

Picatinny Rail Ferrous Recoil Groove Tool



Picatinny Rail Recoil Groove Tool 3 Flute Made to MIL-STD-1913			Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in	
							0.2100	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Slot 	0.210	0.118	440 (352-528)	RPM	8004
							Fz	0.0009
							Feed (ipm)	22.99
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Slot 	0.210	0.118	250 (200-300)	RPM	4548
							Fz	0.0006
							Feed (ipm)	9.79
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Slot 	0.210	0.118	145 (116-174)	RPM	2638
							Fz	0.0005
							Feed (ipm)	4.47
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Slot 	0.210	0.118	390 (312-468)	RPM	7094
							Fz	0.0007
							Feed (ipm)	17.01
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Slot 	0.210	0.118	270 (216-324)	RPM	4911
							Fz	0.0006
							Feed (ipm)	9.41
K	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Slot 	0.210	0.118	250 (200-300)	RPM	4548
							Fz	0.0006
							Feed (ipm)	8.74
	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Slot 	0.210	0.118	270 (216-324)	RPM	4911
							Fz	0.0006
							Feed (ipm)	9.41
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Slot 	0.210	0.118	65 (52-78)	RPM	1182
							Fz	0.0005
							Feed (ipm)	2.00
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Slot 	0.210	0.118	49 (39-59)	RPM	891
							Fz	0.0004
							Feed (ipm)	1.05
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Slot 	0.210	0.118	170 (136-204)	RPM	3092
							Fz	0.0006
							Feed (ipm)	5.89
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Slot 	0.210	0.118	60 (48-72)	RPM	1091
							Fz	0.0006
							Feed (ipm)	2.09

Bhn (Brinell) HRc (Rockwell C)

when recommended speed exceeds your capability, use maximum available and recalculate ipm

rpm = Vc x 3.82 / DC

ipm = Fz x 3 x rpm


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



Picatinny Rail Non-Ferrous Recoil Groove Tool

Picatinny Rail
Non-Ferrous Recoil
Groove Tool
3 Flute
Made to MIL-STD-1913



	Hardness		Ae x DC	Ap x DC	Vc (sfm)	DC • in	
						0.2100	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	Slot 	0.210	0.118	1600 (1280-1920)	RPM	29105
						Fz	0.0026
						Feed (ipm)	227.89
	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390	Slot 	0.210	0.118	600 (480-720)	RPM	10914
						Fz	0.0026
						Feed (ipm)	85.46
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	Slot 	0.210	0.118	345 (276-414)	RPM	6276
						Fz	0.0022
						Feed (ipm)	40.79
	PLASTICS Polycarbonate, PVC, Polypropylene	Slot 	0.210	0.118	1600 (1280-1920)	RPM	29105
						Fz	0.0044
						Feed (ipm)	380.58

Bhn (Brinell) HRC (Rockwell C) HRB (Rockwell B)
when recommended speed exceeds your capability, use maximum available and recalculate ipm
rpm = Vc x 3.82 / DC
ipm = Fz x 3 x rpm
reduce speed and feed for materials harder than listed
reduce feed and Ae when finish milling (.02 x DC maximum)
refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

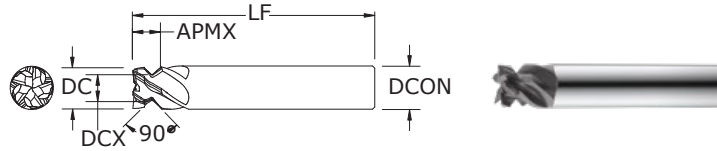

TOLERANCES (inch)

DC = +0.0010/-0.0010

DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS



For patent
information visit
www.ksptpatents.com

Ferrous Dovetail Form Tool

FRACTIONAL SERIES

CUTTING DIAMETER DC	INNER CUTTING DIAMETER DCX	inch			EDP NO.	
		SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	Ti-NAMITE®-A (TA)	Ti-NAMITE®-M (TM)
0.6050	0.384	5/8	0.410	3-1/2	37391	37390

- Five-flute design allows for higher machining parameters
- Open end work design allows for increased chip space
- Square end configuration with enhanced corner strength to improve corner durability
- Meets MIL-STD 1913

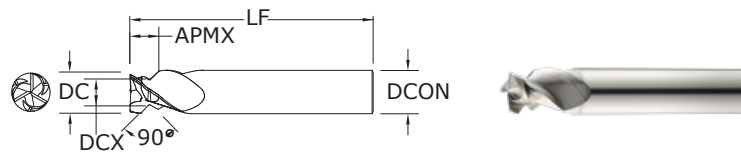

TOLERANCES (inch)

DC = +0.0010/-0.0010

DCON = h_6

NON-FERROUS

For patent
information visit
www.ksptpatents.com


Non-Ferrous Dovetail Form Tool

FRACTIONAL SERIES

CUTTING DIAMETER DC	INNER CUTTING DIAMETER DCX	inch			EDP NO.	
		SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.6050	0.384	5/8	0.410	3-1/2	34762	34763

- Open Flute design improves chip removal at high feed rates
- Specially engineered flute shape for improved chip control
- Circular land improves surface finish and chatter suppression
- Symmetrical end gashing improves balance in high speed operations
- Meets MIL-STD 1913

Picatinny Rail Ferrous Dovetail Form Tool



Picatinny Rail Dovetail Form Tool 5 Flute Made to MIL-STD-1913			Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in 0.6050	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ .50	APMX	450 (360-540)	RPM	2841
							Fz	0.0032
							Feed (ipm)	46.03
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ .50	APMX	260 (208-312)	RPM	1642
							Fz	0.0024
							Feed (ipm)	19.68
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ .50	APMX	145 (116-174)	RPM	916
							Fz	0.0019
							Feed (ipm)	8.60
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ .50	APMX	400 (320-480)	RPM	2526
							Fz	0.0024
							Feed (ipm)	30.28
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ .50	APMX	280 (224-336)	RPM	1768
							Fz	0.0019
							Feed (ipm)	16.61
K	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ .50	APMX	260 (208-312)	RPM	1642
							Fz	0.0019
							Feed (ipm)	15.42
	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile 	≤ .50	APMX	280 (224-336)	RPM	1768
							Fz	0.0029
							Feed (ipm)	25.78
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ .50	APMX	75 (60-90)	RPM	474
							Fz	0.0018
							Feed (ipm)	4.22
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ .50	APMX	60 (48-72)	RPM	379
							Fz	0.0013
							Feed (ipm)	2.39
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ .50	APMX	180 (144-216)	RPM	1137
							Fz	0.0021
							Feed (ipm)	11.97
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Profile 	≤ .50	APMX	70 (56-84)	RPM	442
							Fz	0.0021
							Feed (ipm)	4.65

Bhn (Brinell) HRc (Rockwell C)

when recommended speed exceeds your capability, use maximum available and recalculate ipm

rpm = Vc x 3.82 / DC


ipm = Fz x 5 x rpm


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Picatinny Rail Non-Ferrous Dovetail Form Tool



Picatinny Rail Dovetail Form Tool 3 Flute Made to MIL-STD-1913						Vc (sfm)	DC • in	
Hardness				Ae x DC	Ap x DC		0.6050	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150 Bhn or ≤ 88 HRb	Profile 	≤ .50	APMX	2000 (1600-2400)	RPM	12628
							Fz	0.0056
							Feed (ipm)	211.39
	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390	≤ 125 Bhn or ≤ 77 HRb	Profile 	≤ .50	APMX	750 (600-900)	RPM	4736
							Fz	0.0056
							Feed (ipm)	79.27
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	Profile 	≤ .50	APMX	430 (344-516)	RPM	2715
							Fz	0.0046
							Feed (ipm)	37.72
	PLASTICS Polycarbonate, PVC, Polypropylene		Profile 	≤ .50	APMX	2000 (1600-2400)	RPM	12628
							Fz	0.0093
							Feed (ipm)	353.03

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 when recommended speed exceeds your capability, use maximum available and recalculate ipm
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fz} \times 3 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

High Performance Aluminum End Mills



Milling

HIGH PERFORMANCE ALUMINUM END MILLS	SERIES	DESCRIPTION	PAGE	S&F PAGE
S-Carb APR® & APF®	43APR-3	3 Flute Advanced Productivity Rougher Fractional	133	134
	43APR-3	3 Flute Advanced Productivity Rougher Metric	135	137
	43APR-4	4 Flute Advanced Productivity Rougher Metric	136	137
	43APF	4 Flute Advanced Productivity Finisher Fractional	138	139
	43MAPF	4 Flute Advanced Productivity Finisher Metric	140	141
S-Carb APF-B®	43APF-B	Multi-Flute Advanced Productivity Finisher Metric	142	143
S-Carb® (3 Flute)	43	3 Flute Non-Ferrous Square End Fractional	144	156
	43CR	3 Flute Non-Ferrous Corner Radius Fractional	144	156
	43L	3 Flute Non-Ferrous Square End Long Reach Fractional	148	156
	43LC	3 Flute Non-Ferrous Corner Radius End Long Reach Fractional	148	156
	43EC	3 Flute Non-Ferrous Square End Extra Long Reach Fractional	151	156
	43B	3 Flute Non-Ferrous Ball End Fractional	152	156
	43LB	3 Flute Non-Ferrous Ball End Long Reach Fractional	153	156
	43EB	3 Flute Non-Ferrous Ball End Extra Long Reach Fractional	153	156
	43M	3 Flute Non-Ferrous Square End Metric (Unpolished Flutes)	157	165
	43M	3 Flute Non-Ferrous Square End Metric (Polished Flutes)	157	165
	43MCR	3 Flute Non-Ferrous Corner Radius Metric (Unpolished Flutes)	157	165
	43MCR	3 Flute Non-Ferrous Corner Radius Metric (Polished Flutes)	157	165
	43MCR	3 Flute Non-Ferrous Corner Radius 4xD Metric (Polished Flutes)	157	165
	43ML	3 Flute Non-Ferrous Square End Long Reach Metric	160	165
	43MLC	3 Flute Non-Ferrous Long Reach Corner Radius Metric (Unpolished Flutes)	160	165
	43MLC	3 Flute Non-Ferrous Long Reach Corner Radius Metric (Polished Flutes)	160	165
	43MB	3 Flute Non-Ferrous Ball End Metric (Polished Flutes)	162	165
S-Carb® Rougher (3 Flute)	43CB	3 Flute Rougher Non-Ferrous Chip Breaker Fractional	154	156
	43LCB	3 Flute Rougher Non-Ferrous Chip Breaker Long Reach Fractional	155	156
	43MCB	3 Flute Rougher Non-Ferrous Chip Breaker Metric	164	165
S-Carb® (2 Flute)	47	2 Flute Non-Ferrous Square End Fractional	166	169
	47L	2 Flute Non-Ferrous Square End Long Reach Fractional	167	169
	47B	2 Flute Non-Ferrous Ball End Fractional	168	169
	47LB	2 Flute Non-Ferrous Ball End Long Reach Fractional	168	169
	47M	2 Flute Non-Ferrous Square End Metric	170	172
	47ML	2 Flute Non-Ferrous Square End Long Reach Metric	170	172
	47MB	2 Flute Non-Ferrous Ball End Metric	171	172
	47MLB	2 Flute Non-Ferrous Ball End Long Reach Metric	171	172
Ski-Carb	44	2 Flute Non-Ferrous Materials Square End Fractional	173	174
	44M	2 Flute Non-Ferrous Materials Square End Metric	173	174
	45	2 Flute Non-Ferrous Materials Long Reach Corner Radius Fractional	176	177

Speed & Feed Recommendations listed after each series

FRESAS DE ALTO RENDIMIENTO PARA ALUMINIO	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
S-Carb APR® y APF®	43APR-3	3 filos, productividad avanzada, desbastador, fraccional	133	134
	43APR-3	3 filos, productividad avanzada, desbastador, métrico	135	137
	43APR-4	4 filos, productividad avanzada, desbastador, métrico	136	137
	43APF	4 filos, productividad avanzada, acabador, fraccional	138	139
	43MAPF	4 filos, productividad avanzada, acabador, métrico	140	141
S-Carb APF-B®	43APF-B	Fresa Cónica Circular Multi-Filos tipo Barril, métrica	142	143
S-Carb® (3 filos)	43	3 filos, no férrico, punta cuadrada, fraccional	144	156
	43CR	3 filos, no férrico, radio angulado, fraccional	144	156
	43L	3 filos, no férrico, punta cuadrada, largo alcance, fraccional	148	156
	43LC	3 filos, no férricos, largo alcance, radio angulado, fraccional	148	156
	43EC	3 filos, no férrico, punta cuadrada, alcance extralargo, fraccional	151	156
	43B	3 filos, no férrico, punta esférica, fraccional	152	156
	43LB	3 filos, no férrico, punta esférica, largo alcance, fraccional	153	156
	43EB	3 filos, no férrico, punta esférica, alcance extralargo, fraccional	153	156
	43M	3 filos, no férrico, punta cuadrada, métrico (filos no pulidos)	157	165
	43M	3 filos, no férrico, punta cuadrada, métrico (filos pulidos)	157	165
	43MCR	3 filos, no férrico, radio angulado, métrico (filos no pulidos)	157	165
	43MCR	3 filos, no férrico, radio angulado, métrico (filos pulidos)	157	165
	43MCR	3 filos, no férrico, radio angulado 4xD, métrico (filos pulidos)	157	165
	43ML	3 filos, no férrico, punta cuadrada, largo alcance, métrico	160	165
	43MLC	3 filos, no férrico, largo alcance, radio angulado, métrico (filos no pulidos)	160	165
	43MLC	3 filos, no férrico, largo alcance, radio angulado, métrico (filos pulidos)	160	165
	43MB	3 filos, no férrico, punta esférica, métrico (filos pulidos)	162	165
Desbastador S-Carb® (3 filos)	43CB	3 filos, desbastador, no férrico, rompevirutas, fraccional	154	156
	43LCB	3 filos, desbastador, no férrico, rompevirutas, largo alcance, fraccional	155	156
	43MCB	3 filos, desbastador, no férrico, rompevirutas, métrico	164	165
S-Carb® (2 filos)	47	2 filos, no férrico, punta cuadrada, fraccional	166	169
	47L	2 filos, no férrico, punta cuadrada, largo alcance, fraccional	167	169
	47B	2 filos, no férrico, punta esférica, fraccional	168	169
	47LB	2 filos, no férrico, punta esférica, largo alcance, fraccional	168	169
	47M	2 filos, no férrico, punta cuadrada, métrico	170	172
	47ML	2 filos, no férrico, punta cuadrada, largo alcance, métrico	170	172
	47MB	2 filos, no férrico, punta esférica, métrico	171	172
	47MLB	2 filos, no férrico, punta esférica, largo alcance, métrico	171	172
Ski-Carb	44	2 filos, materiales no férricos, punta cuadrada, fraccional	173	174
	44M	2 filos, materiales no férricos, punta cuadrada, métrico	173	174
	45	2 filos, materiales no férricos, largo alcance, radio angulado, fraccional	176	177



Recomendaciones de velocidades y avances mostradas tras cada serie

FRAISE HAUTE PERFORMANCE POUR ALUMINIUM	SÉRIES	DESCRIPTION	PAGE	S&F PAGE
S-Carb APR®/APF®	43APR-3	3 dents productivité avancée d'ébauche (fractionnel)	133	134
	43APR-3	3 dents productivité avancée d'ébauche (métrique)	135	137
	43APR-4	4 dents productivité avancée d'ébauche (métrique)	136	137
	43APF	4 dents productivité avancée de finition (fractionnel)	138	139
	43MAPF	4 dents productivité avancée de finition (métrique)	140	141
S-Carb APF-B®	43APF-B	Fraise multi dents finition pour productivité avancée cotes (métrique)	142	143
S-Carb® (3 dents)	43	3 dents non-ferreux non rayonné (fractionnel)	144	156
	43CR	3 dents non-ferreux rayonné (fractionnel)	144	156
	43L	3 dents non-ferreux non rayonné longue portée (fractionnel)	148	156
	43LC	3 dents non-ferreux longue portée rayonné (fractionnel)	148	156
	43EC	3 dents non-ferreux non rayonné portée extra-longue (fractionnel)	151	156
	43B	3 dents non-ferreux à bout hémisphérique (fractionnel)	152	156
	43LB	3 dents non-ferreux à bout hémisphérique longue portée (fractionnel)	153	156
	43EB	3 dents non-ferreux à bout hémisphérique portée extra-longue (fractionnel)	153	156
	43M	3 dents non-ferreux non rayonné (métrique) (goujures non polies)	157	165
	43M	3 dents non-ferreux non rayonné (métrique) (goujures polies)	157	165
	43MCR	3 dents matériaux non-ferreux rayonné (métrique) (goujures non polies)	157	165
	43MCR	3 dents matériaux non-ferreux rayonné (métrique) (goujures polies)	157	165
	43MCR	3 dents matériaux non-ferreux rayonné 4xD (métrique) (goujures polies)	157	165
	43MLC	3 dents non-ferreux longue portée rayonné (métrique) (goujures non polies)	160	165
	43MLC	3 dents non-ferreux longue portée rayonné (métrique) (goujures polies)	160	165
	43ML	3 dents non-ferreux non rayonné longue portée (métrique)	160	165
	43MB	3 dents non-ferreux à bout hémisphérique (métrique) (goujures polies)	162	165
S-Carb® d'ébauche (3 dents)	43CB	3 dents d'ébauche non-ferreux brise-copeaux (fractionnel)	154	156
	43LCB	3 dents d'ébauche non-ferreux brise-copeaux longue portée (fractionnel)	155	156
	43MCB	3 dents d'ébauche non-ferreux brise-copeaux (métrique)	164	165
S-Carb® (2 dents)	47	2 dents non-ferreux non rayonné (fractionnel)	166	169
	47L	2 dents non-ferreux non rayonné longue portée (fractionnel)	167	169
	47B	2 dents non-ferreux à bout hémisphérique (fractionnel)	168	169
	47LB	2 dents non-ferreux à bout hémisphérique longue portée (fractionnel)	168	169
	47M	2 dents non-ferreux non rayonné (métrique)	170	172
	47ML	2 dents non-ferreux non rayonné longue portée (métrique)	170	172
	47MB	2 dents non-ferreux à bout hémisphérique (métrique)	171	172
	47MLB	2 dents non-ferreux à bout hémisphérique longue portée (métrique)	171	172
Ski-Carb	44	2 dents matériaux non-ferreux non rayonné (fractionnel)	173	174
	44M	2 dents matériaux non-ferreux non rayonné (métrique)	173	174
	45	2 dents matériaux non-ferreux longue portée rayonné (fractionnel)	176	177

Recommandations de vitesse et avance indiquées après chaque série

HOCHLEISTUNGSSCHAFTFRÄSER FÜR ALUMINIUM	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
S-Carb APR® & APF®	43APR-3	Hochleistungs-Schruppfräser mit 3 Schneiden	133	134
	43APR-3	Hochleistungs-Schruppfräser mit 3 Schneiden (Erweiterung)	135	137
	43APR-4	Hochleistungs-Schruppfräser mit 4 Schneiden	136	137
	43APF	Zölliger Hochleistungs-Schlichtfräser mit 4 Schneiden	138	139
	43MAPF	Hochleistungs-Schlichtfräser mit 4 Schneiden	140	141
S-Carb APF-B®	43APF-B	Metrischer mehrschneidiger Hochleistungsschlichtfräser	142	143
S-Carb® (3 Schneiden)	43	Zölliger NE-Schaftfräser mit 3 Schneiden ohne Eckenradien	144	156
	43CR	Zölliger NE-Fräser mit 3 Schneiden und Eckenradien	144	156
	43L	Zölliger NE-Langloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	148	156
	43LC	Zölliger Langlochfräser mit 3 Schneiden und Eckenradien	148	156
	43EC	Zölliger NE-Superlangloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	151	156
	43B	Zölliger NE-Radiusschaftfräser mit 3 Schneiden	152	156
	43LB	Zölliger NE-Langloch-Radiusschaftfräser mit 3 Schneiden	153	156
	43EB	Zölliger NE-Superlangloch-Radiusschaftfräser mit 3 Schneiden	153	156
	43M	NE-Schaftfräser mit 3 unpolierten Schneiden ohne Eckenradien	157	165
	43M	NE-Schaftfräser mit 3 polierten Schneiden ohne Eckenradien	157	165
	43MCR	NE-Fräser mit 3 unpolierten Schneiden und Eckenradien	157	165
	43MCR	NE-Fräser mit 3 polierten Schneiden und Eckenradien	157	165
	43MCR	NE-Fräser 4xD mit 3 polierten Schneiden und Eckenradien	157	165
	43ML	NE-Langloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	160	165
	43MLC	NE-Langlochfräser mit 3 unpolierten Schneiden und Eckenradien	160	165
	43MLC	NE-Langlochfräser mit 3 polierten Schneiden und Eckenradien	160	165
	43MB	NE-Radiusschaftfräser mit 3 polierten Schneiden	162	165
	43CB	Zölliger NE-Schruppfräser mit 3 Schneiden und Spanbrechern	154	156
	43LCB	Zölliger NE-Langloch-Schruppfräser mit 3 Spanteilernuten	155	156
	43MCB	NE-Schruppfräser mit 3 Schneiden und Spanbrechern	164	165
S-Carb® Schruppfräser (3 Schneiden)	47	Zölliger NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	166	169
	47L	Zölliger NE-Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	167	169
	47B	Zölliger NE-Radiusschaftfräser mit 2 Schneiden	168	169
	47LB	Zölliger NE-Langloch-Radiusschaftfräser mit 2 Schneiden	168	169
	47M	NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	170	172
	47ML	NE-Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	170	172
	47MB	NE-Radiusschaftfräser mit 2 Schneiden	171	172
	47MLB	NE-Langloch-Radiusschaftfräser mit 2 Schneiden	171	172
Ski-Carb	44	Zölliger NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	173	174
	44M	NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	173	174
	45	Zölliger Langlochfräser mit 2 Schneidenn und Eckenradien für Nichteisenmetalle	176	177

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

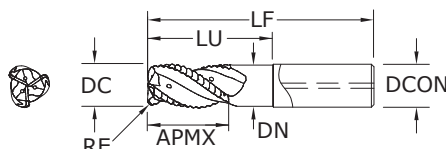

43APR-3

FRACTIONAL SERIES

TOLERANCES (inch)

1/2-1 DIAMETER

DC = -0.0004/-0.004

DCON = h_6

RE = +/-0.002

NON-FERROUS


For patent
information visit
www.ksptpatents.com

inch							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-B (TiB ₂)
1/2	1	3-1/4	1/2	1-1/2	.474	.030	34100
1/2	1	3-1/4	1/2	1-1/2	.474	.060	34101
1/2	1	3-1/4	1/2	1-1/2	.474	.090	34102
1/2	1	3-1/4	1/2	1-1/2	.474	.120	34103
5/8	1-3/8	3-5/8	5/8	2	.594	.030	34104*
5/8	1-3/8	3-5/8	5/8	2	.594	.060	34105*
5/8	1-3/8	3-5/8	5/8	2	.594	.090	34106*
5/8	1-3/8	3-5/8	5/8	2	.594	.120	34107*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.030	34108*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.060	34109*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.090	34110*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.120	34111*
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.030	34112
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.060	34113
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.090	34114
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.120	34115
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.030	34116*
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.060	34117*
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.090	34118*
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.120	34119*
3/4	1-3/8	5-1/8	3/4	3-1/4	.713	.030	34120*
3/4	1-3/8	5-1/8	3/4	3-1/4	.713	.060	34121*
3/4	1-3/8	5-1/8	3/4	3-1/4	.713	.090	34122*
3/4	1-3/8	5-1/8	3/4	3-1/4	.713	.120	34123*
1	1-3/4	4-1/2	1	2-1/2	.949	.030	34124
1	1-3/4	4-1/2	1	2-1/2	.949	.060	34125
1	1-3/4	4-1/2	1	2-1/2	.949	.090	34126
1	1-3/4	4-1/2	1	2-1/2	.949	.120	34127
1	1-3/8	5-1/4	1	3-1/4	.949	.030	34128*
1	1-3/8	5-1/4	1	3-1/4	.949	.060	34129*
1	1-3/8	5-1/4	1	3-1/4	.949	.090	34130*
1	1-3/8	5-1/4	1	3-1/4	.949	.120	34131*
1	1-3/8	6-1/4	1	4-1/4	.949	.030	34132*
1	1-3/8	6-1/4	1	4-1/4	.949	.060	34133*
1	1-3/8	6-1/4	1	4-1/4	.949	.090	34134*
1	1-3/8	6-1/4	1	4-1/4	.949	.120	34135*

*Variable Helix

- Ultra high-productivity rougher for Aluminum alloys, specifically for aircraft components
- Designed for machine tools with capability of 12 L³ per minute material removal rates
- New 3 flute variable geometry with side exit coolant holes
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

FRACTIONAL S-Carb APR®



					DC • inch	
					APR-3	
					0.75	1
Series 43APR-3 Fractional		Ae x DC	Ap x DC	Vc (sfm)		
N	Slot 	1	≤ 1	5250	RPM	26740
				(980-6900)	Fz	0.0055
					Feed (ipm)	441
	Profile 	≤ 0.5	≤ 1.5	5900	RPM	30051
				(980-6900)	Fz	0.0063
					Feed (ipm)	568
	HSM 	≤ 0.1	≤ 2	6900	RPM	35144
				(980-6900)	Fz	0.0075
					Feed (ipm)	791

					DC • inch			
					APR-3 LONG			
					0.5	0.625	0.75	1
Series 43APR-3L Fractional		Ae x DC	Ap x DC	Vc (sfm)				
N	Slot 	1	≤ 1	3280	RPM	25059	20047	16706
				(980-6900)	Fz	0.0039	0.0043	0.0047
					Feed (ipm)	293	259	236
	Profile 	≤ 0.5	≤ 1.5	3950	RPM	30178	24142	20119
				(980-6900)	Fz	0.0047	0.0051	0.0055
					Feed (ipm)	426	369	332
	HSM 	≤ 0.1	≤ 2	4600	RPM	35144	28115	23429
				(980-6900)	Fz	0.0055	0.0059	0.0063
					Feed (ipm)	580	498	443

RPM stated may be outside of most machine tools in the smaller sizes, adjust the surface speed but maintain the Fz

For best results use the peak power of the specific machine torque chart.

Typically 10hp is required to remove 45 cubic inches of material (MRR).

Eg. >> (Ae x Ap x Feed) >> Therefore Full slotting 1" dia: 1 x 1 x 355 = 355 cubic inches, so it needs a min of 78hp.

Larger cuts and chip load consume more power.


Review the power chart of each machine to determine MAX power for ultimate performance.



Example below shows peak power @ 10,000 rpm.

The new coolant supply is designed for MQL as well as normal emulsion coolant on the same data.

Ensure max MQL flow prior to cutting.

Refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com).

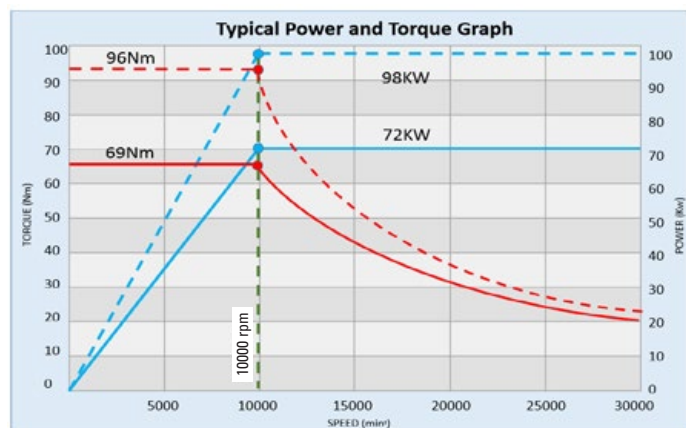

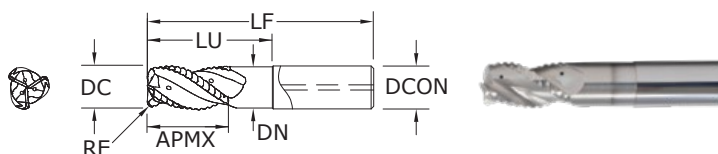

43APR-3

METRIC SERIES

TOLERANCES (mm)

12–25 DIAMETER

DC = $-0,010/-0,100$

DCON = h_6

RE = $+/-0,05$

NON-FERROUS

For patent
information visit
www.ksptpatents.com

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-B (TiB ₂)
12,0	26,0	83,0	12,0	39,0	11,40	1,0	44976*
12,0	26,0	83,0	12,0	39,0	11,40	2,0	44977*
12,0	26,0	83,0	12,0	39,0	11,40	3,0	44978*
12,0	26,0	83,0	12,0	39,0	11,40	4,0	44979*
12,0	26,0	95,0	12,0	—	—	—	44975*
16,0	35,0	92,0	16,0	—	—	—	44980*
16,0	35,0	92,0	16,0	51,0	15,20	2,0	44981*
16,0	35,0	92,0	16,0	51,0	15,20	3,0	44982*
16,0	35,0	92,0	16,0	51,0	15,20	4,0	44983*
16,0	35,0	108,0	16,0	67,0	15,20	2,0	44985*
16,0	35,0	108,0	16,0	67,0	15,20	3,0	44986*
16,0	35,0	108,0	16,0	67,0	15,20	4,0	44987*
16,0	35,0	124,0	16,0	—	—	—	44984*
20,0	35,0	86,0	20,0	—	—	—	44990
20,0	35,0	86,0	20,0	45,0	19,00	3,0	44991
20,0	35,0	86,0	20,0	45,0	19,00	4,0	44992
20,0	35,0	106,0	20,0	—	—	—	44993*
20,0	35,0	106,0	20,0	65,0	19,00	2,0	44994*
20,0	35,0	106,0	20,0	65,0	19,00	3,0	44995*
20,0	35,0	106,0	20,0	65,0	19,00	4,0	44996*
20,0	35,0	106,0	20,0	65,0	19,00	5,0	44997*
20,0	35,0	145,0	20,0	—	—	—	45020*
20,0	35,0	125,0	20,0	84,0	19,00	2,0	45021*
20,0	35,0	125,0	20,0	84,0	19,00	3,0	45022*
20,0	35,0	125,0	20,0	84,0	19,00	4,0	45023*
25,0	43,0	108,0	25,0	—	—	—	44998
25,0	43,0	108,0	25,0	60,0	23,75	2,0	44999
25,0	43,0	108,0	25,0	60,0	23,75	3,0	45000
25,0	43,0	108,0	25,0	60,0	23,75	4,0	45001
25,0	35,0	140,0	25,0	—	—	—	45002*
25,0	35,0	140,0	25,0	80,0	23,75	3,0	45003*
25,0	35,0	140,0	25,0	90,0	23,75	3,0	45004*
25,0	35,0	151,0	25,0	105,0	23,75	3,0	45025*
25,0	35,0	176,0	25,0	—	—	—	45024*


*Variable Helix

- Ultra high-productivity rougher for Aluminum alloys, specifically for aircraft components
- Designed for machine tools with capability of 12 L³ per minute material removal rates
- New 3 flute variable geometry with side exit coolant holes
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



43APR-4

METRIC SERIES

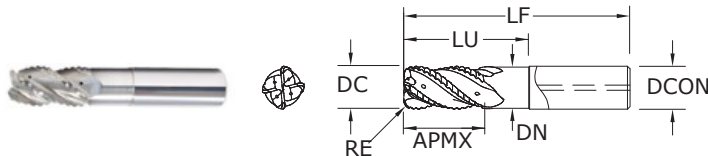

- Ultra high-productivity rougher for Aluminum alloys, specifically for aircraft components
- Designed for machine tools with capability of 12 L³ per minute material removal rates
- 4 flute variable geometry with side exit coolant holes
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-B (TiB ₂)
20,0	35,0	86,0	20,0	—	19,00	—	45005
20,0	35,0	86,0	20,0	45,0	19,00	3,0	45006
20,0	35,0	86,0	20,0	45,0	19,00	4,0	45007
20,0	35,0	106,0	20,0	—	19,00	—	45008
20,0	35,0	106,0	20,0	65,0	19,00	2,0	45009
20,0	35,0	106,0	20,0	65,0	19,00	3,0	45010
20,0	35,0	106,0	20,0	65,0	19,00	4,0	45011
20,0	35,0	106,0	20,0	65,0	19,00	5,0	45012
25,0	43,0	108,0	25,0	—	23,75	—	45013
25,0	43,0	108,0	25,0	60,0	23,75	2,0	45014
25,0	43,0	108,0	25,0	60,0	23,75	3,0	45015
25,0	43,0	108,0	25,0	60,0	23,75	4,0	45016
25,0	35,0	140,0	25,0	—	23,75	—	45017
25,0	35,0	140,0	25,0	80,0	23,75	3,0	45018
25,0	35,0	140,0	25,0	90,0	23,75	3,0	45019

TOLERANCES (mm)

20–25 DIAMETER


DC = -0,010/-0,100

DCON = h₆

RE = ±0,050

NON-FERROUS

For patent information visit
www.ksptpatents.com



Series 43APR-3 43APR-4 Metric		Ae x DC Ap x DC		Vc (m/min)		DC • mm				
						APR-3		APR-4		
						20	25	20	25	
N	ALUMINIUM ALLOYS 6068, 7075		1	≤ 1	1600	RPM	25461	20369	25461	20369
					(300-2100)	Fz	0.14	0.15	0.12	0.13
						Feed (mm/min)	10694	9166	12222	10592
			≤ 0.5	≤ 1.5	1800	RPM	28644	22915	28644	22915
					(300-2100)	Fz	0.16	0.17	0.14	0.15
						Feed (mm/min)	13749	11687	16041	13749
			≤ 0.25	≤ 2	2100	RPM	33418	26735	33418	26735
					(300-2100)	Fz	0.19	0.20	0.16	0.17
						Feed (mm/min)	19048	16041	21388	18180

Series 43APR-3 43APR-4 Metric						DC • mm				
						APR-3 LONG				
						12	16	20	25	
N	ALUMINIUM ALLOYS 6068, 7075		1	≤ 1	1600	RPM	26522	19892	15913	12731
					(300-2100)	Fz	0.10	0.11	0.12	0.13
						Feed (mm/min)	7957	6564	5729	4965
			≤ 0.5	≤ 1.5	1800	RPM	31827	23870	19096	15277
					(300-2100)	Fz	0.12	0.13	0.14	0.15
						Feed (mm/min)	11458	9309	8020	6875
			≤ 0.25	≤ 2	2100	RPM	37131	27849	22279	17823
					(300-2100)	Fz	0.14	0.15	0.16	0.17
						Feed (mm/min)	15595	12532	10694	9090

RPM stated may be outside of most machine tools in the smaller sizes, adjust the surface speed but maintain the Fz

For best results use the peak power of the specific machine torque chart.

Typically 10kw is required to remove 1 litre of material (MMR).

Eg. >> (Ae x Ap x Feed) / 1000000 >> Therefore Full slotting Ø25: 25 x 25 x 7333 = 4.58 Litres so it needs a min of 46Kw.

Larger cuts and chip load consume more power.

Review the power chart of each machine to determine MAX power for ultimate performance.


Example below shows peak power @ 10,000 rpm.

The APR-4 design is for ultimate metal removal but typically requires more power, and is also better suited to horizontal machines.


The new coolant supply is designed for MQL as well as normal emulsion coolant on the same data.

Ensure max MQL flow prior to cutting.


Refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com).

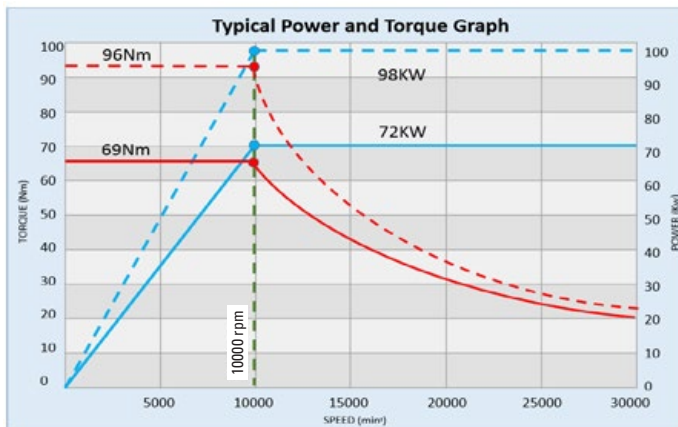

FRACTIONAL S-Carb APF®



43APF FRACTIONAL SERIES

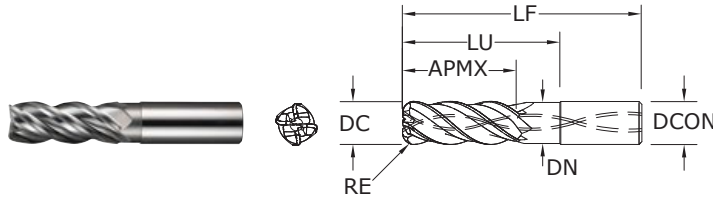

- Ultra high-productivity finisher for Aluminum alloys, specifically for aircraft components
- Two levels of chatter suppression: variable helix and indexing
- Designed for single axial pass semi-finishing and finishing
- Polished flutes maximize chip evacuation and provides enhanced finish
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				EDP NO.
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.030	34016
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.060	34017
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.090	34018
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.120	34019
1/2	2	4	1/2	2-3/8	.478	.030	34020
1/2	2	4	1/2	2-3/8	.478	.060	34021
1/2	2	4	1/2	2-3/8	.478	.090	34022
1/2	2	4	1/2	2-3/8	.478	.120	34023
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.030	34024
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.060	34025
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.090	34026
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.120	34027
3/4	3	5-3/8	3/4	3-1/2	.728	.030	34028
3/4	3	5-3/8	3/4	3-1/2	.728	.060	34029
3/4	3	5-3/8	3/4	3-1/2	.728	.090	34030
3/4	3	5-3/8	3/4	3-1/2	.728	.120	34031

Available on request: • JetStream Technology

TOLERANCES (inch)

1/2-3/4 DIAMETER


DC = $-0.0004/-0.0020$

DCON = h_6

RE = $+0.0012/-0.0012$


NON-FERROUS

For patent
information visit
www.ksptpatents.com




Series 43APF Fractional	Hardness				Vc (sfm)	DC • in			
			Ae x DC	Ap x DC		1/2	3/4		
N	ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	≤ 150 Bhn or ≤ 88 HRb		≤ 0.1	≤ 2.5	2625	RPM	20055	13370
						(2100-3150)	Fz	0.0030	0.0050
							Feed (in/min)	241	267
		≤ 150 Bhn or ≤ 88 HRb		≤ 0.1	≤ 4	2625	RPM	20055	13370
						(2100-3150)	Fz	0.0020	0.0040
							Feed (in/min)	160	214
	ALUMINUM ALLOYS (LITHIUM)* 2090, 2091, 2099, 2195, 2199, 2297, 8090	≤ 150 Bhn or ≤ 88 HRb		≤ 0.1	≤ 2.5	1970	RPM	15051	10034
						(1576-2364)	Fz	0.0030	0.0050
							Feed (in/min)	181	201
		≤ 150 Bhn or ≤ 88 HRb		≤ 0.1	≤ 4	1970	RPM	15051	10034
						(1576-2364)	Fz	0.0020	0.0040
							Feed (in/min)	120	161

Bhn (Brinell) HRb (Rockwell B)
 surface speed is dependent on machine spindle and fixturing
 balancing is recommended at ultra high surface speeds
 tool life may be reduced when machining Lithium Alloys
 $rpm = Vc \times 3.82 / DC$
 $ipm = Fz \times 4 \times rpm$
 maximum recommended depths shown
 reduce speed and feed for materials harder than listed
 finish cuts typically require reduced feed and cutting depths of 0.02 X DC maximum
 ramp angle = 6° (feed rate = 50%)
 plunging not recommended
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



43MAPF

METRIC SERIES

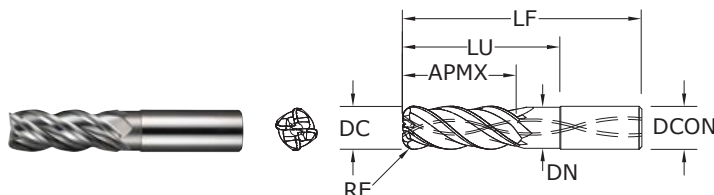

- Ultra high-productivity finisher for Aluminum alloys, specifically for aircraft components
- Two levels of chatter suppression: variable helix and indexing
- Designed for single axial pass semi-finishing and finishing
- Polished flutes maximize chip evacuation and provides enhanced finish
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-B (TiB ₂)
6,0	24,0	58,0	6,0	30,0	5,70	—	44627
8,0	32,0	64,0	8,0	40,0	7,60	—	44628
10,0	40,0	80,0	10,0	50,0	9,50	—	44629
12,0	30,0	83,0	12,0	40,0	11,40	—	44630
12,0	30,0	83,0	12,0	40,0	11,40	2,0	44745
12,0	30,0	83,0	12,0	40,0	11,40	3,0	44746
12,0	30,0	83,0	12,0	40,0	11,40	4,0	44747
12,0	30,0	83,0	12,0	50,0	11,40	0,5	44641
12,0	30,0	83,0	12,0	50,0	11,40	5,0	44642
12,0	48,0	100,0	12,0	62,0	11,40	—	44631
12,0	48,0	100,0	12,0	62,0	11,40	2,0	44748
12,0	48,0	100,0	12,0	62,0	11,40	3,0	44749
12,0	48,0	100,0	12,0	62,0	11,40	4,0	44750
16,0	40,0	92,0	16,0	51,0	15,20	—	44634
16,0	40,0	92,0	16,0	51,0	15,20	2,0	44751
16,0	40,0	92,0	16,0	51,0	15,20	3,0	44752
16,0	40,0	92,0	16,0	51,0	15,20	4,0	44753
16,0	42,0	93,0	16,0	51,0	15,20	5,0	44643
16,0	64,0	125,0	16,0	82,0	15,20	—	44635
16,0	64,0	125,0	16,0	82,0	15,20	2,0	44754
16,0	64,0	125,0	16,0	82,0	15,20	3,0	44755
16,0	64,0	125,0	16,0	82,0	15,20	4,0	44756
20,0	50,0	108,0	20,0	63,0	19,00	—	44636
20,0	50,0	108,0	20,0	63,0	19,00	3,0	44757
20,0	50,0	108,0	20,0	63,0	19,00	4,0	44758
20,0	50,0	108,0	20,0	63,0	19,00	5,0	44759
20,0	80,0	150,0	20,0	102,0	19,00	—	44637
20,0	80,0	150,0	20,0	102,0	19,00	3,0	44760
20,0	80,0	150,0	20,0	102,0	19,00	4,0	44761
20,0	80,0	150,0	20,0	102,0	19,00	5,0	44762
25,0	63,0	130,0	25,0	79,0	23,75	—	44638
25,0	63,0	130,0	25,0	79,0	23,75	3,0	44763
25,0	63,0	130,0	25,0	79,0	23,75	4,0	44764
25,0	63,0	130,0	25,0	79,0	23,75	5,0	44765
25,0	100,0	175,0	25,0	120,0	23,75	—	44639
25,0	100,0	175,0	25,0	120,0	23,75	3,0	44766
25,0	100,0	175,0	25,0	120,0	23,75	4,0	44767
25,0	100,0	175,0	25,0	120,0	23,75	5,0	44768

Available on request: • JetStream Technology

TOLERANCES (mm)

6–25 DIAMETER


DC = $-0,010/-0,050$

DCON = h_6

RE = $+0,03/-0,03$

NON-FERROUS

For patent information visit
www.ksptpatents.com

Series 43MAPF Metric		Hardness			Vc (m/min)	DC • mm								
			Ae x DC	Ap x DC		6	8	10	12	16	20	25		
N	ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	≤ 150 Bhn or ≤ 88 HRb		≤ 0.1	≤ 2.5	800	RPM	42440	31830	25464	21220	15915	12732	10186
						(640-960)	Fz	0.050	0.055	0.060	0.070	0.100	0.140	0.170
						Feed (mm/min)	8488	7003	6111	5942	6366	7130	6926	
		≤ 150 Bhn or ≤ 88 HRb		≤ 0.1	≤ 4	800	RPM	42440	31830	25464	21220	15915	12732	10186
						(640-960)	Fz	0.040	0.045	0.050	0.050	0.070	0.100	0.120
						Feed (mm/min)	6790	5729	5093	4244	4456	5093	4889	
	ALUMINUM ALLOYS (LITHIUM)* 2090, 2091, 2099, 2195, 2199, 2297, 8090	≤ 150 Bhn or ≤ 88 HRb		≤ 0.1	≤ 2.5	600	RPM	31830	23873	19098	15915	11936	9549	7639
						(480-720)	Fz	0.050	0.055	0.060	0.070	0.100	0.140	0.170
						Feed (mm/min)	6366	5252	4584	4456	4774	5347	5195	
		≤ 150 Bhn or ≤ 88 HRb		≤ 0.1	≤ 4	600	RPM	31830	23873	19098	15915	11936	9549	7639
						(480-720)	Fz	0.040	0.045	0.050	0.050	0.070	0.100	0.120
						Feed (mm/min)	5093	4297	3820	3183	3342	3820	3667	

Bhn (Brinell) HRb (Rockwell B)

surface speed is dependent on machine spindle and fixturing

balancing is recommended at ultra high surface speeds

*tool life may be reduced when machining Lithium Alloys

$\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$

$\text{mm/min} = \text{Fz} \times 4 \times \text{rpm}$

maximum recommended depths shown



reduce speed and feed for materials harder than listed

finish cuts typically require reduced feed and cutting depths of 0.02 X DC maximum

ramp angle = 6° (feed rate = 50%)

plunging not recommended

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

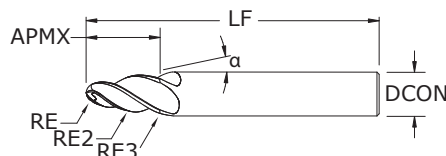S-Carb APF-B®**APF-B**
METRIC SERIES

- Designed to significantly improve traditional ball end applications
- Highly efficient at finishing and semi-finishing profiling
- Main application areas include profiling and pocket milling
- Especially suited to machining deep pockets and hard-to-reach areas without using long-reach tools
- Their versatility also allows for machining profiles and blends with one tool
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	mm				NO. OF FLUTES	EDP NO. Ti-NAMITE®-B (TiB ₂)
			CENTERLINE ANGLE α	TIP RADIUS RE	TAPERED RADIUS RE2	BLENDED RADIUS RE3		
6,0	9,5	58,0	17.5°	1,0	250,0	3,0	3	45718
6,0	8,0	58,0	17.5°	1,5	250,0	3,0	3	45719
8,0	10,5	80,0	20°	1,5	250,0	4,0	3	45720
8,0	9,5	80,0	20°	2,0	250,0	4,0	3	45721
10,0	12,5	89,0	20°	2,0	250,0	5,0	3	45722
10,0	11,5	89,0	20°	2,5	250,0	5,0	3	45723
12,0	13,5	100,0	20°	3,0	250,0	6,0	4	45724
12,0	14,4	100,0	20°	2,5	250,0	6,0	4	45725
12,0	20,0	100,0	14°	2,0	60,0	6,0	4	45726
16,0	31,0	109,0	12.5°	2,0	1000,0	5,0	4	45727
16,0	27,5	109,0	12.5°	3,0	1000,0	5,0	4	45728
16,0	24,0	109,0	12.5°	4,0	1000,0	5,0	4	45729
16,0	21,0	109,0	15°	4,0	1000,0	5,0	4	45730
16,0	18,5	109,0	20°	4,0	1500,0	8,0	4	45731
16,0	28,5	109,0	10°	4,0	1000,0	5,0	4	45732
16,0	19,0	109,0	20°	3,0	750,0	5,0	4	45733
16,0	15,0	109,0	30°	2,0	750,0	3,0	4	45734
16,0	18,5	109,0	20°	3,0	60,0	5,0	4	45735

TOLERANCES (mm)DCON = h_6 RE = $-0,010/-0,010$

NON-FERROUS

For patent
information visit
www.ksptpatents.com

			DCON	6		8		10		12		16	
			Ae max	0,20	0,45	0,25	0,55	0,30	0,60	0,35	0,65	0,40	0,70
			Diameter	3,0	6,0	4,0	8,0	5,0	10,0	6,0	12,0	8,0	16,0
													
Metric	Hardness (HRb)	Vc (m/min)	Cut Zone	RE	RE2	RE	RE2	RE	RE2	RE	RE2	RE	RE2
N Aluminum	≤88	510	RPM	54111	27056	40583	20292	32467	16233	27056	13528	20292	10146
		(388-632)	Fz	0,017	0,040	0,021	0,050	0,025	0,060	0,033	0,080	0,042	0,100
			Feed (mm/min)	2706	3247	2536	3044	2435	2922	3607	4329	3382	4058
	≥88	330	RPM	35013	17507	26260	13130	21008	10504	17507	8753	13130	6565
		(284-376)	Fz	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060	0,033	0,080
			Feed (mm/min)	1313	1576	1313	1576	1313	1576	1751	2101	1751	2101

$rpm = (Vc \times 1000) / (DC \times 3.14)$

Feed= Fz x No. of flutes x rpm


Adjust speed and feed cutting

Adjust rates according to cutting area of tool being used


Avoid using tip of the tool where possible due to reduced chip space

Be aware of max cut Ae, especially on the lower portion of the tool

Refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



**43 •
43CR**
FRACTIONAL SERIES

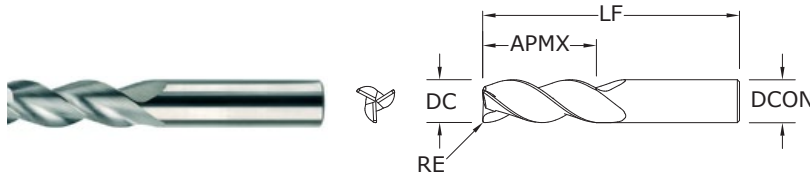

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/8	3/8	1-1/2	1/8	—	34701	34728
1/8	3/8	1-1/2	1/8	.010	34771	34793
3/16	5/16	2-1/2	3/16	—	34822	34857
3/16	9/16	2	3/16	—	34702	34729
3/16	9/16	2	3/16	.010	34772	34794
3/16	3/4	2-1/2	3/16	—	34823	34858
1/4	3/8	2	1/4	—	34703	34730
1/4	3/8	2-1/2	1/4	.010	35575	35665
1/4	3/8	2-1/2	1/4	.015	35576	35666
1/4	3/8	2-1/2	1/4	.030	35577	35667
1/4	3/8	2-1/2	1/4	.060	35578	35668
1/4	1/2	2-1/2	1/4	—	34824	34859
1/4	3/4	2-1/2	1/4	—	34704	34731
1/4	3/4	2-1/2	1/4	.010	34773	34795
1/4	3/4	2-1/2	1/4	.015	35579	35669
1/4	3/4	2-1/2	1/4	.030	34774	34796
1/4	3/4	2-1/2	1/4	.060	35580	35670
1/4	1	3	1/4	—	34825	34860
1/4	1	3	1/4	.010	35581	35671
1/4	1	3	1/4	.015	35582	35672
1/4	1	3	1/4	.030	35583	35673
1/4	1	3	1/4	.060	35584	35674
1/4	1-1/4	3-1/2	1/4	—	34705	34732
1/4	1-3/4	4	1/4	—	34826	34861
5/16	7/16	2	5/16	—	34706	34733
5/16	5/8	2-1/2	5/16	—	34707	34734
5/16	5/8	2-1/2	5/16	.030	34775	34797
5/16	1-1/4	4	5/16	—	34708	34735
3/8	1/2	2	3/8	—	34709	34736
3/8	1/2	3	3/8	.010	35585	35675
3/8	1/2	3	3/8	.015	35586	35676
3/8	1/2	3	3/8	.030	35587	35677
3/8	1/2	3	3/8	.060	35588	35678
3/8	1/2	3	3/8	.090	35589	35679
3/8	1	2-1/2	3/8	—	34710	34737
3/8	1	2-1/2	3/8	.010	34776	34798

continued on next page

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

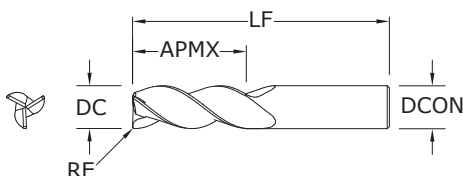

**43 •
43CR**
FRACTIONAL SERIES

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h_6

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0000/–0.0020

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6


RE = +0.0000/–0.0020

NON-FERROUS


For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3/8	1	2-1/2	3/8	.030	34777	34799
3/8	1	2-1/2	3/8	.060	32761	32825
3/8	1	3	3/8	.015	35590	35680
3/8	1	3	3/8	.090	35591	35681
3/8	1-1/4	3-1/2	3/8	—	34827	34862
3/8	1-1/2	3-1/2	3/8	—	34711	34738
3/8	1-1/2	4	3/8	.010	35592	35682
3/8	1-1/2	4	3/8	.015	35593	35683
3/8	1-1/2	4	3/8	.030	35594	35684
3/8	1-1/2	4	3/8	.060	35595	35685
3/8	1-1/2	4	3/8	.090	35596	35686
3/8	2	4	3/8	—	34828	34863
1/2	5/8	2-1/2	1/2	—	34712	34739
1/2	5/8	3	1/2	.010	35597	35687
1/2	5/8	3	1/2	.015	35598	35688
1/2	5/8	3	1/2	.030	35599	35689
1/2	5/8	3	1/2	.060	35600	35690
1/2	5/8	3	1/2	.090	35601	35691
1/2	5/8	3	1/2	.120	35602	35692
1/2	1	3	1/2	—	34830	34865
1/2	1	3	1/2	.010	35603	35693
1/2	1	3	1/2	.015	35604	35694
1/2	1	3	1/2	.030	35605	35695
1/2	1	3	1/2	.060	35606	35696
1/2	1	3	1/2	.090	35607	35697
1/2	1	3	1/2	.120	35608	35698
1/2	1-1/4	3	1/2	.015	35609	35699
1/2	1-1/4	3-1/4	1/2	—	34713	34740
1/2	1-1/4	3-1/4	1/2	.010	34778	34800
1/2	1-1/4	3-1/4	1/2	.030	34779	34801
1/2	1-1/4	3-1/4	1/2	.060	34780	34802
1/2	1-1/4	3-1/4	1/2	.090	34781	34803
1/2	1-1/4	3-1/4	1/2	.120	32766	32830
1/2	1-5/8	4	1/2	—	34831	34866
1/2	1-5/8	4	1/2	.010	35610	35700
1/2	1-5/8	4	1/2	.015	35611	35701

continued on next page



**43 •
43CR**
FRACTIONAL SERIES

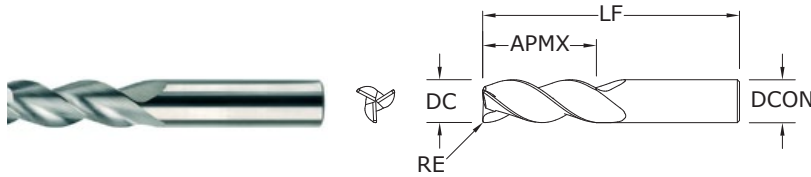

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/2	1-5/8	4	1/2	.030	35612	35702
1/2	1-5/8	4	1/2	.060	35613	35703
1/2	1-5/8	4	1/2	.090	35614	35704
1/2	1-5/8	4	1/2	.120	35615	35705
1/2	2	4	1/2	—	34714	34741
1/2	2	4	1/2	.010	35616	35706
1/2	2	4	1/2	.015	35617	35707
1/2	2	4	1/2	.030	35618	35708
1/2	2	4	1/2	.060	35619	35709
1/2	2	4	1/2	.090	35620	35710
1/2	2	4	1/2	.120	35621	35711
1/2	2-1/2	5	1/2	—	34832	34867
1/2	3-1/8	6	1/2	—	34715	34742
5/8	3/4	3	5/8	—	34716	34743
5/8	3/4	3-1/2	5/8	.030	35622	35712
5/8	3/4	3-1/2	5/8	.060	35623	35713
5/8	3/4	3-1/2	5/8	.090	35624	35714
5/8	3/4	3-1/2	5/8	.120	35625	35715
5/8	1-5/8	3-3/4	5/8	—	34717	34744
5/8	1-5/8	3-3/4	5/8	.030	34782	34804
5/8	1-5/8	3-3/4	5/8	.060	34783	34805
5/8	1-5/8	3-3/4	5/8	.090	34784	34806
5/8	1-5/8	3-3/4	5/8	.120	35626	35716
5/8	2-1/8	4	5/8	—	34833	34868
5/8	2-1/2	5	5/8	—	34718	34745
5/8	3-1/4	6	5/8	—	34834	34869
5/8	3-3/4	6	5/8	—	34719	34746
3/4	1	3	3/4	—	34720	34747
3/4	1	4	3/4	.030	35627	35717
3/4	1	4	3/4	.060	35628	35718
3/4	1	4	3/4	.090	35629	35719
3/4	1	4	3/4	.120	35630	35720
3/4	1	4	3/4	.190	35631	35721
3/4	1	4	3/4	.250	35632	35722
3/4	1-5/8	4	3/4	—	34721	34748
3/4	1-5/8	4	3/4	.030	34785	34807

continued on next page

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

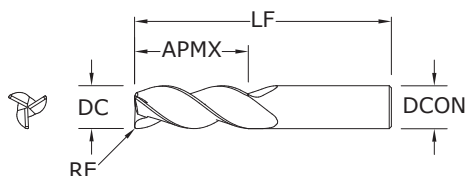

43 •
43CR
FRACTIONAL SERIES

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h₆


RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com


CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3/4	1-5/8	4	3/4	.060	34786	34808
3/4	1-5/8	4	3/4	.090	34787	34809
3/4	1-5/8	4	3/4	.120	34815	34817
3/4	1-5/8	4	3/4	.190	35633	35723
3/4	1-5/8	4	3/4	.250	35634	35724
3/4	2-1/4	5	3/4	—	34722	34749
3/4	2-1/4	5	3/4	.030	35635	35725
3/4	2-1/4	5	3/4	.060	35636	35726
3/4	2-1/4	5	3/4	.090	35637	35727
3/4	2-1/4	5	3/4	.120	35638	35728
3/4	2-1/4	5	3/4	.190	35639	35729
3/4	2-1/4	5	3/4	.250	35640	35730
3/4	2-1/2	5	3/4	—	34758	34765
3/4	3-1/4	6	3/4	—	34723	34750
1	1-1/4	4	1	—	34724	34751
1	1-1/4	5	1	.030	35641	35731
1	1-1/4	5	1	.060	35642	35732
1	1-1/4	5	1	.090	35643	35733
1	1-1/4	5	1	.120	35644	35734
1	1-1/4	5	1	.190	35645	35735
1	1-1/4	5	1	.250	35646	35736
1	2	4-1/2	1	—	34725	34752
1	2	4-1/2	1	.030	34789	34811
1	2	4-1/2	1	.060	34790	34812
1	2	4-1/2	1	.090	34791	34813
1	2	4-1/2	1	.120	34816	34818
1	2	5	1	.190	35647	35737
1	2	5	1	.250	35648	35738
1	2-5/8	6	1	—	34726	34753
1	3-1/4	6	1	—	34727	34754
1	3-1/4	6	1	.030	35649	35739
1	3-1/4	6	1	.060	35650	35740
1	3-1/4	6	1	.090	35651	35741
1	3-1/4	6	1	.120	35652	35742
1	3-1/4	6	1	.190	35653	35743
1	3-1/4	6	1	.250	35654	35744
1	4-1/8	7	1	—	34835	34870

CONTINUED



43L • 43LC

FRACTIONAL SERIES

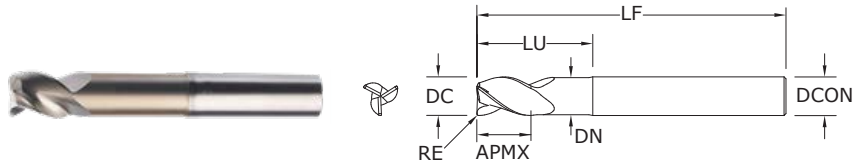

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/8	5/32	3	1/8	1/2	.105	—	32700	32725
1/8	5/32	3	1/8	1/2	.105	.010	32751	32815
1/8	5/32	3	1/8	3/4	.105	—	32691	34888
3/16	7/32	3	3/16	1/2	.167	—	32701	32726
3/16	7/32	3	3/16	1/2	.167	.010	32752	32816
3/16	7/32	3	3/16	3/4	.167	—	32692	34889
1/4	3/8	2-1/2	1/4	3/4	.230	.015	35787	36235
1/4	3/8	2-1/2	1/4	3/4	.230	.060	35788	36236
1/4	3/8	4	1/4	3/4	.230	—	32702	32727
1/4	3/8	4	1/4	3/4	.230	.010	32753	32817
1/4	3/8	4	1/4	3/4	.230	.030	32754	32818
1/4	3/8	4	1/4	1-1/2	.230	—	32703	32728
1/4	3/8	4	1/4	1-1/2	.230	.010	32755	32819
1/4	3/8	4	1/4	1-1/2	.230	.030	32756	32820
1/4	3/8	4	1/4	2-1/8	.230	—	32704	32729
1/4	3/8	4	1/4	2-1/8	.230	.010	32757	32821
1/4	3/8	4	1/4	2-1/8	.230	.030	32758	32822
5/16	7/16	4	5/16	1-1/8	.292	—	32705	32730
5/16	7/16	4	5/16	1-1/8	.292	.030	32759	32823
5/16	7/16	4	5/16	2-1/8	.292	—	32706	32731
5/16	7/16	4	5/16	2-1/8	.292	.030	32760	32824
3/8	1/2	3	3/8	1-1/8	.355	.015	35791	36239
3/8	1/2	3	3/8	1-1/8	.355	.090	35792	36240
3/8	1/2	4	3/8	1-1/8	.355	—	32707	32732
3/8	1/2	4	3/8	1-1/8	.355	.030	32762	32826
3/8	1/2	4	3/8	1-1/8	.355	.060	32763	32827
3/8	1/2	4	3/8	2-1/8	.355	—	32708	32733
3/8	1/2	4	3/8	2-1/8	.355	.030	32764	32828
3/8	1/2	4	3/8	2-1/8	.355	.060	32765	32829
1/2	5/8	3	1/2	1-3/8	.480	.015	35795	36243
1/2	5/8	4	1/2	1-3/8	.480	—	32709	32734
1/2	5/8	4	1/2	1-3/8	.480	.030	32767	32831
1/2	5/8	4	1/2	1-3/8	.480	.060	32768	32832
1/2	5/8	4	1/2	1-3/8	.480	.090	32769	32833
1/2	5/8	4	1/2	1-3/8	.480	.120	32770	32834
1/2	5/8	4	1/2	2-1/4	.480	.015	35796	36244

continued on next page

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

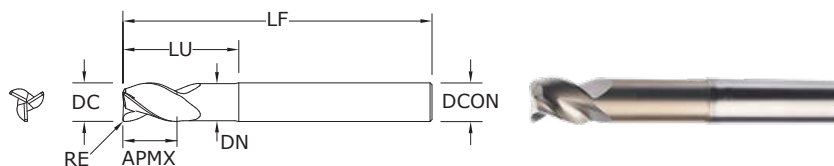

**43L •
43LC**
FRACTIONAL SERIES

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h_6

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0000/–0.0020

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6


RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				CORNER RADIUS RE	EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN			UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/2	5/8	6	1/2	2-1/8	.480	—	—	32710	32735
1/2	5/8	6	1/2	2-1/8	.480	.030	—	32771	32835
1/2	5/8	6	1/2	2-1/8	.480	.060	—	32772	32836
1/2	5/8	6	1/2	2-1/8	.480	.090	—	32773	32837
1/2	5/8	6	1/2	2-1/8	.480	.120	—	32774	32838
1/2	5/8	6	1/2	3-3/8	.480	—	—	32711	32736
1/2	5/8	6	1/2	3-3/8	.480	.030	—	32775	32839
1/2	5/8	6	1/2	3-3/8	.480	.060	—	32776	32840
1/2	5/8	6	1/2	3-3/8	.480	.090	—	32777	32841
1/2	5/8	6	1/2	3-3/8	.480	.120	—	32778	32842
1/2	5/8	6	1/2	4-1/4	.480	—	—	32697	34894
5/8	3/4	4	5/8	1-3/4	.605	—	—	32712	32737
5/8	3/4	4	5/8	1-3/4	.605	.030	—	32779	32843
5/8	3/4	4	5/8	1-3/4	.605	.060	—	32780	32844
5/8	3/4	4	5/8	1-3/4	.605	.090	—	32781	32845
5/8	3/4	4	5/8	1-3/4	.605	.120	—	32782	32846
5/8	3/4	4	5/8	2-3/8	.605	—	—	32713	32738
5/8	3/4	4	5/8	2-3/8	.605	.030	—	32783	32847
5/8	3/4	4	5/8	2-3/8	.605	.060	—	32784	32848
5/8	3/4	4	5/8	2-3/8	.605	.090	—	32785	32849
5/8	3/4	4	5/8	2-3/8	.605	.120	—	32786	32850
5/8	3/4	6	5/8	3-3/8	.605	—	—	32714	32739
5/8	3/4	6	5/8	3-3/8	.605	.030	—	32787	32851
5/8	3/4	6	5/8	3-3/8	.605	.060	—	32788	32852
5/8	3/4	6	5/8	3-3/8	.605	.090	—	32789	32853
5/8	3/4	6	5/8	3-3/8	.605	.120	—	32790	32854
5/8	3/4	6	5/8	4-3/8	.605	—	—	32698	34895
3/4	1	4	3/4	1-3/4	.730	—	—	32715	32740
3/4	1	4	3/4	1-3/4	.730	.030	—	32791	32855
3/4	1	4	3/4	1-3/4	.730	.060	—	32792	32856
3/4	1	4	3/4	1-3/4	.730	.090	—	32793	32857
3/4	1	4	3/4	1-3/4	.730	.120	—	32794	32858
3/4	1	4	3/4	2	.730	.190	—	35803	36251
3/4	1	4	3/4	2	.730	.250	—	35804	36252
3/4	1	6	3/4	2-3/8	.730	—	—	32716	32741
3/4	1	6	3/4	2-3/8	.730	.030	—	32795	32859

continued on next page



43L • 43LC

FRACTIONAL SERIES

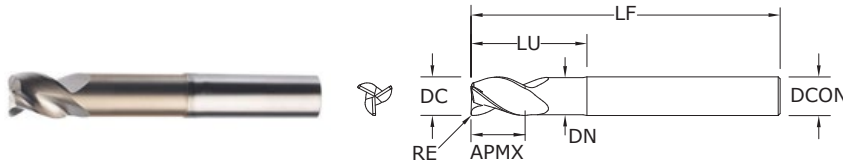

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3/4	1	6	3/4	2-3/8	.730	.060	32796	32860
3/4	1	6	3/4	2-3/8	.730	.090	32797	32861
3/4	1	6	3/4	2-3/8	.730	.120	32798	32862
3/4	1	6	3/4	3-3/8	.730	—	32717	32742
3/4	1	6	3/4	3-3/8	.730	.030	32799	32863
3/4	1	6	3/4	3-3/8	.730	.060	32800	32864
3/4	1	6	3/4	3-3/8	.730	.090	32801	32865
3/4	1	6	3/4	3-3/8	.730	.120	32802	32866
3/4	1	6	3/4	4-3/8	.730	—	32699	34896
1	1-1/4	5	1	2-5/8	.980	.190	35809	36257
1	1-1/4	5	1	2-5/8	.980	.250	35810	36258
1	1-1/4	6	1	2-3/8	.980	—	32718	32743
1	1-1/4	6	1	2-3/8	.980	.030	32803	32867
1	1-1/4	6	1	2-3/8	.980	.060	32804	32868
1	1-1/4	6	1	2-3/8	.980	.090	32805	32869
1	1-1/4	6	1	2-3/8	.980	.120	32806	32870
1	1-1/4	6	1	3-3/8	.980	—	32719	32744
1	1-1/4	6	1	3-3/8	.980	.030	32807	32871
1	1-1/4	6	1	3-3/8	.980	.060	32808	32872
1	1-1/4	6	1	3-3/8	.980	.090	32809	32873
1	1-1/4	6	1	3-3/8	.980	.120	32810	32874
1	1-1/4	6	1	3-3/8	.980	.190	35811	36259
1	1-1/4	6	1	3-3/8	.980	.250	35812	36260
1	1-1/4	7	1	4-3/8	.980	—	32720	32745

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

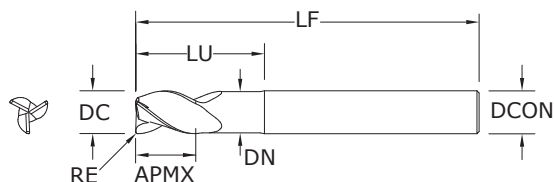

43EC
FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0000/–0.0020

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6


RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				CORNER RADIUS RE	EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN			UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	3	1/4	1-1/8	.230	.015		35789	36237
1/4	3/8	3	1/4	1-1/8	.230	.060		35790	36238
3/8	1/2	4	3/8	2-1/8	.355	.015		35793	36241
3/8	1/2	4	3/8	2-1/8	.355	.090		35794	36242
1/2	5/8	5	1/2	3-3/8	.480	.015		35797	36245
1/2	5/8	6	1/2	4-1/4	.480	.015		35798	36246
1/2	5/8	6	1/2	4-1/4	.480	.030		35799	36247
1/2	5/8	6	1/2	4-1/4	.480	.060		35800	36248
1/2	5/8	6	1/2	4-1/4	.480	.090		35801	36249
1/2	5/8	6	1/2	4-1/4	.480	.120		35802	36250
3/4	1	6	3/4	3-3/8	.730	.190		35805	36253
3/4	1	6	3/4	3-3/8	.730	.250		35806	36254
1	1-1/4	7	1	4-3/8	.980	.030		35813	36261
1	1-1/4	7	1	4-3/8	.980	.060		35814	36262
1	1-1/4	7	1	4-3/8	.980	.090		35815	36263
1	1-1/4	7	1	4-3/8	.980	.120		35816	36264
1	1-1/4	7	1	4-3/8	.980	.190		35817	36265
1	1-1/4	7	1	4-3/8	.980	.250		35818	36266


- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



43B

FRACTIONAL SERIES

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

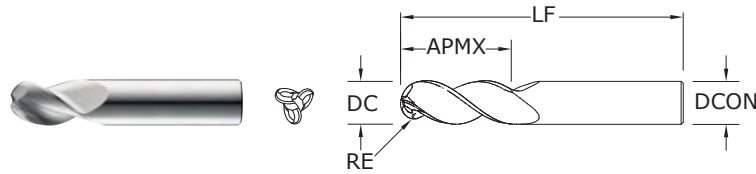

CUTTING DIAMETER DC	inch			EDP NO.	
	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	2	1/4	34916	34972
1/4	3/4	2-1/2	1/4	34917	34973
1/4	1	3	1/4	34918	34974
3/8	1/2	2	3/8	34919	34975
3/8	1	2-1/2	3/8	34920	34976
3/8	1-1/2	3-1/2	3/8	34921	34977
1/2	5/8	2-1/2	1/2	34922	34978
1/2	1	3	1/2	34923	34979
1/2	1-1/4	3	1/2	34924	34980
1/2	1-5/8	4	1/2	34925	34981
1/2	2	4	1/2	34926	34982
5/8	3/4	3	5/8	34927	34983
5/8	1-5/8	4	5/8	34928	34984
3/4	1	3	3/4	34929	34985
3/4	1-5/8	4	3/4	34930	34986
3/4	2-1/4	5	3/4	34931	34987
1	1-1/4	4	1	34932	34988
1	2	5	1	34933	34989
1	3-1/4	6	1	34934	34990

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0005/–0.0005

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0005/–0.0005

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0005/–0.0005

NON-FERROUS

For patent
information visit
www.ksptpatents.com

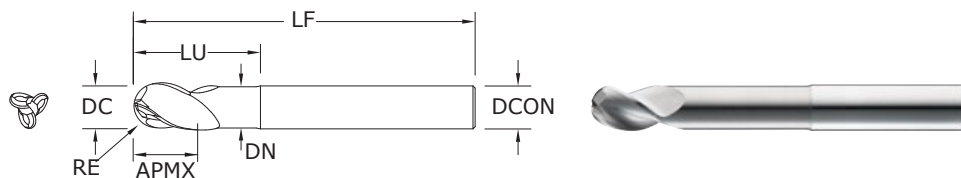

43LB
FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0005/–0.0005

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0005/–0.0005

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6

RE = +0.0005/–0.0005



inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	TI-NAMITE®-B (TiB ₂)
1/4	3/8	2-1/2	1/4	3/4	.230	34941	35005
3/8	1/2	3	3/8	1-1/8	.355	34943	35007
1/2	5/8	3	1/2	1-3/8	.480	34945	35009
1/2	5/8	4	1/2	2-1/4	.480	34946	35010
5/8	3/4	4	5/8	1-5/8	.605	34949	35013
3/4	1	4	3/4	2	.730	34951	35015
1	1-1/4	5	1	2-5/8	.980	34954	35018
1	1-1/4	6	1	3-3/8	.980	34955	35019

RE = 1/2 Cutting Diameter (DC)

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

NON-FERROUS

For patent information visit
www.ksptpatents.com

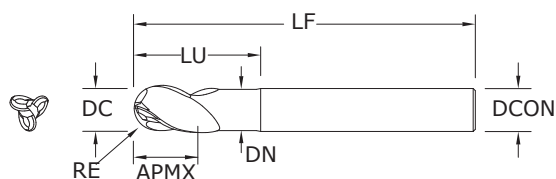

43EB
FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0005/–0.0005

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0005/–0.0005

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6

RE = +0.0005/–0.0005


inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	TI-NAMITE®-B (TiB ₂)
1/4	3/8	3	1/4	1-1/8	.230	34942	35006
3/8	1/2	4	3/8	2-1/8	.355	34944	35008
1/2	5/8	5	1/2	3-3/8	.480	34947	35011
1/2	5/8	6	1/2	4-1/4	.480	34948	35012
5/8	3/4	6	5/8	3-3/8	.605	34950	35014
3/4	1	6	3/4	3-3/8	.730	34952	35016
1	1-1/4	7	1	4-3/8	.980	34956	35020

RE = 1/2 Cutting Diameter (DC)

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)


NON-FERROUS

For patent information visit
www.ksptpatents.com



43CB

FRACTIONAL SERIES

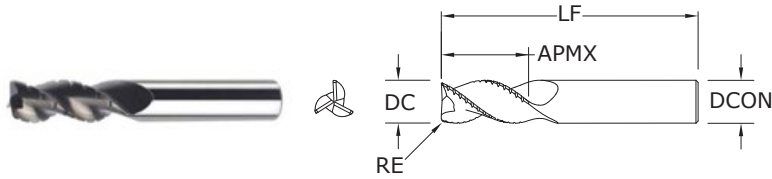

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Chip breakers reduce machine loads up to 15% for increased roughing feed rate capability
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	2-1/2	1/4	.020	33390	33450
1/4	1/2	2-1/2	1/4	.020	33391	33451
1/4	3/4	2-1/2	1/4	.020	33392	33452
1/4	1	3	1/4	.020	33393	33453
1/4	1-1/4	3-1/2	1/4	.020	33394	33454
1/4	1-3/4	4	1/4	.020	33395	33455
5/16	7/16	2-1/2	5/16	.020	33396	33456
5/16	11/16	2-1/2	5/16	.020	33397	33457
5/16	1	3	5/16	.020	33398	33458
5/16	2-1/8	4	5/16	.020	33400	33460
3/8	1/2	3	3/8	.020	33401	33461
3/8	1	2-1/2	3/8	.020	33400	33405
3/8	1-1/4	3-1/2	3/8	.020	33402	33462
3/8	1-1/2	4	3/8	.020	33403	33463
3/8	2	4	3/8	.020	33404	33464
1/2	5/8	3	1/2	.030	33406	33466
1/2	1	3	1/2	.030	33407	33467
1/2	1-1/4	3-1/4	1/2	.030	33401	33406
1/2	1-5/8	4	1/2	.030	33408	33468
1/2	2	4	1/2	.030	33409	33469
1/2	2-1/2	5	1/2	.030	33410	33470
1/2	3-1/8	6	1/2	.030	33411	33471
5/8	3/4	3-1/2	5/8	.030	33412	33472
5/8	1-5/8	3-3/4	5/8	.030	33402	33407
5/8	2-1/8	4	5/8	.030	33413	33473
5/8	3-1/4	6	5/8	.030	33415	33475
5/8	3-3/4	6	5/8	.030	33416	33476
3/4	1	4	3/4	.030	33417	33477
3/4	1-5/8	4	3/4	.030	33403	33408
3/4	2-1/4	5	3/4	.030	33418	33478
3/4	3-1/4	6	3/4	.030	33419	33479
3/4	4	6	3/4	.030	33420	33480
1	1-1/4	5	1	.030	33421	33481
1	2	4-1/2	1	.030	33404	33409
1	2-5/8	6	1	.030	33422	33482
1	3-1/4	6	1	.030	33423	33483
1	4-1/8	7	1	.030	33424	33484

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0000/–0.0020

NON-FERROUS

For patent information visit
www.ksptpatents.com

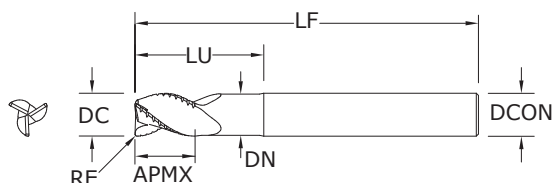

43LCB

FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0000/–0.0020

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6

RE = +0.0000/–0.0020


NON-FERROUS

For patent
information visit
www.ksptpatents.com

inch							EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	4	1/4	3/4	.230	.020	33500	33540
1/4	3/8	4	1/4	1-1/8	.230	.020	33501	33541
1/4	3/8	4	1/4	2-1/8	.230	.020	33502	33542
5/16	7/16	4	5/16	1-1/8	.292	.020	33503	33543
5/16	7/16	4	5/16	2-1/8	.292	.020	33504	33544
3/8	1/2	4	3/8	1-1/8	.355	.020	33507	33547
3/8	1/2	4	3/8	2-1/8	.355	.020	33508	33548
1/2	5/8	4	1/2	1-3/8	.480	.030	33511	33551
1/2	5/8	4	1/2	2-1/4	.480	.030	33512	33552
1/2	5/8	6	1/2	3-3/8	.480	.030	33513	33553
1/2	5/8	6	1/2	4-1/4	.480	.030	33514	33554
5/8	3/4	4	5/8	1-5/8	.605	.030	33515	33555
5/8	3/4	6	5/8	2-3/8	.605	.030	33516	33556
5/8	3/4	6	5/8	3-3/8	.605	.030	33517	33557
5/8	3/4	6	5/8	4-3/8	.605	.030	33518	33558
3/4	1	4	3/4	2	.730	.030	33519	33559
3/4	1	6	3/4	2-1/2	.730	.030	33520	33560
3/4	1	6	3/4	3-3/8	.730	.030	33521	33561
3/4	1	6	3/4	4-3/8	.730	.030	33522	33562
1	1-1/4	6	1	2-5/8	.980	.030	33523	33563
1	1-1/4	6	1	3-3/8	.980	.030	33524	33564
1	1-1/4	7	1	4-3/8	.980	.030	33525	33565



- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Chip breakers reduce machine loads up to 15% for increased roughing feed rate capability
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

Series
43CR, 43CB, 43LC,
43, 43L, 43LCB, 43B,
43LB, 43ELB, 43EC
Fractional



43, 43L, 43LCB, 43B, 43LB, 43ELB, 43EC Fractional		Hardness	Ae		Vc (sfm)	DC • in								
			Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4	1		
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb		1	≤ 1	1600	RPM	48896	24448	16299	12224	9779	8149	6112	
					(1280-1920)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085	
					Feed (ipm)	132	183	220	220	191	171	156		
			≤ 0.5	≤ 1.5	2000	RPM	61120	30560	20373	15280	12224	10187	7640	
					(1600-2400)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085	
					Feed (ipm)	165	229	275	275	238	214	195		
			≤ 0.05	≤ 2	3300	RPM	100848	50424	33616	25212	20170	16808	12606	
					(2640-3960)	Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195	
					Feed (ipm)	635	832	1059	1059	908	832	737		
	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb		1	≤ 1	600	RPM	18336	9168	6112	4584	3667	3056	2292
						(480-720)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
						Feed (ipm)	50	69	83	83	72	64	58	
				≤ 0.5	≤ 1.5	750	RPM	22920	11460	7640	5730	4584	3820	2865
						(600-900)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
						Feed (ipm)	62	86	103	103	89	80	73	
				≤ 0.05	≤ 2	1240	RPM	37894	18947	12631	9474	7579	6316	4737
						(992-1488)	Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
						Feed (ipm)	239	313	398	398	341	313	277	
	COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc		1	≤ 1	865	RPM	26434	13217	8811	6609	5287	4406	3304
						(692-1038)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
						Feed (ipm)	63	79	106	99	87	79	69	
				≤ 0.5	≤ 1.5	1080	RPM	33005	16502	11002	8251	6601	5501	4126
						(864-1296)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
						Feed (ipm)	79	99	132	124	109	99	87	
				≤ 0.05	≤ 2	1780	RPM	54397	27198	18132	13599	10879	9066	6800
						(1424-2136)	Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160
						Feed (ipm)	277	367	462	469	408	381	326	
	COPPER ALLOYS Beryllium Copper C110, Malleable Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc		1	≤ 1	345	RPM	10543	5272	3514	2636	2109	1757	1318
(276-414)						Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070	
Feed (ipm)						25	32	42	40	35	32	28		
			≤ 0.5	≤ 1.5	430	RPM	13141	6570	4380	3285	2628	2190	1643	
					(344-516)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070	
					Feed (ipm)	32	39	53	49	43	39	34		
			≤ 0.05	≤ 2	710	RPM	21698	10849	7233	5424	4340	3616	2712	
					(568-852)	Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160	
					Feed (ipm)	111	146	184	187	163	152	130		
PLASTICS ABS, Polycarbonate, PVC, Polypropylene			1	≤ 1	1600	RPM	48896	24448	16299	12224	9779	8149	6112	
					(1280-1920)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140	
					Feed (ipm)	220	293	367	367	323	293	257		
			≤ 0.5	≤ 1.5	2000	RPM	61120	30560	20373	15280	12224	10187	7640	
					(1600-2400)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140	
					Feed (ipm)	275	367	458	458	403	367	321		
			≤ 0.05	≤ 2	3300	RPM	100848	50424	33616	25212	20170	16808	12606	
					(2640-3960)	Fz	0.0034	0.0090	0.0170	0.0230	0.0250	0.0275	0.0320	
					Feed (ipm)	1029	1361	1714	1740	1513	1387	1210		

Bhn (Brinell) HRC (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 3 x rpm
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

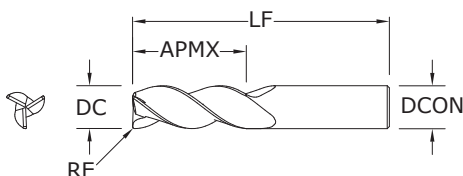

43M •
43MCR
METRIC SERIES

TOLERANCES (mm)

≤6 DIAMETER

DC = +0,000/-0,008

DCON = h₆

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,009

DCON = h₆

RE = +0,000/-0,050

>10-18 DIAMETER

DC = +0,000/-0,011

DCON = h₆

RE = +0,000/-0,050

>18-20 DIAMETER

DC = +0,000/-0,013

DCON = h₆

RE = +0,000/-0,050


NON-FERROUS

For patent
information visit
www.ksptpatents.com


CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3,0	8,0	52,0	6,0	—	—	44890
4,0	11,0	55,0	6,0	—	—	44891
5,0	13,0	57,0	6,0	—	—	44892
6,0	13,0	57,0	6,0	—	44701	44715
6,0	13,0	57,0	6,0	1,5	—	44732
6,0	13,0	57,0	6,0	0,5	—	44902
6,0	13,0	57,0	6,0	1,0	—	44894
6,0	13,0	72,0	6,0	—	44702	44716
6,0	13,0	72,0	6,0	0,8	—	44842
6,0	13,0	72,0	6,0	1,2	—	44843
6,0	24,0	75,0	6,0	—	—	44893
6,0	24,0	75,0	6,0	0,5	—	44844
6,0	24,0	75,0	6,0	1,0	—	44845
8,0	19,0	63,0	8,0	—	44703	44717
8,0	19,0	63,0	8,0	0,3	—	44846
8,0	19,0	63,0	8,0	0,5	—	44847
8,0	19,0	63,0	8,0	1,0	—	44848
8,0	19,0	63,0	8,0	1,5	—	44849
8,0	32,0	75,0	8,0	—	—	44895
8,0	32,0	75,0	8,0	0,5	—	44850
8,0	32,0	75,0	8,0	1,0	—	44851
8,0	32,0	75,0	8,0	1,5	—	44852
8,0	32,0	75,0	8,0	2,0	—	44853
10,0	22,0	72,0	10,0	—	44705	44719
10,0	22,0	72,0	10,0	0,3	—	44854
10,0	22,0	72,0	10,0	0,5	—	44855
10,0	22,0	72,0	10,0	1,0	—	44856
10,0	22,0	72,0	10,0	1,5	—	44857
10,0	40,0	100,0	10,0	—	—	44896
10,0	40,0	100,0	10,0	0,5	—	44858

continued on next page

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



**43M •
43MCR**
METRIC SERIES

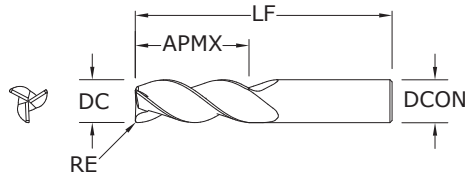

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
10,0	40,0	100,0	10,0	1,0	—	44859
10,0	40,0	100,0	10,0	1,5	—	44860
10,0	40,0	100,0	10,0	2,0	—	44861
12,0	26,0	83,0	12,0	—	44708	44722
12,0	26,0	83,0	12,0	1,5	44814	44733
12,0	26,0	83,0	12,0	2,0	44815	44826
12,0	26,0	83,0	12,0	2,5	44816	44827
12,0	26,0	83,0	12,0	3,0	44817	44734
12,0	48,0	100,0	12,0	—	—	44897
12,0	48,0	100,0	12,0	0,5	—	44862
12,0	48,0	100,0	12,0	1,0	—	44863
12,0	48,0	100,0	12,0	1,5	—	44864
12,0	48,0	100,0	12,0	2,0	—	44865
12,0	48,0	100,0	12,0	2,5	—	44866
12,0	48,0	100,0	12,0	3,0	—	44867
14,0	30,0	89,0	14,0	—	—	44898
14,0	30,0	89,0	14,0	1,0	—	44868
14,0	30,0	89,0	14,0	2,0	—	44869
14,0	30,0	89,0	14,0	3,0	—	44870
16,0	32,0	92,0	16,0	—	44711	44725
16,0	32,0	92,0	16,0	1,5	44818	44735
16,0	32,0	92,0	16,0	2,0	44819	44828
16,0	32,0	92,0	16,0	2,5	44820	44829
16,0	32,0	92,0	16,0	3,0	44821	44736
16,0	32,0	92,0	16,0	4,0	—	44871
16,0	64,0	125,0	16,0	—	—	44900
16,0	64,0	125,0	16,0	0,5	—	44872
16,0	64,0	125,0	16,0	1,0	—	44873
16,0	64,0	125,0	16,0	1,5	—	44874
16,0	64,0	125,0	16,0	2,0	—	44875
16,0	64,0	125,0	16,0	2,5	—	44876
16,0	64,0	125,0	16,0	3,0	—	44877

continued on next page

TOLERANCES (mm)

≤6 DIAMETER

DC = +0,000/–0,008

DCON = h₆

RE = +0,000/–0,050

>6–10 DIAMETER

DC = +0,000/–0,009

DCON = h₆

RE = +0,000/–0,050

>10–18 DIAMETER

DC = +0,000/–0,011

DCON = h₆

RE = +0,000/–0,050

>18–20 DIAMETER



DC = +0,000/–0,013

DCON = h₆

RE = +0,000/–0,050

NON-FERROUS


For patent
information visit
www.ksptpatents.com

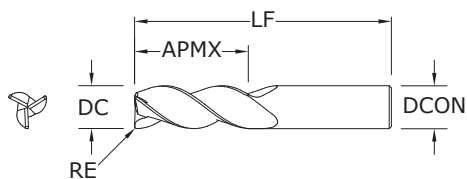

**43M •
43MCR**
METRIC SERIES


CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
16,0	64,0	125,0	16,0	4,0	—	44878
20,0	38,0	104,0	20,0	—	44714	44728
20,0	38,0	104,0	20,0	2,0	44822	44830
20,0	38,0	104,0	20,0	2,5	44823	44831
20,0	38,0	104,0	20,0	3,0	44824	44737
20,0	38,0	104,0	20,0	4,0	—	44879
20,0	80,0	150,0	20,0	—	—	44901
20,0	80,0	150,0	20,0	0,5	—	44880
20,0	80,0	150,0	20,0	1,0	—	44881
20,0	80,0	150,0	20,0	1,5	—	44882
20,0	80,0	150,0	20,0	2,0	—	44883
20,0	80,0	150,0	20,0	2,5	—	44884
20,0	80,0	150,0	20,0	3,0	—	44885
20,0	80,0	150,0	20,0	4,0	—	44886
25,0	50,0	125,0	25,0	—	—	44731

CONTINUED



43ML • 43MLC

METRIC SERIES

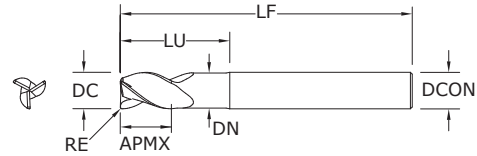

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	mm				EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
6,0	10,0	63,0	6,0	20,0	5,49	0,5	44769	44789
6,0	10,0	63,0	6,0	20,0	5,49	1,0	44770	44790
6,0	10,0	75,0	6,0	20,0	5,49	—	—	42706
6,0	13,0	72,0	6,0	30,0	5,49	0,5	44771	44791
6,0	13,0	72,0	6,0	30,0	5,49	1,0	44772	44792
8,0	12,0	75,0	8,0	25,0	7,49	—	—	42707
8,0	12,0	75,0	8,0	25,0	7,49	0,3	44773	44793
8,0	12,0	75,0	8,0	25,0	7,49	0,5	44774	44794
8,0	12,0	75,0	8,0	25,0	7,49	0,8	—	44950
8,0	12,0	75,0	8,0	25,0	7,49	1,0	44775	44795
8,0	12,0	75,0	8,0	25,0	7,49	1,2	—	44951
8,0	12,0	75,0	8,0	25,0	7,49	1,5	44776	44796
8,0	12,0	75,0	8,0	25,0	7,49	1,6	—	44952
10,0	14,0	100,0	10,0	35,0	9,48	—	—	42708
10,0	14,0	100,0	10,0	35,0	9,48	0,3	44777	44797
10,0	14,0	100,0	10,0	35,0	9,48	0,5	44778	44798
10,0	14,0	100,0	10,0	35,0	9,48	1,0	44779	44799
10,0	14,0	100,0	10,0	35,0	9,48	1,5	44780	44800
10,0	14,0	100,0	10,0	35,0	9,50	0,8	—	44953
10,0	14,0	100,0	10,0	35,0	9,50	1,2	—	44954
10,0	14,0	100,0	10,0	35,0	9,50	1,6	—	44955
10,0	14,0	100,0	10,0	35,0	9,50	2,4	—	44956
12,0	16,0	100,0	12,0	40,0	11,48	—	—	42709
12,0	16,0	100,0	12,0	40,0	11,48	0,5	44781	44801
12,0	16,0	100,0	12,0	40,0	11,48	0,8	—	44957
12,0	16,0	100,0	12,0	40,0	11,48	1,0	44782	44802
12,0	16,0	100,0	12,0	40,0	11,48	1,2	—	44958
12,0	16,0	100,0	12,0	40,0	11,48	1,5	44783	44803
12,0	16,0	100,0	12,0	40,0	11,48	1,6	—	44959
12,0	16,0	100,0	12,0	40,0	11,48	2,0	44784	44804
12,0	16,0	100,0	12,0	40,0	11,48	2,4	—	44960
12,0	16,0	100,0	12,0	40,0	11,48	2,5	44832	44839
12,0	16,0	100,0	12,0	40,0	11,48	3,0	44833	44738
12,0	16,0	100,0	12,0	40,0	11,48	4,0	44834	44741

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/−0,008
DCON = h₆

>6–10 DIAMETER

DC = +0,000/−0,009
DCON = h₆
RE = +0,000/−0,050

>10–18 DIAMETER

DC = +0,000/−0,011
DCON = h₆
RE = +0,000/−0,050



>18–20 DIAMETER

DC = +0,000/−0,013
DCON = h₆
RE = +0,000/−0,050

NON-FERROUS

For patent
information visit
www.ksptpatents.com


continued on next page

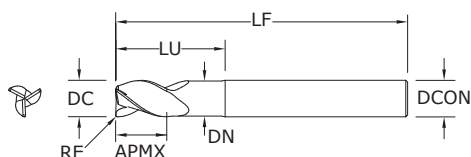

**43ML •
43MLC**
METRIC SERIES


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	mm				EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
14,0	18,0	125,0	14,0	45,0	13,49	—	—	44899
14,0	18,0	125,0	14,0	45,0	13,49	1,0	—	44961
14,0	18,0	125,0	14,0	45,0	13,49	2,0	—	44962
14,0	18,0	125,0	14,0	45,0	13,49	3,0	—	44963
14,0	18,0	125,0	14,0	45,0	13,49	4,0	—	44964
16,0	20,0	125,0	16,0	50,0	15,47	—	—	42710
16,0	20,0	125,0	16,0	50,0	15,47	2,0	44785	44805
16,0	20,0	125,0	16,0	50,0	15,47	2,5	44835	44840
16,0	20,0	125,0	16,0	50,0	15,47	3,0	44836	44739
16,0	20,0	125,0	16,0	50,0	15,47	4,0	44786	44806
16,0	20,0	125,0	16,0	50,0	15,49	0,8	—	44965
16,0	20,0	125,0	16,0	50,0	15,49	1,2	—	44966
16,0	20,0	125,0	16,0	50,0	15,49	1,6	—	44967
16,0	20,0	125,0	16,0	50,0	15,49	2,4	—	44968
16,0	20,0	125,0	16,0	50,0	15,49	3,2	—	44969
20,0	25,0	150,0	20,0	65,0	19,46	—	—	42711
20,0	25,0	150,0	20,0	65,0	19,46	2,0	44787	44807
20,0	25,0	150,0	20,0	65,0	19,46	2,4	—	44973
20,0	25,0	150,0	20,0	65,0	19,46	2,5	44837	44841
20,0	25,0	150,0	20,0	65,0	19,46	3,0	44838	44740
20,0	25,0	150,0	20,0	65,0	19,46	4,0	44788	44808
20,0	25,0	150,0	20,0	65,0	19,48	0,8	—	44970
20,0	25,0	150,0	20,0	65,0	19,48	1,2	—	44971
20,0	25,0	150,0	20,0	65,0	19,48	1,6	—	44972
20,0	25,0	150,0	20,0	65,0	19,48	3,2	—	44974

CONTINUED



43MB

METRIC SERIES

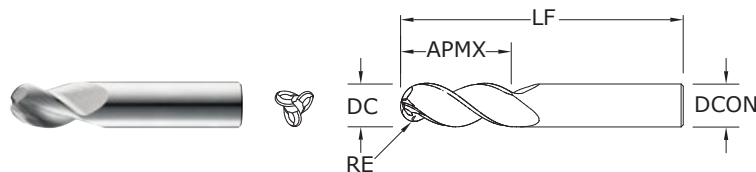

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-B (TiB ₂)
3,0	4,5	57,0	6,0	44916
4,0	6,0	57,0	6,0	44919
5,0	7,5	57,0	6,0	44922
6,0	9,0	57,0	6,0	44925
8,0	12,0	63,0	8,0	44928
10,0	15,0	75,0	10,0	44931
12,0	18,0	83,0	12,0	44934
16,0	24,0	100,0	16,0	44937
20,0	30,0	108,0	20,0	44940
25,0	37,5	127,0	25,0	44943

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (mm)

3 DIAMETER

DC = +0,000/-0,006

DCON = h₆

RE = +0,0127/-0,0127

>3-6 DIAMETER

DC = +0,000/-0,008

DCON = h₆

RE = +0,0127/-0,0127

>6-10 DIAMETER

DC = +0,000/-0,009

DCON = h₆

RE = +0,0127/-0,0127

>10-18 DIAMETER

DC = +0,000/-0,011

DCON = h₆

RE = +0,0127/-0,0127

>18-25 DIAMETER



DC = +0,000/-0,013

DCON = h₆

RE = +0,0127/-0,0127

NON-FERROUS

For patent
information visit
www.ksptpatents.com

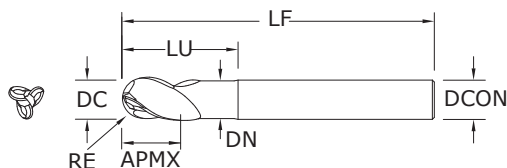

43MB

METRIC SERIES

TOLERANCES (mm)

3 DIAMETER

DC = +0,000/-0,006

DCON = h_6

RE = +0,0127/-0,0127

>3-6 DIAMETER

DC = +0,000/-0,008

DCON = h_6

RE = +0,0127/-0,0127

>6-10 DIAMETER

DC = +0,000/-0,009

DCON = h_6

RE = +0,0127/-0,0127

>10-18 DIAMETER

DC = +0,000/-0,011

DCON = h_6

RE = +0,0127/-0,0127

>18-25 DIAMETER

DC = +0,000/-0,013

DCON = h_6

RE = +0,0127/-0,0127


NON-FERROUS

For patent
information visit
www.ksptpatents.com

mm						EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	Ti-NAMITE®-B (TiB ₂)
3,0	6,0	57,0	6,0	10,0	2,74	44917
3,0	9,0	57,0	6,0	16,0	2,74	44918
4,0	8,0	57,0	6,0	13,0	3,73	44920
4,0	12,0	57,0	6,0	21,0	3,73	44921
5,0	10,0	63,0	6,0	16,0	4,50	44923
5,0	15,0	63,0	6,0	26,0	4,50	44924
6,0	12,0	63,0	6,0	19,0	5,49	44926
6,0	18,0	75,0	6,0	31,0	5,49	44927
8,0	16,0	75,0	8,0	25,0	7,49	44929
8,0	24,0	83,0	8,0	41,0	7,49	44930
10,0	20,0	83,0	10,0	31,0	9,50	44932
10,0	30,0	100,0	10,0	51,0	9,50	44933
12,0	24,0	100,0	12,0	37,0	11,48	44935
12,0	36,0	130,0	12,0	61,0	11,48	44936
16,0	32,0	130,0	16,0	49,0	15,49	44938
16,0	48,0	150,0	16,0	81,0	15,49	44939
20,0	40,0	130,0	20,0	61,0	19,48	44941
20,0	60,0	150,0	20,0	101,0	19,48	44942
25,0	50,0	152,0	25,0	76,0	24,49	44944
25,0	75,0	170,0	25,0	126,0	24,49	44945


RE = 1/2 Cutting Diameter (DC)

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



43MCB

METRIC SERIES

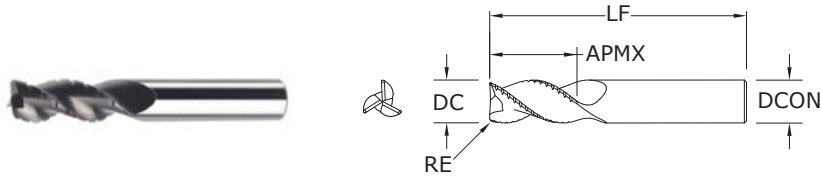

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Chip breakers reduce machine loads up to 15% for increased roughing feed rate capability
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
6,0	19,0	63,0	6,0	0,5	44298	44299
8,0	19,0	63,0	8,0	0,3	44300	44305
10,0	22,0	72,0	10,0	0,3	44301	44306
12,0	26,0	83,0	12,0	1,0	44302	44307
16,0	32,0	92,0	16,0	1,0	44303	44308
20,0	38,0	104,0	20,0	1,0	44304	44309

TOLERANCES (mm)

>6–10 DIAMETER

DC = +0,000/–0,009

DCON = h₆

RE = +0,000/–0,050

>10–18 DIAMETER

DC = +0,000/–0,011

DCON = h₆

RE = +0,000/–0,050

>18–20 DIAMETER

DC = +0,000/–0,013


DCON = h₆

RE = +0,000/–0,050

NON-FERROUS


For patent
information visit
www.ksptpatents.com

Series
43M, 43MB, 43MCR,
43ML, 43MLC,
43MCB
Metric



43ML, 43MLC, 43MCB		 Ae x DC		 Ap x DC		Vc (m/min)		DC • mm						
Metric	Hardness							3	6	10	12	16	20	25
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb	 Slot	1	≤ 1	490	RPM	52022	26011	15607	13005	9754	7803	6243	
					(392-588)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213	
					Feed (mm/min)	3371	4682	5618	5618	4869	4370	3980		
		 Profile	≤ 0.5	≤ 1.5	610	RPM	64762	32381	19429	16190	12143	9714	7771	
					(488-732)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213	
					Feed (mm/min)	4196	5828	6994	6994	6061	5440	4955		
		 HSM	≤ 0.05	≤ 2	1005	RPM	106698	53349	32009	26674	20006	16005	12804	
					(804-1206)	Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488	
					Feed (mm/min)	16131	21124	26888	26885	23046	21126	18726		
ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb	 Slot	1	≤ 1	185	RPM	19641	9820	5892	4910	3683	2946	2357	
					(148-222)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213	
					Feed (mm/min)	1273	1768	2121	2121	1838	1650	1503		
		 Profile	≤ 0.5	≤ 1.5	230	RPM	24418	12209	7326	6105	4578	3663	2930	
					(184-276)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213	
					Feed (mm/min)	1582	2197	2637	2637	2285	2051	1868		
		 HSM	≤ 0.05	≤ 2	380	RPM	40343	20172	12103	10086	7564	6052	4841	
					(304-456)	Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488	
					Feed (mm/min)	6099	7987	10166	10166	8714	7988	7081		
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc	 Slot	1	≤ 1	265	RPM	28134	14067	8440	7034	5275	4220	3376	
					(212-318)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175	
					Feed (mm/min)	1620	2025	2701	2532	2228	2026	1773		
		 Profile	≤ 0.5	≤ 1.5	330	RPM	35035	17518	10511	8759	6569	5255	4204	
					(264-396)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175	
					Feed (mm/min)	2018	2522	3363	3153	2775	2523	2207		
		 HSM	≤ 0.05	≤ 2	545	RPM	57861	28930	17358	14465	10849	8679	6943	
					(436-654)	Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400	
					Feed (mm/min)	7082	9373	11804	11976	10415	9721	8332		
COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc	 Slot	1	≤ 1	105	RPM	11148	5574	3344	2787	2090	1672	1338	
					(84-126)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175	
					Feed (mm/min)	642	803	1070	1003	883	803	702		
		 Profile	≤ 0.5	≤ 1.5	130	RPM	13802	6901	4141	3450	2588	2070	1656	
					(104-156)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175	
					Feed (mm/min)	795	994	1325	1242	1093	994	870		
		 HSM	≤ 0.05	≤ 2	215	RPM	22826	11413	6848	5706	4280	3424	2739	
					(172-258)	Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400	
					Feed (mm/min)	2794	3697	4656	4725	4109	3835	3287		
PLASTICS ABS, Polycarbonate, PVC, Polypropylene		 Slot	1	≤ 1	490	RPM	52022	26011	15607	13005	9754	7803	6243	
					(392-588)	Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350	
					Feed (mm/min)	5618	7490	9364	9363	8240	7491	6555		
		 Profile	≤ 0.5	≤ 1.5	610	RPM	64762	32381	19429	16190	12143	9714	7771	
					(488-732)	Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350	
					Feed (mm/min)	6994	9325	11657	11656	10258	9326	8160		
		 HSM	≤ 0.05	≤ 2	1005	RPM	106698	53349	32009	26674	20006	16005	12804	
					(804-1206)	Fz	0.082	0.216	0.453	0.552	0.640	0.733	0.800	
					Feed (mm/min)	26117	34567	43532	44169	38410	35210	30730		


Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fz} \times 3 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



47

FRACTIONAL SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

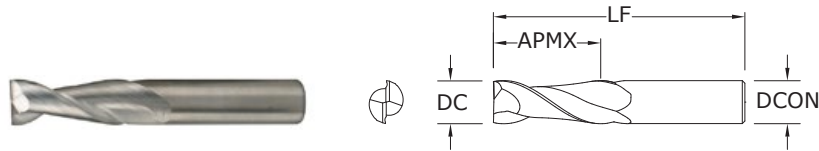

CUTTING DIAMETER DC	inch			EDP NO.	
	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/8	3/8	1-1/2	1/8	34620	34660
3/16	9/16	2	3/16	34621	34661
1/4	3/4	2-1/2	1/4	34622	34662
5/16	13/16	2-1/2	5/16	34623	34663
3/8	1	2-1/2	3/8	34624	34664
1/2	1-1/4	3-1/4	1/2	34625	34665
5/8	1-5/8	3-3/4	5/8	34626	34666
3/4	1-5/8	4	3/4	34627	34667
1	2	4-1/2	1	34628	34668

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆



3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

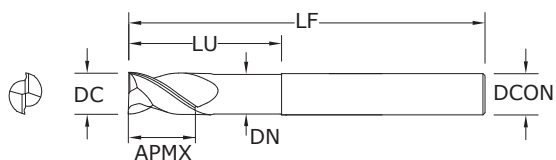

47L
FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

3/4–1 DIAMETER

DC = +0.0000/–0.00051


DCON = h_6

NON-FERROUS

For patent
information visit
www.ksptpatents.com

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	4	1/4	2-1/8	.235	34640	34678
3/8	1/2	4	3/8	2-1/8	.360	34641	34679
1/2	5/8	6	1/2	2-1/8	.485	34642	34680
1/2	5/8	6	1/2	3-3/8	.485	34643	34681
5/8	3/4	6	5/8	2-3/8	.610	34644	34682
5/8	3/4	6	5/8	3-3/8	.610	34645	34683
3/4	1	6	3/4	2-1/2	.735	34646	34684
3/4	1	6	3/4	3-3/8	.735	34647	34685


- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Necked design with blended diameter transitions provide clearance to reach
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



47B

FRACTIONAL SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

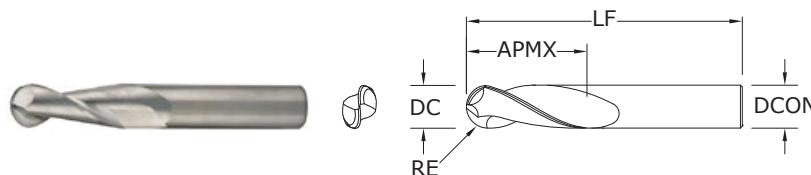

inch				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/8	3/8	1-1/2	1/8	34630	34669
3/16	9/16	2	3/16	34631	34670
1/4	3/4	2-1/2	1/4	34632	34671
5/16	13/16	2-1/2	5/16	34633	34672
3/8	1	2-1/2	3/8	34634	34673
1/2	1-1/4	3-1/4	1/2	34635	34674
5/8	1-5/8	3-3/4	5/8	34636	34675
3/4	1-5/8	4	3/4	34637	34676
1	2	4-1/2	1	34638	34677

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0005/–0.0005

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0005/–0.0005

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0005/–0.0005

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0005/–0.0005


NON-FERROUS

For patent
information visit
www.ksptpatents.com

47LB

FRACTIONAL SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Necked design with blended diameter transitions provide clearance to reach
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

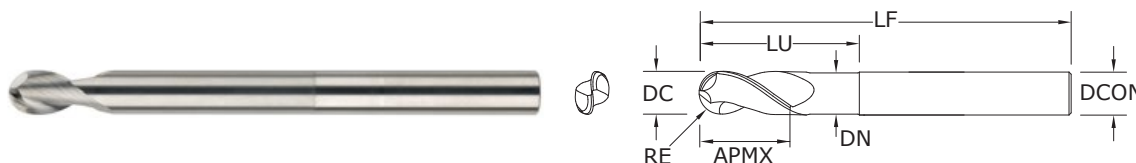

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	4	1/4	2-1/8	.235	34650	34686
3/8	1/2	4	3/8	2-1/8	.360	34651	34687
1/2	5/8	6	1/2	2-1/8	.485	34652	34688
1/2	5/8	6	1/2	3-3/8	.485	34653	34689
5/8	3/4	6	5/8	2-3/8	.610	34655	34691
5/8	3/4	6	5/8	3-3/8	.610	34654	34690
3/4	1	6	3/4	2-1/2	.735	34656	34693
3/4	1	6	3/4	3-3/8	.735	34657	34692

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0005/–0.0005

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0005/–0.0005

3/4–1 DIAMETER


DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0005/–0.0005

NON-FERROUS

For patent
information visit
www.ksptpatents.com



Series
47, 47B, 47L, 47LB
Fractional

Hardness

Ae x DC Ap x DC


Vc
(sfm)

DC • in

1/8 1/4 3/8 1/2 5/8 3/4 1

N	ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb	Slot	1	≤ 1	1600	RPM	48896	24448	16299	12224	9779	8149	6112
				1	≤ 1	(1280-1920)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
							Feed (ipm)	88	122	147	147	127	114	104
			Profile	≤ 0.5	≤ 1.5	2000	RPM	61120	30560	20373	15280	12224	10187	7640
				≤ 0.5	≤ 1.5	(1600-2400)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
							Feed (ipm)	110	153	183	183	159	143	130
			HSM	≤ 0.05	≤ 2	3300	RPM	100848	50424	33616	25212	20170	16808	12606
				≤ 0.05	≤ 2	(2640-3960)	Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
							Feed (ipm)	424	555	706	706	605	555	492
	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390	≤ 125 Bhn or ≤ 77 HRb	Slot	1	≤ 1	600	RPM	18336	9168	6112	4584	3667	3056	2292
				1	≤ 1	(480-720)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
							Feed (ipm)	33	46	55	55	48	43	39
			Profile	≤ 0.5	≤ 1.5	750	RPM	22920	11460	7640	5730	4584	3820	2865
				≤ 0.5	≤ 1.5	(600-900)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
							Feed (ipm)	41	57	69	69	60	53	49
			HSM	≤ 0.05	≤ 2	1240	RPM	37894	18947	12631	9474	7579	6316	4737
				≤ 0.05	≤ 2	(992-1488)	Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
							Feed (ipm)	159	208	265	265	227	208	185
	COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc	Slot	1	≤ 1	865	RPM	26434	13217	8811	6609	5287	4406	3304
				1	≤ 1	(692-1038)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
							Feed (ipm)	42	53	70	66	58	53	46
			Profile	≤ 0.5	≤ 1.5	1080	RPM	33005	16502	11002	8251	6601	5501	4126
				≤ 0.5	≤ 1.5	(864-1296)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
							Feed (ipm)	53	66	88	83	73	66	58
			HSM	≤ 0.05	≤ 2	1780	RPM	54397	27198	18132	13599	10879	9066	6800
				≤ 0.05	≤ 2	(1424-2136)	Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160
							Feed (ipm)	185	245	308	313	272	254	218
	COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc	Slot	1	≤ 1	345	RPM	10543	5272	3514	2636	2109	1757	1318
				1	≤ 1	(276-414)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
							Feed (ipm)	17	21	28	26	23	21	18
			Profile	≤ 0.5	≤ 1.5	430	RPM	13141	6570	4380	3285	2628	2190	1643
				≤ 0.5	≤ 1.5	(344-516)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
							Feed (ipm)	21	26	35	33	29	26	23
			HSM	≤ 0.05	≤ 2	710	RPM	21698	10849	7233	5424	4340	3616	2712
				≤ 0.05	≤ 2	(568-852)	Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160
							Feed (ipm)	74	98	123	125	108	101	87
N	PLASTICS ABS, Polycarbonate, PVC, Polypropylene		Slot	1	≤ 1	1600	RPM	48896	24448	16299	12224	9779	8149	6112
				1	≤ 1	(1280-1920)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
							Feed (ipm)	147	196	244	244	215	196	171
			Profile	≤ 0.5	≤ 1.5	2000	RPM	61120	30560	20373	15280	12224	10187	7640
				≤ 0.5	≤ 1.5	(1600-2400)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
							Feed (ipm)	183	244	306	306	269	244	214
			HSM	≤ 0.05	≤ 2	3300	RPM	100848	50424	33616	25212	20170	16808	12606
				≤ 0.05	≤ 2	(2640-3960)	Fz	0.0034	0.0090	0.0170	0.0230	0.0250	0.0275	0.0320
							Feed (ipm)	686	908	1143	1160	1008	924	807


Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 2 x rpm
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



47M

METRIC SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

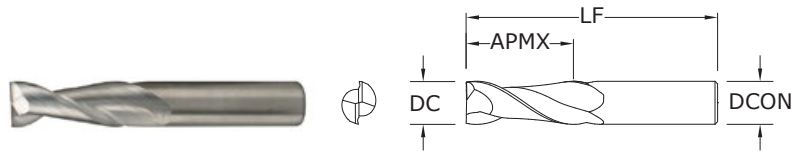

mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3,0	8,0	38,0	3,0	44550	44587
4,0	11,0	50,0	4,0	44551	44588
5,0	13,0	50,0	5,0	44552	44589
6,0	13,0	57,0	6,0	44553	44590
8,0	19,0	63,0	8,0	44554	44591
10,0	22,0	72,0	10,0	44555	44592
12,0	26,0	83,0	12,0	44556	44593
14,0	26,0	83,0	14,0	44557	44594
16,0	32,0	92,0	16,0	44558	44595
20,0	38,0	104,0	20,0	44559	44596
25,0	38,0	104,0	25,0	44560	44597

TOLERANCES (mm)

3 DIAMETER

DC = +0,000/-0,006
DCON = h₆

>3-6 DIAMETER

DC = +0,000/-0,008
DCON = h₆

>6-10 DIAMETER

DC = +0,000/-0,009
DCON = h₆

>10-18 DIAMETER


DC = +0,000/-0,012
DCON = h₆

>18-25 DIAMETER

DC = +0,000/-0,013
DCON = h₆

NON-FERROUS


For patent information visit
www.ksptpatents.com



47ML

METRIC SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Necked design with blended diameter transitions provide clearance to reach
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

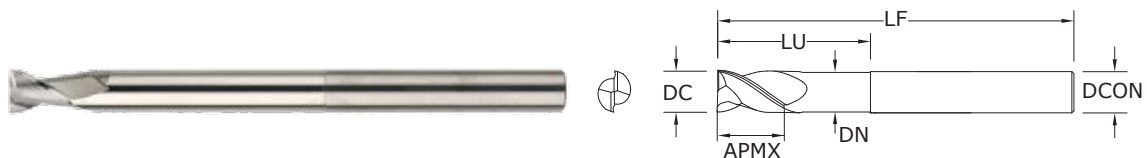

mm						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	Ti-NAMITE®-B (TiB ₂)
6,0	10,0	100,0	6,0	54,0	5,62	44561	44609
8,0	12,0	100,0	8,0	54,0	7,62	44562	44610
10,0	12,0	100,0	10,0	54,0	9,62	44563	44611
12,0	16,0	150,0	12,0	80,0	11,62	44564	44612
16,0	20,0	150,0	16,0	80,0	15,62	44565	44613
20,0	25,0	150,0	20,0	80,0	19,62	44566	44614

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,008
DCON = h₆

>6-10 DIAMETER

DC = +0,000/-0,009
DCON = h₆

>10-18 DIAMETER



DC = +0,000/-0,011
DCON = h₆

>18-20 DIAMETER

DC = +0,000/-0,013
DCON = h₆

NON-FERROUS

For patent information visit
www.ksptpatents.com

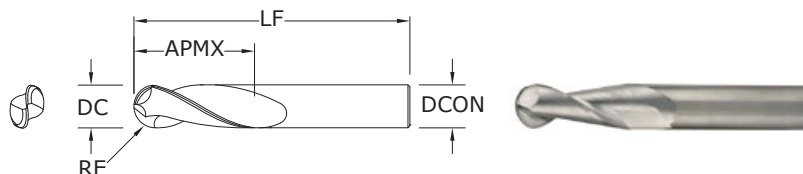

47MB
METRIC SERIES

TOLERANCES (mm)

3 DIAMETER

DC = +0,000/-0,006
DCON = h_6
RE = +0,0127/-0,0127

>3-6 DIAMETER

DC = +0,000/-0,008
DCON = h_6
RE = +0,0127/-0,0127

>6-10 DIAMETER

DC = +0,000/-0,009
DCON = h_6
RE = +0,0127/-0,0127

>10-18 DIAMETER

DC = +0,000/-0,012
DCON = h_6
RE = +0,0127/-0,0127

>18-25 DIAMETER

DC = +0,000/-0,013
DCON = h_6
RE = +0,0127/-0,0127



mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3,0	8,0	38,0	3,0	44570	44598
4,0	11,0	50,0	4,0	44571	44599
5,0	13,0	50,0	5,0	44572	44600
6,0	13,0	57,0	6,0	44573	44601
8,0	19,0	63,0	8,0	44574	44602
10,0	22,0	72,0	10,0	44575	44603
12,0	26,0	83,0	12,0	44576	44604
14,0	26,0	83,0	14,0	44577	44605
16,0	32,0	92,0	16,0	44578	44606
20,0	37,3	104,0	20,0	44579	44607
25,0	38,0	104,0	25,0	44580	44608

RE = 1/2 Cutting Diameter (DC)

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

NON-FERROUS

For patent information visit
www.ksptpatents.com

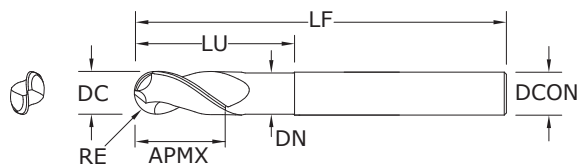

47MLB
METRIC SERIES

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,008
DCON = h_6
RE = +0,0127/-0,0127

>6-10 DIAMETER

DC = +0,000/-0,009
DCON = h_6
RE = +0,0127/-0,0127

>10-18 DIAMETER

DC = +0,000/-0,011
DCON = h_6
RE = +0,0127/-0,0127

>18-20 DIAMETER

DC = +0,000/-0,013
DCON = h_6
RE = +0,0127/-0,0127


mm						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	Ti-NAMITE®-B (TiB ₂)
6,0	10,0	100,0	6,0	54,0	5,62	44581	44615
8,0	12,0	100,0	8,0	54,0	7,62	44582	44616
10,0	12,0	100,0	10,0	54,0	9,62	44583	44617
12,0	16,0	150,0	12,0	80,0	11,62	44584	44618
16,0	20,0	150,0	16,0	80,0	15,62	44585	44619
20,0	25,0	150,0	20,0	80,0	19,62	44586	44620

RE = 1/2 Cutting Diameter (DC)

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Necked design with blended diameter transitions provide clearance to reach
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)


NON-FERROUS

For patent information visit
www.ksptpatents.com



Series 47M, 47MB, 47ML, 47MLB Metric					DC • mm										
Hardness		Ae x DC	Ap x DC	Vc (m/min)		3	6	10	12	16	20	25			
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb	 Slot	1	≤ 1	490	RPM	52022	26011	15607	13005	9754	7803	6243		
					(392-588)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213		
					Feed (mm/min)	2247	3121	3746	3745	3246	2913	2653			
		 Profile	≤ 0.5	≤ 1.5	610	RPM	64762	32381	19429	16190	12143	9714	7771		
					(488-732)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213		
					Feed (mm/min)	2797	3885	4663	4662	4041	3627	3303			
	≤ 125 Bhn or ≤ 77 HRb	 HSM	≤ 0.05	≤ 2	1005	RPM	106698	53349	32009	26674	20006	16005	12804		
					(804-1206)	Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488		
					Feed (mm/min)	10754	14083	17925	17924	15364	14084	12484			
		ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb	 Slot	1	≤ 1	185	RPM	19641	9820	5892	4910	3683	2946	2357
							(148-222)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
							Feed (mm/min)	848	1178	1414	1414	1226	1100	1002	
 Profile	≤ 0.5			≤ 1.5	230	RPM	24418	12209	7326	6105	4578	3663	2930		
					(184-276)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213		
					Feed (mm/min)	1055	1465	1758	1758	1524	1367	1245			
≤ 140 Bhn or ≤ 3 HRc	 HSM		≤ 0.05	≤ 2	380	RPM	40343	20172	12103	10086	7564	6052	4841		
					(304-456)	Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488		
					Feed (mm/min)	4066	5325	6778	6777	5809	5325	4720			
	COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass		≤ 140 Bhn or ≤ 3 HRc	 Slot	1	≤ 1	265	RPM	28134	14067	8440	7034	5275	4220	3376
							(212-318)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
							Feed (mm/min)	1080	1350	1801	1688	1485	1350	1182	
 Profile		≤ 0.5		≤ 1.5	330	RPM	35035	17518	10511	8759	6569	5255	4204		
					(264-396)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175		
					Feed (mm/min)	1345	1682	2242	2102	1850	1682	1472			
≤ 200 Bhn or ≤ 23 HRC		 HSM	≤ 0.05	≤ 2	545	RPM	57861	28930	17358	14465	10849	8679	6943		
					(436-654)	Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400		
					Feed (mm/min)	4721	6248	7869	7984	6943	6480	5555			
		COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRC	 Slot	1	≤ 1	105	RPM	11148	5574	3344	2787	2090	1672	1338
							(84-126)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
							Feed (mm/min)	428	535	713	669	589	535	468	
 Profile	≤ 0.5			≤ 1.5	130	RPM	13802	6901	4141	3450	2588	2070	1656		
					(104-156)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175		
					Feed (mm/min)	530	662	883	828	729	662	580			
≤ 200 Bhn or ≤ 23 HRC	 HSM		≤ 0.05	≤ 2	215	RPM	22826	11413	6848	5706	4280	3424	2739		
					(172-258)	Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400		
					Feed (mm/min)	1862	2465	3104	3150	2739	2556	2191			
	PLASTICS ABS, Polycarbonate, PVC, Polypropylene			 Slot	1	≤ 1	490	RPM	52022	26011	15607	13005	9754	7803	6243
							(392-588)	Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350
							Feed (mm/min)	3745	4994	6243	6242	5493	4994	4370	
 Profile		≤ 0.5		≤ 1.5	610	RPM	64762	32381	19429	16190	12143	9714	7771		
					(488-732)	Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350		
					Feed (mm/min)	4662	6217	7771	7771	6839	6217	5440			
		 HSM	≤ 0.05	≤ 2	1005	RPM	106698	53349	32009	26674	20006	16005	12804		
					(804-1206)	Fz	0.082	0.216	0.453	0.552	0.640	0.733	0.800		
					Feed (mm/min)	17412	23045	29022	29446	25607	23473	20487			

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 $rpm = (Vc \times 1000) / (DC \times 3.14)$
 $mm/min = Fz \times 2 \times rpm$
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

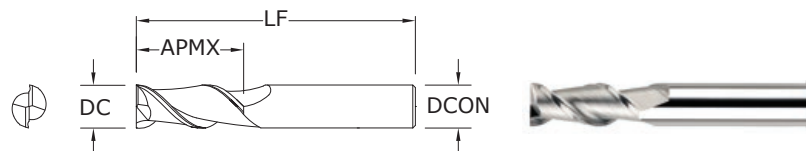

TOLERANCES (inch)

1/4–3/8 DIAMETER

 $DC = +0.0000/-0.00035$
 $DCON = h_6$

1/2–5/8 DIAMETER

 $DC = +0.0000/-0.00043$
 $DCON = h_6$


3/4–1 DIAMETER

 $DC = +0.0000/-0.00051$
 $DCON = h_6$
NON-FERROUS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED W/FLAT	Ti-NAMITE®-B (TiB ₂) W/FLAT	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/4	2-7/16	3/8	34501	34502	32033	32053
1/4	1-1/4	3-1/16	3/8	34503	34504	32034	32054
1/4	1-3/4	3-9/16	3/8	34505	34506	32035	32055
5/16	1-3/8	3-1/8	3/8	34507	34508	32036	32056
3/8	3/4	2-1/2	3/8	34509	34510	32037	32057
3/8	1-1/2	3-1/4	3/8	34511	34512	32038	32058
3/8	2-1/2	4-1/4	3/8	34513	34514	32039	32059
1/2	1-1/4	3-1/4	1/2	34515	34516	32040	32060
1/2	2	4	1/2	34517	34518	32041	32061
1/2	3	5	1/2	34519	34520	32042	32062
5/8	1-5/8	3-3/4	5/8	34521	34522	32043	32063
5/8	2-1/2	4-5/8	5/8	34523	34524	32044	32064
3/4	1-5/8	3-7/8	3/4	34525	34526	32045	32065
3/4	3	5-1/4	3/4	34527	34528	32046	32066
3/4	4	6-1/4	3/4	34529	34530	32047	32067
1	2	4-1/2	1	34531	34532	32048	32068
1	4	6-1/2	1	34533	34534	32049	32069

Contact your KSPT Sales Representative for more information on Corner Radius options.

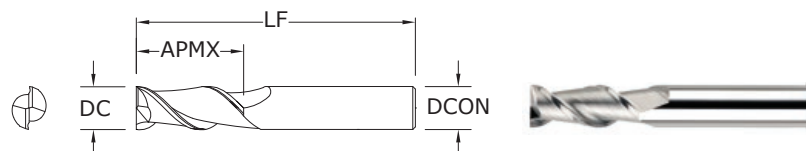

TOLERANCES (mm)

≤3 DIAMETER

 $DC = +0,000/-0,006$
 $DCON = h_6$

>3–6 DIAMETER

 $DC = +0,000/-0,008$
 $DCON = h_6$

>6–10 DIAMETER

 $DC = +0,000/-0,009$
 $DCON = h_6$

>10–18 DIAMETER

 $DC = +0,000/-0,011$
 $DCON = h_6$

>18–20 DIAMETER

 $DC = +0,000/-0,013$
 $DCON = h_6$
NON-FERROUS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED W/FLAT	UNCOATED	Ti-NAMITE®-B (TiB ₂) W/FLAT	Ti-NAMITE®-B (TiB ₂)
3,0	8,0	52,0	6,0	44505	49663	44506	49674
4,0	11,0	55,0	6,0	44509	49664	44510	49675
5,0	13,0	57,0	6,0	44513	49665	44514	49676
6,0	13,0	57,0	6,0	44517	49666	44518	49677
8,0	19,0	69,0	10,0	44521	49667	44522	49678
10,0	22,0	72,0	10,0	44525	49668	44526	49679
12,0	26,0	83,0	12,0	44529	49669	44530	49680
14,0	26,0	83,0	14,0	44533	49670	44534	49681
16,0	32,0	92,0	16,0	44537	49671	44538	49682
18,0	32,0	92,0	18,0	44541	49672	44542	49683
20,0	38,0	104,0	20,0	44545	49673	44546	49684

Contact your KSPT Sales Representative for more information on Corner Radius options.

- Polished ski land with primary and secondary flute wall design minimizes chip interference by directing chips away from secondary flute
- Circular land allows for increased control at various speed and feed rates ultimately reducing chatter
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

- Polished ski land with primary and secondary flute wall design minimizes chip interference by directing chips away from secondary flute
- Circular land allows for increased control at various speed and feed rates ultimately reducing chatter
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)


44

FRACTIONAL SERIES

44M


METRIC SERIES

FRACTIONAL Ski-Carb




Series 44	Fractional	Hardness			Vc (sfm)	DC • in								
			Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4	1		
N	ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb		1	≤ 1	1600 (1280-1920)	RPM	48896	24448	16299	12224	9779	8149	6112
							Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
							Feed (ipm)	88	122	147	147	127	114	104
				≤ 0.5	≤ 1.5	2000 (1600-2400)	RPM	61120	30560	20373	15280	12224	10187	7640
							Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
							Feed (ipm)	110	153	183	183	159	143	130
				≤ 0.05	≤ 2	3300 (2640-3960)	RPM	100848	50424	33616	25212	20170	16808	12606
							Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
							Feed (ipm)	424	555	706	706	605	555	492
	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb		1	≤ 1	600 (480-720)	RPM	18336	9168	6112	4584	3667	3056	2292
							Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
							Feed (ipm)	33	46	55	55	48	43	39
				≤ 0.5	≤ 1.5	750 (600-900)	RPM	22920	11460	7640	5730	4584	3820	2865
							Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
							Feed (ipm)	41	57	69	69	60	53	49
				≤ 0.05	≤ 2	1240 (992-1488)	RPM	37894	18947	12631	9474	7579	6316	4737
							Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
							Feed (ipm)	159	208	265	265	227	208	185
	COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc		1	≤ 1	865 (692-1038)	RPM	26434	13217	8811	6609	5287	4406	3304
							Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
							Feed (ipm)	42	53	70	66	58	53	46
				≤ 0.5	≤ 1.5	1080 (864-1296)	RPM	33005	16502	11002	8251	6601	5501	4126
							Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
							Feed (ipm)	53	66	88	83	73	66	58
			≤ 0.05	≤ 2	1780 (1424-2136)	RPM	54397	27198	18132	13599	10879	9066	6800	
						Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160	
						Feed (ipm)	185	245	308	313	272	254	218	
COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc		1	≤ 1	345 (276-414)	RPM	10543	5272	3514	2636	2109	1757	1318	
						Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070	
						Feed (ipm)	17	21	28	26	23	21	18	
			≤ 0.5	≤ 1.5	430 (344-516)	RPM	13141	6570	4380	3285	2628	2190	1643	
						Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070	
						Feed (ipm)	21	26	35	33	29	26	23	
			≤ 0.05	≤ 2	710 (568-852)	RPM	21698	10849	7233	5424	4340	3616	2712	
						Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160	
						Feed (ipm)	74	98	123	125	108	101	87	
PLASTICS ABS, Polycarbonate, PVC, Polypropylene			1	≤ 1	1600 (1280-1920)	RPM	48896	24448	16299	12224	9779	8149	6112	
						Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140	
						Feed (ipm)	147	196	244	244	215	196	171	
			≤ 0.5	≤ 1.5	2000 (1600-2400)	RPM	61120	30560	20373	15280	12224	10187	7640	
						Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140	
						Feed (ipm)	183	244	306	306	269	244	214	
			≤ 0.05	≤ 2	3300 (2640-3960)	RPM	100848	50424	33616	25212	20170	16808	12606	
						Fz	0.0034	0.0090	0.0170	0.0230	0.0250	0.0275	0.0320	
						Feed (ipm)	686	908	1143	1160	1008	924	807	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 2 x rpm
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



Series 44M Metric	Hardness			Vc (m/min)	DC • mm								
		Ae x DC	Ap x DC		3	6	10	12	16	20	25		
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb		1	≤ 1	490 (392-588)	RPM	52022	26011	15607	13005	9754	7803	6243
						Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
						Feed (mm/min)	2247	3121	3746	3745	3246	2913	2653
			≤ 0.5	≤ 1.5	610 (488-732)	RPM	64762	32381	19429	16190	12143	9714	7771
						Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
						Feed (mm/min)	2797	3885	4663	4662	4041	3627	3303
			≤ 0.05	≤ 2	1005 (804-1206)	RPM	106698	53349	32009	26674	20006	16005	12804
						Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488
						Feed (mm/min)	10754	14083	17925	17924	15364	14084	12484
ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb		1	≤ 1	185 (148-222)	RPM	19641	9820	5892	4910	3683	2946	2357
						Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
						Feed (mm/min)	848	1178	1414	1414	1226	1100	1002
			≤ 0.5	≤ 1.5	230 (184-276)	RPM	24418	12209	7326	6105	4578	3663	2930
						Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
						Feed (mm/min)	1055	1465	1758	1758	1524	1367	1245
			≤ 0.05	≤ 2	380 (304-456)	RPM	40343	20172	12103	10086	7564	6052	4841
						Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488
						Feed (mm/min)	4066	5325	6778	6777	5809	5325	4720
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc		1	≤ 1	265 (212-318)	RPM	28134	14067	8440	7034	5275	4220	3376
						Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
						Feed (mm/min)	1080	1350	1801	1688	1485	1350	1182
			≤ 0.5	≤ 1.5	330 (264-396)	RPM	35035	17518	10511	8759	6569	5255	4204
						Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
						Feed (mm/min)	1345	1682	2242	2102	1850	1682	1472
			≤ 0.05	≤ 2	545 (436-654)	RPM	57861	28930	17358	14465	10849	8679	6943
						Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400
						Feed (mm/min)	4721	6248	7869	7984	6943	6480	5555
COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc		1	≤ 1	105 (84-126)	RPM	11148	5574	3344	2787	2090	1672	1338
						Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
						Feed (mm/min)	428	535	713	669	589	535	468
			≤ 0.5	≤ 1.5	130 (104-156)	RPM	13802	6901	4141	3450	2588	2070	1656
						Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
						Feed (mm/min)	530	662	883	828	729	662	580
			≤ 0.05	≤ 2	215 (172-258)	RPM	22826	11413	6848	5706	4280	3424	2739
						Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400
						Feed (mm/min)	1862	2465	3104	3150	2739	2556	2191
PLASTICS ABS, Polycarbonate, PVC, Polypropylene			1	≤ 1	490 (392-588)	RPM	52022	26011	15607	13005	9754	7803	6243
						Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350
						Feed (mm/min)	3745	4994	6243	6242	5493	4994	4370
			≤ 0.5	≤ 1.5	610 (488-732)	RPM	64762	32381	19429	16190	12143	9714	7771
						Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350
						Feed (mm/min)	4662	6217	7771	7771	6839	6217	5440
			≤ 0.05	≤ 2	1005 (804-1206)	RPM	106698	53349	32009	26674	20006	16005	12804
						Fz	0.082	0.216	0.453	0.552	0.640	0.733	0.800
						Feed (mm/min)	17412	23045	29022	29446	25607	23473	20487


Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fz} \times 2 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



45

FRACTIONAL SERIES

- Polished ski land with primary and secondary flute wall design minimizes chip interference by directing chips away from secondary flute
- Circular land allows for increased control at various speed and feed rates ultimately reducing chatter
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

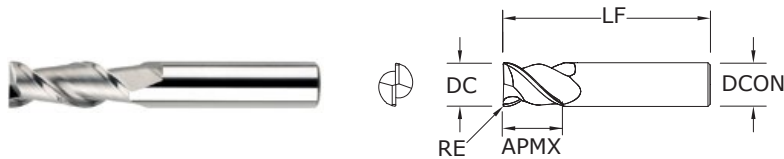

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.			
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED W/FLAT	UNCOATED	TI-NAMITE®-B (TiB ₂) W/FLAT	TI-NAMITE®-B (TiB ₂)
1/4	3/8	2-1/2	3/8	.010	91257	91250	91242	91235
5/16	7/16	2-1/2	3/8	.012	91258	91251	91243	91236
3/8	9/16	2-1/2	3/8	.015	91259	91252	91244	91237
1/2	3/4	3	1/2	.020	91260	91253	91245	91238
5/8	7/8	3-1/2	5/8	.025	91261	91254	91246	91239
3/4	1	4	3/4	.030	91262	91255	91247	91240
1	1-1/4	4	1	.040	91263	91256	91248	91241

Contact your KSPT representative for reach options.

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = $+0.0000/-0.00035$

DCON = h_6

RE = $+0.0000/-0.0020$

1/2–5/8 DIAMETER

DC = $+0.0000/-0.00043$

DCON = h_6

RE = $+0.0000/-0.0020$

3/4–1 DIAMETER


DC = $+0.0000/-0.00051$

DCON = h_6

RE = $+0.0000/-0.0020$

NON-FERROUS

For patent
information visit
www.ksptpatents.com

Series 45 Fractional	Hardness			Vc (sfm)	DC • in							
		Ae x DC	Ap x DC		1/4	3/8	1/2	5/8	3/4	1		
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb		1	≤ 1	1600	RPM	24448	16299	12224	9779	8149	6112
					(1280-1920)	Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
					Feed (ipm)	122	147	147	127	114	104	
			≤ 0.5	≤ 1.5	2000	RPM	30560	20373	15280	12224	10187	7640
					(1600-2400)	Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
					Feed (ipm)	153	183	183	159	143	130	
			≤ 0.05	≤ 2	3300	RPM	50424	33616	25212	20170	16808	12606
					(2640-3960)	Fz	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
					Feed (ipm)	555	706	706	605	555	492	
ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb		1	≤ 1	600	RPM	9168	6112	4584	3667	3056	2292
					(480-720)	Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
					Feed (ipm)	46	55	55	48	43	39	
			≤ 0.5	≤ 1.5	750	RPM	11460	7640	5730	4584	3820	2865
					(600-900)	Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
					Feed (ipm)	57	69	69	60	53	49	
			≤ 0.05	≤ 2	1240	RPM	18947	12631	9474	7579	6316	4737
					(992-1488)	Fz	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
					Feed (ipm)	208	265	265	227	208	185	
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc		1	≤ 1	865	RPM	13217	8811	6609	5287	4406	3304
					(692-1038)	Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
					Feed (ipm)	53	70	66	58	53	46	
			≤ 0.5	≤ 1.5	1080	RPM	16502	11002	8251	6601	5501	4126
					(864-1296)	Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
					Feed (ipm)	66	88	83	73	66	58	
			≤ 0.05	≤ 2	1780	RPM	27198	18132	13599	10879	9066	6800
					(1424-2136)	Fz	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160
					Feed (ipm)	245	308	313	272	254	218	
COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc		1	≤ 1	345	RPM	5272	3514	2636	2109	1757	1318
					(276-414)	Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
					Feed (ipm)	21	28	26	23	21	18	
			≤ 0.5	≤ 1.5	430	RPM	6570	4380	3285	2628	2190	1643
					(344-516)	Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
					Feed (ipm)	26	35	33	29	26	23	
			≤ 0.05	≤ 2	710	RPM	10849	7233	5424	4340	3616	2712
					(568-852)	Fz	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160
					Feed (ipm)	98	123	125	108	101	87	
PLASTICS ABS, Polycarbonate, PVC, Polypropylene			1	≤ 1	1600	RPM	24448	16299	12224	9779	8149	6112
					(1280-1920)	Fz	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
					Feed (ipm)	196	244	244	215	196	171	
			≤ 0.5	≤ 1.5	2000	RPM	30560	20373	15280	12224	10187	7640
					(1600-2400)	Fz	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
					Feed (ipm)	244	306	306	269	244	214	
			≤ 0.05	≤ 2	3300	RPM	50424	33616	25212	20170	16808	12606
					(2640-3960)	Fz	0.0090	0.0170	0.0230	0.0250	0.0275	0.0320
					Feed (ipm)	908	1143	1160	1008	924	807	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 2 x rpm
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

High Performance Drills



Hole Making

HIGH PERFORMANCE DRILLS	SERIES	DESCRIPTION	APPLICATION		PAGE	S&F PAGE
			● PREFERRED	○ ALTERNATE		
Hi-PerCarb®	142P (3XD)	2 Flute Internal Coolant 4 Margin 3XD	●		188	202
	142P (5XD)	2 Flute Internal Coolant 4 Margin 5XD	●		191	202
	142P (8XD)	2 Flute Internal Coolant 4 Margin 8XD	●		194	202
	142P (12XD)	2 Flute Internal Coolant 4 Margin 12XD	●		198	202
	143M-S (3XD)	2 Flute Internal Coolant 2 Margin 3XD	●	○	206	214
	143M-S (5XD)	2 Flute Internal Coolant 2 Margin 5XD	●	○	210	214
	141K (5xD)	3 Flute Internal Coolant 3 Margin 5xD	●		218	222
	131N (3xD)	3 Flute External Coolant 3 Margin 3xD		●	223	231
	131N (5xD)	3 Flute External Coolant 3 Margin 5xD		●	227	231
	135 (3xD)	2 Flute External Coolant 4 Margin 3xD	●	○	234	240
	135 (5xD)	2 Flute External Coolant 4 Margin 5xD	●	○	244	250
	146U (3xD)	2 Flute Internal Coolant 4 Margin 3xD	●	○	254	268
	146U (5xD)	2 Flute Internal Coolant 4 Margin 5xD	●	○	259	268
	136U (2xD)	2 Flute External Coolant 4 Margin 2xD	●	○	264	268
CFRP 8 Facet	120	2 Flute External Coolant 4 Margin CFRP		●	232	233

Speed & Feed Recommendations listed after each series

Taladrado

BROCAS DE ALTO RENDIMIENTO	SERIE	DESCRIPCIÓN	APLICACIÓN		PÁGINA	S&F PÁGINA
			● PREFERIDO	○ ALTERNATIVO		
Hi-PerCarb®	142P (3XD)	2 filos, refrigeración interna, 4 margen, 3XD	●		188	202
	142P (5XD)	2 filos, refrigeración interna, 4 margen, 5XD	●		191	202
	142P (8XD)	2 filos, refrigeración interna, 4 margen, 8XD	●		194	202
	142P (12XD)	2 filos, refrigeración interna, 4 margen, 12XD	●		198	202
	143M-S (3XD)	2 filos, refrigeración interna, 2 margen, 3XD	●	●	206	214
	143M-S (5XD)	2 filos, refrigeración interna, 2 margen, 5XD	●	●	210	214
	141K (5xD)	3 filos, refrigeración interna, 3 margen, 5xD	●		218	222
	131N (3xD)	3 filos, refrigeración externa, 3 margen, 3xD		●	223	231
	131N (5xD)	3 filos, refrigeración externa, 3 margen, 5xD		●	227	231
	135 (3xD)	2 filos, refrigeración externa, 4 margen, 3xD	●	●	234	240
	135 (5xD)	2 filos, refrigeración externa, 4 margen, 5xD	●	●	244	250
	146U (3xD)	2 filos, refrigeración interna, 4 margen, 3xD	●	●	254	268
	146U (5xD)	2 filos, refrigeración interna, 4 margen, 5xD	●	●	259	268
	136U (2xD)	2 filos, refrigeración externa, 4 margen, 2xD	●	●	264	268
				●		
De 8 caras CFRP	120	2 filos, refrigeración externa, 4 margen, CFRP		●	232	233

Recomendaciones de velocidades y avances mostradas tras cada serie

Outils de perçage

FORETS HAUTE PERFORMANCE	SÉRIES	DESCRIPTION	APPLICATION		PAGE	S&F PAGE
			● PRÉFÉRÉ	○ ALTERNER		
Hi-PerCarb®	142P (3XD)	2 dents trou d'huile 4 listel 3XD	●		188	202
	142P (5XD)	2 dents trou d'huile 4 listel 5XD	●		191	202
	142P (8XD)	2 dents trou d'huile 4 listel 8XD	●		194	202
	142P (12XD)	2 dents trou d'huile 4 listel 12XD	●		198	202
	143M-S (3XD)	2 dents trou d'huile 2 listel 3XD	●	●	206	214
	143M-S (5XD)	2 dents trou d'huile 2 listel 5XD	●	●	210	214
	141K (5xD)	3 dents refroidissement interne à 3 listel 5xD	●		218	222
	131N (3xD)	3 dents refroidissement externe à 3 listel 3xD		●	223	231
	131N (5xD)	3 dents refroidissement externe à 3 listel 5xD		●	227	231
	135 (3xD)	2 dents refroidissement externe à 4 listel 3xD	●	●	234	240
	135 (5xD)	2 dents refroidissement externe à 4 listel 5xD	●	●	244	250
	146U (3xD)	2 dents refroidissement interne à 4 listel 3xD	●	●	254	268
	146U (5xD)	2 dents refroidissement interne à 4 listel 5xD	●	●	259	268
	136U (2xD)	2 dents refroidissement externe à 4 listel 2xD	●	●	264	268
				●		
CFRP à 8 facettes	120	2 dents refroidissement externe à 4 listel CFRP		●	232	233


Recommandations de vitesse et avance indiquées après chaque série

Bohren

HOCHLEISTUNGS- BOHRER	SERIE	BESCHREIBUNG	ANWENDUNG		SEITE	S&F SEITE
			● BEVORZUGT	○ WECHSELN		
Hi-PerCarb®	142P (3XD)	Doppelfasenbohrer mit 4 Schneiden und Innenkühlung, 3xD			188	202
	142P (3XD)	Doppelfasenbohrer mit 4 Schneiden und Innenkühlung, 5xD			191	202
	142P (3XD)	Doppelfasenbohrer mit 4 Schneiden und Innenkühlung, 8xD			194	202
	142P (12XD)	Doppelfasenbohrer mit 4 Schneiden und Innenkühlung, 12xD			198	202
	143M-S (3XD)	2 Einfasenbohrer mit 2 Schneiden und Innenkühlung, 3xD			206	214
	143M-S (5XD)	2 Einfasenbohrer mit 2 Schneiden und Innenkühlung, 5xD			210	214
	141K (5xD)	Dreifasenbohrer 5xD mit 3 Schneiden und Innenkühlung			218	222
	131N (3xD)	Dreifasenbohrer 3xD mit 3 Schneiden und Außenkühlung			223	231
	131N (5xD)	Dreifasenbohrer 5xD mit 3 Schneiden und Außenkühlung			227	231
	135 (3xD)	Doppelfasenbohrer 3xD mit 4 Schneiden und Außenkühlung		    	234	240
	135 (5xD)	Doppelfasenbohrer 5xD mit 4 Schneiden und Außenkühlung		    	244	250
	146U (3xD)	Doppelfasenbohrer 3xD mit 4 Schneiden und Innenkühlung		    	254	268
	146U (5xD)	Doppelfasenbohrer 5xD mit 4 Schneiden und Innenkühlung		    	259	268
	136U (2xD)	Doppelfasenbohrer 2xD mit 4 Schneiden und Außenkühlung		    	264	268
CFRP 8 Facet	120	Doppelfasenbohrer CFRP mit 4 Schneiden und Außenkühlung			232	233

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

Drill Matrix

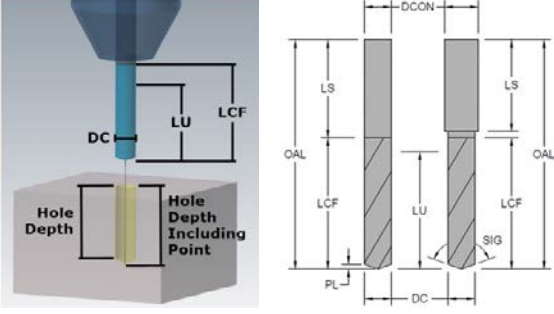Item				Preferred Cut Type for Series ★ Best ☆ Better ○ Good (blank) Not Recommended																		
				Material																		
				Low Carbon ≤ 20 HRC	Medium Carbon, Alloy 20 to 35 HRC	High Carbon, Alloy 35 to 45 HRC	Ferritic & Martensitic ≤ 45 HRC	Austenitic & Duplex ≤ 25 HRC	Precipitation Hardened ≤ 45 HRC	Low Alloy, Grey, Ductile ≤ 25 HRC	Med-High Alloy, Nodular 25 to 35 HRC	High Alloy, Nodular ≥ 35 HRC	Aluminum Alloys	Copper Alloys	Plastics, Composites	Titanium Alloys ≤ 45 HRC	Iron, Nickel, Cobalt Alloys ≤ 45 HRC	Refractory Alloys, Mo, Ta, W ≤ 35 HRC	High Carbon, Med Alloy 45 to 50 HRC	Tool, Mold & Die 45 to 55 HRC	Tool, Mold & Die 55 to 65 HRC	
Name / Series	Tool Type	Coolant Delivery	Page	Steel			Stainless Steel			Cast Iron			Non Ferrous			HRSA			Hard Steel			
Hi-PerCarb® 142P	High Performance Drill	Internal	188	★	★	★	☆	☆	☆	☆	☆	☆	☆	★		☆	☆	☆	★	☆	☆	
Hi-PerCarb® 143M-S	High Performance Drill	Internal	206	☆			★	★	★	☆	☆	☆	○	★		★	★	★				
Hi-PerCarb® 141K	High Performance Drill	Internal	218	☆	☆	☆	○		○	★	★	★	☆	☆		○		○				
Hi-PerCarb® 131N	High Performance Drill	External	223							○			★	★	☆	○						
Series 120	High Performance Drill	External	232												★							
Hi-PerCarb® 135	High Performance Drill	External	234	★	★	★	★	☆	★	☆	☆	☆	○	○		☆	☆	☆	★	☆	☆	
Hi-PerCarb® 146U	High Performance Drill	Internal	254	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
Hi-PerCarb® 136U	High Performance Drill	External	264	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
Series 120	High Performance Drill	External	232												★							
Series 106	General Application Drill	External	348	○	○	○						☆							★	★	☆	
Series 101	General Application Drill	External	336	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○				
Series 103	General Application Drill	External	352	○	○	○	○	○	○	○	☆	☆	○			○	○	○				
Series 108	General Application Drill	External	341	★	☆	☆	☆	☆	☆	☆	☆	☆		○	○	☆	☆	☆				
Series 301, 301M	Drill & Countersink	External	358	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	○	○	☆	○	○	
Series 601	Countersink	External	364	○	○	○	○	★	○	☆	☆	☆	★	☆	○	○	○	○				
Series 603	Countersink	External	367	☆	☆	☆	☆	★	☆	★	☆	☆	★	★	☆	☆	☆	☆	○			
Series 606	Countersink	External	370	★	★	★	★	★	★	★	★	★	○	★	★	★	★	★	☆	☆	○	
Series 200	Reamer	External	374	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	○	
Series 201M	Reamer	External	378	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	○	

Drill Matrix


	Attributes										
	Material hardness and machinability affect speed, feed, and cut depths. For dimensional and finish quality, a low TIR of the tool-holder assembly in the machine is critical: less than 0.1% drill diameter is preferred. Spot drilling is not necessary in most situations if the drilling surface is machined flat ; spot drill point angle should be greater than drill point angle. Liquid coolant (internal or external) such as oil based or synthetic is highly recommended for all drilling applications. For proper cooling, lubrication and chip evacuation, ensure the coolant is supplied throughout the entire depth of the hole. When liquid coolant cannot be applied for applications such as plastics or composites, clear the swarf with air or vacuum. Depending on material machinability, a peck cycle may be necessary for external coolant drills beyond 2x or 3x depths.										
	Diameter Range inch	Diameter Range mm	Tolerance	Length	Point Angle °	Self Centering	Flute Count	Margins	Helix Angle °	Shank	Coating
	0.1250 0.7500	3,00 16,00	DC + / +	3x, 5x, 8x, 12x	137	yes	2	4	30	Common	Ti-NAMITE®-X
	0.1250 0.7500	3,00 16,00	DC + / +	3x, 5x	136	yes	2	2	30	Common	Ti-NAMITE®-A
	0.1250 0.7500	3,00 16,00	DC + / +	5x	124	yes	3	3	30	Common	Ti-NAMITE®-X
	0.1250 0.7500	3,00 16,00	DC + / +	3x, 5x	124	yes	3	3	30	Common	Ti-NAMITE®-B
	0.0980 0.5000	2,70 12,00	DC 0 / -	3x	145, 90	yes	2	4	20	Common	Di-NAMITE®
	0.0156 0.9219	1,25 22,00	DC + / +	3x, 5x	145	yes	2	4	32	Common	Ti-NAMITE®-A
	0.1250 0.8125	3,00 20,50	DC + / +	3x, 5x	180	yes	2	4	15	Common	Ti-NAMITE®-X
	0.0625 0.8125	1,50 20,50	DC + / +	2x	180	yes	2	4	15	Common	Ti-NAMITE®-X
	0.0980 0.5000	2,70 12,00	DC + / -	3x	145, 90	yes	2	4	20	Common	Di-Namite®
	0.0400 0.5000	1,00 12,00	DC 0 / -	3x	140	yes	2	2	0	Straight	Ti-NAMITE®-A or uncoated
	0.0135 0.5000	0,70 12,00	DC 0 / -	5x	118	no	2	2	20	Straight	Ti-NAMITE®-A or uncoated
	0.1065 0.7500	3,00 20,00	DC 0 / -	3x	150	yes	3	3	30	Straight	Ti-NAMITE®-A or uncoated
	-	0,50 16,00	DC 0 / -	3x	118	yes	2	2	20	Straight	Ti-NAMITE®-A or uncoated
	0.0250 0.2188	0,50 5,00	DC + / 0	spot	118, 60	yes	2	2	0	Straight	Ti-NAMITE®-A or uncoated
	0.1250 1.0000	-	DC + / -	spot	60, 82, or 90	yes	1	-	0	Common	uncoated
	0.1250 1.0000	-	DC + / -	spot	60, 82, or 90	yes	3	-	0	Common	uncoated
	0.1250 1.0000	-	DC + / -	spot	60, 82, or 90	yes	6	6	0	Common	uncoated
	0.0469 0.5000	-	DC + / 0	varies	-	-	4 or 6	4 or 6	0	Straight	uncoated
	-	1,00 10,00	DC + / 0	varies	-	-	4 or 6	4 or 6	0	Straight	uncoated

Drilling Operations



Coolant Recommendations

- Coolant works to mobilize chips away from the cut zone, reduce the heat created during the cutting process and minimize friction.
- It is important to optimize the coolant pressure and position in order to gain the full benefits coolant offers the cutting process.
- Proper coolant application promotes greater operating parameters, greater material removal rates, improved surface finishes, predictable tool life, reduced power consumption and reduced cycle times.
- Pressure is important, but more importantly is consistency of the pressure and application onto the tool; intermittent cooling of carbide leads to thermal stressing of the material and the formation of "microcracks."
- Proper cleanliness and filtration of coolants is important in order for the coolant to maintain its beneficial properties, and also to avoid a reduction in coolant pressure or the possibility of clogging the coolant channels in coolant through drills.


RECOMMENDED COOLANT PRESSURE
BY DIAMETER – psi

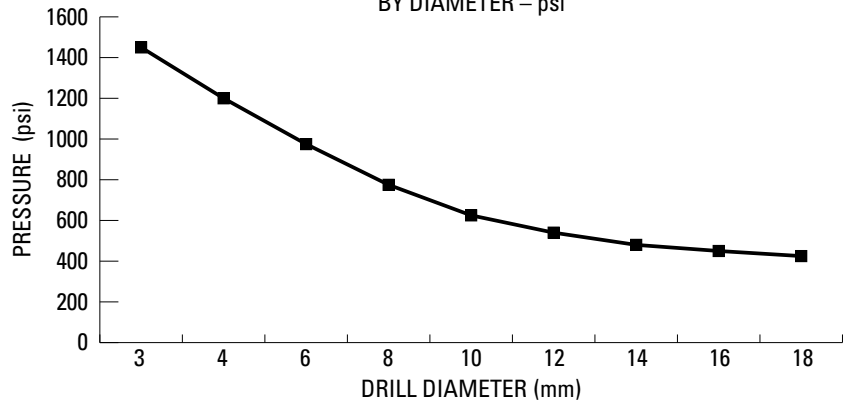

RECOMMENDED COOLANT PRESSURE
BY DIAMETER – bar

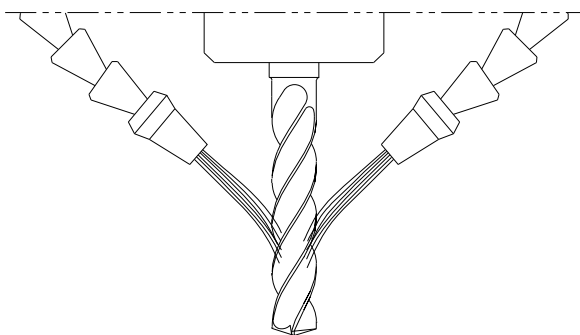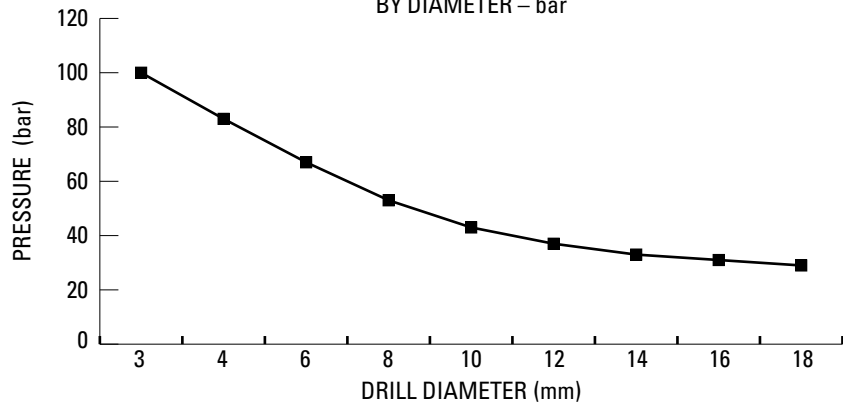

LARGE TIP – LOW VELOCITY
NO COVERAGE AT MAXIMUM DEPTH



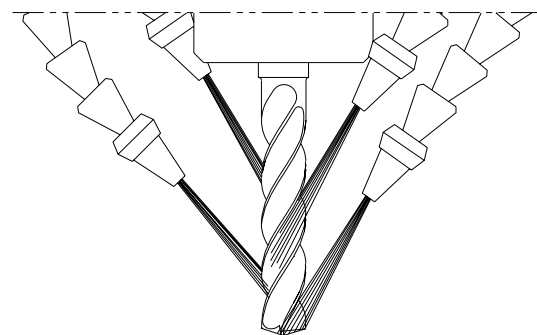


SMALL TIP – HIGH VELOCITY
COMPLETE COVERAGE


- Reducing the nozzle size helps maximize the cooling benefits of the unique double margin design on the Hi-PerCarb drill by increasing velocity. Aim the nozzles in line with the secondary flute located between the two margins as well as the flute for best results.

Recomendaciones en operacion de taladrado

- El líquido de refrigeración actúa movilizandando las virutas fuera de la zona de corte, disminuyendo el calor generado durante el proceso de corte y minimizando la fricción.
- Es importante optimizar la presión de la refrigeración y la posición para poder obtener todos los beneficios del refrigerante durante el proceso de corte.
- Una aplicación apropiada de la refrigeración fomenta mayores parámetros de operación, mayores índices de eliminación de material, acabados de superficie mejorados, una duración de la herramienta más predecible, bajo consumo de energía y un tiempo de ciclo reducido.
- La presión del refrigerante es importante, pero lo es más el flujo continuo aplicado a la herramienta; una refrigeración intermitente en el carburo puede ocasionar un estrés térmico en el material y la formación de "micro-fisuras".
- Una limpieza y filtración adecuadas son importantes para que el refrigerante mantenga sus propiedades y beneficios; por otra parte, se evita la reducción de la presión o la posibilidad de obstruir los canales de refrigeración de la broca.

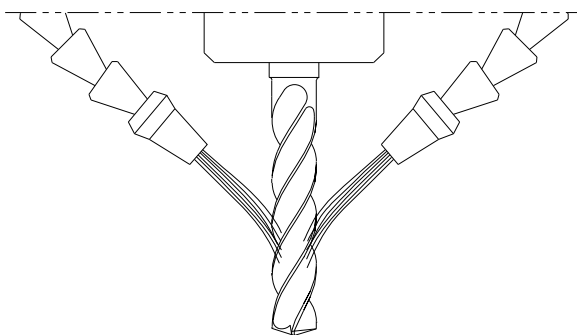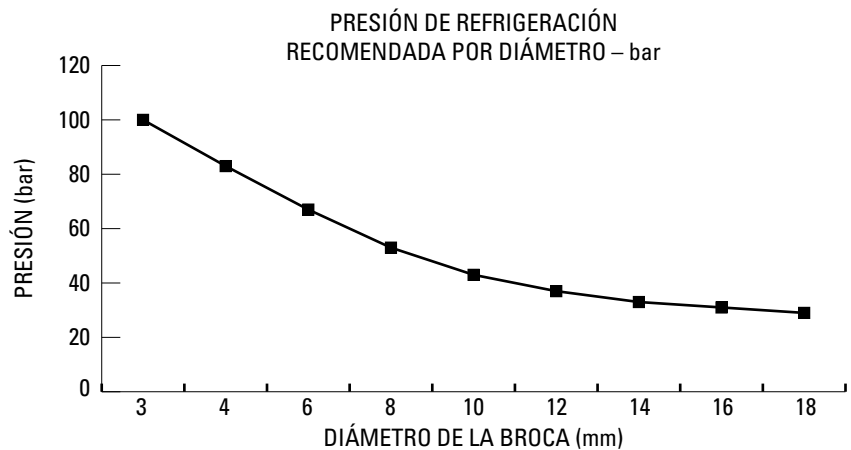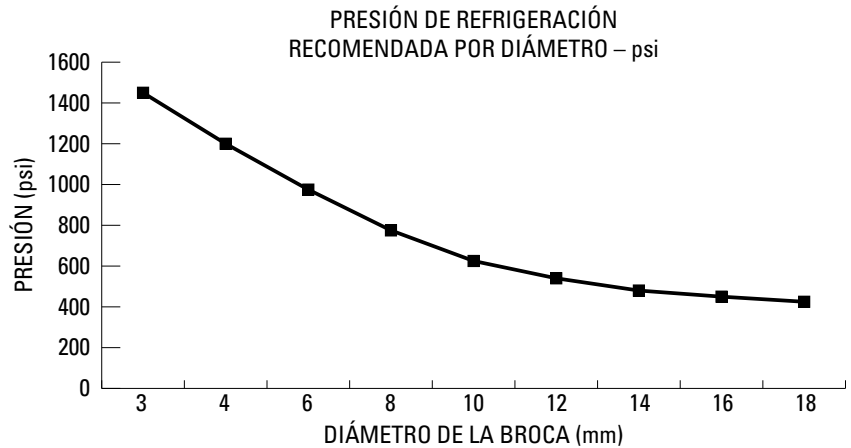

PUNTA GRANDE – BAJA VELOCIDAD
SIN ALCANCE A PROFUNDIDAD MÁXIMA

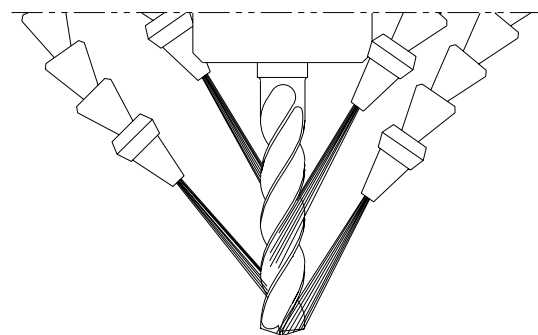




PUNTA PEQUEÑA – ALTA VELOCIDAD
COMPLETO ALCANCE

- Reducir el tamaño de la boquilla ayuda a maximizar los beneficios de refrigeración del exclusivo diseño de doble margen de la broca. Hi-PerCarb aumentando la velocidad. Coloque las boquillas en línea con el segundo filo que se encuentra entre los dos márgenes y también el filo para obtener mejores resultados.


Opérations de perçage

Recommandations en matière de refroidissement

- Le liquide de refroidissement sert à éloigner les copeaux de la zone de coupe, à réduire la chaleur dégagée durant la coupe et à minimiser la friction.
- Il est important d'optimiser la pression et la position du réfrigérant pour en retirer les bénéfices maximums durant la coupe.
- L'application adéquate de réfrigérant se traduit par des paramètres opératoires supérieurs, des taux d'élimination supérieurs des matériaux, de plus belles finitions des surfaces, une durée de vie des outils prévisible, moins de consommation d'énergie et des temps de cycle réduits.
- La pression est importante, mais une pression régulière et l'application sur l'outil sont des facteurs encore plus importants ; le refroidissement intermittent du carbure se traduit par des contraintes thermiques pour le matériau et la formation de microfissures.
- La propreté et le filtrage adéquats des réfrigérants sont importants pour qu'ils conservent leur propriétés, mais aussi pour éviter la réduction de pression du réfrigérant ou le risque d'obturation des conduits à réfrigérant dans les perceuses à réfrigérant intégré.

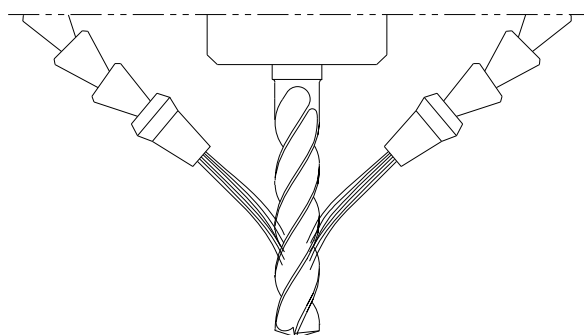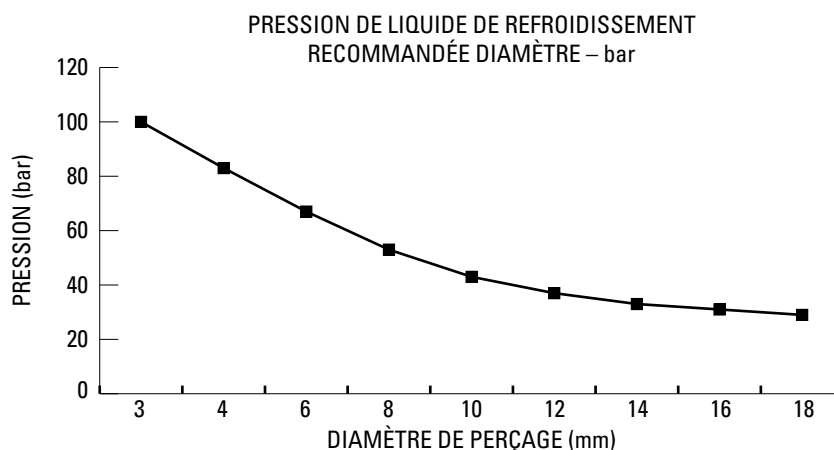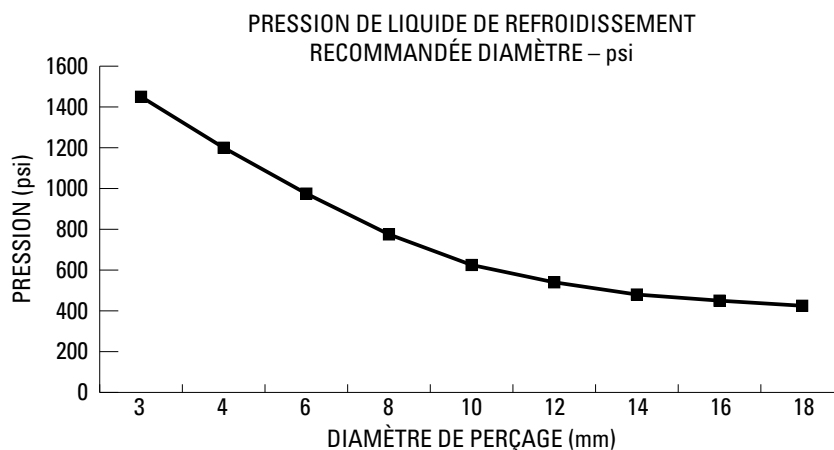

POINTE LARGE – BASSE VITESSE
PAS DE COUVERTURE À LA PROFONDEUR MAXIMUM



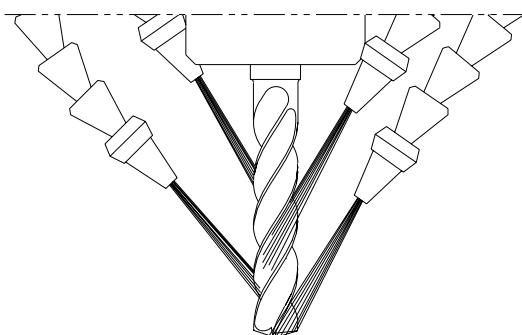


POINTE FINE – GRANDE VITESSE
COUVERTURE COMPLÈTE


- La réduction de la taille de l'embout permet de maximiser les bienfaits du refroidissement du concept à double listel original de la perceuse Hi-PerCarb en augmentant la vitesse. Pour les meilleurs résultats, orientez les embouts dans l'axe de la goujure secondaire située entre les deux listels, de même que la goujure primaire.

Bohrarbeiten Kühlmittlempfehlungen

- Kühlmittel dienen dazu, die Späne aus dem Schneidenbereich zu entfernen, die beim Schneiden erzeugte Wärme abzutransportieren und die Reibung zu verringern.
- Es kommt darauf an, den Kühlschmiermitteldruck und die Zufuhr zu optimieren, um alle Vorteile beim Bohren nutzen zu können.
- Der richtige Kühlschmiermitteleinsatz ermöglicht höhere Schnittparameter, höheren Materialabtrag, bessere Oberflächengüte, vorhersehbare Standzeiten und geringere Leistungsaufnahme und Laufzeiten.
- Der Druck ist wichtig, aber wichtiger ist dessen Konstanz und die Zufuhr zum Werkzeug. Unterbrochene Kühlung des Hartmetalls führt zur thermischen Belastung und Bildung von "Mikrorissen".
- Kühlmittel sind sauber zu halten und zu filtern, damit die Qualität des Kühlmittels erhalten bleibt und der Kühlmitteldruck durch Verstopfung der Kühlmittelkanäle im Bohrer nicht absinkt.

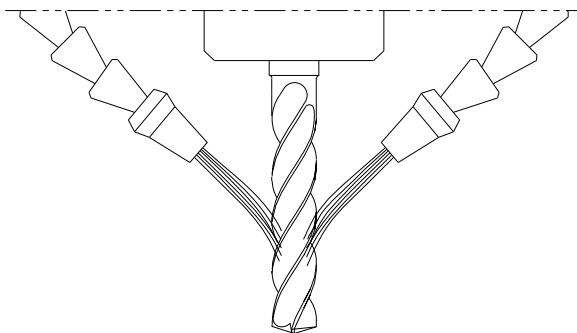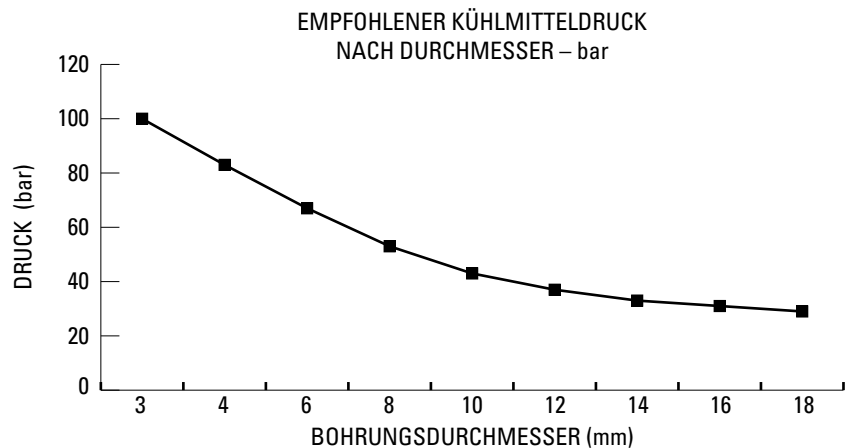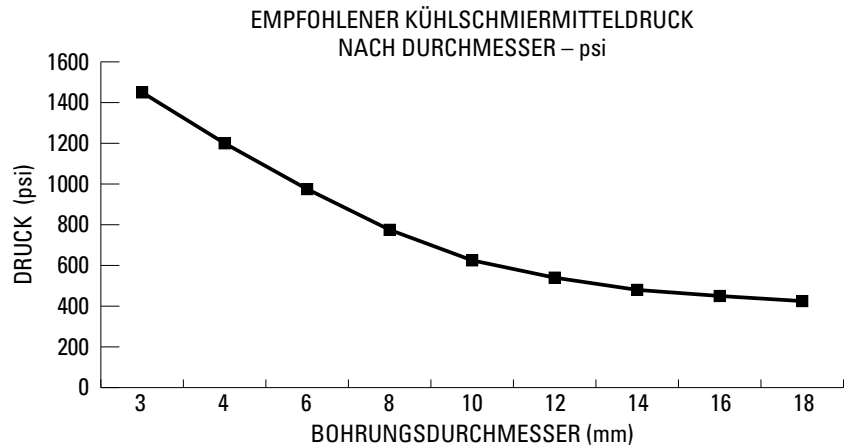

BREITE QUERSCHNEIDE – GERINGE DREHZAHL
KEINE VOLLSTÄNDIGE BENETZUNG BEI MAX. BOHRUNGSTIEFE

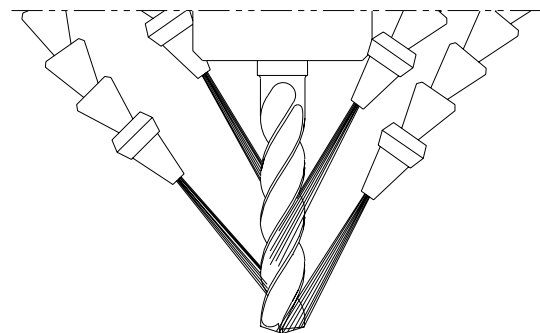

SCHMALE QUERSCHNEIDE – HOHE DREHZAHL
VOLLSTÄNDIGE BENETZUNG

- Durch Verringern der Düsengröße können die vorteilhaften Eigenschaften der Doppelfase genutzt werden, um die Drehzahl des Hi-PerCarb-Bohrers zu steigern. Richten Sie die Düsen auf die Nebennut zwischen beiden Fasen sowie auf die Schneiden aus, um beste Ergebnisse zu erzielen.




3xD



142P 3xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRc (475 Bhn)

		inch & mm						EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.1181	3,000 mm		6,0	62,0	20,0	15,0	36,0	66400
0.1220	3,100 mm		6,0	62,0	20,0	15,0	36,0	66401
0.1250	3,175 mm	1/8	6,0	62,0	20,0	15,0	36,0	56400
0.1260	3,200 mm		6,0	62,0	20,0	15,0	36,0	66402
0.1299	3,300 mm		6,0	62,0	20,0	15,0	36,0	66403
0.1339	3,400 mm		6,0	62,0	20,0	15,0	36,0	66404
0.1360	3,454 mm	#29	6,0	62,0	20,0	15,0	36,0	56401
0.1378	3,500 mm		6,0	62,0	20,0	15,0	36,0	66405
0.1406	3,571 mm	9/64	6,0	62,0	20,0	15,0	36,0	56402
0.1417	3,600 mm		6,0	62,0	20,0	15,0	36,0	66406
0.1457	3,700 mm		6,0	62,0	20,0	15,0	36,0	66407
0.1496	3,800 mm		6,0	66,0	24,0	18,0	36,0	66408
0.1535	3,900 mm		6,0	66,0	24,0	18,0	36,0	66409
0.1562	3,967 mm	5/32	6,0	66,0	24,0	18,0	36,0	56403
0.1575	4,000 mm		6,0	66,0	24,0	18,0	36,0	66410
0.1590	4,039 mm	#21	6,0	66,0	24,0	18,0	36,0	56404
0.1614	4,100 mm		6,0	66,0	24,0	18,0	36,0	66411
0.1654	4,200 mm		6,0	66,0	24,0	18,0	36,0	66412
0.1693	4,300 mm		6,0	66,0	24,0	18,0	36,0	66413
0.1719	4,366 mm	11/64	6,0	66,0	24,0	17,0	36,0	56405
0.1732	4,400 mm		6,0	66,0	24,0	17,0	36,0	66414
0.1772	4,500 mm		6,0	66,0	24,0	17,0	36,0	66415
0.1811	4,600 mm		6,0	66,0	24,0	17,0	36,0	66416
0.1850	4,699 mm	#13	6,0	66,0	24,0	17,0	36,0	66417
0.1875	4,763 mm	3/16	6,0	66,0	28,0	21,0	36,0	56406
0.1890	4,801 mm	#12	6,0	66,0	28,0	21,0	36,0	66418
0.1929	4,900 mm		6,0	66,0	28,0	21,0	36,0	66419
0.1969	5,000 mm		6,0	66,0	28,0	20,0	36,0	66420
0.2008	5,100 mm		6,0	66,0	28,0	20,0	36,0	66421
0.2031	5,159 mm	13/64	6,0	66,0	28,0	20,0	36,0	56407
0.2047	5,200 mm		6,0	66,0	28,0	20,0	36,0	66422
0.2087	5,300 mm		6,0	66,0	28,0	20,0	36,0	66423
0.2126	5,400 mm		6,0	66,0	28,0	20,0	36,0	66424
0.2165	5,500 mm		6,0	66,0	28,0	20,0	36,0	66425
0.2188	5,558 mm	7/32	6,0	66,0	28,0	20,0	36,0	56408
0.2205	5,600 mm		6,0	66,0	28,0	20,0	36,0	66426
0.2244	5,700 mm		6,0	66,0	28,0	19,0	36,0	66427
0.2283	5,800 mm		6,0	66,0	28,0	19,0	36,0	66428
0.2323	5,900 mm		6,0	66,0	28,0	19,0	36,0	66429
0.2344	5,954 mm	15/64	6,0	66,0	28,0	19,0	36,0	56409
0.2362	6,000 mm		6,0	66,0	28,0	19,0	36,0	66430
0.2402	6,100 mm		8,0	79,0	34,0	25,0	36,0	66431
0.2441	6,200 mm		8,0	79,0	34,0	25,0	36,0	66432
0.2480	6,300 mm		8,0	79,0	34,0	25,0	36,0	66433

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.0114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

continued on next page

142P 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm		OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON					TI-NAMITE®-X (TX)
0.2500	6,350 mm	1/4 E	8,0	79,0	34,0	24,0	36,0	56410
0.2520	6,400 mm		8,0	79,0	34,0	24,0	36,0	66434
0.2559	6,500 mm		8,0	79,0	34,0	24,0	36,0	66435
0.2570	6,528 mm	F	8,0	79,0	34,0	24,0	36,0	56411
0.2598	6,600 mm		8,0	79,0	34,0	24,0	36,0	66436
0.2638	6,700 mm		8,0	79,0	34,0	24,0	36,0	66437
0.2656	6,746 mm	17/64	8,0	79,0	34,0	24,0	36,0	56412
0.2677	6,800 mm		8,0	79,0	34,0	24,0	36,0	66438
0.2717	6,900 mm		8,0	79,0	34,0	24,0	36,0	66439
0.2756	7,000 mm		8,0	79,0	34,0	24,0	36,0	66440
0.2795	7,100 mm		8,0	79,0	41,0	30,0	36,0	66441
0.2812	7,142 mm	9/32	8,0	79,0	41,0	30,0	36,0	56413
0.2835	7,200 mm		8,0	79,0	41,0	30,0	36,0	66442
0.2874	7,300 mm		8,0	79,0	41,0	30,0	36,0	66443
0.2913	7,400 mm		8,0	79,0	41,0	30,0	36,0	66444
0.2953	7,500 mm		8,0	79,0	41,0	30,0	36,0	66445
0.2969	7,541 mm	19/64	8,0	79,0	41,0	30,0	36,0	56414
0.2992	7,600 mm		8,0	79,0	41,0	30,0	36,0	66446
0.3031	7,700 mm		8,0	79,0	41,0	29,0	36,0	66447
0.3071	7,800 mm		8,0	79,0	41,0	29,0	36,0	66448
0.3110	7,900 mm		8,0	79,0	41,0	29,0	36,0	66449
0.3125	7,938 mm	5/16	8,0	79,0	41,0	29,0	36,0	56415
0.3150	8,000 mm		8,0	79,0	41,0	29,0	36,0	66450
0.3189	8,100 mm		10,0	89,0	47,0	35,0	40,0	66451
0.3228	8,200 mm		10,0	89,0	47,0	35,0	40,0	66452
0.3268	8,300 mm		10,0	89,0	47,0	35,0	40,0	66453
0.3281	8,334 mm	21/64	10,0	89,0	47,0	34,0	40,0	56416
0.3307	8,400 mm		10,0	89,0	47,0	34,0	40,0	66454
0.3320	8,433 mm	Q	10,0	89,0	47,0	34,0	40,0	56417
0.3346	8,500 mm		10,0	89,0	47,0	34,0	40,0	66455
0.3386	8,600 mm		10,0	89,0	47,0	34,0	40,0	66456
0.3425	8,700 mm		10,0	89,0	47,0	34,0	40,0	66457
0.3438	8,733 mm	11/32	10,0	89,0	47,0	34,0	40,0	56418
0.3465	8,800 mm		10,0	89,0	47,0	34,0	40,0	66458
0.3504	8,900 mm		10,0	89,0	47,0	34,0	40,0	66459
0.3543	9,000 mm		10,0	89,0	47,0	34,0	40,0	66460
0.3583	9,100 mm		10,0	89,0	47,0	33,0	40,0	66461
0.3594	9,129 mm	23/64	10,0	89,0	47,0	33,0	40,0	56419
0.3622	9,200 mm		10,0	89,0	47,0	33,0	40,0	66462
0.3661	9,300 mm		10,0	89,0	47,0	33,0	40,0	66463
0.3680	9,347 mm	U	10,0	89,0	47,0	33,0	40,0	56420
0.3701	9,400 mm		10,0	89,0	47,0	33,0	40,0	66464
0.3740	9,500 mm		10,0	89,0	47,0	33,0	40,0	66465
0.3750	9,525 mm	3/8	10,0	89,0	47,0	33,0	40,0	56421
0.3780	9,600 mm		10,0	89,0	47,0	33,0	40,0	66466
0.3819	9,700 mm		10,0	89,0	47,0	32,0	40,0	66467
0.3858	9,800 mm		10,0	89,0	47,0	32,0	40,0	66468
0.3898	9,900 mm		10,0	89,0	47,0	32,0	40,0	66469
0.3906	9,921 mm	25/64	10,0	89,0	47,0	32,0	40,0	56422
0.3937	10,000 mm		10,0	89,0	47,0	32,0	40,0	66470
0.3976	10,100 mm		12,0	102,0	55,0	40,0	45,0	66471
0.4016	10,200 mm		12,0	102,0	55,0	40,0	45,0	66472
0.4055	10,300 mm		12,0	102,0	55,0	40,0	45,0	66473
0.4062	10,317 mm	13/32	12,0	102,0	55,0	40,0	45,0	56423

continued on next page

CONTINUED




3xD



142P 3xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials $\leq 50\text{HRC}$ (475 Bhn)

		inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)		
0.4095	10,400 mm		12,0	102,0	55,0	39,0	45,0	66474		
0.4134	10,500 mm		12,0	102,0	55,0	39,0	45,0	66475		
0.4173	10,600 mm		12,0	102,0	55,0	39,0	45,0	66476		
0.4213	10,700 mm		12,0	102,0	55,0	39,0	45,0	66477		
0.4219	10,716 mm	27/64	12,0	102,0	55,0	39,0	45,0	56424		
0.4252	10,800 mm		12,0	102,0	55,0	39,0	45,0	66478		
0.4291	10,900 mm		12,0	102,0	55,0	39,0	45,0	66479		
0.4331	11,000 mm		12,0	102,0	55,0	39,0	45,0	66480		
0.4370	11,100 mm		12,0	102,0	55,0	38,0	45,0	66481		
0.4375	11,113 mm	7/16	12,0	102,0	55,0	38,0	45,0	56425		
0.4409	11,200 mm		12,0	102,0	55,0	38,0	45,0	66482		
0.4449	11,300 mm		12,0	102,0	55,0	38,0	45,0	66483		
0.4488	11,400 mm		12,0	102,0	55,0	38,0	45,0	66484		
0.4528	11,500 mm		12,0	102,0	55,0	38,0	45,0	66485		
0.4567	11,600 mm		12,0	102,0	55,0	38,0	45,0	66486		
0.4606	11,700 mm		12,0	102,0	55,0	37,0	45,0	66487		
0.4646	11,800 mm		12,0	102,0	55,0	37,0	45,0	66488		
0.4685	11,900 mm		12,0	102,0	55,0	37,0	45,0	66489		
0.4688	11,908 mm	15/32	12,0	102,0	55,0	37,0	45,0	56426		
0.4724	12,000 mm		12,0	102,0	55,0	37,0	45,0	66490		
0.4844	12,304 mm	31/64	14,0	107,0	60,0	41,0	45,0	56427		
0.4921	12,500 mm		14,0	107,0	60,0	41,0	45,0	66491		
0.5000	12,700 mm	1/2	14,0	107,0	60,0	41,0	45,0	56428		
0.5039	12,800 mm		14,0	107,0	60,0	41,0	45,0	66492		
0.5118	13,000 mm		14,0	107,0	60,0	41,0	45,0	66493		
0.5156	13,096 mm	33/64	14,0	107,0	60,0	40,0	45,0	56429		
0.5315	13,500 mm		14,0	107,0	60,0	40,0	45,0	66494		
0.5433	13,800 mm		14,0	107,0	60,0	39,0	45,0	66495		
0.5512	14,000 mm		14,0	107,0	60,0	39,0	45,0	66496		
0.5625	14,288 mm	9/16	16,0	115,0	65,0	43,0	48,0	56430		
0.5709	14,500 mm		16,0	115,0	65,0	43,0	48,0	66497		
0.5781	14,684 mm	37/64	16,0	115,0	65,0	43,0	48,0	56431		
0.5827	14,800 mm		16,0	115,0	65,0	43,0	48,0	66498		
0.5906	15,000 mm		16,0	115,0	65,0	42,0	48,0	66499		
0.6102	15,500 mm		16,0	115,0	65,0	42,0	48,0	66500		
0.6221	15,800 mm		16,0	115,0	65,0	41,0	48,0	66501		
0.6250	15,875 mm	5/8	16,0	115,0	65,0	41,0	48,0	56432		
0.6299	16,000 mm		16,0	115,0	65,0	41,0	48,0	66502		
0.6562	16,667 mm	21/32	18,0	123,0	73,0	47,0	48,0	56433		
0.6875	17,463 mm	11/16	18,0	123,0	73,0	47,0	48,0	56434		
0.7500	19,050 mm	3/4	20,0	131,0	79,0	50,0	50,0	56435		

TOLERANCES (inch)

 $\leq .1181$ DIAMETERDC = $\pm .00008/\pm .00047$ DCON = h_6 $> .1181-.2362$ DIAMETERDC = $\pm .00016/\pm .00063$ DCON = h_6 $> .2362-.3937$ DIAMETERDC = $\pm .00024/\pm .00083$ DCON = h_6 $> .3937-.7087$ DIAMETERDC = $\pm .00028/\pm .00098$ DCON = h_6 $> .7087-1.1811$ DIAMETERDC = $\pm .00031/\pm .00114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $\pm .002/\pm .012$ DCON = h_6 $> 3-6$ DIAMETERDC = $\pm .004/\pm .016$ DCON = h_6 $> 6-10$ DIAMETERDC = $\pm .006/\pm .021$ DCON = h_6 $> 10-18$ DIAMETERDC = $\pm .007/\pm .025$ DCON = h_6 $> 18-30$ DIAMETERDC = $\pm .008/\pm .029$ DCON = h_6

STEELS

STAINLESS STEELS


CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com



142P 5xD

FRACTIONAL & METRIC SERIES

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0.002/+0.012

DCON = h₆

>3-6 DIAMETER

DC = +0.004/+0.016

DCON = h₆

>6-10 DIAMETER

DC = +0.006/+0.021

DCON = h₆

>10-18 DIAMETER

DC = +0.007/+0.025

DCON = h₆

>18-30 DIAMETER

DC = +0.008/+0.029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

		inch & mm							EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)	
0.1181	3,000 mm		6,0	66,0	28,0	23,0	36,0	66503	
0.1220	3,100 mm		6,0	66,0	28,0	23,0	36,0	66504	
0.1250	3,175 mm	1/8	6,0	66,0	28,0	23,0	36,0	56436	
0.1260	3,200 mm		6,0	66,0	28,0	23,0	36,0	66505	
0.1299	3,300 mm		6,0	66,0	28,0	23,0	36,0	66506	
0.1339	3,400 mm		6,0	66,0	28,0	23,0	36,0	66507	
0.1360	3,454 mm	#29	6,0	66,0	28,0	23,0	36,0	56437	
0.1378	3,500 mm		6,0	66,0	28,0	23,0	36,0	66508	
0.1406	3,571 mm	9/64	6,0	66,0	28,0	23,0	36,0	56438	
0.1417	3,600 mm		6,0	66,0	28,0	23,0	36,0	66509	
0.1457	3,700 mm		6,0	66,0	28,0	23,0	36,0	66510	
0.1496	3,800 mm		6,0	74,0	36,0	29,0	36,0	66511	
0.1535	3,900 mm		6,0	74,0	36,0	29,0	36,0	66512	
0.1562	3,967 mm	5/32	6,0	74,0	36,0	29,0	36,0	56439	
0.1575	4,000 mm		6,0	74,0	36,0	29,0	36,0	66513	
0.1590	4,039 mm	#21	6,0	74,0	36,0	29,0	36,0	56440	
0.1614	4,100 mm		6,0	74,0	36,0	29,0	36,0	66514	
0.1654	4,200 mm		6,0	74,0	36,0	29,0	36,0	66515	
0.1693	4,300 mm		6,0	74,0	36,0	29,0	36,0	66516	
0.1719	4,366 mm	11/64	6,0	74,0	36,0	29,0	36,0	56441	
0.1732	4,400 mm		6,0	74,0	36,0	29,0	36,0	66517	
0.1772	4,500 mm		6,0	74,0	36,0	29,0	36,0	66518	
0.1811	4,600 mm		6,0	74,0	36,0	29,0	36,0	66519	
0.1850	4,699 mm	#13	6,0	74,0	36,0	29,0	36,0	66520	
0.1875	4,763 mm	3/16	6,0	82,0	44,0	37,0	36,0	56442	
0.1890	4,801 mm	#12	6,0	82,0	44,0	37,0	36,0	66521	
0.1929	4,900 mm		6,0	82,0	44,0	37,0	36,0	66522	
0.1969	5,000 mm		6,0	82,0	44,0	36,0	36,0	66523	
0.2008	5,100 mm		6,0	82,0	44,0	36,0	36,0	66524	
0.2031	5,159 mm	13/64	6,0	82,0	44,0	36,0	36,0	56443	
0.2047	5,200 mm		6,0	82,0	44,0	36,0	36,0	66525	
0.2087	5,300 mm		6,0	82,0	44,0	36,0	36,0	66526	
0.2126	5,400 mm		6,0	82,0	44,0	36,0	36,0	66527	
0.2165	5,500 mm		6,0	82,0	44,0	36,0	36,0	66528	
0.2188	5,558 mm	7/32	6,0	82,0	44,0	36,0	36,0	56444	
0.2205	5,600 mm		6,0	82,0	44,0	36,0	36,0	66529	
0.2244	5,700 mm		6,0	82,0	44,0	35,0	36,0	66530	
0.2283	5,800 mm		6,0	82,0	44,0	35,0	36,0	66531	
0.2323	5,900 mm		6,0	82,0	44,0	35,0	36,0	66532	
0.2344	5,954 mm	15/64	6,0	82,0	44,0	35,0	36,0	56445	
0.2362	6,000 mm		6,0	82,0	44,0	35,0	36,0	66533	
0.2402	6,100 mm		8,0	91,0	53,0	44,0	36,0	66534	
0.2441	6,200 mm		8,0	91,0	53,0	44,0	36,0	66535	

continued on next page

- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4 margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤50HRc (475 Bhn)




5xD



142P 5xD

FRACTIONAL & METRIC SERIES

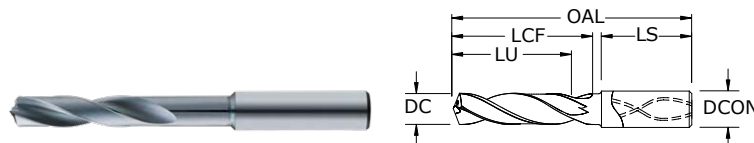

- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRc (475 Bhn)

		inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)		
0.2480	6,300 mm		8,0	91,0	53,0	44,0	36,0	66536		
0.2500	6,350 mm	1/4 E	8,0	91,0	53,0	43,0	36,0	56446		
0.2520	6,400 mm		8,0	91,0	53,0	43,0	36,0	66537		
0.2559	6,500 mm		8,0	91,0	53,0	43,0	36,0	66538		
0.2570	6,528 mm	F	8,0	91,0	53,0	43,0	36,0	56447		
0.2598	6,600 mm		8,0	91,0	53,0	43,0	36,0	66539		
0.2638	6,700 mm		8,0	91,0	53,0	43,0	36,0	66540		
0.2656	6,746 mm	17/64	8,0	91,0	53,0	43,0	36,0	56448		
0.2677	6,800 mm		8,0	91,0	53,0	43,0	36,0	66541		
0.2717	6,900 mm		8,0	91,0	53,0	43,0	36,0	66542		
0.2756	7,000 mm		8,0	91,0	53,0	42,0	36,0	66543		
0.2795	7,100 mm		8,0	91,0	53,0	42,0	36,0	66544		
0.2812	7,142 mm	9/32	8,0	91,0	53,0	42,0	36,0	56449		
0.2835	7,200 mm		8,0	91,0	53,0	42,0	36,0	66545		
0.2874	7,300 mm		8,0	91,0	53,0	42,0	36,0	66546		
0.2913	7,400 mm		8,0	91,0	53,0	42,0	36,0	66547		
0.2953	7,500 mm		8,0	91,0	53,0	42,0	36,0	66548		
0.2969	7,541 mm	19/64	8,0	91,0	53,0	42,0	36,0	56450		
0.2992	7,600 mm		8,0	91,0	53,0	42,0	36,0	66549		
0.3031	7,700 mm		8,0	91,0	53,0	41,0	36,0	66550		
0.3071	7,800 mm		8,0	91,0	53,0	41,0	36,0	66551		
0.3110	7,900 mm		8,0	91,0	53,0	41,0	36,0	66552		
0.3125	7,938 mm	5/16	8,0	91,0	53,0	41,0	36,0	56451		
0.3150	8,000 mm		8,0	91,0	53,0	41,0	36,0	66553		
0.3189	8,100 mm		10,0	103,0	61,0	49,0	40,0	66554		
0.3228	8,200 mm		10,0	103,0	61,0	49,0	40,0	66555		
0.3268	8,300 mm		10,0	103,0	61,0	49,0	40,0	66556		
0.3281	8,334 mm	21/64	10,0	103,0	61,0	48,0	40,0	56452		
0.3307	8,400 mm		10,0	103,0	61,0	48,0	40,0	66557		
0.3320	8,433 mm	Q	10,0	103,0	61,0	48,0	40,0	56453		
0.3346	8,500 mm		10,0	103,0	61,0	48,0	40,0	66558		
0.3386	8,600 mm		10,0	103,0	61,0	48,0	40,0	66559		
0.3425	8,700 mm		10,0	103,0	61,0	48,0	40,0	66560		
0.3438	8,733 mm	11/32	10,0	103,0	61,0	48,0	40,0	56454		
0.3465	8,800 mm		10,0	103,0	61,0	48,0	40,0	66561		
0.3504	8,900 mm		10,0	103,0	61,0	48,0	40,0	66562		
0.3543	9,000 mm		10,0	103,0	61,0	48,0	40,0	66563		
0.3583	9,100 mm		10,0	103,0	61,0	47,0	40,0	66564		
0.3594	9,129 mm	23/64	10,0	103,0	61,0	47,0	40,0	56455		
0.3622	9,200 mm		10,0	103,0	61,0	47,0	40,0	66565		
0.3661	9,300 mm		10,0	103,0	61,0	47,0	40,0	66566		
0.3680	9,347 mm	U	10,0	103,0	61,0	47,0	40,0	56456		
0.3701	9,400 mm		10,0	103,0	61,0	47,0	40,0	66567		

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

142P 5xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm		OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON					
0.3740	9,500 mm		10,0	103,0	61,0	47,0	40,0	66568
0.3750	9,525 mm	3/8	10,0	103,0	61,0	47,0	40,0	56457
0.3780	9,600 mm		10,0	103,0	61,0	47,0	40,0	66569
0.3819	9,700 mm		10,0	103,0	61,0	46,0	40,0	66570
0.3858	9,800 mm		10,0	103,0	61,0	46,0	40,0	66571
0.3898	9,900 mm		10,0	103,0	61,0	46,0	40,0	66572
0.3906	9,921 mm	25/64	10,0	103,0	61,0	46,0	40,0	56458
0.3937	10,000 mm		10,0	103,0	61,0	46,0	40,0	66573
0.3976	10,100 mm		12,0	118,0	71,0	56,0	45,0	66574
0.4016	10,200 mm		12,0	118,0	71,0	56,0	45,0	66575
0.4055	10,300 mm		12,0	118,0	71,0	56,0	45,0	66576
0.4062	10,317 mm	13/32	12,0	118,0	71,0	56,0	45,0	56459
0.4095	10,400 mm		12,0	118,0	71,0	55,0	45,0	66577
0.4134	10,500 mm		12,0	118,0	71,0	55,0	45,0	66578
0.4173	10,600 mm		12,0	118,0	71,0	55,0	45,0	66579
0.4213	10,700 mm		12,0	118,0	71,0	55,0	45,0	66580
0.4219	10,716 mm	27/64	12,0	118,0	71,0	55,0	45,0	56460
0.4252	10,800 mm		12,0	118,0	71,0	55,0	45,0	66581
0.4291	10,900 mm		12,0	118,0	71,0	55,0	45,0	66582
0.4331	11,000 mm		12,0	118,0	71,0	54,0	45,0	66583
0.4370	11,100 mm		12,0	118,0	71,0	54,0	45,0	66584
0.4375	11,113 mm	7/16	12,0	118,0	71,0	54,0	45,0	56461
0.4409	11,200 mm		12,0	118,0	71,0	54,0	45,0	66585
0.4449	11,300 mm		12,0	118,0	71,0	54,0	45,0	66586
0.4488	11,400 mm		12,0	118,0	71,0	54,0	45,0	66587
0.4528	11,500 mm		12,0	118,0	71,0	54,0	45,0	66588
0.4567	11,600 mm		12,0	118,0	71,0	54,0	45,0	66589
0.4606	11,700 mm		12,0	118,0	71,0	53,0	45,0	66590
0.4646	11,800 mm		12,0	118,0	71,0	53,0	45,0	66591
0.4685	11,900 mm		12,0	118,0	71,0	53,0	45,0	66592
0.4688	11,908 mm	15/32	12,0	118,0	71,0	53,0	45,0	56462
0.4724	12,000 mm		12,0	118,0	71,0	53,0	45,0	66593
0.4844	12,304 mm	31/64	14,0	124,0	77,0	58,0	45,0	56463
0.4921	12,500 mm		14,0	124,0	77,0	58,0	45,0	66594
0.5000	12,700 mm	1/2	14,0	124,0	77,0	58,0	45,0	56464
0.5039	12,800 mm		14,0	124,0	77,0	58,0	45,0	66595
0.5118	13,000 mm		14,0	124,0	77,0	58,0	45,0	66596
0.5156	13,096 mm	33/64	14,0	124,0	77,0	57,0	45,0	56465
0.5315	13,500 mm		14,0	124,0	77,0	57,0	45,0	66597
0.5433	13,800 mm		14,0	124,0	77,0	56,0	45,0	66598
0.5512	14,000 mm		14,0	124,0	77,0	56,0	45,0	66599
0.5625	14,288 mm	9/16	16,0	133,0	83,0	61,0	48,0	56466
0.5709	14,500 mm		16,0	133,0	83,0	61,0	48,0	66600
0.5781	14,684 mm	37/64	16,0	133,0	83,0	61,0	48,0	56467
0.5827	14,800 mm		16,0	133,0	83,0	61,0	48,0	66601
0.5906	15,000 mm		16,0	133,0	83,0	60,0	48,0	66602
0.6102	15,500 mm		16,0	133,0	83,0	60,0	48,0	66603
0.6221	15,800 mm		16,0	133,0	83,0	59,0	48,0	66604
0.6250	15,875 mm	5/8	16,0	133,0	83,0	59,0	48,0	56468
0.6299	16,000 mm		16,0	133,0	83,0	59,0	48,0	66605
0.6562	16,667 mm	21/32	18,0	143,0	93,0	68,0	48,0	56469
0.6875	17,463 mm	11/16	18,0	143,0	93,0	67,0	48,0	56470
0.7500	19,050 mm	3/4	20,0	153,0	101,0	72,0	50,0	56471

CONTINUED




8xD



142P 8xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life

- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation

- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle

- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications

- Recommended for materials ≤ 50HRc (475 Bhn)

DECIMAL DC	METRIC DC	inch & mm		OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON					
0.1181	3,000 mm		6,0	72,0	34,0	29,0	36,0	66606
0.1220	3,100 mm		6,0	72,0	34,0	29,0	36,0	66607
0.1250	3,175 mm	1/8	6,0	72,0	34,0	29,0	36,0	56472
0.1260	3,200 mm		6,0	72,0	34,0	29,0	36,0	66608
0.1299	3,300 mm		6,0	72,0	34,0	29,0	36,0	66609
0.1339	3,400 mm		6,0	72,0	34,0	29,0	36,0	66610
0.1360	3,454 mm	#29	6,0	72,0	34,0	29,0	36,0	56473
0.1378	3,500 mm		6,0	72,0	34,0	29,0	36,0	66611
0.1406	3,571 mm	9/64	6,0	72,0	34,0	29,0	36,0	56474
0.1417	3,600 mm		6,0	72,0	34,0	29,0	36,0	66612
0.1457	3,700 mm		6,0	72,0	34,0	29,0	36,0	66613
0.1496	3,800 mm		6,0	81,0	43,0	37,0	36,0	66614
0.1535	3,900 mm		6,0	81,0	43,0	37,0	36,0	66615
0.1562	3,967 mm	5/32	6,0	81,0	43,0	37,0	36,0	56475
0.1575	4,000 mm		6,0	81,0	43,0	37,0	36,0	66616
0.1590	4,039 mm	#21	6,0	81,0	43,0	37,0	36,0	56476
0.1614	4,100 mm		6,0	81,0	43,0	37,0	36,0	66617
0.1654	4,200 mm		6,0	81,0	43,0	37,0	36,0	66618
0.1693	4,300 mm		6,0	81,0	43,0	37,0	36,0	66619
0.1719	4,366 mm	11/64	6,0	81,0	43,0	36,0	36,0	56477
0.1732	4,400 mm		6,0	81,0	43,0	36,0	36,0	66620
0.1772	4,500 mm		6,0	81,0	43,0	36,0	36,0	66621
0.1811	4,600 mm		6,0	81,0	43,0	36,0	36,0	66622
0.1850	4,699 mm	#13	6,0	81,0	43,0	36,0	36,0	66623
0.1875	4,763 mm	3/16	6,0	95,0	57,0	50,0	36,0	56478
0.1890	4,801 mm	#12	6,0	95,0	57,0	50,0	36,0	66624
0.1929	4,900 mm		6,0	95,0	57,0	50,0	36,0	66625
0.1969	5,000 mm		6,0	95,0	57,0	49,0	36,0	66626
0.2008	5,100 mm		6,0	95,0	57,0	49,0	36,0	66627
0.2031	5,159 mm	13/64	6,0	95,0	57,0	49,0	36,0	56479
0.2047	5,200 mm		6,0	95,0	57,0	49,0	36,0	66628
0.2087	5,300 mm		6,0	95,0	57,0	49,0	36,0	66629
0.2126	5,400 mm		6,0	95,0	57,0	49,0	36,0	66630
0.2165	5,500 mm		6,0	95,0	57,0	49,0	36,0	66631
0.2188	5,558 mm	7/32	6,0	95,0	57,0	49,0	36,0	56480
0.2205	5,600 mm		6,0	95,0	57,0	49,0	36,0	66632

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

142P 8xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2244	5,700 mm		6,0	95,0	57,0	48,0	36,0	66633
0.2283	5,800 mm		6,0	95,0	57,0	48,0	36,0	66634
0.2323	5,900 mm		6,0	95,0	57,0	48,0	36,0	66635
0.2344	5,954 mm	15/64	6,0	95,0	57,0	48,0	36,0	56481
0.2362	6,000 mm		6,0	95,0	57,0	48,0	36,0	66636
0.2402	6,100 mm		8,0	114,0	76,0	67,0	36,0	66637
0.2441	6,200 mm		8,0	114,0	76,0	67,0	36,0	66638
0.2480	6,300 mm		8,0	114,0	76,0	67,0	36,0	66639
0.2500	6,350 mm	1/4 E	8,0	114,0	76,0	66,0	36,0	56482
0.2520	6,400 mm		8,0	114,0	76,0	66,0	36,0	66640
0.2559	6,500 mm		8,0	114,0	76,0	66,0	36,0	66641
0.2570	6,528 mm	F	8,0	114,0	76,0	66,0	36,0	56483
0.2598	6,600 mm		8,0	114,0	76,0	66,0	36,0	66642
0.2638	6,700 mm		8,0	114,0	76,0	66,0	36,0	66643
0.2656	6,746 mm	17/64	8,0	114,0	76,0	66,0	36,0	56484
0.2677	6,800 mm		8,0	114,0	76,0	66,0	36,0	66644
0.2717	6,900 mm		8,0	114,0	76,0	66,0	36,0	66645
0.2756	7,000 mm		8,0	114,0	76,0	65,0	36,0	66646
0.2795	7,100 mm		8,0	114,0	76,0	65,0	36,0	66647
0.2812	7,142 mm	9/32	8,0	114,0	76,0	65,0	36,0	56485
0.2835	7,200 mm		8,0	114,0	76,0	65,0	36,0	66648
0.2874	7,300 mm		8,0	114,0	76,0	65,0	36,0	66649
0.2913	7,400 mm		8,0	114,0	76,0	65,0	36,0	66650
0.2953	7,500 mm		8,0	114,0	76,0	65,0	36,0	66651
0.2969	7,541 mm	19/64	8,0	114,0	76,0	65,0	36,0	56486
0.2992	7,600 mm		8,0	114,0	76,0	65,0	36,0	66652
0.3031	7,700 mm		8,0	114,0	76,0	64,0	36,0	66653
0.3071	7,800 mm		8,0	114,0	76,0	64,0	36,0	66654
0.3110	7,900 mm		8,0	114,0	76,0	64,0	36,0	66655
0.3125	7,938 mm	5/16	8,0	114,0	76,0	64,0	36,0	56487
0.3150	8,000 mm		8,0	114,0	76,0	64,0	36,0	66656
0.3189	8,100 mm		10,0	142,0	95,0	83,0	40,0	66657
0.3228	8,200 mm		10,0	142,0	95,0	83,0	40,0	66658
0.3268	8,300 mm		10,0	142,0	95,0	83,0	40,0	66659
0.3281	8,334 mm	21/64	10,0	142,0	95,0	83,0	40,0	56488
0.3307	8,400 mm		10,0	142,0	95,0	82,0	40,0	66660
0.3320	8,433 mm	Q	10,0	142,0	95,0	82,0	40,0	56489
0.3346	8,500 mm		10,0	142,0	95,0	82,0	40,0	66661
0.3386	8,600 mm		10,0	142,0	95,0	82,0	40,0	66662
0.3425	8,700 mm		10,0	142,0	95,0	82,0	40,0	66663
0.3438	8,733 mm	11/32	10,0	142,0	95,0	82,0	40,0	56490
0.3465	8,800 mm		10,0	142,0	95,0	82,0	40,0	66664
0.3504	8,900 mm		10,0	142,0	95,0	82,0	40,0	66665
0.3543	9,000 mm		10,0	142,0	95,0	82,0	40,0	66666

continued on next page

CONTINUED




8xD



142P 8xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRc (475 Bhn)

		inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)		
0.3583	9,100 mm		10,0	142,0	95,0	81,0	40,0	66667		
0.3594	9,129 mm	23/64	10,0	142,0	95,0	81,0	40,0	56491		
0.3622	9,200 mm		10,0	142,0	95,0	81,0	40,0	66668		
0.3661	9,300 mm		10,0	142,0	95,0	81,0	40,0	66669		
0.3680	9,347 mm	U	10,0	142,0	95,0	81,0	40,0	56492		
0.3701	9,400 mm		10,0	142,0	95,0	81,0	40,0	66670		
0.3740	9,500 mm		10,0	142,0	95,0	81,0	40,0	66671		
0.3750	9,525 mm	3/8	10,0	142,0	95,0	81,0	40,0	56493		
0.3780	9,600 mm		10,0	142,0	95,0	81,0	40,0	66672		
0.3819	9,700 mm		10,0	142,0	95,0	80,0	40,0	66673		
0.3858	9,800 mm		10,0	142,0	95,0	80,0	40,0	66674		
0.3898	9,900 mm		10,0	142,0	95,0	80,0	40,0	66675		
0.3906	9,921 mm	25/64	10,0	142,0	95,0	80,0	40,0	56494		
0.3937	10,000 mm		10,0	142,0	95,0	80,0	40,0	66676		
0.3976	10,100 mm		12,0	162,0	114,0	99,0	45,0	66677		
0.4016	10,200 mm		12,0	162,0	114,0	99,0	45,0	66678		
0.4055	10,300 mm		12,0	162,0	114,0	99,0	45,0	66679		
0.4062	10,317 mm	13/32	12,0	162,0	114,0	99,0	45,0	56495		
0.4095	10,400 mm		12,0	162,0	114,0	98,0	45,0	66680		
0.4134	10,500 mm		12,0	162,0	114,0	98,0	45,0	66681		
0.4173	10,600 mm		12,0	162,0	114,0	98,0	45,0	66682		
0.4213	10,700 mm		12,0	162,0	114,0	98,0	45,0	66683		
0.4219	10,716 mm	27/64	12,0	162,0	114,0	98,0	45,0	56496		
0.4252	10,800 mm		12,0	162,0	114,0	98,0	45,0	66684		
0.4291	10,900 mm		12,0	162,0	114,0	98,0	45,0	66685		
0.4331	11,000 mm		12,0	162,0	114,0	97,0	45,0	66686		
0.4370	11,100 mm		12,0	162,0	114,0	97,0	45,0	66687		
0.4375	11,113 mm	7/16	12,0	162,0	114,0	97,0	45,0	56497		
0.4409	11,200 mm		12,0	162,0	114,0	97,0	45,0	66688		
0.4449	11,300 mm		12,0	162,0	114,0	97,0	45,0	66689		
0.4488	11,400 mm		12,0	162,0	114,0	97,0	45,0	66690		
0.4528	11,500 mm		12,0	162,0	114,0	97,0	45,0	66691		
0.4567	11,600 mm		12,0	162,0	114,0	97,0	45,0	66692		
0.4606	11,700 mm		12,0	162,0	114,0	96,0	45,0	66693		

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.0114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS


For patent
information visit
www.ksptpatents.com

142P 8xD

FRACTIONAL & METRIC SERIES


DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.4646	11,800 mm		12,0	162,0	114,0	96,0	45,0	66694
0.4685	11,900 mm		12,0	162,0	114,0	96,0	45,0	66695
0.4688	11,908 mm	15/32	12,0	162,0	114,0	96,0	45,0	56498
0.4724	12,000 mm		12,0	162,0	114,0	96,0	45,0	66696
0.4844	12,304 mm	31/64	14,0	178,0	133,0	114,0	45,0	56499
0.4921	12,500 mm		14,0	178,0	133,0	114,0	45,0	66697
0.5000	12,700 mm	1/2	14,0	178,0	133,0	114,0	45,0	56500
0.5039	12,800 mm		14,0	178,0	133,0	114,0	45,0	66698
0.5118	13,000 mm		14,0	178,0	133,0	114,0	45,0	66699
0.5156	13,096 mm	33/64	14,0	178,0	133,0	113,0	45,0	56501
0.5315	13,500 mm		14,0	178,0	133,0	113,0	45,0	66700
0.5433	13,800 mm		14,0	178,0	133,0	113,0	45,0	66701
0.5512	14,000 mm		14,0	178,0	133,0	113,0	45,0	66702
0.5625	14,288 mm	9/16	16,0	203,0	152,0	130,0	48,0	56502
0.5709	14,500 mm		16,0	203,0	152,0	130,0	48,0	66703
0.5781	14,684 mm	37/64	16,0	203,0	152,0	130,0	48,0	56503
0.5827	14,800 mm		16,0	203,0	152,0	130,0	48,0	66704
0.5906	15,000 mm		16,0	203,0	152,0	129,0	48,0	66705
0.6102	15,500 mm		16,0	203,0	152,0	129,0	48,0	66706
0.6221	15,800 mm		16,0	203,0	152,0	128,0	48,0	66707
0.6250	15,875 mm	5/8	16,0	203,0	152,0	128,0	48,0	56504
0.6299	16,000 mm		16,0	203,0	152,0	128,0	48,0	66708
0.6562	16,667 mm	21/32	18,0	222,0	171,0	145,0	48,0	56505
0.6875	17,463 mm	11/16	18,0	222,0	171,0	145,0	48,0	56506
0.7500	19,050 mm	3/4	20,0	243,0	190,0	161,0	50,0	56507

CONTINUED



142P 12xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRC (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.1181	3,000 mm		6,0	87,0	49,0	44,0	36,0	66709
0.1220	3,100 mm		6,0	87,0	49,0	44,0	36,0	66710
0.1250	3,175 mm	1/8	6,0	87,0	49,0	44,0	36,0	56508
0.1260	3,200 mm		6,0	87,0	49,0	44,0	36,0	66711
0.1299	3,300 mm		6,0	87,0	49,0	44,0	36,0	66712
0.1339	3,400 mm		6,0	87,0	49,0	44,0	36,0	66713
0.1360	3,454 mm	#29	6,0	87,0	49,0	44,0	36,0	56509
0.1378	3,500 mm		6,0	87,0	49,0	44,0	36,0	66714
0.1406	3,571 mm	9/64	6,0	87,0	49,0	43,0	36,0	56510
0.1417	3,600 mm		6,0	87,0	49,0	43,0	36,0	66715
0.1457	3,700 mm		6,0	87,0	49,0	43,0	36,0	66716
0.1496	3,800 mm		6,0	100,0	62,0	56,0	36,0	66717
0.1535	3,900 mm		6,0	100,0	62,0	56,0	36,0	66718
0.1562	3,967 mm	5/32	6,0	100,0	62,0	56,0	36,0	56511
0.1575	4,000 mm		6,0	100,0	62,0	56,0	36,0	66719
0.1590	4,039 mm	#21	6,0	100,0	62,0	56,0	36,0	56512
0.1614	4,100 mm		6,0	100,0	62,0	56,0	36,0	66720
0.1654	4,200 mm		6,0	100,0	62,0	55,0	36,0	66721
0.1693	4,300 mm		6,0	100,0	62,0	55,0	36,0	66722
0.1719	4,366 mm	11/64	6,0	100,0	62,0	55,0	36,0	56513
0.1732	4,400 mm		6,0	100,0	62,0	55,0	36,0	66723
0.1772	4,500 mm		6,0	100,0	62,0	55,0	36,0	66724
0.1811	4,600 mm		6,0	100,0	62,0	55,0	36,0	66725
0.1850	4,699 mm	#13	6,0	100,0	62,0	55,0	36,0	66726
0.1875	4,763 mm	3/16	6,0	119,0	81,0	74,0	36,0	56514
0.1890	4,801 mm	#12	6,0	119,0	81,0	74,0	36,0	66727
0.1929	4,900 mm		6,0	119,0	81,0	74,0	36,0	66728
0.1969	5,000 mm		6,0	119,0	81,0	73,0	36,0	66729
0.2008	5,100 mm		6,0	119,0	81,0	73,0	36,0	66730
0.2031	5,159 mm	13/64	6,0	119,0	81,0	73,0	36,0	56515
0.2047	5,200 mm		6,0	119,0	81,0	73,0	36,0	66731
0.2087	5,300 mm		6,0	119,0	81,0	73,0	36,0	66732
0.2126	5,400 mm		6,0	119,0	81,0	73,0	36,0	66733
0.2165	5,500 mm		6,0	119,0	81,0	73,0	36,0	66734

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

142P 12xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2188	5,558 mm	7/32	6,0	119,0	81,0	73,0	36,0	56516
0.2205	5,600 mm		6,0	119,0	81,0	73,0	36,0	66735
0.2244	5,700 mm		6,0	119,0	81,0	72,0	36,0	66736
0.2283	5,800 mm		6,0	119,0	81,0	72,0	36,0	66737
0.2323	5,900 mm		6,0	119,0	81,0	72,0	36,0	66738
0.2344	5,954 mm	15/64	6,0	119,0	81,0	72,0	36,0	56517
0.2362	6,000 mm		6,0	119,0	81,0	72,0	36,0	66739
0.2402	6,100 mm		8,0	146,0	108,0	99,0	36,0	66740
0.2441	6,200 mm		8,0	146,0	108,0	99,0	36,0	66741
0.2480	6,300 mm		8,0	146,0	108,0	99,0	36,0	66742
0.2500	6,350 mm	1/4 E	8,0	146,0	108,0	98,0	36,0	56518
0.2520	6,400 mm		8,0	146,0	108,0	98,0	36,0	66743
0.2559	6,500 mm		8,0	146,0	108,0	98,0	36,0	66744
0.2570	6,528 mm	F	8,0	146,0	108,0	98,0	36,0	56519
0.2598	6,600 mm		8,0	146,0	108,0	98,0	36,0	66745
0.2638	6,700 mm		8,0	146,0	108,0	98,0	36,0	66746
0.2656	6,746 mm	17/64	8,0	146,0	108,0	98,0	36,0	56520
0.2677	6,800 mm		8,0	146,0	108,0	98,0	36,0	66747
0.2717	6,900 mm		8,0	146,0	108,0	98,0	36,0	66748
0.2756	7,000 mm		8,0	146,0	108,0	97,0	36,0	66749
0.2795	7,100 mm		8,0	146,0	108,0	97,0	36,0	66750
0.2812	7,142 mm	9/32	8,0	146,0	108,0	97,0	36,0	56521
0.2835	7,200 mm		8,0	146,0	108,0	97,0	36,0	66751
0.2874	7,300 mm		8,0	146,0	108,0	97,0	36,0	66752
0.2913	7,400 mm		8,0	146,0	108,0	97,0	36,0	66753
0.2953	7,500 mm		8,0	146,0	108,0	97,0	36,0	66754
0.2969	7,541 mm	19/64	8,0	146,0	108,0	97,0	36,0	56522
0.2992	7,600 mm		8,0	146,0	108,0	97,0	36,0	66755
0.3031	7,700 mm		8,0	146,0	108,0	96,0	36,0	66756
0.3071	7,800 mm		8,0	146,0	108,0	96,0	36,0	66757
0.3110	7,900 mm		8,0	146,0	108,0	96,0	36,0	66758
0.3125	7,938 mm	5/16	8,0	146,0	108,0	96,0	36,0	56523
0.3150	8,000 mm		8,0	146,0	108,0	96,0	36,0	66759
0.3189	8,100 mm		10,0	182,0	135,0	123,0	40,0	66760
0.3228	8,200 mm		10,0	182,0	135,0	123,0	40,0	66761
0.3268	8,300 mm		10,0	182,0	135,0	123,0	40,0	66762
0.3281	8,334 mm	21/64	10,0	182,0	135,0	123,0	40,0	56524
0.3307	8,400 mm		10,0	182,0	135,0	122,0	40,0	66763
0.3320	8,433 mm	Q	10,0	182,0	135,0	122,0	40,0	56525
0.3346	8,500 mm		10,0	182,0	135,0	122,0	40,0	66764
0.3386	8,600 mm		10,0	182,0	135,0	122,0	40,0	66765
0.3425	8,700 mm		10,0	182,0	135,0	122,0	40,0	66766

continued on next page

CONTINUED




12xD



142P 12xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.3438	8,733 mm	11/32	10,0	182,0	135,0	122,0	40,0	56526
0.3465	8,800 mm		10,0	182,0	135,0	122,0	40,0	66767
0.3504	8,900 mm		10,0	182,0	135,0	122,0	40,0	66768
0.3543	9,000 mm		10,0	182,0	135,0	122,0	40,0	66769
0.3583	9,100 mm		10,0	182,0	135,0	121,0	40,0	66770
0.3594	9,129 mm	23/64	10,0	182,0	135,0	121,0	40,0	56527
0.3622	9,200 mm		10,0	182,0	135,0	121,0	40,0	66771
0.3661	9,300 mm		10,0	182,0	135,0	121,0	40,0	66772
0.3680	9,347 mm	U	10,0	182,0	135,0	121,0	40,0	56528
0.3701	9,400 mm		10,0	182,0	135,0	121,0	40,0	66773
0.3740	9,500 mm		10,0	182,0	135,0	121,0	40,0	66774
0.3750	9,525 mm	3/8	10,0	182,0	135,0	121,0	40,0	56529
0.3780	9,600 mm		10,0	182,0	135,0	121,0	40,0	66775
0.3819	9,700 mm		10,0	182,0	135,0	120,0	40,0	66776
0.3858	9,800 mm		10,0	182,0	135,0	120,0	40,0	66777
0.3898	9,900 mm		10,0	182,0	135,0	120,0	40,0	66778
0.3906	9,921 mm	25/64	10,0	182,0	135,0	120,0	40,0	56530
0.3937	10,000 mm		10,0	182,0	135,0	120,0	40,0	66779
0.3976	10,100 mm		12,0	210,0	162,0	147,0	45,0	66780
0.4016	10,200 mm		12,0	210,0	162,0	147,0	45,0	66781
0.4055	10,300 mm		12,0	210,0	162,0	147,0	45,0	66782
0.4062	10,317 mm	13/32	12,0	210,0	162,0	147,0	45,0	56531
0.4095	10,400 mm		12,0	210,0	162,0	146,0	45,0	66783
0.4134	10,500 mm		12,0	210,0	162,0	146,0	45,0	66784
0.4173	10,600 mm		12,0	210,0	162,0	146,0	45,0	66785
0.4213	10,700 mm		12,0	210,0	162,0	146,0	45,0	66786
0.4219	10,716 mm	27/64	12,0	210,0	162,0	146,0	45,0	56532
0.4252	10,800 mm		12,0	210,0	162,0	146,0	45,0	66787
0.4291	10,900 mm		12,0	210,0	162,0	146,0	45,0	66788
0.4331	11,000 mm		12,0	210,0	162,0	145,0	45,0	66789
0.4370	11,100 mm		12,0	210,0	162,0	145,0	45,0	66790
0.4375	11,113 mm	7/16	12,0	210,0	162,0	145,0	45,0	56533
0.4409	11,200 mm		12,0	210,0	162,0	145,0	45,0	66791
0.4449	11,300 mm		12,0	210,0	162,0	145,0	45,0	66792

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.0114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

142P 12xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.4488	11,400 mm		12,0	210,0	162,0	145,0	45,0	66793
0.4528	11,500 mm		12,0	210,0	162,0	145,0	45,0	66794
0.4567	11,600 mm		12,0	210,0	162,0	145,0	45,0	66795
0.4606	11,700 mm		12,0	210,0	162,0	144,0	45,0	66796
0.4646	11,800 mm		12,0	210,0	162,0	144,0	45,0	66797
0.4685	11,900 mm		12,0	210,0	162,0	144,0	45,0	66798
0.4688	11,908 mm	15/32	12,0	210,0	162,0	144,0	45,0	56534
0.4724	12,000 mm		12,0	210,0	162,0	144,0	45,0	66799
0.4844	12,304 mm	31/64	14,0	234,0	189,0	171,0	45,0	56535
0.4921	12,500 mm		14,0	234,0	189,0	170,0	45,0	66800
0.5000	12,700 mm	1/2	14,0	234,0	189,0	170,0	45,0	56536
0.5039	12,800 mm		14,0	234,0	189,0	170,0	45,0	66801
0.5118	13,000 mm		14,0	234,0	189,0	170,0	45,0	66802
0.5156	13,096 mm	33/64	14,0	234,0	189,0	169,0	45,0	56537
0.5315	13,500 mm		14,0	234,0	189,0	169,0	45,0	66803
0.5433	13,800 mm		14,0	234,0	189,0	168,0	45,0	66804
0.5512	14,000 mm		14,0	234,0	189,0	168,0	45,0	66805
0.5625	14,288 mm	9/16	16,0	267,0	216,0	195,0	48,0	56538
0.5709	14,500 mm		16,0	267,0	216,0	194,0	48,0	66806
0.5781	14,684 mm	37/64	16,0	267,0	216,0	194,0	48,0	56539
0.5827	14,800 mm		16,0	267,0	216,0	194,0	48,0	66807
0.5906	15,000 mm		16,0	267,0	216,0	193,0	48,0	66808
0.6102	15,500 mm		16,0	267,0	216,0	193,0	48,0	66809
0.6221	15,800 mm		16,0	267,0	216,0	192,0	48,0	66810
0.6250	15,875 mm	5/8	16,0	267,0	216,0	192,0	48,0	56540
0.6299	16,000 mm		16,0	267,0	216,0	192,0	48,0	66811
0.6562	16,667 mm	21/32	18,0	292,0	241,0	216,0	48,0	56541
0.6875	17,463 mm	11/16	18,0	292,0	241,0	215,0	48,0	56542
0.7500	19,050 mm	3/4	20,0	319,0	266,0	238,0	50,0	56543

CONTINUED

Series 142P Fractional	Hardness	Vc (sfm)	DC • in								
			1/8	3/16	1/4	3/8	1/2	5/8	3/4		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc (340-510)	425	RPM	12988	8659	6494	4329	3247	2598	2165
				Fr	0.0043	0.0065	0.0086	0.0129	0.0172	0.0216	0.0259
				Feed (ipm)	56.0	56.0	56.0	56.0	56.0	56.0	56.0
		≤ 275 Bhn or ≤ 28 HRc (304-456)	380	RPM	11613	7742	5806	3871	2903	2323	1935
				Fr	0.0039	0.0058	0.0078	0.0116	0.0155	0.0194	0.0233
				Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0	45.0
		≤ 425 Bhn or ≤ 45 HRc (176-264)	220	RPM	6723	4482	3362	2241	1681	1345	1121
				Fr	0.0033	0.0049	0.0065	0.0098	0.0131	0.0164	0.0196
				Feed (ipm)	22.0	22.0	22.0	22.0	22.0	22.0	22.0
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc (264-396)	330	RPM	10085	6723	5042	3362	2521	2017	1681
				Fr	0.0033	0.0049	0.0065	0.0098	0.0131	0.0164	0.0196
				Feed (ipm)	33.0	33.0	33.0	33.0	33.0	33.0	33.0
		≤ 375 Bhn or ≤ 40 HRc (160-240)	200	RPM	6112	4075	3056	2037	1528	1222	1019
				Fr	0.0028	0.0042	0.0056	0.0083	0.0111	0.0139	0.0167
				Feed (ipm)	17.0	17.0	17.0	17.0	17.0	17.0	17.0
		≤ 425 Bhn or ≤ 45 HRc (112-168)	140	RPM	4278	2852	2139	1426	1070	856	713
				Fr	0.0020	0.0030	0.0040	0.0060	0.0079	0.0099	0.0119
				Feed (ipm)	8.5	8.5	8.5	8.5	8.5	8.5	8.5
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc (116-174)	145	RPM	4431	2954	2216	1477	1108	886	739
				Fr	0.0028	0.0042	0.0056	0.0085	0.0113	0.0141	0.0169
				Feed (ipm)	12.5	12.5	12.5	12.5	12.5	12.5	12.5
		≤ 375 Bhn or ≤ 40 HRc (76-114)	95	RPM	2903	1935	1452	968	726	581	484
				Fr	0.0013	0.0020	0.0027	0.0040	0.0054	0.0067	0.0081
				Feed (ipm)	3.9	3.9	3.9	3.9	3.9	3.9	3.9
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc (244-366)	305	RPM	9321	6214	4660	3107	2330	1864	1553
				Fr	0.0026	0.0039	0.0051	0.0077	0.0103	0.0129	0.0154
				Feed (ipm)	24.0	24.0	24.0	24.0	24.0	24.0	24.0
		≤ 275 Bhn or ≤ 28 HRc (156-234)	195	RPM	5959	3973	2980	1986	1490	1192	993
				Fr	0.0020	0.0030	0.0040	0.0060	0.0081	0.0101	0.0121
				Feed (ipm)	12.0	12.0	12.0	12.0	12.0	12.0	12.0
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc (120-180)	150	RPM	4584	3056	2292	1528	1146	917	764
				Fr	0.0020	0.0030	0.0040	0.0060	0.0079	0.0099	0.0119
				Feed (ipm)	9.1	9.1	9.1	9.1	9.1	9.1	9.1
		≤ 375 Bhn or ≤ 40 HRc (88-132)	110	RPM	3362	2241	1681	1121	840	672	560
				Fr	0.0018	0.0027	0.0036	0.0054	0.0071	0.0089	0.0107
				Feed (ipm)	6.0	6.0	6.0	6.0	6.0	6.0	6.0
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc (288-432)	360	RPM	11002	7334	5501	3667	2750	2200	1834
				Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273
				Feed (ipm)	50.0	50.0	50.0	50.0	50.0	50.0	50.0
		≤ 260 Bhn or ≤ 26 HRc (268-402)	335	RPM	10238	6825	5119	3413	2559	2048	1706
				Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273
				Feed (ipm)	46.5	46.5	46.5	46.5	46.5	46.5	46.5

continued on next page

	Series 142P Fractional	Hardness	Vc (sfm)	DC • in							
				1/8	3/16	1/4	3/8	1/2	5/8	3/4	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	770	RPM	23531	15687	11766	7844	5883	4706	3922
			(616-924)	Fr	0.0049	0.0073	0.0098	0.0147	0.0195	0.0244	0.0293
				Feed (ipm)	115.0	115.0	115.0	115.0	115.0	115.0	115.0
		≤ 150 Bhn or ≤ 8 HRb	660	RPM	20170	13446	10085	6723	5042	4034	3362
			(528-792)	Fr	0.0050	0.0074	0.0099	0.0149	0.0198	0.0248	0.0297
				Feed (ipm)	100.0	100.0	100.0	100.0	100.0	100.0	100.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	550	RPM	16808	11205	8404	5603	4202	3362	2801
			(440-660)	Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0120
				Feed (ipm)	33.5	33.5	33.5	33.5	33.5	33.5	33.5
		≤ 200 Bhn or ≤ 23 HRc	440	RPM	13446	8964	6723	4482	3362	2689	2241
			(352-528)	Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0120
				Feed (ipm)	27.0	27.0	27.0	27.0	27.0	27.0	27.0
S	HIGH TEMP ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	95	RPM	2903	1935	1452	968	726	581	484
			(76-114)	Fr	0.0008	0.0012	0.0016	0.0024	0.0032	0.0040	0.0048
				Feed (ipm)	2.3	2.3	2.3	2.3	2.3	2.3	2.3
		≤ 400 Bhn or ≤ 43 HRc	50	RPM	1528	1019	764	509	382	306	255
			(40-60)	Fr	0.0007	0.0010	0.0013	0.0020	0.0026	0.0033	0.0039
				Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	215	RPM	6570	4380	3285	2190	1643	1314	1095
			(172-258)	Fr	0.0018	0.0026	0.0035	0.0053	0.0070	0.0088	0.0105
				Feed (ipm)	11.5	11.5	11.5	11.5	11.5	11.5	11.5
		≤ 350 Bhn or ≤ 38 HRc	160	RPM	4890	3260	2445	1630	1222	978	815
			(128-192)	Fr	0.0016	0.0024	0.0032	0.0048	0.0064	0.0080	0.0096
				Feed (ipm)	7.8	7.8	7.8	7.8	7.8	7.8	7.8
		≤ 440 Bhn or ≤ 47 HRc	85	RPM	2598	1732	1299	866	649	520	433
			(68-102)	Fr	0.0012	0.0018	0.0024	0.0036	0.0048	0.0060	0.0072
				Feed (ipm)	3.1	3.1	3.1	3.1	3.1	3.1	3.1
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	85	RPM	2598	1732	1299	866	649	520	433
			(68-102)	Fr	0.0008	0.0013	0.0017	0.0025	0.0034	0.0042	0.0051
				Feed (ipm)	2.2	2.2	2.2	2.2	2.2	2.2	2.2

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 rpm = Vc x 3.82 / DC
 ipm = Fr x RPM
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 142P Metric	Hardness	Vc (m/min)	DC • mm							
			3	6	8	10	12	14	16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	130	RPM	13733	6867	5150	4120	3433	2943	2575
		≤ 175 Bhn or ≤ 7 HRc (104-155)	Fr	0.104	0.207	0.276	0.345	0.414	0.483	0.552
			Feed (mm/min)	1422	1422	1422	1422	1422	1422	1422
		116	RPM	12279	6140	4605	3684	3070	2631	2302
		≤ 275 Bhn or ≤ 28 HRc (93-139)	Fr	0.093	0.186	0.248	0.310	0.372	0.434	0.496
			Feed (mm/min)	1143	1143	1143	1143	1143	1143	1143
		67	RPM	7109	3555	2666	2133	1777	1523	1333
		≤ 425 Bhn or ≤ 45 HRc (54-80)	Fr	0.079	0.157	0.210	0.262	0.314	0.367	0.419
			Feed (mm/min)	559	559	559	559	559	559	559
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	101	RPM	10664	5332	3999	3199	2666	2285	1999
		≤ 275 Bhn or ≤ 28 HRc (80-121)	Fr	0.079	0.157	0.210	0.262	0.314	0.367	0.419
			Feed (mm/min)	838	838	838	838	838	838	838
		61	RPM	6463	3231	2424	1939	1616	1385	1212
		≤ 375 Bhn or ≤ 40 HRc (49-73)	Fr	0.067	0.134	0.178	0.223	0.267	0.312	0.356
			Feed (mm/min)	432	432	432	432	432	432	432
		43	RPM	4524	2262	1696	1357	1131	969	848
		≤ 425 Bhn or ≤ 45 HRc (34-51)	Fr	0.048	0.095	0.127	0.159	0.191	0.223	0.255
			Feed (mm/min)	216	216	216	216	216	216	216
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	44	RPM	4686	2343	1757	1406	1171	1004	879
		≤ 200 Bhn or ≤ 13 HRc (35-53)	Fr	0.068	0.136	0.181	0.226	0.271	0.316	0.361
			Feed (mm/min)	318	318	318	318	318	318	318
		29	RPM	3070	1535	1151	921	767	658	576
		≤ 375 Bhn or ≤ 40 HRc (23-35)	Fr	0.032	0.065	0.086	0.108	0.129	0.151	0.172
			Feed (mm/min)	99	99	99	99	99	99	99
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	93	9856	9856	4928	3696	2957	2464	2112	1848
		≤ 185 Bhn or ≤ 9 HRc (74-112)	0.062	0.062	0.124	0.165	0.206	0.247	0.289	0.330
			610	610	610	610	610	610	610	610
		59	6301	6301	3151	2363	1890	1575	1350	1181
		≤ 275 Bhn or ≤ 28 HRc (48-71)	0.048	0.048	0.097	0.129	0.161	0.193	0.226	0.258
			305	305	305	305	305	305	305	305
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	46	4847	4847	2424	1818	1454	1212	1039	909
		≤ 275 Bhn or ≤ 28 HRc (37-55)	0.048	0.048	0.095	0.127	0.159	0.191	0.223	0.254
			231	231	231	231	231	231	231	231
		34	3555	3555	1777	1333	1066	889	762	666
		≤ 375 Bhn or ≤ 40 HRc (27-40)	0.043	0.043	0.086	0.114	0.143	0.171	0.200	0.229
			152	152	152	152	152	152	152	152
K	CAST IRONS Gray, Malleable, Ductile	110	RPM	11633	5816	4362	3490	2908	2493	2181
		≤ 220 Bhn or ≤ 19 HRc (88-132)	Fr	0.109	0.218	0.291	0.364	0.437	0.509	0.582
			Feed (mm/min)	1270	1270	1270	1270	1270	1270	1270
		102	RPM	10825	5413	4059	3248	2706	2320	2030
		≤ 260 Bhn or ≤ 26 HRc (82-123)	Fr	0.109	0.218	0.291	0.364	0.436	0.509	0.582
			Feed (mm/min)	1181	1181	1181	1181	1181	1181	1181

continued on next page

Series 142P				DC • mm							
Metric	Hardness	Vc (m/min)		3	6	8	10	12	14	16	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRB	235 (188-282)	RPM	24882	12441	9331	7465	6220	5332	4665
				Fr	0.117	0.235	0.313	0.391	0.470	0.548	0.626
				Feed (mm/min)	2921	2921	2921	2921	2921	2921	2921
		≤ 150 Bhn or ≤ 88 HRB	201 (161-241)	RPM	21327	10664	7998	6398	5332	4570	3999
				Fr	0.119	0.238	0.318	0.397	0.476	0.556	0.635
				Feed (mm/min)	2540	2540	2540	2540	2540	2540	2540
	Copper Alloys Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	168 (134-201)	RPM	17773	8886	6665	5332	4443	3808	3332
				Fr	0.048	0.096	0.128	0.160	0.192	0.223	0.255
				Feed (mm/min)	851	851	851	851	851	851	851
		≤ 200 Bhn or ≤ 23 HRc	134 (107-161)	RPM	14218	7109	5332	4265	3555	3047	2666
				Fr	0.048	0.096	0.129	0.161	0.193	0.225	0.257
				Feed (mm/min)	686	686	686	686	686	686	686
S	HIGH TEMP ALLOYS (Nickel , Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	29 (23-35)	RPM	3070	1535	1151	921	767	658	576
				Fr	0.019	0.038	0.051	0.063	0.076	0.089	0.101
				Feed (mm/min)	58	58	58	58	58	58	58
		≤ 400 Bhn or ≤ 43 HRc	15 (12-18)	RPM	1616	808	606	485	404	346	303
				Fr	0.016	0.031	0.042	0.052	0.063	0.073	0.084
				Feed (mm/min)	25	25	25	25	25	25	25
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	66 (52-79)	RPM	6947	3474	2605	2084	1737	1489	1303
				Fr	0.042	0.084	0.112	0.140	0.168	0.196	0.224
				Feed (mm/min)	292	292	292	292	292	292	292
		≤ 350 Bhn or ≤ 38 HRc	49 (39-59)	RPM	5170	2585	1939	1551	1293	1108	969
				Fr	0.038	0.077	0.102	0.128	0.153	0.179	0.204
				Feed (mm/min)	198	198	198	198	198	198	198
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 440 Bhn or ≤ 47 HRc	26 (21-31)	RPM	2747	1373	1030	824	687	589	515
				Fr	0.029	0.057	0.076	0.096	0.115	0.134	0.153
				Feed (mm/min)	79	79	79	79	79	79	79
		≤ 475 Bhn or ≤ 50 HRc	26 (21-31)	RPM	2747	1373	1030	824	687	589	515
				Fr	0.020	0.041	0.054	0.068	0.081	0.095	0.109
				Feed (mm/min)	56	56	56	56	56	56	56

(Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x RPM

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)




3xD



143M-S 3xD

FRACTIONAL & METRIC SERIES

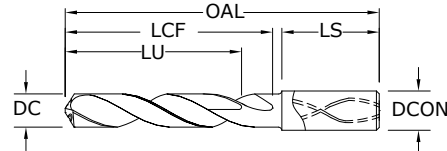

- Coolant through design improves coolant flow to extend tool life and aid in chip evacuation
- Eccentric 2-margin design reduces frictional heat and minimizes material adhesion to the margins without weakening the drill
- Computer controlled edge honing protects against chip damage
- High-performance point design stabilizes on contact for exceptional hole size and cylindricity allowing for low thrust force and extended tool life
- SGS Ti-NAMITE®-A coating provides exceptional wear and erosion resistance when drilling heat resisting alloys like Inconel, Stainless Steel, and Titanium Alloys
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)
0.1181	3,000 mm		6,0	62,0	20,0	15,0	36,0	69120
0.1220	3,100 mm		6,0	62,0	20,0	15,0	36,0	69121
0.1250	3,175 mm	1/8	6,0	62,0	20,0	15,0	36,0	56800
0.1260	3,200 mm		6,0	62,0	20,0	15,0	36,0	69122
0.1299	3,300 mm		6,0	62,0	20,0	15,0	36,0	69123
0.1339	3,400 mm		6,0	62,0	20,0	15,0	36,0	69124
0.1360	3,454 mm	#29	6,0	62,0	20,0	15,0	36,0	56801
0.1378	3,500 mm		6,0	62,0	20,0	15,0	36,0	69125
0.1406	3,571 mm	9/64	6,0	62,0	20,0	15,0	36,0	56802
0.1417	3,600 mm		6,0	62,0	20,0	15,0	36,0	69126
0.1457	3,700 mm		6,0	62,0	20,0	15,0	36,0	69127
0.1496	3,800 mm		6,0	66,0	24,0	18,0	36,0	69128
0.1535	3,900 mm		6,0	66,0	24,0	18,0	36,0	69129
0.1562	3,967 mm	5/32	6,0	66,0	24,0	18,0	36,0	56803
0.1575	4,000 mm		6,0	66,0	24,0	18,0	36,0	69130
0.1590	4,039 mm	#21	6,0	66,0	24,0	18,0	36,0	56804
0.1614	4,100 mm		6,0	66,0	24,0	18,0	36,0	69131
0.1654	4,200 mm		6,0	66,0	24,0	18,0	36,0	69132
0.1693	4,300 mm		6,0	66,0	24,0	18,0	36,0	69133
0.1719	4,366 mm	11/64	6,0	66,0	24,0	17,0	36,0	56805
0.1732	4,400 mm		6,0	66,0	24,0	17,0	36,0	69134
0.1772	4,500 mm		6,0	66,0	24,0	17,0	36,0	69135
0.1811	4,600 mm		6,0	66,0	24,0	17,0	36,0	69136
0.1850	4,699 mm	#13	6,0	66,0	24,0	17,0	36,0	69137
0.1875	4,763 mm	3/16	6,0	66,0	28,0	21,0	36,0	56806
0.1890	4,801 mm	#12	6,0	66,0	28,0	21,0	36,0	69138
0.1929	4,900 mm		6,0	66,0	28,0	21,0	36,0	69139
0.1969	5,000 mm		6,0	66,0	28,0	20,0	36,0	69140
0.2008	5,100 mm		6,0	66,0	28,0	20,0	36,0	69141
0.2031	5,159 mm	13/64	6,0	66,0	28,0	20,0	36,0	56807
0.2047	5,200 mm		6,0	66,0	28,0	20,0	36,0	69142
0.2087	5,300 mm		6,0	66,0	28,0	20,0	36,0	69143
0.2126	5,400 mm		6,0	66,0	28,0	20,0	36,0	69144
0.2165	5,500 mm		6,0	66,0	28,0	20,0	36,0	69145
0.2188	5,558 mm	7/32	6,0	66,0	28,0	20,0	36,0	56808
0.2205	5,600 mm		6,0	66,0	28,0	20,0	36,0	69146

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029
DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

143M-S 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2244	5,700 mm		6,0	66,0	28,0	19,0	36,0	69147
0.2283	5,800 mm		6,0	66,0	28,0	19,0	36,0	69148
0.2323	5,900 mm		6,0	66,0	28,0	19,0	36,0	69149
0.2344	5,954 mm	15/64	6,0	66,0	28,0	19,0	36,0	56809
0.2362	6,000 mm		6,0	66,0	28,0	19,0	36,0	69150
0.2402	6,100 mm		8,0	79,0	34,0	25,0	36,0	69151
0.2441	6,200 mm		8,0	79,0	34,0	25,0	36,0	69152
0.2480	6,300 mm		8,0	79,0	34,0	25,0	36,0	69153
0.2500	6,350 mm	1/4 E	8,0	79,0	34,0	24,0	36,0	56810
0.2520	6,400 mm		8,0	79,0	34,0	24,0	36,0	69154
0.2559	6,500 mm		8,0	79,0	34,0	24,0	36,0	69155
0.2570	6,528 mm	F	8,0	79,0	34,0	24,0	36,0	56811
0.2598	6,600 mm		8,0	79,0	34,0	24,0	36,0	69156
0.2638	6,700 mm		8,0	79,0	34,0	24,0	36,0	69157
0.2656	6,746 mm	17/64	8,0	79,0	34,0	24,0	36,0	56812
0.2677	6,800 mm		8,0	79,0	34,0	24,0	36,0	69158
0.2717	6,900 mm		8,0	79,0	34,0	24,0	36,0	69159
0.2756	7,000 mm		8,0	79,0	34,0	24,0	36,0	69160
0.2795	7,100 mm		8,0	79,0	41,0	30,0	36,0	69161
0.2812	7,142 mm	9/32	8,0	79,0	41,0	30,0	36,0	56813
0.2835	7,200 mm		8,0	79,0	41,0	30,0	36,0	69162
0.2874	7,300 mm		8,0	79,0	41,0	30,0	36,0	69163
0.2913	7,400 mm		8,0	79,0	41,0	30,0	36,0	69164
0.2953	7,500 mm		8,0	79,0	41,0	30,0	36,0	69165
0.2969	7,541 mm	19/64	8,0	79,0	41,0	30,0	36,0	56814
0.2992	7,600 mm		8,0	79,0	41,0	30,0	36,0	69166
0.3031	7,700 mm		8,0	79,0	41,0	29,0	36,0	69167
0.3071	7,800 mm		8,0	79,0	41,0	29,0	36,0	69168
0.3110	7,900 mm		8,0	79,0	41,0	29,0	36,0	69169
0.3125	7,938 mm	5/16	8,0	79,0	41,0	29,0	36,0	56815
0.3150	8,000 mm		8,0	79,0	41,0	29,0	36,0	69170
0.3189	8,100 mm		10,0	89,0	47,0	35,0	40,0	69171
0.3228	8,200 mm		10,0	89,0	47,0	35,0	40,0	69172
0.3268	8,300 mm		10,0	89,0	47,0	35,0	40,0	69173
0.3281	8,334 mm	21/64	10,0	89,0	47,0	34,0	40,0	56816
0.3307	8,400 mm		10,0	89,0	47,0	34,0	40,0	69174
0.3320	8,433 mm	Q	10,0	89,0	47,0	34,0	40,0	56817
0.3346	8,500 mm		10,0	89,0	47,0	34,0	40,0	69175
0.3386	8,600 mm		10,0	89,0	47,0	34,0	40,0	69176
0.3425	8,700 mm		10,0	89,0	47,0	34,0	40,0	69177
0.3438	8,733 mm	11/32	10,0	89,0	47,0	34,0	40,0	56818
0.3465	8,800 mm		10,0	89,0	47,0	34,0	40,0	69178
0.3504	8,900 mm		10,0	89,0	47,0	34,0	40,0	69179
0.3543	9,000 mm		10,0	89,0	47,0	34,0	40,0	69180

continued on next page

CONTINUED




3xD



143M-S 3xD

FRACTIONAL & METRIC SERIES

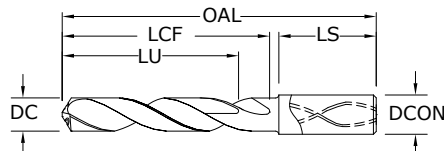

- Coolant through design improves coolant flow to extend tool life and aid in chip evacuation
- Eccentric 2-margin design reduces frictional heat and minimizes material adhesion to the margins without weakening the drill
- Computer controlled edge honing protects against chip damage
- High-performance point design stabilizes on contact for exceptional hole size and cylindricity allowing for low thrust force and extended tool life
- SGS Ti-NAMITE®-A coating provides exceptional wear and erosion resistance when drilling heat resisting alloys like Inconel, Stainless Steel, and Titanium Alloys
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)
0.3583	9,100 mm		10,0	89,0	47,0	33,0	40,0	69181
0.3594	9,129 mm	23/64	10,0	89,0	47,0	33,0	40,0	56819
0.3622	9,200 mm		10,0	89,0	47,0	33,0	40,0	69182
0.3661	9,300 mm		10,0	89,0	47,0	33,0	40,0	69183
0.3680	9,347 mm	U	10,0	89,0	47,0	33,0	40,0	56820
0.3701	9,400 mm		10,0	89,0	47,0	33,0	40,0	69184
0.3740	9,500 mm		10,0	89,0	47,0	33,0	40,0	69185
0.3750	9,525 mm	3/8	10,0	89,0	47,0	33,0	40,0	56821
0.3780	9,600 mm		10,0	89,0	47,0	33,0	40,0	69186
0.3819	9,700 mm		10,0	89,0	47,0	32,0	40,0	69187
0.3858	9,800 mm		10,0	89,0	47,0	32,0	40,0	69188
0.3898	9,900 mm		10,0	89,0	47,0	32,0	40,0	69189
0.3906	9,921 mm	25/64	10,0	89,0	47,0	32,0	40,0	56822
0.3937	10,000 mm		10,0	89,0	47,0	32,0	40,0	69190
0.3976	10,100 mm		12,0	102,0	55,0	40,0	45,0	69191
0.4016	10,200 mm		12,0	102,0	55,0	40,0	45,0	69192
0.4055	10,300 mm		12,0	102,0	55,0	40,0	45,0	69193
0.4062	10,317 mm	13/32	12,0	102,0	55,0	40,0	45,0	56823
0.4095	10,400 mm		12,0	102,0	55,0	39,0	45,0	69194
0.4134	10,500 mm		12,0	102,0	55,0	39,0	45,0	69195
0.4173	10,600 mm		12,0	102,0	55,0	39,0	45,0	69196
0.4213	10,700 mm		12,0	102,0	55,0	39,0	45,0	69197
0.4219	10,716 mm	27/64	12,0	102,0	55,0	39,0	45,0	56824
0.4252	10,800 mm		12,0	102,0	55,0	39,0	45,0	69198
0.4291	10,900 mm		12,0	102,0	55,0	39,0	45,0	69199
0.4331	11,000 mm		12,0	102,0	55,0	39,0	45,0	69200
0.4370	11,100 mm		12,0	102,0	55,0	38,0	45,0	69201
0.4375	11,113 mm	7/16	12,0	102,0	55,0	38,0	45,0	56825
0.4409	11,200 mm		12,0	102,0	55,0	38,0	45,0	69202
0.4449	11,300 mm		12,0	102,0	55,0	38,0	45,0	69203
0.4488	11,400 mm		12,0	102,0	55,0	38,0	45,0	69204
0.4528	11,500 mm		12,0	102,0	55,0	38,0	45,0	69205
0.4567	11,600 mm		12,0	102,0	55,0	38,0	45,0	69206
0.4606	11,700 mm		12,0	102,0	55,0	37,0	45,0	69207
0.4646	11,800 mm		12,0	102,0	55,0	37,0	45,0	69208
0.4685	11,900 mm		12,0	102,0	55,0	37,0	45,0	69209

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

143M-S 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)
0.4688	11,908 mm	15/32	12,0	102,0	55,0	37,0	45,0	56826
0.4724	12,000 mm		12,0	102,0	55,0	37,0	45,0	69210
0.4844	12,304 mm	31/64	14,0	107,0	60,0	41,0	45,0	56827
0.4921	12,500 mm		14,0	107,0	60,0	41,0	45,0	69211
0.5000	12,700 mm	1/2	14,0	107,0	60,0	41,0	45,0	56828
0.5039	12,800 mm		14,0	107,0	60,0	41,0	45,0	69212
0.5118	13,000 mm		14,0	107,0	60,0	41,0	45,0	69213
0.5156	13,096 mm	33/64	14,0	107,0	60,0	40,0	45,0	56829
0.5315	13,500 mm		14,0	107,0	60,0	40,0	45,0	69214
0.5433	13,800 mm		14,0	107,0	60,0	39,0	45,0	69215
0.5512	14,000 mm		14,0	107,0	60,0	39,0	45,0	69216
0.5625	14,288 mm	9/16	16,0	115,0	65,0	43,0	48,0	56830
0.5709	14,500 mm		16,0	115,0	65,0	43,0	48,0	69217
0.5781	14,684 mm	37/64	16,0	115,0	65,0	43,0	48,0	56831
0.5827	14,800 mm		16,0	115,0	65,0	43,0	48,0	69218
0.5906	15,000 mm		16,0	115,0	65,0	42,0	48,0	69219
0.6102	15,500 mm		16,0	115,0	65,0	42,0	48,0	69220
0.6221	15,800 mm		16,0	115,0	65,0	41,0	48,0	69221
0.6250	15,875 mm	5/8	16,0	115,0	65,0	41,0	48,0	56832
0.6299	16,000 mm		16,0	115,0	65,0	41,0	48,0	69222
0.6562	16,667 mm	21/32	18,0	123,0	73,0	47,0	48,0	56833
0.6875	17,463 mm	11/16	18,0	123,0	73,0	47,0	48,0	56834
0.7500	19,050 mm	3/4	20,0	131,0	79,0	50,0	50,0	56835

CONTINUED




5xD



143M-S 5xD

FRACTIONAL & METRIC SERIES



- Coolant through design improves coolant flow to extend tool life and aid in chip evacuation
- Eccentric 2-margin design reduces frictional heat and minimizes material adhesion to the margins without weakening the drill
- Computer controlled edge honing protects against chip damage
- High-performance point design stabilizes on contact for exceptional hole size and cylindricity allowing for low thrust force and extended tool life
- SGS Ti-NAMITE®-A coating provides exceptional wear and erosion resistance when drilling heat resisting alloys like Inconel, Stainless Steel, and Titanium Alloys
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)
0.1181	3,000 mm		6,0	66,0	28,0	23,0	36,0	69223
0.1220	3,100 mm		6,0	66,0	28,0	23,0	36,0	69224
0.1250	3,175 mm	1/8	6,0	66,0	28,0	23,0	36,0	56836
0.1260	3,200 mm		6,0	66,0	28,0	23,0	36,0	69225
0.1299	3,300 mm		6,0	66,0	28,0	23,0	36,0	69226
0.1339	3,400 mm		6,0	66,0	28,0	23,0	36,0	69227
0.1360	3,454 mm	#29	6,0	66,0	28,0	23,0	36,0	56837
0.1378	3,500 mm		6,0	66,0	28,0	23,0	36,0	69228
0.1406	3,571 mm	9/64	6,0	66,0	28,0	23,0	36,0	56838
0.1417	3,600 mm		6,0	66,0	28,0	23,0	36,0	69229
0.1457	3,700 mm		6,0	66,0	28,0	23,0	36,0	69230
0.1496	3,800 mm		6,0	74,0	36,0	29,0	36,0	69231
0.1535	3,900 mm		6,0	74,0	36,0	29,0	36,0	69232
0.1562	3,967 mm	5/32	6,0	74,0	36,0	29,0	36,0	56839
0.1575	4,000 mm		6,0	74,0	36,0	29,0	36,0	69233
0.1590	4,039 mm	#21	6,0	74,0	36,0	29,0	36,0	56840
0.1614	4,100 mm		6,0	74,0	36,0	29,0	36,0	69234
0.1654	4,200 mm		6,0	74,0	36,0	29,0	36,0	69235
0.1693	4,300 mm		6,0	74,0	36,0	29,0	36,0	69236
0.1719	4,366 mm	11/64	6,0	74,0	36,0	29,0	36,0	56841
0.1732	4,400 mm		6,0	74,0	36,0	29,0	36,0	69237
0.1772	4,500 mm		6,0	74,0	36,0	29,0	36,0	69238
0.1811	4,600 mm		6,0	74,0	36,0	29,0	36,0	69239
0.1850	4,699 mm	#13	6,0	74,0	36,0	29,0	36,0	69240
0.1875	4,763 mm	3/16	6,0	82,0	44,0	37,0	36,0	56842
0.1890	4,801 mm	#12	6,0	82,0	44,0	37,0	36,0	69241
0.1929	4,900 mm		6,0	82,0	44,0	37,0	36,0	69242
0.1969	5,000 mm		6,0	82,0	44,0	36,0	36,0	69243
0.2008	5,100 mm		6,0	82,0	44,0	36,0	36,0	69244
0.2031	5,159 mm	13/64	6,0	82,0	44,0	36,0	36,0	56843
0.2047	5,200 mm		6,0	82,0	44,0	36,0	36,0	69245
0.2087	5,300 mm		6,0	82,0	44,0	36,0	36,0	69246
0.2126	5,400 mm		6,0	82,0	44,0	36,0	36,0	69247
0.2165	5,500 mm		6,0	82,0	44,0	36,0	36,0	69248
0.2188	5,558 mm	7/32	6,0	82,0	44,0	36,0	36,0	56844
0.2205	5,600 mm		6,0	82,0	44,0	36,0	36,0	69249

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029
DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

143M-S 5xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-A (AITIN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2244	5,700 mm		6,0	82,0	44,0	35,0	36,0	69250
0.2283	5,800 mm		6,0	82,0	44,0	35,0	36,0	69251
0.2323	5,900 mm		6,0	82,0	44,0	35,0	36,0	69252
0.2344	5,954 mm	15/64	6,0	82,0	44,0	35,0	36,0	56845
0.2362	6,000 mm		6,0	82,0	44,0	35,0	36,0	69253
0.2402	6,100 mm		8,0	91,0	53,0	44,0	36,0	69254
0.2441	6,200 mm		8,0	91,0	53,0	44,0	36,0	69255
0.2480	6,300 mm		8,0	91,0	53,0	44,0	36,0	69256
0.2500	6,350 mm	1/4 E	8,0	91,0	53,0	43,0	36,0	56846
0.2520	6,400 mm		8,0	91,0	53,0	43,0	36,0	69257
0.2559	6,500 mm		8,0	91,0	53,0	43,0	36,0	69258
0.2570	6,528 mm	F	8,0	91,0	53,0	43,0	36,0	56847
0.2598	6,600 mm		8,0	91,0	53,0	43,0	36,0	69259
0.2638	6,700 mm		8,0	91,0	53,0	43,0	36,0	69260
0.2656	6,746 mm	17/64	8,0	91,0	53,0	43,0	36,0	56848
0.2677	6,800 mm		8,0	91,0	53,0	43,0	36,0	69261
0.2717	6,900 mm		8,0	91,0	53,0	43,0	36,0	69262
0.2756	7,000 mm		8,0	91,0	53,0	42,0	36,0	69263
0.2795	7,100 mm		8,0	91,0	53,0	42,0	36,0	69264
0.2812	7,142 mm	9/32	8,0	91,0	53,0	42,0	36,0	56849
0.2835	7,200 mm		8,0	91,0	53,0	42,0	36,0	69265
0.2874	7,300 mm		8,0	91,0	53,0	42,0	36,0	69266
0.2913	7,400 mm		8,0	91,0	53,0	42,0	36,0	69267
0.2953	7,500 mm		8,0	91,0	53,0	42,0	36,0	69268
0.2969	7,541 mm	19/64	8,0	91,0	53,0	42,0	36,0	56850
0.2992	7,600 mm		8,0	91,0	53,0	42,0	36,0	69269
0.3031	7,700 mm		8,0	91,0	53,0	41,0	36,0	69270
0.3071	7,800 mm		8,0	91,0	53,0	41,0	36,0	69271
0.3110	7,900 mm		8,0	91,0	53,0	41,0	36,0	69272
0.3125	7,938 mm	5/16	8,0	91,0	53,0	41,0	36,0	56851
0.3150	8,000 mm		8,0	91,0	53,0	41,0	36,0	69273
0.3189	8,100 mm		10,0	103,0	61,0	49,0	40,0	69274
0.3228	8,200 mm		10,0	103,0	61,0	49,0	40,0	69275
0.3268	8,300 mm		10,0	103,0	61,0	49,0	40,0	69276
0.3281	8,334 mm	21/64	10,0	103,0	61,0	48,0	40,0	56852
0.3307	8,400 mm		10,0	103,0	61,0	48,0	40,0	69277
0.3320	8,433 mm	Q	10,0	103,0	61,0	48,0	40,0	56853
0.3346	8,500 mm		10,0	103,0	61,0	48,0	40,0	69278
0.3386	8,600 mm		10,0	103,0	61,0	48,0	40,0	69279
0.3425	8,700 mm		10,0	103,0	61,0	48,0	40,0	69280
0.3438	8,733 mm	11/32	10,0	103,0	61,0	48,0	40,0	56854
0.3465	8,800 mm		10,0	103,0	61,0	48,0	40,0	69281
0.3504	8,900 mm		10,0	103,0	61,0	48,0	40,0	69282
0.3543	9,000 mm		10,0	103,0	61,0	48,0	40,0	69283

continued on next page

CONTINUED




5xD



143M-S 5xD

FRACTIONAL & METRIC SERIES



- Coolant through design improves coolant flow to extend tool life and aid in chip evacuation
- Eccentric 2-margin design reduces frictional heat and minimizes material adhesion to the margins without weakening the drill
- Computer controlled edge honing protects against chip damage
- High-performance point design stabilizes on contact for exceptional hole size and cylindricity allowing for low thrust force and extended tool life
- SGS Ti-NAMITE®-A coating provides exceptional wear and erosion resistance when drilling heat resisting alloys like Inconel, Stainless Steel, and Titanium Alloys
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)
0.3583	9,100 mm		10,0	103,0	61,0	47,0	40,0	69284
0.3594	9,129 mm	23/64	10,0	103,0	61,0	47,0	40,0	56855
0.3622	9,200 mm		10,0	103,0	61,0	47,0	40,0	69285
0.3661	9,300 mm		10,0	103,0	61,0	47,0	40,0	69286
0.3680	9,347 mm	U	10,0	103,0	61,0	47,0	40,0	56856
0.3701	9,400 mm		10,0	103,0	61,0	47,0	40,0	69287
0.3740	9,500 mm		10,0	103,0	61,0	47,0	40,0	69288
0.3750	9,525 mm	3/8	10,0	103,0	61,0	47,0	40,0	56857
0.3780	9,600 mm		10,0	103,0	61,0	47,0	40,0	69289
0.3819	9,700 mm		10,0	103,0	61,0	46,0	40,0	69290
0.3858	9,800 mm		10,0	103,0	61,0	46,0	40,0	69291
0.3898	9,900 mm		10,0	103,0	61,0	46,0	40,0	69292
0.3906	9,921 mm	25/64	10,0	103,0	61,0	46,0	40,0	56858
0.3937	10,000 mm		10,0	103,0	61,0	46,0	40,0	69293
0.3976	10,100 mm		12,0	118,0	71,0	56,0	45,0	69294
0.4016	10,200 mm		12,0	118,0	71,0	56,0	45,0	69295
0.4055	10,300 mm		12,0	118,0	71,0	56,0	45,0	69296
0.4062	10,317 mm	13/32	12,0	118,0	71,0	56,0	45,0	56859
0.4095	10,400 mm		12,0	118,0	71,0	55,0	45,0	69297
0.4134	10,500 mm		12,0	118,0	71,0	55,0	45,0	69298
0.4173	10,600 mm		12,0	118,0	71,0	55,0	45,0	69299
0.4213	10,700 mm		12,0	118,0	71,0	55,0	45,0	69300
0.4219	10,716 mm	27/64	12,0	118,0	71,0	55,0	45,0	56860
0.4252	10,800 mm		12,0	118,0	71,0	55,0	45,0	69301
0.4291	10,900 mm		12,0	118,0	71,0	55,0	45,0	69302
0.4331	11,000 mm		12,0	118,0	71,0	54,0	45,0	69303
0.4370	11,100 mm		12,0	118,0	71,0	54,0	45,0	69304
0.4375	11,113 mm	7/16	12,0	118,0	71,0	54,0	45,0	56861
0.4409	11,200 mm		12,0	118,0	71,0	54,0	45,0	69305
0.4449	11,300 mm		12,0	118,0	71,0	54,0	45,0	69306
0.4488	11,400 mm		12,0	118,0	71,0	54,0	45,0	69307
0.4528	11,500 mm		12,0	118,0	71,0	54,0	45,0	69308
0.4567	11,600 mm		12,0	118,0	71,0	54,0	45,0	69309
0.4606	11,700 mm		12,0	118,0	71,0	53,0	45,0	69310
0.4646	11,800 mm		12,0	118,0	71,0	53,0	45,0	69311
0.4685	11,900 mm		12,0	118,0	71,0	53,0	45,0	69312

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

143M-S 5xD

FRACTIONAL & METRIC SERIES

inch & mm								EDP NO.	CONTINUED
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)	
0.4688	11,908 mm	15/32	12,0	118,0	71,0	53,0	45,0	56862	
0.4724	12,000 mm		12,0	118,0	71,0	53,0	45,0	69313	
0.4844	12,304 mm	31/64	14,0	124,0	77,0	58,0	45,0	56863	
0.4921	12,500 mm		14,0	124,0	77,0	58,0	45,0	69314	
0.5000	12,700 mm	1/2	14,0	124,0	77,0	58,0	45,0	56864	
0.5039	12,800 mm		14,0	124,0	77,0	58,0	45,0	69315	
0.5118	13,000 mm		14,0	124,0	77,0	58,0	45,0	69316	
0.5156	13,096 mm	33/64	14,0	124,0	77,0	57,0	45,0	56865	
0.5315	13,500 mm		14,0	124,0	77,0	57,0	45,0	69317	
0.5433	13,800 mm		14,0	124,0	77,0	56,0	45,0	69318	
0.5512	14,000 mm		14,0	124,0	77,0	56,0	45,0	69319	
0.5625	14,288 mm	9/16	16,0	133,0	83,0	61,0	48,0	56866	
0.5709	14,500 mm		16,0	133,0	83,0	61,0	48,0	69320	
0.5781	14,684 mm	37/64	16,0	133,0	83,0	61,0	48,0	56867	
0.5827	14,800 mm		16,0	133,0	83,0	61,0	48,0	69321	
0.5906	15,000 mm		16,0	133,0	83,0	60,0	48,0	69322	
0.6102	15,500 mm		16,0	133,0	83,0	60,0	48,0	69323	
0.6221	15,800 mm		16,0	133,0	83,0	59,0	48,0	69324	
0.6250	15,875 mm	5/8	16,0	133,0	83,0	59,0	48,0	56868	
0.6299	16,000 mm		16,0	133,0	83,0	59,0	48,0	69325	
0.6562	16,667 mm	21/32	18,0	143,0	93,0	68,0	48,0	56869	
0.6875	17,463 mm	11/16	18,0	143,0	93,0	67,0	48,0	56870	
0.7500	19,050 mm	3/4	20,0	153,0	101,0	72,0	50,0	56871	

Series 143M-S Fractional	Hardness	Vc (sfm)	DC • in								
			1/8	3/16	1/4	3/8	1/2	5/8	3/4		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	425	RPM	12988	8659	6494	4329	3247	2598	2165
			(340-510)	Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236
				Feed (ipm)	51.0	51.0	51.0	51.0	51.0	51.0	51.0
		≤ 275 Bhn or ≤ 28 HRc	380	RPM	11613	7742	5806	3871	2903	2323	1935
			(304-456)	Fr	0.0035	0.0053	0.0071	0.0106	0.0141	0.0177	0.0212
				Feed (ipm)	41.0	41.0	41.0	41.0	41.0	41.0	41.0
		≤ 425 Bhn or ≤ 45 HRc	220	RPM	6723	4482	3362	2241	1681	1345	1121
			(176-264)	Fr	0.0030	0.0045	0.0059	0.0089	0.0119	0.0149	0.0178
				Feed (ipm)	20.0	20.0	20.0	20.0	20.0	20.0	20.0
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	330	RPM	10085	6723	5042	3362	2521	2017	1681
			(264-396)	Fr	0.0030	0.0045	0.0059	0.0089	0.0119	0.0149	0.0178
				Feed (ipm)	30.0	30.0	30.0	30.0	30.0	30.0	30.0
		≤ 375 Bhn or ≤ 40 HRc	200	RPM	6112	4075	3056	2037	1528	1222	1019
			(160-240)	Fr	0.0025	0.0038	0.0051	0.0076	0.0101	0.0127	0.0152
				Feed (ipm)	15.5	15.5	15.5	15.5	15.5	15.5	15.5
		≤ 425 Bhn or ≤ 45 HRc	140	RPM	4278	2852	2139	1426	1070	856	713
			(112-168)	Fr	0.0018	0.0027	0.0036	0.0054	0.0072	0.0090	0.0108
				Feed (ipm)	7.7	7.7	7.7	7.7	7.7	7.7	7.7
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	145	RPM	4431	2954	2216	1477	1108	886	739
			(116-174)	Fr	0.0026	0.0039	0.0052	0.0078	0.0104	0.0130	0.0156
				Feed (ipm)	11.5	11.5	11.5	11.5	11.5	11.5	11.5
		≤ 375 Bhn or ≤ 40 HRc	95	RPM	2903	1935	1452	968	726	581	484
			(76-114)	Fr	0.0012	0.0018	0.0024	0.0036	0.0048	0.0060	0.0072
				Feed (ipm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	325	RPM	9932	6621	4966	3311	2483	1986	1655
			(260-390)	Fr	0.0030	0.0045	0.0060	0.0091	0.0121	0.0151	0.0181
				Feed (ipm)	30.0	30.0	30.0	30.0	30.0	30.0	30.0
		≤ 275 Bhn or ≤ 28 HRc	210	RPM	6418	4278	3209	2139	1604	1284	1070
			(168-252)	Fr	0.0023	0.0035	0.0047	0.0070	0.0093	0.0117	0.0140
				Feed (ipm)	15.0	15.0	15.0	15.0	15.0	15.0	15.0
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	160	RPM	4890	3260	2445	1630	1222	978	815
			(128-192)	Fr	0.0023	0.0035	0.0047	0.0070	0.0093	0.0117	0.0140
				Feed (ipm)	11.4	11.4	11.4	11.4	11.4	11.4	11.4
		≤ 375 Bhn or ≤ 40 HRc	115	RPM	3514	2343	1757	1171	879	703	586
			(92-138)	Fr	0.0021	0.0031	0.0042	0.0062	0.0083	0.0104	0.0125
				Feed (ipm)	7.3	7.3	7.3	7.3	7.3	7.3	7.3

continued on next page

	Series 143M-S Fractional	Hardness	Vc (sfm)	DC • in							
				1/8	3/16	1/4	3/8	1/2	5/8	3/4	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	360	RPM	11002	7334	5501	3667	2750	2200	1834
			(288-432)	Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273
				Feed (ipm)	50.0	50.0	50.0	50.0	50.0	50.0	50.0
		≤ 260 Bhn or ≤ 26 HRc	335	RPM	10238	6825	5119	3413	2559	2048	1706
			(268-402)	Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273
				Feed (ipm)	46.5	46.5	46.5	46.5	46.5	46.5	46.5
S	HIGH TEMP ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	130	RPM	3973	2649	1986	1324	993	795	662
			(104-156)	Fr	0.0014	0.0022	0.0029	0.0043	0.0057	0.0072	0.0086
				Feed (ipm)	5.7	5.7	5.7	5.7	5.7	5.7	5.7
		≤ 400 Bhn or ≤ 43 HRc	70	RPM	2139	1426	1070	713	535	428	357
			(56-84)	Fr	0.0012	0.0018	0.0024	0.0036	0.0049	0.0061	0.0073
				Feed (ipm)	2.6	2.6	2.6	2.6	2.6	2.6	2.6
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	215	RPM	6570	4380	3285	2190	1643	1314	1095
			(172-258)	Fr	0.0018	0.0026	0.0035	0.0053	0.0070	0.0088	0.0105
				Feed (ipm)	11.5	11.5	11.5	11.5	11.5	11.5	11.5
		≤ 350 Bhn or ≤ 38 HRc	160	RPM	4890	3260	2445	1630	1222	978	815
			(128-192)	Fr	0.0016	0.0024	0.0032	0.0048	0.0064	0.0080	0.0096
				Feed (ipm)	7.8	7.8	7.8	7.8	7.8	7.8	7.8
		≤ 440 Bhn or ≤ 47 HRc	85	RPM	2598	1732	1299	866	649	520	433
			(68-102)	Fr	0.0012	0.0018	0.0024	0.0036	0.0048	0.0060	0.0072
				Feed (ipm)	3.1	3.1	3.1	3.1	3.1	3.1	3.1

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x RPM

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 143M-S Metric	Hardness	Vc		DC • mm							
		(m/min)		3	6	8	10	12	14	16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	130	RPM	13733	6867	5150	4120	3433	2943	2575
			(104-155)	Fr	0.094	0.189	0.252	0.314	0.377	0.440	0.503
				Feed (mm/min)	1295	1295	1295	1295	1295	1295	1295
		≤ 275 Bhn or ≤ 28 HRc	116	RPM	12279	6140	4605	3684	3070	2631	2302
			(93-139)	Fr	0.085	0.170	0.226	0.283	0.339	0.396	0.452
				Feed (mm/min)	1041	1041	1041	1041	1041	1041	1041
		≤ 425 Bhn or ≤ 45 HRc	67	RPM	7109	3555	2666	2133	1777	1523	1333
			(54-80)	Fr	0.071	0.143	0.191	0.238	0.286	0.333	0.381
				Feed (mm/min)	508	508	508	508	508	508	508
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	101	RPM	10664	5332	3999	3199	2666	2285	1999
			(80-121)	Fr	0.071	0.143	0.191	0.238	0.286	0.333	0.381
				Feed (mm/min)	762	762	762	762	762	762	762
		≤ 375 Bhn or ≤ 40 HRc	61	RPM	6463	3231	2424	1939	1616	1385	1212
			(49-73)	Fr	0.061	0.122	0.162	0.203	0.244	0.284	0.325
				Feed (mm/min)	394	394	394	394	394	394	394
		≤ 425 Bhn or ≤ 45 HRc	43	RPM	4524	2262	1696	1357	1131	969	848
			(34-51)	Fr	0.043	0.086	0.115	0.144	0.173	0.202	0.231
				Feed (mm/min)	196	196	196	196	196	196	196
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	44	RPM	4686	2343	1757	1406	1171	1004	879
			(35-53)	Fr	0.062	0.125	0.166	0.208	0.249	0.291	0.332
				Feed (mm/min)	292	292	292	292	292	292	292
		≤ 375 Bhn or ≤ 40 HRc	29	RPM	3070	1535	1151	921	767	658	576
			(23-35)	Fr	0.029	0.058	0.077	0.097	0.116	0.135	0.154
				Feed (mm/min)	89	89	89	89	89	89	89
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	99	RPM	10502	5251	3938	3151	2626	2250	1969
			(79-119)	Fr	0.073	0.145	0.193	0.242	0.290	0.339	0.387
				Feed (mm/min)	762	762	762	762	762	762	762
		≤ 275 Bhn or ≤ 28 HRc	64	RPM	6786	3393	2545	2036	1696	1454	1272
			(51-77)	Fr	0.056	0.112	0.150	0.187	0.225	0.262	0.299
				Feed (mm/min)	381	381	381	381	381	381	381
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	49	RPM	5170	2585	1939	1551	1293	1108	969
			(39-59)	Fr	0.056	0.112	0.149	0.187	0.224	0.261	0.299
				Feed (mm/min)	290	290	290	290	290	290	290
		≤ 375 Bhn or ≤ 40 HRc	35	RPM	3716	1858	1394	1115	929	796	697
			(28-42)	Fr	0.050	0.100	0.133	0.166	0.200	0.233	0.266
				Feed (mm/min)	185	185	185	185	185	185	185

continued on next page

Series 143M-S Metric		Hardness	Vc (m/min)	DC • mm								
				3	6	8	10	12	14	16		
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	110	RPM	11633	5816	4362	3490	2908	2493	2181	
			(88-132)	Fr	0.109	0.218	0.291	0.364	0.437	0.509	0.582	
				Feed (mm/min)	1270	1270	1270	1270	1270	1270	1270	
		≤ 260 Bhn or ≤ 26 HRc	102	RPM	10825	5413	4059	3248	2706	2320	2030	
			(82-123)	Fr	0.109	0.218	0.291	0.364	0.436	0.509	0.582	
				Feed (mm/min)	1181	1181	1181	1181	1181	1181	1181	
S	HIGH TEMP ALLOYS (Nickel , Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	40	RPM	4201	2100	1575	1260	1050	900	788	
			(32-48)	Fr	0.034	0.069	0.092	0.115	0.138	0.161	0.184	
				Feed (mm/min)	145	145	145	145	145	145	145	
		≤ 400 Bhn or ≤ 43 HRc	21	RPM	2262	1131	848	679	565	485	424	
			(17-26)	Fr	0.029	0.058	0.078	0.097	0.117	0.136	0.156	
				Feed (mm/min)	66	66	66	66	66	66	66	
		TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	66	RPM	6947	3474	2605	2084	1737	1489	1303
				(52-79)	Fr	0.042	0.084	0.112	0.140	0.168	0.196	0.224
					Feed (mm/min)	292	292	292	292	292	292	292
	≤ 350 Bhn or ≤ 38 HRc		49	RPM	5170	2585	1939	1551	1293	1108	969	
			(39-59)	Fr	0.038	0.077	0.102	0.128	0.153	0.179	0.204	
				Feed (mm/min)	198	198	198	198	198	198	198	
	≤ 440 Bhn or ≤ 47 HRc	26	RPM	2747	1373	1030	824	687	589	515		
		(21-31)	Fr	0.029	0.057	0.076	0.096	0.115	0.134	0.153		
			Feed (mm/min)	79	79	79	79	79	79	79		

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{RPM}$
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)




5xD



141K 5xD

FRACTIONAL & METRIC SERIES

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 43 HRc (≤ 400 Bhn)

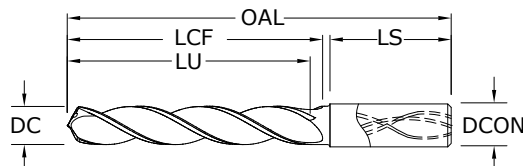

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-M (TM)	
0.1181	3,000 mm		6,0	66,0	28,0	23,0	36,0	65160	
0.1220	3,100 mm		6,0	66,0	28,0	23,0	36,0	65161	
0.1250	3,175 mm	1/8	6,0	66,0	28,0	23,0	36,0	55160	
0.1260	3,200 mm		6,0	66,0	28,0	23,0	36,0	65162	
0.1299	3,300 mm		6,0	66,0	28,0	23,0	36,0	65163	
0.1339	3,400 mm		6,0	66,0	28,0	23,0	36,0	65164	
0.1360	3,454 mm	#29	6,0	66,0	28,0	23,0	36,0	55161	
0.1378	3,500 mm		6,0	66,0	28,0	23,0	36,0	65165	
0.1406	3,571 mm	9/64	6,0	66,0	28,0	23,0	36,0	55162	
0.1417	3,600 mm		6,0	66,0	28,0	23,0	36,0	65166	
0.1457	3,700 mm		6,0	66,0	28,0	23,0	36,0	65167	
0.1496	3,800 mm		6,0	74,0	36,0	29,0	36,0	65168	
0.1535	3,900 mm		6,0	74,0	36,0	29,0	36,0	65169	
0.1562	3,967 mm	5/32	6,0	74,0	36,0	29,0	36,0	55163	
0.1575	4,000 mm		6,0	74,0	36,0	29,0	36,0	65170	
0.1590	4,039 mm	#21	6,0	74,0	36,0	29,0	36,0	55164	
0.1614	4,100 mm		6,0	74,0	36,0	29,0	36,0	65171	
0.1654	4,200 mm		6,0	74,0	36,0	29,0	36,0	65172	
0.1693	4,300 mm		6,0	74,0	36,0	29,0	36,0	65173	
0.1719	4,366 mm	11/64	6,0	74,0	36,0	29,0	36,0	55165	
0.1732	4,400 mm		6,0	74,0	36,0	29,0	36,0	65174	
0.1772	4,500 mm		6,0	74,0	36,0	29,0	36,0	65175	
0.1811	4,600 mm		6,0	74,0	36,0	29,0	36,0	65176	
0.1850	4,699 mm	#13	6,0	74,0	36,0	29,0	36,0	65177	
0.1875	4,763 mm	3/16	6,0	82,0	44,0	37,0	36,0	55166	
0.1890	4,801 mm	#12	6,0	82,0	44,0	37,0	36,0	65178	
0.1929	4,900 mm		6,0	82,0	44,0	37,0	36,0	65179	
0.1969	5,000 mm		6,0	82,0	44,0	36,0	36,0	65180	
0.2008	5,100 mm		6,0	82,0	44,0	36,0	36,0	65181	
0.2031	5,159 mm	13/64	6,0	82,0	44,0	36,0	36,0	55167	
0.2047	5,200 mm		6,0	82,0	44,0	36,0	36,0	65182	
0.2087	5,300 mm		6,0	82,0	44,0	36,0	36,0	65183	
0.2126	5,400 mm		6,0	82,0	44,0	36,0	36,0	65184	
0.2165	5,500 mm		6,0	82,0	44,0	36,0	36,0	65185	
0.2188	5,558 mm	7/32	6,0	82,0	44,0	36,0	36,0	55168	
0.2205	5,600 mm		6,0	82,0	44,0	36,0	36,0	65186	

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h_6

CAST IRON

For patent
information visit
www.ksptpatents.com

continued on next page

141K 5xD

FRACTIONAL & METRIC SERIES

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-M (TM)
0.2244	5,700 mm		6,0	82,0	44,0	35,0	36,0	65187
0.2283	5,800 mm		6,0	82,0	44,0	35,0	36,0	65188
0.2323	5,900 mm		6,0	82,0	44,0	35,0	36,0	65189
0.2344	5,954 mm	15/64	6,0	82,0	44,0	35,0	36,0	55169
0.2362	6,000 mm		6,0	82,0	44,0	35,0	36,0	65190
0.2402	6,100 mm		8,0	91,0	53,0	44,0	36,0	65191
0.2441	6,200 mm		8,0	91,0	53,0	44,0	36,0	65192
0.2480	6,300 mm		8,0	91,0	53,0	44,0	36,0	65193
0.2500	6,350 mm	1/4 E	8,0	91,0	53,0	43,0	36,0	55170
0.2520	6,400 mm		8,0	91,0	53,0	43,0	36,0	65194
0.2559	6,500 mm		8,0	91,0	53,0	43,0	36,0	65195
0.2570	6,528 mm	F	8,0	91,0	53,0	43,0	36,0	55171
0.2598	6,600 mm		8,0	91,0	53,0	43,0	36,0	65196
0.2638	6,700 mm		8,0	91,0	53,0	43,0	36,0	65197
0.2656	6,746 mm	17/64	8,0	91,0	53,0	43,0	36,0	55172
0.2677	6,800 mm		8,0	91,0	53,0	43,0	36,0	65198
0.2717	6,900 mm		8,0	91,0	53,0	43,0	36,0	65199
0.2756	7,000 mm		8,0	91,0	53,0	42,0	36,0	65200
0.2795	7,100 mm		8,0	91,0	53,0	42,0	36,0	65201
0.2812	7,142 mm	9/32	8,0	91,0	53,0	42,0	36,0	55173
0.2835	7,200 mm		8,0	91,0	53,0	42,0	36,0	65202
0.2874	7,300 mm		8,0	91,0	53,0	42,0	36,0	65203
0.2913	7,400 mm		8,0	91,0	53,0	42,0	36,0	65204
0.2953	7,500 mm		8,0	91,0	53,0	42,0	36,0	65205
0.2969	7,541 mm	19/64	8,0	91,0	53,0	42,0	36,0	55174
0.2992	7,600 mm		8,0	91,0	53,0	42,0	36,0	65206
0.3031	7,700 mm		8,0	91,0	53,0	41,0	36,0	65207
0.3071	7,800 mm		8,0	91,0	53,0	41,0	36,0	65208
0.3110	7,900 mm		8,0	91,0	53,0	41,0	36,0	65209
0.3125	7,938 mm	5/16	8,0	91,0	53,0	41,0	36,0	55175
0.3150	8,000 mm		8,0	91,0	53,0	41,0	36,0	65210
0.3189	8,100 mm		10,0	103,0	61,0	49,0	40,0	65211
0.3228	8,200 mm		10,0	103,0	61,0	49,0	40,0	65212
0.3268	8,300 mm		10,0	103,0	61,0	49,0	40,0	65213
0.3281	8,334 mm	21/64	10,0	103,0	61,0	48,0	40,0	55176
0.3307	8,400 mm		10,0	103,0	61,0	48,0	40,0	65214
0.3320	8,433 mm	Q	10,0	103,0	61,0	48,0	40,0	55177
0.3346	8,500 mm		10,0	103,0	61,0	48,0	40,0	65215
0.3386	8,600 mm		10,0	103,0	61,0	48,0	40,0	65216
0.3425	8,700 mm		10,0	103,0	61,0	48,0	40,0	65217
0.3438	8,733 mm	11/32	10,0	103,0	61,0	48,0	40,0	55178
0.3465	8,800 mm		10,0	103,0	61,0	48,0	40,0	65218
0.3504	8,900 mm		10,0	103,0	61,0	48,0	40,0	65219
0.3543	9,000 mm		10,0	103,0	61,0	48,0	40,0	65220
0.3583	9,100 mm		10,0	103,0	61,0	47,0	40,0	65221
0.3594	9,129 mm	23/64	10,0	103,0	61,0	47,0	40,0	55179

continued on next page

CONTINUED




5xD



141K 5xD

FRACTIONAL & METRIC SERIES

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 43 HRc (≤ 400 Bhn)

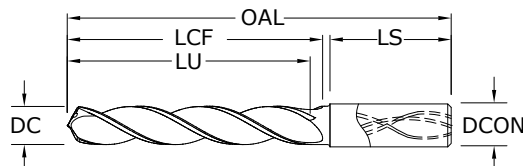

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-M (TM)	
0.3622	9,200 mm		10,0	103,0	61,0	47,0	40,0	65222	
0.3661	9,300 mm		10,0	103,0	61,0	47,0	40,0	65223	
0.3680	9,347 mm	U	10,0	103,0	61,0	47,0	40,0	55180	
0.3701	9,400 mm		10,0	103,0	61,0	47,0	40,0	65224	
0.3740	9,500 mm		10,0	103,0	61,0	47,0	40,0	65225	
0.3750	9,525 mm	3/8	10,0	103,0	61,0	47,0	40,0	55181	
0.3780	9,600 mm		10,0	103,0	61,0	47,0	40,0	65226	
0.3819	9,700 mm		10,0	103,0	61,0	46,0	40,0	65227	
0.3858	9,800 mm		10,0	103,0	61,0	46,0	40,0	65228	
0.3898	9,900 mm		10,0	103,0	61,0	46,0	40,0	65229	
0.3906	9,921 mm	25/64	10,0	103,0	61,0	46,0	40,0	55182	
0.3937	10,000 mm		10,0	103,0	61,0	46,0	40,0	65230	
0.3976	10,100 mm		12,0	118,0	71,0	56,0	45,0	65231	
0.4016	10,200 mm		12,0	118,0	71,0	56,0	45,0	65232	
0.4055	10,300 mm		12,0	118,0	71,0	56,0	45,0	65233	
0.4062	10,317 mm	13/32	12,0	118,0	71,0	56,0	45,0	55183	
0.4095	10,400 mm		12,0	118,0	71,0	55,0	45,0	65234	
0.4134	10,500 mm		12,0	118,0	71,0	55,0	45,0	65235	
0.4173	10,600 mm		12,0	118,0	71,0	55,0	45,0	65236	
0.4213	10,700 mm		12,0	118,0	71,0	55,0	45,0	65237	
0.4219	10,716 mm	27/64	12,0	118,0	71,0	55,0	45,0	55184	
0.4252	10,800 mm		12,0	118,0	71,0	55,0	45,0	65238	
0.4291	10,900 mm		12,0	118,0	71,0	55,0	45,0	65239	
0.4331	11,000 mm		12,0	118,0	71,0	54,0	45,0	65240	
0.4370	11,100 mm		12,0	118,0	71,0	54,0	45,0	65241	
0.4375	11,113 mm	7/16	12,0	118,0	71,0	54,0	45,0	55185	
0.4409	11,200 mm		12,0	118,0	71,0	54,0	45,0	65242	
0.4449	11,300 mm		12,0	118,0	71,0	54,0	45,0	65243	
0.4488	11,400 mm		12,0	118,0	71,0	54,0	45,0	65244	
0.4528	11,500 mm		12,0	118,0	71,0	54,0	45,0	65245	
0.4567	11,600 mm		12,0	118,0	71,0	54,0	45,0	65246	
0.4606	11,700 mm		12,0	118,0	71,0	53,0	45,0	65247	
0.4646	11,800 mm		12,0	118,0	71,0	53,0	45,0	65248	
0.4685	11,900 mm		12,0	118,0	71,0	53,0	45,0	65249	
0.4688	11,908 mm	15/32	12,0	118,0	71,0	53,0	45,0	55186	
0.4724	12,000 mm		12,0	118,0	71,0	53,0	45,0	65250	

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00028/+0.00083

DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h_6

CAST IRON

For patent
information visit
www.ksptpatents.com

continued on next page

141K 5xD

FRACTIONAL & METRIC SERIES

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-M (TM)
0.4844	12,304 mm	31/64	14,0	124,0	77,0	58,0	45,0	55187
0.4921	12,500 mm		14,0	124,0	77,0	58,0	45,0	65251
0.5000	12,700 mm	1/2	14,0	124,0	77,0	58,0	45,0	55188
0.5039	12,800 mm		14,0	124,0	77,0	58,0	45,0	65252
0.5118	13,000 mm		14,0	124,0	77,0	58,0	45,0	65253
0.5156	13,096 mm	33/64	14,0	124,0	77,0	57,0	45,0	55189
0.5315	13,500 mm		14,0	124,0	77,0	57,0	45,0	65254
0.5433	13,800 mm		14,0	124,0	77,0	56,0	45,0	65255
0.5512	14,000 mm		14,0	124,0	77,0	56,0	45,0	65256
0.5625	14,288 mm	9/16	16,0	133,0	83,0	61,0	48,0	55190
0.5709	14,500 mm		16,0	133,0	83,0	61,0	48,0	65257
0.5781	14,684 mm	37/64	16,0	133,0	83,0	61,0	48,0	55191
0.5827	14,800 mm		16,0	133,0	83,0	61,0	48,0	65258
0.5906	15,000 mm		16,0	133,0	83,0	60,0	48,0	65259
0.6102	15,500 mm		16,0	133,0	83,0	60,0	48,0	65260
0.6221	15,800 mm		16,0	133,0	83,0	59,0	48,0	65261
0.6250	15,875 mm	5/8	16,0	133,0	83,0	59,0	48,0	55192
0.6299	16,000 mm		16,0	133,0	83,0	59,0	48,0	65262
0.6562	16,667 mm	21/32	18,0	143,0	93,0	68,0	48,0	55193
0.6875	17,463 mm	11/16	18,0	143,0	93,0	67,0	48,0	55194
0.7500	19,050 mm	3/4	20,0	153,0	101,0	72,0	50,0	55195

CONTINUED

FRACTIONAL Hi-PerCarb®

Series 141K 5D Fractional	Hardness	Vc (sfm)	DC • in								
			1/8	3/16	1/4	3/8	1/2	5/8	3/4		
K	GRAY CAST IRON FERRITIC ASTM A48: CLASS 20 SAE J431C: GRADE 1800	≤ 150 Bhn or ≤ 1 HRc (360-540)	450	RPM	13752	9168	6876	4584	3438	2750	2292
			Fr	0.0049	0.0074	0.0099	0.0148	0.0198	0.0247	0.0297	
			Feed (ipm)	68	68	68	68	68	68	68	
	GRAY CAST IRON PEARLITIC ASTM A48: CLASS 30, 35, 40 SAE J431C: GRADE 3000	≤ 220 Bhn or ≤ 19 HRc (300-450)	375	RPM	11460	7640	5730	3820	2865	2292	1910
			Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236	
			Feed (ipm)	45	45	45	45	45	45	45	
	COMPACTED GRAPHITE IRON	≤ 250 Bhn or ≤ 25 HRc (260-390)	325	RPM	9932	6621	4966	3311	2483	1986	1655
			Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236	
			Feed (ipm)	39	39	39	39	39	39	39	
	MALLEABLE CAST IRON FERRITIC ASTM A220: GRADE 40010 SAE J158: GRADE M4504	≤ 160 Bhn or ≤ 3 HRc (360-540)	450	RPM	13752	9168	6876	4584	3438	2750	2292
			Fr	0.0049	0.0074	0.0099	0.0148	0.0198	0.0247	0.0297	
			Feed (ipm)	68	68	68	68	68	68	68	
	MALLEABLE CAST IRON MARTENSITE ASTM A220: GRADE 90001 SAE J158: GRADE M8501	≤ 320 Bhn or ≤ 34 HRc (200-300)	250	RPM	7640	5093	3820	2547	1910	1528	1273
			Fr	0.0031	0.0047	0.0063	0.0094	0.0126	0.0157	0.0188	
			Feed (ipm)	24	24	24	24	24	24	24	

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

METRIC Hi-PerCarb®

Series 141K 5D Metric	Hardness	Vc (m/min)	DC • mm								
			3	6	8	10	12	14	16		
K	GRAY CAST IRON FERRITIC ASTM A48: CLASS 20 SAE J431C: GRADE 1800	≤ 150 Bhn or ≤ 1 HRc	137	RPM	14541	7271	5453	4362	3635	3116	2726
		(110-165)	Fr	0.119	0.237	0.316	0.395	0.475	0.554	0.633	
			Feed (mm/min)	1725	1725	1725	1725	1725	1725	1725	
	GRAY CAST IRON PEARLITIC ASTM A48: CLASS 30, 35, 40 SAE J431C: GRADE 3000	≤ 220 Bhn or ≤ 19 HRc	114	RPM	12118	6059	4544	3635	3029	2597	2272
		(91-137)	Fr	0.094	0.189	0.252	0.315	0.378	0.441	0.504	
			Feed (mm/min)	1145	1145	1145	1145	1145	1145	1145	
	COMPACTED GRAPHITE IRON	≤ 250 Bhn or ≤ 25 HRc	99	RPM	10502	5251	3938	3151	2626	2250	1969
		(79-119)	Fr	0.094	0.189	0.251	0.314	0.377	0.440	0.503	
			Feed (mm/min)	990	990	990	990	990	990	990	
	MALLEABLE CAST IRON FERRITIC ASTM A220: GRADE 40010 SAE J158: GRADE M4504	≤ 160 Bhn or ≤ 3 HRc	137	RPM	14541	7271	5453	4362	3635	3116	2726
		(110-165)	Fr	0.119	0.237	0.316	0.395	0.475	0.554	0.633	
			Feed (mm/min)	1725	1725	1725	1725	1725	1725	1725	
	MALLEABLE CAST IRON MARTENSITE ASTM A220: GRADE 90001 SAE J158: GRADE M8501	≤ 320 Bhn or ≤ 34 HRc	76	RPM	8078	4039	3029	2424	2020	1731	1515
		(61-91)	Fr	0.076	0.151	0.201	0.252	0.302	0.352	0.403	
			Feed (mm/min)	610	610	610	610	610	610	610	



(Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

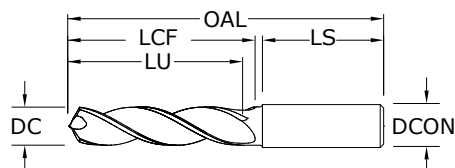

131N 3xD

FRACTIONAL & METRIC SERIES

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0.002/+0.012

DCON = h₆

>3-6 DIAMETER

DC = +0.004/+0.016

DCON = h₆

>6-10 DIAMETER

DC = +0.006/+0.021

DCON = h₆

>10-18 DIAMETER

DC = +0.007/+0.025

DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

		inch & mm						EDP NO.	
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.1181	3,000 mm		6,0	62,0	20,0	15,0	36,0	64600	67600
0.1220	3,100 mm		6,0	62,0	20,0	15,0	36,0	64601	67601
0.1250	3,175 mm	1/8	6,0	62,0	20,0	15,0	36,0	54600	54700
0.1260	3,200 mm		6,0	62,0	20,0	15,0	36,0	64602	67602
0.1299	3,300 mm		6,0	62,0	20,0	15,0	36,0	64603	67603
0.1339	3,400 mm		6,0	62,0	20,0	15,0	36,0	64604	67604
0.1360	3,454 mm	#29	6,0	62,0	20,0	15,0	36,0	54601	54701
0.1378	3,500 mm		6,0	62,0	20,0	15,0	36,0	64605	67605
0.1406	3,571 mm	9/64	6,0	62,0	20,0	15,0	36,0	54602	54702
0.1417	3,600 mm		6,0	62,0	20,0	15,0	36,0	64606	67606
0.1457	3,700 mm		6,0	62,0	20,0	15,0	36,0	64607	67607
0.1496	3,800 mm		6,0	66,0	24,0	18,0	36,0	64608	67608
0.1535	3,900 mm		6,0	66,0	24,0	18,0	36,0	64609	67609
0.1562	3,967 mm	5/32	6,0	66,0	24,0	18,0	36,0	54603	54703
0.1575	4,000 mm		6,0	66,0	24,0	18,0	36,0	64610	67610
0.1590	4,039 mm	#21	6,0	66,0	24,0	18,0	36,0	54604	54704
0.1614	4,100 mm		6,0	66,0	24,0	18,0	36,0	64611	67611
0.1654	4,200 mm		6,0	66,0	24,0	18,0	36,0	64612	67612
0.1693	4,300 mm		6,0	66,0	24,0	18,0	36,0	64613	67613
0.1719	4,366 mm	11/64	6,0	66,0	24,0	17,0	36,0	54605	54705
0.1732	4,400 mm		6,0	66,0	24,0	17,0	36,0	64614	67614
0.1772	4,500 mm		6,0	66,0	24,0	17,0	36,0	64615	67615
0.1811	4,600 mm		6,0	66,0	24,0	17,0	36,0	64616	67616
0.1850	4,699 mm	#13	6,0	66,0	24,0	17,0	36,0	64617	67617
0.1875	4,763 mm	3/16	6,0	66,0	28,0	21,0	36,0	54606	54706
0.1890	4,801 mm	#12	6,0	66,0	28,0	21,0	36,0	64618	67618
0.1929	4,900 mm		6,0	66,0	28,0	21,0	36,0	64619	67619
0.1969	5,000 mm		6,0	66,0	28,0	20,0	36,0	64620	67620
0.2008	5,100 mm		6,0	66,0	28,0	20,0	36,0	64621	67621
0.2031	5,159 mm	13/64	6,0	66,0	28,0	20,0	36,0	54607	54707
0.2047	5,200 mm		6,0	66,0	28,0	20,0	36,0	64622	67622
0.2087	5,300 mm		6,0	66,0	28,0	20,0	36,0	64623	67623
0.2126	5,400 mm		6,0	66,0	28,0	20,0	36,0	64624	67624
0.2165	5,500 mm		6,0	66,0	28,0	20,0	36,0	64625	67625
0.2188	5,558 mm	7/32	6,0	66,0	28,0	20,0	36,0	54608	54708
0.2205	5,600 mm		6,0	66,0	28,0	20,0	36,0	64626	67626

continued on next page

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRC)




3xD



131N 3xD

FRACTIONAL & METRIC SERIES

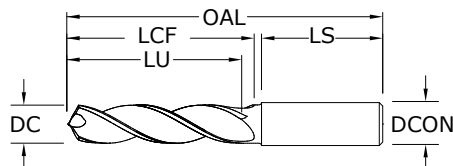

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

DECIMAL DC	METRIC DC	inch & mm						EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.2244	5,700 mm		6,0	66,0	28,0	19,0	36,0	64627	67627
0.2283	5,800 mm		6,0	66,0	28,0	19,0	36,0	64628	67628
0.2323	5,900 mm		6,0	66,0	28,0	19,0	36,0	64629	67629
0.2344	5,954 mm	15/64	6,0	66,0	28,0	19,0	36,0	54609	54709
0.2362	6,000 mm		6,0	66,0	28,0	19,0	36,0	64630	67630
0.2402	6,100 mm		8,0	79,0	34,0	25,0	36,0	64631	67631
0.2441	6,200 mm		8,0	79,0	34,0	25,0	36,0	64632	67632
0.2480	6,300 mm		8,0	79,0	34,0	25,0	36,0	64633	67633
0.2500	6,350 mm	1/4 E	8,0	79,0	34,0	24,0	36,0	54610	54710
0.2520	6,400 mm		8,0	79,0	34,0	24,0	36,0	64634	67634
0.2559	6,500 mm		8,0	79,0	34,0	24,0	36,0	64635	67635
0.2570	6,528 mm	F	8,0	79,0	34,0	24,0	36,0	54611	54711
0.2598	6,600 mm		8,0	79,0	34,0	24,0	36,0	64636	67636
0.2638	6,700 mm		8,0	79,0	34,0	24,0	36,0	64637	67637
0.2656	6,746 mm	17/64	8,0	79,0	34,0	24,0	36,0	54612	54712
0.2677	6,800 mm		8,0	79,0	34,0	24,0	36,0	64638	67638
0.2717	6,900 mm		8,0	79,0	34,0	24,0	36,0	64639	67639
0.2756	7,000 mm		8,0	79,0	34,0	24,0	36,0	64640	67640
0.2795	7,100 mm		8,0	79,0	41,0	30,0	36,0	64641	67641
0.2812	7,142 mm	9/32	8,0	79,0	41,0	30,0	36,0	54613	54713
0.2835	7,200 mm		8,0	79,0	41,0	30,0	36,0	64642	67642
0.2874	7,300 mm		8,0	79,0	41,0	30,0	36,0	64643	67643
0.2913	7,400 mm		8,0	79,0	41,0	30,0	36,0	64644	67644
0.2953	7,500 mm		8,0	79,0	41,0	30,0	36,0	64645	67645
0.2969	7,541 mm	19/64	8,0	79,0	41,0	30,0	36,0	54614	54714
0.2992	7,600 mm		8,0	79,0	41,0	30,0	36,0	64646	67646
0.3031	7,700 mm		8,0	79,0	41,0	29,0	36,0	64647	67647
0.3071	7,800 mm		8,0	79,0	41,0	29,0	36,0	64648	67648
0.3110	7,900 mm		8,0	79,0	41,0	29,0	36,0	64649	67649
0.3125	7,938 mm	5/16	8,0	79,0	41,0	29,0	36,0	54615	54715
0.3150	8,000 mm		8,0	79,0	41,0	29,0	36,0	64650	67650
0.3189	8,100 mm		10,0	89,0	47,0	35,0	40,0	64651	67651
0.3228	8,200 mm		10,0	89,0	47,0	35,0	40,0	64652	67652
0.3268	8,300 mm		10,0	89,0	47,0	35,0	40,0	64653	67653
0.3281	8,334 mm	21/64	10,0	89,0	47,0	34,0	40,0	54616	54716
0.3307	8,400 mm		10,0	89,0	47,0	34,0	40,0	64654	67654

TOLERANCES (inch)

≤.1181 DIAMETER

DC = $\pm 0.0008/\pm 0.0047$ DCON = h_6

>.1181-.2362 DIAMETER

DC = $\pm 0.0016/\pm 0.0063$ DCON = h_6

>.2362-.3937 DIAMETER

DC = $\pm 0.0024/\pm 0.0083$ DCON = h_6

>.3937-.7087 DIAMETER

DC = $\pm 0.0028/\pm 0.0098$ DCON = h_6

>.7087-1.1811 DIAMETER

DC = $\pm 0.0031/\pm 0.0114$ DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = $\pm 0,002/\pm 0,012$ DCON = h_6

>3-6 DIAMETER

DC = $\pm 0,004/\pm 0,016$ DCON = h_6

>6-10 DIAMETER

DC = $\pm 0,006/\pm 0,021$ DCON = h_6

>10-18 DIAMETER

DC = $\pm 0,007/\pm 0,025$ DCON = h_6

NON-FERROUS

For patent information visit
www.ksptpatents.com

continued on next page


131N 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.3320	8,433 mm	Q	10,0	89,0	47,0	34,0	40,0	54617	54717
0.3346	8,500 mm		10,0	89,0	47,0	34,0	40,0	64655	67655
0.3386	8,600 mm		10,0	89,0	47,0	34,0	40,0	64656	67656
0.3425	8,700 mm		10,0	89,0	47,0	34,0	40,0	64657	67657
0.3438	8,733 mm	11/32	10,0	89,0	47,0	34,0	40,0	54618	54718
0.3465	8,800 mm		10,0	89,0	47,0	34,0	40,0	64658	67658
0.3504	8,900 mm		10,0	89,0	47,0	34,0	40,0	64659	67659
0.3543	9,000 mm		10,0	89,0	47,0	34,0	40,0	64660	67660
0.3583	9,100 mm		10,0	89,0	47,0	33,0	40,0	64661	67661
0.3594	9,129 mm	23/64	10,0	89,0	47,0	33,0	40,0	54619	54719
0.3622	9,200 mm		10,0	89,0	47,0	33,0	40,0	64662	67662
0.3661	9,300 mm		10,0	89,0	47,0	33,0	40,0	64663	67663
0.3680	9,347 mm	U	10,0	89,0	47,0	33,0	40,0	54620	54720
0.3701	9,400 mm		10,0	89,0	47,0	33,0	40,0	64664	67664
0.3740	9,500 mm		10,0	89,0	47,0	33,0	40,0	64665	67665
0.3750	9,525 mm	3/8	10,0	89,0	47,0	33,0	40,0	54621	54721
0.3780	9,600 mm		10,0	89,0	47,0	33,0	40,0	64666	67666
0.3819	9,700 mm		10,0	89,0	47,0	32,0	40,0	64667	67667
0.3858	9,800 mm		10,0	89,0	47,0	32,0	40,0	64668	67668
0.3898	9,900 mm		10,0	89,0	47,0	32,0	40,0	64669	67669
0.3906	9,921 mm	25/64	10,0	89,0	47,0	32,0	40,0	54622	54722
0.3937	10,000 mm		10,0	89,0	47,0	32,0	40,0	64670	67670
0.3976	10,100 mm		12,0	102,0	55,0	40,0	45,0	64671	67671
0.4016	10,200 mm		12,0	102,0	55,0	40,0	45,0	64672	67672
0.4055	10,300 mm		12,0	102,0	55,0	40,0	45,0	64673	67673
0.4062	10,317 mm	13/32	12,0	102,0	55,0	40,0	45,0	54623	54723
0.4095	10,400 mm		12,0	102,0	55,0	39,0	45,0	64674	67674
0.4134	10,500 mm		12,0	102,0	55,0	39,0	45,0	64675	67675
0.4173	10,600 mm		12,0	102,0	55,0	39,0	45,0	64676	67676
0.4213	10,700 mm		12,0	102,0	55,0	39,0	45,0	64677	67677
0.4219	10,716 mm	27/64	12,0	102,0	55,0	39,0	45,0	54624	54724
0.4252	10,800 mm		12,0	102,0	55,0	39,0	45,0	64678	67678
0.4291	10,900 mm		12,0	102,0	55,0	39,0	45,0	64679	67679
0.4331	11,000 mm		12,0	102,0	55,0	39,0	45,0	64680	67680
0.4370	11,100 mm		12,0	102,0	55,0	38,0	45,0	64681	67681
0.4375	11,113 mm	7/16	12,0	102,0	55,0	38,0	45,0	54625	54725
0.4409	11,200 mm		12,0	102,0	55,0	38,0	45,0	64682	67682
0.4449	11,300 mm		12,0	102,0	55,0	38,0	45,0	64683	67683
0.4488	11,400 mm		12,0	102,0	55,0	38,0	45,0	64684	67684
0.4528	11,500 mm		12,0	102,0	55,0	38,0	45,0	64685	67685
0.4567	11,600 mm		12,0	102,0	55,0	38,0	45,0	64686	67686
0.4606	11,700 mm		12,0	102,0	55,0	37,0	45,0	64687	67687
0.4646	11,800 mm		12,0	102,0	55,0	37,0	45,0	64688	67688
0.4685	11,900 mm		12,0	102,0	55,0	37,0	45,0	64689	67689


continued on next page

CONTINUED



131N 3xD

FRACTIONAL & METRIC SERIES

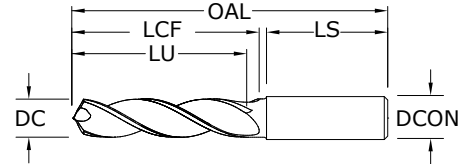

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

inch & mm									EDP NO.	
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS		UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.4688	11,908 mm	15/32	12,0	102,0	55,0	37,0	45,0		54626	54726
0.4724	12,000 mm		12,0	102,0	55,0	37,0	45,0		64690	67690
0.4844	12,304 mm	31/64	14,0	107,0	60,0	41,0	45,0		54627	54727
0.4921	12,500 mm		14,0	107,0	60,0	41,0	45,0		64691	67691
0.5000	12,700 mm	1/2	14,0	107,0	60,0	41,0	45,0		54628	54728
0.5039	12,800 mm		14,0	107,0	60,0	41,0	45,0		64692	67692
0.5118	13,000 mm		14,0	107,0	60,0	41,0	45,0		64693	67693
0.5156	13,096 mm	33/64	14,0	107,0	60,0	40,0	45,0		54629	54729
0.5315	13,500 mm		14,0	107,0	60,0	40,0	45,0		64694	67694
0.5433	13,800 mm		14,0	107,0	60,0	39,0	45,0		64695	67695
0.5512	14,000 mm		14,0	107,0	60,0	39,0	45,0		64696	67696
0.5625	14,288 mm	9/16	16,0	115,0	65,0	43,0	48,0		54630	54730
0.5709	14,500 mm		16,0	115,0	65,0	43,0	48,0		64697	67697
0.5781	14,684 mm	37/64	16,0	115,0	65,0	43,0	48,0		54631	54731
0.5827	14,800 mm		16,0	115,0	65,0	43,0	48,0		64698	67698
0.5906	15,000 mm		16,0	115,0	65,0	42,0	48,0		64699	67699
0.6102	15,500 mm		16,0	115,0	65,0	42,0	48,0		64700	67700
0.6221	15,800 mm		16,0	115,0	65,0	41,0	48,0		64701	67701
0.6250	15,875 mm	5/8	16,0	115,0	65,0	41,0	48,0		54632	54732
0.6299	16,000 mm		16,0	115,0	65,0	41,0	48,0		64702	67702
0.6562	16,667 mm	21/32	18,0	123,0	73,0	47,0	48,0		54633	54733
0.6875	17,463 mm	11/16	18,0	123,0	73,0	47,0	48,0		54634	54734
0.7500	19,050 mm	3/4	20,0	131,0	79,0	50,0	50,0		54635	54735

TOLERANCES (inch)

≤.1181 DIAMETER

DC = $\pm 0.0008/\pm 0.0047$

DCON = h_6

>.1181-.2362 DIAMETER

DC = $\pm 0.0016/\pm 0.0063$

DCON = h_6

>.2362-.3937 DIAMETER

DC = $\pm 0.0024/\pm 0.0083$

DCON = h_6

>.3937-.7087 DIAMETER

DC = $\pm 0.0028/\pm 0.0098$

DCON = h_6

>.7087-1.1811 DIAMETER

DC = $\pm 0.0031/\pm 0.0114$

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = $\pm 0.002/\pm 0.012$

DCON = h_6

>3-6 DIAMETER

DC = $\pm 0.004/\pm 0.016$

DCON = h_6

>6-10 DIAMETER

DC = $\pm 0.006/\pm 0.021$

DCON = h_6



>10-18 DIAMETER

DC = $\pm 0.007/\pm 0.025$

DCON = h_6

NON-FERROUS

For patent information visit
www.ksptpatents.com

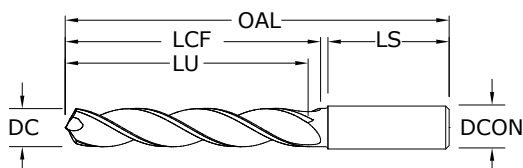

131N 5xD

FRACTIONAL & METRIC SERIES

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00028/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0.002/+0.012

DCON = h₆

>3-6 DIAMETER

DC = +0.004/+0.016

DCON = h₆

>6-10 DIAMETER

DC = +0.006/+0.021

DCON = h₆

>10-18 DIAMETER

DC = +0.007/+0.025

DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

		inch & mm						EDP NO.	
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED	TI-NAMITE®-B (TiB ₂)
0.1181	3,000 mm		6,0	66,0	28,0	23,0	36,0	65000	64800
0.1220	3,100 mm		6,0	66,0	28,0	23,0	36,0	65001	64801
0.1250	3,175 mm	1/8	6,0	66,0	28,0	23,0	36,0	55000	54800
0.1260	3,200 mm		6,0	66,0	28,0	23,0	36,0	65002	64802
0.1299	3,300 mm		6,0	66,0	28,0	23,0	36,0	65003	64803
0.1339	3,400 mm		6,0	66,0	28,0	23,0	36,0	65004	64804
0.1360	3,454 mm	#29	6,0	66,0	28,0	23,0	36,0	55001	54801
0.1378	3,500 mm		6,0	66,0	28,0	23,0	36,0	65005	64805
0.1406	3,571 mm	9/64	6,0	66,0	28,0	23,0	36,0	55002	54802
0.1417	3,600 mm		6,0	66,0	28,0	23,0	36,0	65006	64806
0.1457	3,700 mm		6,0	66,0	28,0	23,0	36,0	65007	64807
0.1496	3,800 mm		6,0	74,0	36,0	29,0	36,0	65008	64808
0.1535	3,900 mm		6,0	74,0	36,0	29,0	36,0	65009	64809
0.1562	3,967 mm	5/32	6,0	74,0	36,0	29,0	36,0	55003	54803
0.1575	4,000 mm		6,0	74,0	36,0	29,0	36,0	65010	64810
0.1590	4,039 mm	#21	6,0	74,0	36,0	29,0	36,0	55004	54804
0.1614	4,100 mm		6,0	74,0	36,0	29,0	36,0	65011	64811
0.1654	4,200 mm		6,0	74,0	36,0	29,0	36,0	65012	64812
0.1693	4,300 mm		6,0	74,0	36,0	29,0	36,0	65013	64813
0.1719	4,366 mm	11/64	6,0	74,0	36,0	29,0	36,0	55005	54805
0.1732	4,400 mm		6,0	74,0	36,0	29,0	36,0	65014	64814
0.1772	4,500 mm		6,0	74,0	36,0	29,0	36,0	65015	64815
0.1811	4,600 mm		6,0	74,0	36,0	29,0	36,0	65016	64816
0.1850	4,699 mm	#13	6,0	74,0	36,0	29,0	36,0	65017	64817
0.1875	4,763 mm	3/16	6,0	82,0	44,0	37,0	36,0	55006	54806
0.1890	4,801 mm	#12	6,0	82,0	44,0	37,0	36,0	65018	64818
0.1929	4,900 mm		6,0	82,0	44,0	37,0	36,0	65019	64819
0.1969	5,000 mm		6,0	82,0	44,0	36,0	36,0	65020	64820
0.2008	5,100 mm		6,0	82,0	44,0	36,0	36,0	65021	64821
0.2031	5,159 mm	13/64	6,0	82,0	44,0	36,0	36,0	55007	54807
0.2047	5,200 mm		6,0	82,0	44,0	36,0	36,0	65022	64822
0.2087	5,300 mm		6,0	82,0	44,0	36,0	36,0	65023	64823
0.2126	5,400 mm		6,0	82,0	44,0	36,0	36,0	65024	64824
0.2165	5,500 mm		6,0	82,0	44,0	36,0	36,0	65025	64825
0.2188	5,558 mm	7/32	6,0	82,0	44,0	36,0	36,0	55008	54808
0.2205	5,600 mm		6,0	82,0	44,0	36,0	36,0	65026	64826

continued on next page

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRC)




5xD



131N 5xD

FRACTIONAL & METRIC SERIES

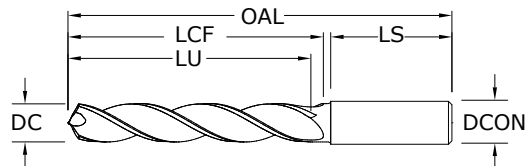

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

		inch & mm							EDP NO.	
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS		UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.2244	5,700 mm		6,0	82,0	44,0	35,0	36,0		65027	64827
0.2283	5,800 mm		6,0	82,0	44,0	35,0	36,0		65028	64828
0.2323	5,900 mm		6,0	82,0	44,0	35,0	36,0		65029	64829
0.2344	5,954 mm	15/64	6,0	82,0	44,0	35,0	36,0		55009	54809
0.2362	6,000 mm		6,0	82,0	44,0	35,0	36,0		65030	64830
0.2402	6,100 mm		8,0	91,0	53,0	44,0	36,0		65031	64831
0.2441	6,200 mm		8,0	91,0	53,0	44,0	36,0		65032	64832
0.2480	6,300 mm		8,0	91,0	53,0	44,0	36,0		65033	64833
0.2500	6,350 mm	1/4 E	8,0	91,0	53,0	43,0	36,0		55010	54810
0.2520	6,400 mm		8,0	91,0	53,0	43,0	36,0		65034	64834
0.2559	6,500 mm		8,0	91,0	53,0	43,0	36,0		65035	64835
0.2570	6,528 mm	F	8,0	91,0	53,0	43,0	36,0		55011	54811
0.2598	6,600 mm		8,0	91,0	53,0	43,0	36,0		65036	64836
0.2638	6,700 mm		8,0	91,0	53,0	43,0	36,0		65037	64837
0.2656	6,746 mm	17/64	8,0	91,0	53,0	43,0	36,0		55012	54812
0.2677	6,800 mm		8,0	91,0	53,0	43,0	36,0		65038	64838
0.2717	6,900 mm		8,0	91,0	53,0	43,0	36,0		65039	64839
0.2756	7,000 mm		8,0	91,0	53,0	42,0	36,0		65040	64840
0.2795	7,100 mm		8,0	91,0	53,0	42,0	36,0		65041	64841
0.2812	7,142 mm	9/32	8,0	91,0	53,0	42,0	36,0		55013	54813
0.2835	7,200 mm		8,0	91,0	53,0	42,0	36,0		65042	64842
0.2874	7,300 mm		8,0	91,0	53,0	42,0	36,0		65043	64843
0.2913	7,400 mm		8,0	91,0	53,0	42,0	36,0		65044	64844
0.2953	7,500 mm		8,0	91,0	53,0	42,0	36,0		65045	64845
0.2969	7,541 mm	19/64	8,0	91,0	53,0	42,0	36,0		55014	54814
0.2992	7,600 mm		8,0	91,0	53,0	42,0	36,0		65046	64846
0.3031	7,700 mm		8,0	91,0	53,0	41,0	36,0		65047	64847
0.3071	7,800 mm		8,0	91,0	53,0	41,0	36,0		65048	64848
0.3110	7,900 mm		8,0	91,0	53,0	41,0	36,0		65049	64849
0.3125	7,938 mm	5/16	8,0	91,0	53,0	41,0	36,0		55015	54815
0.3150	8,000 mm		8,0	91,0	53,0	41,0	36,0		65050	64850
0.3189	8,100 mm		10,0	103,0	61,0	49,0	40,0		65051	64851
0.3228	8,200 mm		10,0	103,0	61,0	49,0	40,0		65052	64852
0.3268	8,300 mm		10,0	103,0	61,0	49,0	40,0		65053	64853
0.3281	8,334 mm	21/64	10,0	103,0	61,0	48,0	40,0		55016	54816
0.3307	8,400 mm		10,0	103,0	61,0	48,0	40,0		65054	64854

TOLERANCES (inch)

≤.1181 DIAMETER

DC = $\pm 0.0008/\pm 0.0047$ DCON = h_6

>.1181-.2362 DIAMETER

DC = $\pm 0.0016/\pm 0.0063$ DCON = h_6

>.2362-.3937 DIAMETER

DC = $\pm 0.0024/\pm 0.0083$ DCON = h_6

>.3937-.7087 DIAMETER

DC = $\pm 0.0028/\pm 0.0098$ DCON = h_6

>.7087-1.1811 DIAMETER

DC = $\pm 0.0031/\pm 0.0114$ DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = $\pm 0.002/\pm 0.012$ DCON = h_6

>3-6 DIAMETER

DC = $\pm 0.004/\pm 0.016$ DCON = h_6

>6-10 DIAMETER

DC = $\pm 0.006/\pm 0.021$ DCON = h_6

>10-18 DIAMETER

DC = $\pm 0.007/\pm 0.025$ DCON = h_6

NON-FERROUS

For patent
information visit
www.ksptpatents.com


continued on next page

131N 5xD

FRACTIONAL & METRIC SERIES

inch & mm								EDP NO.		CONTINUED
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED	Ti-NAMITE®-B (TiB ₂)	
0.3320	8,433 mm	Q	10,0	103,0	61,0	48,0	40,0	55017	54817	
0.3346	8,500 mm		10,0	103,0	61,0	48,0	40,0	65055	64855	
0.3386	8,600 mm		10,0	103,0	61,0	48,0	40,0	65056	64856	
0.3425	8,700 mm		10,0	103,0	61,0	48,0	40,0	65057	64857	
0.3438	8,733 mm	11/32	10,0	103,0	61,0	48,0	40,0	55018	54818	
0.3465	8,800 mm		10,0	103,0	61,0	48,0	40,0	65058	64858	
0.3504	8,900 mm		10,0	103,0	61,0	48,0	40,0	65059	64859	
0.3543	9,000 mm		10,0	103,0	61,0	48,0	40,0	65060	64860	
0.3583	9,100 mm		10,0	103,0	61,0	47,0	40,0	65061	64861	
0.3594	9,129 mm	23/64	10,0	103,0	61,0	47,0	40,0	55019	54819	
0.3622	9,200 mm		10,0	103,0	61,0	47,0	40,0	65062	64862	
0.3661	9,300 mm		10,0	103,0	61,0	47,0	40,0	65063	64863	
0.3680	9,347 mm	U	10,0	103,0	61,0	47,0	40,0	55020	54820	
0.3701	9,400 mm		10,0	103,0	61,0	47,0	40,0	65064	64864	
0.3740	9,500 mm		10,0	103,0	61,0	47,0	40,0	65065	64865	
0.3750	9,525 mm	3/8	10,0	103,0	61,0	47,0	40,0	55021	54821	
0.3780	9,600 mm		10,0	103,0	61,0	47,0	40,0	65066	64866	
0.3819	9,700 mm		10,0	103,0	61,0	46,0	40,0	65067	64867	
0.3858	9,800 mm		10,0	103,0	61,0	46,0	40,0	65068	64868	
0.3898	9,900 mm		10,0	103,0	61,0	46,0	40,0	65069	64869	
0.3906	9,921 mm	25/64	10,0	103,0	61,0	46,0	40,0	55022	54822	
0.3937	10,000 mm		10,0	103,0	61,0	46,0	40,0	65070	64870	
0.3976	10,100 mm		12,0	118,0	71,0	56,0	45,0	65071	64871	
0.4016	10,200 mm		12,0	118,0	71,0	56,0	45,0	65072	64872	
0.4055	10,300 mm		12,0	118,0	71,0	56,0	45,0	65073	64873	
0.4062	10,317 mm	13/32	12,0	118,0	71,0	56,0	45,0	55023	54823	
0.4095	10,400 mm		12,0	118,0	71,0	55,0	45,0	65074	64874	
0.4134	10,500 mm		12,0	118,0	71,0	55,0	45,0	65075	64875	
0.4173	10,600 mm		12,0	118,0	71,0	55,0	45,0	65076	64876	
0.4213	10,700 mm		12,0	118,0	71,0	55,0	45,0	65077	64877	
0.4219	10,716 mm	27/64	12,0	118,0	71,0	55,0	45,0	55024	54824	
0.4252	10,800 mm		12,0	118,0	71,0	55,0	45,0	65078	64878	
0.4291	10,900 mm		12,0	118,0	71,0	55,0	45,0	65079	64879	
0.4331	11,000 mm		12,0	118,0	71,0	54,0	45,0	65080	64880	
0.4370	11,100 mm		12,0	118,0	71,0	54,0	45,0	65081	64881	
0.4375	11,113 mm	7/16	12,0	118,0	71,0	54,0	45,0	55025	54825	
0.4409	11,200 mm		12,0	118,0	71,0	54,0	45,0	65082	64882	
0.4449	11,300 mm		12,0	118,0	71,0	54,0	45,0	65083	64883	
0.4488	11,400 mm		12,0	118,0	71,0	54,0	45,0	65084	64884	
0.4528	11,500 mm		12,0	118,0	71,0	54,0	45,0	65085	64885	
0.4567	11,600 mm		12,0	118,0	71,0	54,0	45,0	65086	64886	
0.4606	11,700 mm		12,0	118,0	71,0	53,0	45,0	65087	64887	
0.4646	11,800 mm		12,0	118,0	71,0	53,0	45,0	65088	64888	
0.4685	11,900 mm		12,0	118,0	71,0	53,0	45,0	65089	64889	
0.4688	11,908 mm	15/32	12,0	118,0	71,0	53,0	45,0	55026	54826	
0.4724	12,000 mm		12,0	118,0	71,0	53,0	45,0	65090	64890	

continued on next page




131N 5xD

FRACTIONAL & METRIC SERIES

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

inch & mm										EDP NO.	
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED Ti-NAMITE®-B (TiB ₂)			
0.4844	12,304 mm	31/64	14,0	124,0	77,0	58,0	45,0	55027	54827		
0.4921	12,500 mm		14,0	124,0	77,0	58,0	45,0	65091	64891		
0.5000	12,700 mm	1/2	14,0	124,0	77,0	58,0	45,0	55028	54828		
0.5039	12,800 mm		14,0	124,0	77,0	58,0	45,0	65092	64892		
0.5118	13,000 mm		14,0	124,0	77,0	58,0	45,0	65093	64893		
0.5156	13,096 mm	33/64	14,0	124,0	77,0	57,0	45,0	55029	54829		
0.5315	13,500 mm		14,0	124,0	77,0	57,0	45,0	65094	64894		
0.5433	13,800 mm		14,0	124,0	77,0	56,0	45,0	65095	64895		
0.5512	14,000 mm		14,0	124,0	77,0	56,0	45,0	65096	64896		
0.5625	14,288 mm	9/16	16,0	133,0	83,0	61,0	48,0	55030	54830		
0.5709	14,500 mm		16,0	133,0	83,0	61,0	48,0	65097	64897		
0.5781	14,684 mm	37/64	16,0	133,0	83,0	61,0	48,0	55031	54831		
0.5827	14,800 mm		16,0	133,0	83,0	61,0	48,0	65098	64898		
0.5906	15,000 mm		16,0	133,0	83,0	60,0	48,0	65099	64899		
0.6102	15,500 mm		16,0	133,0	83,0	60,0	48,0	65100	64900		
0.6221	15,800 mm		16,0	133,0	83,0	59,0	48,0	65101	64901		
0.6250	15,875 mm	5/8	16,0	133,0	83,0	59,0	48,0	55032	54832		
0.6299	16,000 mm		16,0	133,0	83,0	59,0	48,0	65102	64902		
0.6562	16,667 mm	21/32	18,0	143,0	93,0	68,0	48,0	55033	54833		
0.6875	17,463 mm	11/16	18,0	143,0	93,0	67,0	48,0	55034	54834		
0.7500	19,050 mm	3/4	20,0	153,0	101,0	72,0	50,0	55035	54835		

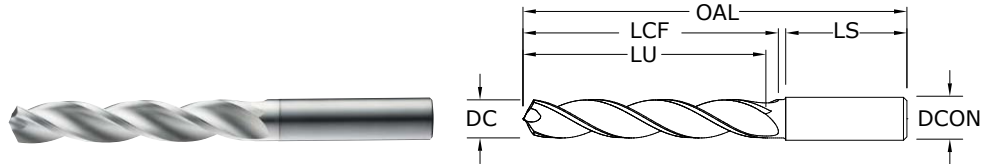

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

Series 131N 3D & 5D Fractional				DC • in							
Hardness		Vc (sfm)		1/8	3/16	1/4	3/8	1/2	5/8	3/4	
N	ALUMINUM ALLOYS < 12% SI 6061, 2024, 7075	≤ 150 Bhn or ≤ 88 HRb	800	RPM	24448	16299	12224	8149	6112	4890	4075
			(640-960)	Fr	0.0055	0.0083	0.0110	0.0166	0.0221	0.0276	0.0331
			Feed (ipm)	135	135	135	135	135	135	135	135
	ALUMINUM ALLOYS > 12% SI A356.0, 390.0, 319.0	≤ 125 Bhn or ≤ 77 HRb	600	RPM	18336	12224	9168	6112	4584	3667	3056
			(480-720)	Fr	0.0055	0.0082	0.0109	0.0164	0.0218	0.0273	0.0327
			Feed (ipm)	100	100	100	100	100	100	100	100
	COPPER ALLOYS Alum Bronze, Muntz Brass, Navel Brass	≤ 175 Bhn or ≤ 16 HRc	550	RPM	16808	11205	8404	5603	4202	3362	2801
			(440-660)	Fr	0.0020	0.0030	0.0040	0.0061	0.0081	0.0101	0.0121
			Feed (ipm)	34	34	34	34	34	34	34	34
	PLASTICS Acrylic, PVC, Polypropylene		450	RPM	13752	9168	6876	4584	3438	2750	2292
			(360-540)	Fr	0.0025	0.0037	0.0049	0.0074	0.0099	0.0124	0.0148
			Feed (ipm)	34	34	34	34	34	34	34	34

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fr} \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 131N 3D & 5D Metric				DC • mm							
Hardness	Vc (m/min)			3	6	8	10	12	14	16	
N	ALUMINUM ALLOYS < 12% SI 6061, 2024, 7075	≤ 150 Bhn or ≤ 88 HRb	244	RPM	25851	12926	9694	7755	6463	5540	4847
			(195-293)	Fr	0.133	0.265	0.354	0.442	0.531	0.619	0.708
				Feed (mm/min)	3430	3430	3430	3430	3430	3430	3430
	ALUMINUM ALLOYS > 12% SI A356.0, 390.0, 319.0	≤ 125 Bhn or ≤ 77 HRb	183	RPM	19388	9694	7271	5816	4847	4155	3635
			(146-219)	Fr	0.131	0.262	0.349	0.437	0.524	0.611	0.699
				Feed (mm/min)	2540	2540	2540	2540	2540	2540	2540
	COPPER ALLOYS Alum Bronze, Muntz Brass, Navel Brass	≤ 175 Bhn or ≤ 16 HRc	168	RPM	17773	8886	6665	5332	4443	3808	3332
			(134-201)	Fr	0.049	0.097	0.130	0.162	0.194	0.227	0.259
				Feed (mm/min)	864	864	864	864	864	864	864
PLASTICS Acrylic, PVC, Polypropylene		137	RPM	14541	7271	5453	4362	3635	3116	2726	
		(110-165)	Fr	0.059	0.119	0.158	0.198	0.238	0.277	0.317	
			Feed (mm/min)	864	864	864	864	864	864	864	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 120




3xD



120

FRACTIONAL & METRIC SERIES

- Double margin design stabilizes the drill for greater hole accuracy and improved surface finish
- Notched point reduces thrust force over conventional designs
- 8 facet point reduces fiber breakout and delamination on exit
- 90 degree secondary chamfer angle improves hole entrance and exit quality

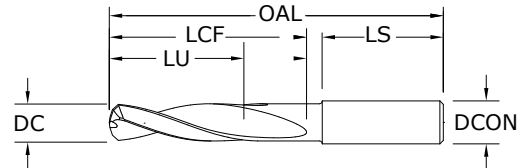

DECIMAL DC	METRIC DC	inch & mm						EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.0980	2,489 mm	#40	1/8	2	9/16	7/16	1-1/4	50000
0.1063	2,700 mm		6,0	63,0	20,0	16,0	32,0	50001
0.1181	3,000 mm		6,0	63,0	20,0	16,0	36,0	50002
0.1250	3,175 mm	1/8	1/4	2-1/2	3/4	9/16	1-7/16	50003
0.1260	3,200 mm		6,0	63,0	20,0	15,0	36,0	50004
0.1285	3,264 mm	#30	1/4	2-1/2	3/4	9/16	1-7/16	50005
0.1405	3,569 mm	#28	1/4	2-1/2	3/4	9/16	1-7/16	50006
0.1570	3,988 mm	#22	1/4	2-5/8	7/8	5/8	1-7/16	50007
0.1590	4,039 mm	#21	1/4	2-5/8	7/8	5/8	1-7/16	50008
0.1614	4,100 mm		6,0	66,0	24,0	18,0	36,0	50009
0.1660	4,216 mm	#19	1/4	2-5/8	7/8	5/8	1-7/16	50010
0.1719	4,366 mm	11/64	1/4	2-5/8	7/8	5/8	1-7/16	50011
0.1875	4,763 mm	3/16	1/4	2-5/8	1	23/32	1-7/16	50012
0.1910	4,851 mm	#11	1/4	2-5/8	1	23/32	1-7/16	50013
0.1990	5,055 mm	#8	1/4	2-5/8	1	23/32	1-7/16	50014
0.2010	5,105 mm	#7	1/4	2-5/8	1	23/32	1-7/16	50015
0.2210	5,613 mm	#2	1/4	2-5/8	1	21/32	1-7/16	50016
0.2362	6,000 mm		6,0	66,0	28,0	19,0	36,0	50017
0.2500	6,350 mm	1/4 E	1/4	3-1/8	1-5/16	15/16	1-7/16	50018
0.2510	6,380 mm		5/16	3-1/8	1-5/16	15/16	1-7/16	50019
0.2570	6,528 mm	F	5/16	3-1/8	1-5/16	15/16	1-7/16	50020
0.2720	6,909 mm	I	5/16	3-1/8	1-5/16	29/32	1-7/16	50021
0.2770	7,036 mm	J	5/16	3-1/8	1-5/16	29/32	1-7/16	50022
0.2810	7,137 mm	K	5/16	3-1/8	1-9/16	1-9/64	1-7/16	50023
0.3125	7,938 mm	5/16	5/16	3-1/8	1-9/16	1-3/32	1-7/16	50024
0.3150	8,000 mm		8,0	79,0	41,0	29,0	36,0	50025
0.3750	9,525 mm	3/8	3/8	3-1/2	1-27/32	1-9/32	1-9/16	50026
0.3770	9,576 mm	V	1/2	3-1/2	1-27/32	1-9/32	1-9/16	50027
0.3937	10,000 mm		10,0	89,0	47,0	32,0	40,0	50028
0.4375	11,113 mm	7/16	1/2	4-1/16	2-3/16	1-17/32	1-9/16	50029
0.4724	12,000 mm		12,0	102,0	55,0	37,0	45,0	50030
0.5000	12,700 mm	1/2	1/2	4-1/4	2-5/16	1-9/16	1-3/4	50031

TOLERANCES (inch)

DC = +.0000/+0.0005
DCON = h₆

TOLERANCES (mm)

DC = +0,000/+0,013
DCON = h₆

NON-FERROUS

For patent information visit
www.ksptpatents.com

Series 120

Series 120 Fractional			DC • in							
Vc (sfm)			1/8	3/16	1/4	5/16	3/8	7/16	1/2	
N	CFRP, AFRP (Carbon Fiber, Aramid Fiber)	320	RPM	9779	6519	4890	3912	3260	2794	2445
		(256-384)	Fr	0.0006	0.0009	0.0012	0.0015	0.0018	0.0021	0.0024
			Feed (ipm)	5.9	5.9	5.9	5.9	5.9	5.9	5.9
	GFRP (Fiberglass)	240	RPM	7334	4890	3667	2934	2445	2096	1834
		(192-288)	Fr	0.0006	0.0009	0.0012	0.0015	0.0018	0.0021	0.0024
			Feed (ipm)	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	CARBON, GRAPHITE	400	RPM	12224	8149	6112	4890	4075	3493	3056
		(320-480)	Fr	0.0008	0.0012	0.0016	0.0020	0.0024	0.0028	0.0032
			Feed (ipm)	9.8	9.8	9.8	9.8	9.8	9.8	9.8

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

adjust speed and / or feed based on resin type and / or fiber structure

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 120 Metric			DC • mm							
Vc (m/min)			2.5	3	4	6	8	10	12	
N	CFRP, AFRP (Carbon Fiber, Aramid Fiber)	100	RPM	12722	10602	7951	5301	3976	3181	2650
		(80-120)	Fr	0.012	0.014	0.019	0.028	0.038	0.047	0.057
			Feed (mm/min)	150	150	150	150	150	150	150
	GFRP (Fiberglass)	75	RPM	9542	7951	5963	3976	2982	2385	1988
		(65-90)	Fr	0.012	0.014	0.019	0.029	0.039	0.048	0.058
			Feed (mm/min)	115	115	115	115	115	115	115
	CARBON, GRAPHITE	120	RPM	15266	12722	9542	6361	4771	3817	3181
		(96-144)	Fr	0.015	0.018	0.025	0.037	0.049	0.062	0.074
			Feed (mm/min)	235	235	235	235	235	235	235

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm


adjust speed and / or feed based on resin type and / or fiber structure

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



135 3xD

FRACTIONAL & METRIC SERIES

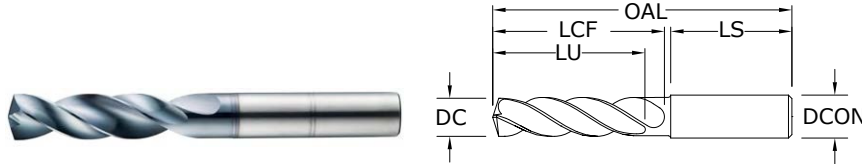

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 50 HRc (≤ 475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AlTiN)
0.0156	0,396 mm	1/64	1/8	1-1/2	1/8	7/64	1	51752*
0.0312	0,792 mm	1/32	1/8	1-1/2	1/4	13/64	1	51269*
0.0469	1,191 mm	3/64	1/8	1-1/2	3/8	5/16	1	51270*
0.0492	1,250 mm		3,0	38,0	9,5	8,0	25,0	64500*
0.0571	1,450 mm		3,0	38,0	9,5	7,0	25,0	64501*
0.0595	1,511 mm	#53	1/8	1-1/2	3/8	9/32	1	64502*
0.0625	1,588 mm	1/16	1/8	2	7/16	11/32	1-1/4	51271*
0.0630	1,600 mm		3,0	50,0	11,0	9,0	32,0	64503*
0.0689	1,750 mm		3,0	50,0	11,0	8,0	32,0	64504*
0.0700	1,778 mm	#50	1/8	2	7/16	21/64	1-1/4	64505*
0.0781	1,984 mm	5/64	1/8	2	1/2	25/64	1-1/4	51272*
0.0785	1,994 mm	#47	1/8	2	1/2	25/64	1-1/4	64506*
0.0807	2,050 mm		3,0	50,0	12,0	9,0	32,0	64507*
0.0810	2,057 mm	#46	1/8	2	1/2	3/8	1-1/4	64508*
0.0890	2,261 mm	#43	1/8	2	1/2	3/8	1-1/4	64509*
0.0935	2,375 mm	#42	1/8	2	1/2	23/64	1-1/4	64510*
0.0938	2,383 mm	3/32	1/8	2	1/2	23/64	1-1/4	51273
0.0980	2,489 mm	#40	1/8	2	9/16	27/64	1-1/4	51274
0.0984	2,500 mm		3,0	50,0	14,0	10,0	32,0	64511
0.0995	2,527 mm	#39	1/8	2	9/16	27/64	1-1/4	51753
0.1015	2,578 mm	#38	1/8	2	9/16	27/64	1-1/4	51754
0.1040	2,642 mm	#37	1/8	2	9/16	13/32	1-1/4	51755
0.1065	2,705 mm	#36	1/8	2	9/16	13/32	1-1/4	51756
0.1094	2,779 mm	7/64	1/8	2	5/8	15/32	1-1/4	51275
0.1100	2,794 mm	#35	1/8	2	5/8	15/32	1-1/4	51276
0.1110	2,819 mm	#34	1/8	2	5/8	15/32	1-1/4	51277
0.1130	2,870 mm	#33	1/8	2	5/8	29/64	1-1/4	51757
0.1142	2,900 mm		3,0	50,0	16,0	12,0	32,0	64512
0.1160	2,946 mm	#32	1/8	2	5/8	29/64	1-1/4	51758
0.1181	3,000 mm		6,0	62,0	20,0	16,0	36,0	63155
0.1200	3,048 mm	#31	1/8	2	5/8	29/64	1-1/4	51759
0.1220	3,100 mm		6,0	62,0	20,0	15,0	36,0	63741
0.1250	3,175 mm	1/8	1/4	2-1/2	3/4	9/16	1-7/16	51330
0.1260	3,200 mm		6,0	62,0	20,0	15,0	36,0	63156
0.1285	3,264 mm	#30	1/4	2-1/2	3/4	9/16	1-7/16	51278
0.1299	3,300 mm		6,0	62,0	20,0	15,0	36,0	63157

*Single Margin

continued on next page

TOLERANCES (inch)

$\leq .1181$ DIAMETER

DC = $\pm .00008/\pm .00047$

DCON = h_6

$>.1181-.2362$ DIAMETER

DC = $\pm .00016/\pm .00063$

DCON = h_6

$>.2362-.3937$ DIAMETER

DC = $\pm .00024/\pm .00083$

DCON = h_6

$>.3937-.7087$ DIAMETER

DC = $\pm .00028/\pm .00098$

DCON = h_6

$>.7087-1.1811$ DIAMETER

DC = $\pm .00031/\pm .00114$

DCON = h_6

TOLERANCES (mm)

≤ 3 DIAMETER

DC = $\pm 0,002/\pm 0,012$

DCON = h_6

$>3-6$ DIAMETER

DC = $\pm 0,004/\pm 0,016$

DCON = h_6

$>6-10$ DIAMETER

DC = $\pm 0,006/\pm 0,021$

DCON = h_6

$>10-18$ DIAMETER

DC = $\pm 0,007/\pm 0,025$

DCON = h_6

$>18-30$ DIAMETER

DC = $\pm 0,008/\pm 0,029$

DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent information visit
www.ksptpatents.com

135 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.1339	3,400 mm		6,0	62,0	20,0	15,0	36,0	63158
0.1360	3,454 mm	#29	1/4	2-1/2	3/4	9/16	1-7/16	51331
0.1378	3,500 mm		6,0	62,0	20,0	15,0	36,0	63159
0.1405	3,569 mm	#28	1/4	2-1/2	3/4	35/64	1-7/16	51760
0.1406	3,571 mm	9/64	1/4	2-1/2	3/4	9/16	1-7/16	51332
0.1417	3,600 mm		6,0	62,0	20,0	15,0	36,0	63160
0.1440	3,658 mm	#27	1/4	2-1/2	3/4	35/64	1-7/16	51761
0.1457	3,700 mm		6,0	62,0	20,0	14,0	36,0	63161
0.1470	3,734 mm	#26	1/4	2-1/2	3/4	17/32	1-7/16	51762
0.1495	3,797 mm	#25	1/4	2-5/8	7/8	21/32	1-7/16	51333
0.1496	3,800 mm		6,0	66,0	24,0	18,0	36,0	63742
0.1520	3,861 mm	#24	1/4	2-5/8	7/8	21/32	1-7/16	51763
0.1535	3,900 mm		6,0	66,0	24,0	18,0	36,0	63743
0.1540	3,912 mm	#23	1/4	2-5/8	7/8	21/32	1-7/16	51764
0.1562	3,967 mm	5/32	1/4	2-5/8	7/8	41/64	1-7/16	51334
0.1570	3,988 mm	#22	1/4	2-5/8	7/8	41/64	1-7/16	51765
0.1575	4,000 mm		6,0	66,0	24,0	18,0	36,0	63162
0.1590	4,039 mm	#21	1/4	2-5/8	7/8	41/64	1-7/16	51335
0.1610	4,089 mm	#20	1/4	2-5/8	7/8	5/8	1-7/16	51279
0.1614	4,100 mm		6,0	66,0	24,0	18,0	36,0	63744
0.1654	4,200 mm		6,0	66,0	24,0	18,0	36,0	63163
0.1660	4,216 mm	#19	1/4	2-5/8	7/8	5/8	1-7/16	51766
0.1693	4,300 mm		6,0	66,0	24,0	18,0	36,0	63164
0.1695	4,305 mm	#18	1/4	2-5/8	7/8	5/8	1-7/16	51767
0.1719	4,366 mm	11/64	1/4	2-5/8	7/8	39/64	1-7/16	51336
0.1730	4,394 mm	#17	1/4	2-5/8	7/8	5/8	1-7/16	51768
0.1732	4,400 mm		6,0	66,0	24,0	17,0	36,0	63745
0.1770	4,496 mm	#16	1/4	2-5/8	7/8	39/64	1-7/16	51769
0.1772	4,500 mm		6,0	66,0	24,0	17,0	36,0	63165
0.1800	4,572 mm	#15	1/4	2-5/8	7/8	39/64	1-7/16	51770
0.1811	4,600 mm		6,0	66,0	24,0	17,0	36,0	63166
0.1820	4,623 mm	#14	1/4	2-5/8	7/8	39/64	1-7/16	51771
0.1850	4,700 mm	#13	1/4	2-5/8	7/8	39/64	1-7/16	51772
0.1850	4,700 mm	#13	6,0	66,0	24,0	17,0	36,0	63746
0.1875	4,763 mm	3/16	1/4	2-5/8	1	23/32	1-7/16	51337
0.1890	4,800 mm	#12	1/4	2-5/8	1	23/32	1-7/16	51773
0.1890	4,800 mm	#12	6,0	66,0	28,0	21,0	36,0	63167
0.1910	4,851 mm	#11	1/4	2-5/8	1	23/32	1-7/16	51774
0.1929	4,900 mm		6,0	66,0	28,0	21,0	36,0	63747
0.1935	4,915 mm	#10	1/4	2-5/8	1	23/32	1-7/16	51775
0.1960	4,978 mm	#9	1/4	2-5/8	1	23/32	1-7/16	51776
0.1969	5,000 mm		6,0	66,0	28,0	20,0	36,0	63168
0.1990	5,055 mm	#8	1/4	2-5/8	1	45/64	1-7/16	51777
0.2008	5,100 mm		6,0	66,0	28,0	20,0	36,0	63748
0.2010	5,105 mm	#7	1/4	2-5/8	1	45/64	1-7/16	51338
0.2031	5,159 mm	13/64	1/4	2-5/8	1	45/64	1-7/16	51339


continued on next page

CONTINUED



135 3xD

FRACTIONAL & METRIC SERIES

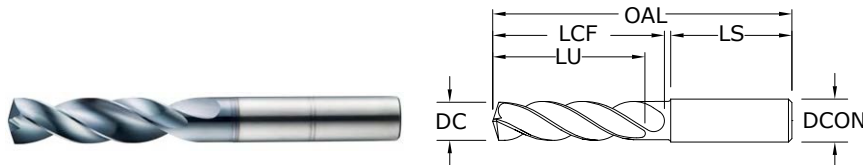

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 50 HRc (≤ 475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (A1TiN)
0.2040	5,182 mm	#6	1/4	2-5/8	1	45/64	1-7/16	51778
0.2047	5,200 mm		6,0	66,0	28,0	20,0	36,0	63749
0.2055	5,220 mm	#5	1/4	2-5/8	1	45/64	1-7/16	51779
0.2067	5,250 mm		6,0	66,0	28,0	20,0	36,0	63169
0.2087	5,300 mm		6,0	66,0	28,0	20,0	36,0	63170
0.2090	5,309 mm	#4	1/4	2-5/8	1	11/16	1-7/16	51780
0.2126	5,400 mm		6,0	66,0	28,0	20,0	36,0	63750
0.2130	5,410 mm	#3	1/4	2-5/8	1	11/16	1-7/16	51340
0.2165	5,500 mm		6,0	66,0	28,0	20,0	36,0	63171
0.2188	5,558 mm	7/32	1/4	2-5/8	1	43/64	1-7/16	51341
0.2205	5,600 mm		6,0	66,0	28,0	20,0	36,0	63751
0.2210	5,613 mm	#2	1/4	2-5/8	1	11/16	1-7/16	51781
0.2244	5,700 mm		6,0	66,0	28,0	19,0	36,0	63752
0.2280	5,791 mm	#1	1/4	2-5/8	1	21/32	1-7/16	51782
0.2283	5,800 mm		6,0	66,0	28,0	19,0	36,0	63172
0.2323	5,900 mm		6,0	66,0	28,0	19,0	36,0	63753
0.2340	5,944 mm	A	1/4	2-5/8	1	21/32	1-7/16	51601
0.2344	5,954 mm	15/64	1/4	2-5/8	1	21/32	1-7/16	51342
0.2362	6,000 mm		6,0	66,0	28,0	19,0	36,0	63173
0.2380	6,045 mm	B	1/4	3-1/8	1-5/16	31/32	1-7/16	51602
0.2402	6,100 mm		8,0	79,0	34,0	25,0	36,0	63754
0.2420	6,147 mm	C	1/4	3-1/8	1-5/16	61/64	1-7/16	51603
0.2441	6,200 mm		8,0	79,0	34,0	25,0	36,0	63755
0.2460	6,248 mm	D	1/4	3-1/8	1-5/16	61/64	1-7/16	51604
0.2461	6,250 mm		8,0	79,0	34,0	25,0	36,0	63174
0.2480	6,300 mm		8,0	79,0	34,0	25,0	36,0	63756
0.2500	6,350 mm	1/4 E	1/4	3-1/8	1-5/16	15/16	1-7/16	51343
0.2520	6,400 mm		8,0	79,0	34,0	24,0	36,0	63175
0.2559	6,500 mm		8,0	79,0	34,0	24,0	36,0	63213
0.2570	6,528 mm	F	5/16	3-1/8	1-5/16	59/64	1-7/16	51344
0.2598	6,600 mm		8,0	79,0	34,0	24,0	36,0	63757
0.2610	6,629 mm	G	5/16	3-1/8	1-5/16	59/64	1-7/16	51606
0.2638	6,700 mm		8,0	79,0	34,0	24,0	36,0	63758
0.2656	6,746 mm	17/64	5/16	3-1/8	1-5/16	59/64	1-7/16	51345
0.2660	6,756 mm	H	5/16	3-1/8	1-5/16	59/64	1-7/16	51607
0.2677	6,800 mm		8,0	79,0	34,0	24,0	36,0	63176
0.2717	6,900 mm		8,0	79,0	34,0	24,0	36,0	63759
0.2720	6,909 mm	I	5/16	3-1/8	1-5/16	29/32	1-7/16	51346

TOLERANCES (inch)

$\leq .1181$ DIAMETER

DC = $\pm .00008/\pm .00047$

DCON = h_6

$>.1181-.2362$ DIAMETER

DC = $\pm .00016/\pm .00063$

DCON = h_6

$>.2362-.3937$ DIAMETER

DC = $\pm .00024/\pm .00083$

DCON = h_6

$>.3937-.7087$ DIAMETER

DC = $\pm .00028/\pm .00098$

DCON = h_6

$>.7087-1.1811$ DIAMETER

DC = $\pm .00031/\pm .00114$

DCON = h_6

TOLERANCES (mm)

≤ 3 DIAMETER

DC = $\pm 0,002/\pm 0,012$

DCON = h_6

$>3-6$ DIAMETER

DC = $\pm 0,004/\pm 0,016$

DCON = h_6

$>6-10$ DIAMETER

DC = $\pm 0,006/\pm 0,021$

DCON = h_6

$>10-18$ DIAMETER

DC = $\pm 0,007/\pm 0,025$

DCON = h_6

$>18-30$ DIAMETER

DC = $\pm 0,008/\pm 0,029$

DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent information visit
www.kspatents.com

continued on next page

135 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2756	7,000 mm		8,0	79,0	34,0	24,0	36,0	63177
0.2770	7,036 mm	J	5/16	3-1/8	1-5/16	29/32	1-7/16	51608
0.2795	7,100 mm		8,0	79,0	41,0	30,0	36,0	63760
0.2810	7,137 mm	K	5/16	3-1/8	1-9/16	1-9/64	1-7/16	51609
0.2812	7,142 mm	9/32	5/16	3-1/8	1-9/16	1-9/64	1-7/16	51347
0.2835	7,200 mm		8,0	79,0	41,0	30,0	36,0	63761
0.2854	7,250 mm		8,0	79,0	41,0	30,0	36,0	63178
0.2874	7,300 mm		8,0	79,0	41,0	30,0	36,0	63762
0.2900	7,366 mm	L	5/16	3-1/8	1-9/16	1-1/8	1-7/16	51610
0.2913	7,400 mm		8,0	79,0	41,0	30,0	36,0	63763
0.2950	7,493 mm	M	5/16	3-1/8	1-9/16	1-1/8	1-7/16	51611
0.2953	7,500 mm		8,0	79,0	41,0	30,0	36,0	63179
0.2969	7,541 mm	19/64	5/16	3-1/8	1-9/16	1-7/64	1-7/16	51348
0.2992	7,600 mm		8,0	79,0	41,0	30,0	36,0	63764
0.3020	7,671 mm	N	5/16	3-1/8	1-9/16	1-7/64	1-7/16	51612
0.3031	7,700 mm		8,0	79,0	41,0	29,0	36,0	63765
0.3071	7,800 mm		8,0	79,0	41,0	29,0	36,0	63180
0.3110	7,900 mm		8,0	79,0	41,0	29,0	36,0	63766
0.3125	7,938 mm	5/16	5/16	3-1/8	1-9/16	1-3/32	1-7/16	51349
0.3150	8,000 mm		8,0	79,0	41,0	29,0	36,0	63181
0.3160	8,026 mm	O	3/8	3-1/2	1-27/32	1-3/8	1-9/16	51613
0.3189	8,100 mm		10,0	89,0	47,0	35,0	40,0	63767
0.3228	8,200 mm		10,0	89,0	47,0	35,0	40,0	63768
0.3230	8,204 mm	P	3/8	3-1/2	1-27/32	1-23/64	1-9/16	51614
0.3268	8,300 mm		10,0	89,0	47,0	35,0	40,0	63769
0.3281	8,334 mm	21/64	3/8	3-1/2	1-27/32	1-23/64	1-9/16	51350
0.3307	8,400 mm		10,0	89,0	47,0	34,0	40,0	63182
0.3320	8,433 mm	Q	3/8	3-1/2	1-27/32	1-11/32	1-9/16	51351
0.3346	8,500 mm		10,0	89,0	47,0	34,0	40,0	63183
0.3386	8,600 mm		10,0	89,0	47,0	34,0	40,0	63770
0.3390	8,611 mm	R	3/8	3-1/2	1-27/32	1-11/32	1-9/16	51615
0.3425	8,700 mm		10,0	89,0	47,0	34,0	40,0	63771
0.3438	8,733 mm	11/32	3/8	3-1/2	1-27/32	1-21/64	1-9/16	51352
0.3465	8,800 mm		10,0	89,0	47,0	34,0	40,0	63184
0.3480	8,839 mm	S	3/8	3-1/2	1-27/32	1-21/64	1-9/16	51616
0.3504	8,900 mm		10,0	89,0	47,0	34,0	40,0	63772
0.3543	9,000 mm		10,0	89,0	47,0	34,0	40,0	63185
0.3580	9,093 mm	T	3/8	3-1/2	1-27/32	1-5/16	1-9/16	51617
0.3583	9,100 mm		10,0	89,0	47,0	33,0	40,0	63773
0.3594	9,129 mm	23/64	3/8	3-1/2	1-27/32	1-21/64	1-9/16	51353
0.3622	9,200 mm		10,0	89,0	47,0	33,0	40,0	63774
0.3642	9,250 mm		10,0	89,0	47,0	33,0	40,0	63186
0.3661	9,300 mm		10,0	89,0	47,0	33,0	40,0	63775
0.3680	9,347 mm	U	3/8	3-1/2	1-27/32	1-19/64	1-9/16	51354
0.3701	9,400 mm		10,0	89,0	47,0	33,0	40,0	63776
0.3740	9,500 mm		10,0	89,0	47,0	33,0	40,0	63187


continued on next page

CONTINUED



135 3xD

FRACTIONAL & METRIC SERIES

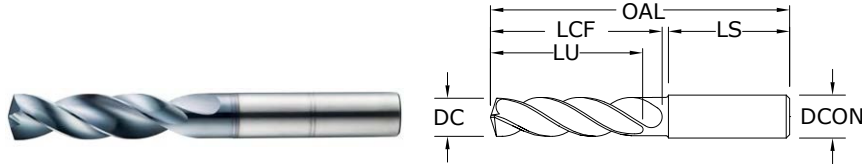

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 50 HRc (≤ 475 Bhn)

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AItin)	
0.3750	9,525 mm	3/8	3/8	3-1/2	1-27/32	1-9/32	1-9/16	51355	
0.3770	9,576 mm	V	1/2	3-1/2	1-27/32	1-9/32	1-9/16	51618	
0.3780	9,600 mm		10,0	89,0	47,0	33,0	40,0	63777	
0.3819	9,700 mm		10,0	89,0	47,0	32,0	40,0	63778	
0.3858	9,800 mm		10,0	89,0	47,0	32,0	40,0	63779	
0.3860	9,804 mm	W	1/2	3-1/2	1-27/32	1-17/64	1-9/16	51619	
0.3898	9,900 mm		10,0	89,0	47,0	40,0	40,0	63780	
0.3906	9,921 mm	25/64	1/2	3-1/2	1-27/32	1-37/64	1-9/16	51356	
0.3937	10,000 mm		10,0	89,0	47,0	40,0	40,0	63188	
0.3970	10,083 mm	X	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51620	
0.3976	10,100 mm		12,0	102,0	55,0	45,0	45,0	63781	
0.4016	10,200 mm		12,0	102,0	55,0	45,0	45,0	63189	
0.4040	10,261 mm	Y	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51621	
0.4055	10,300 mm		12,0	102,0	55,0	45,0	45,0	63782	
0.4062	10,317 mm	13/32	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51357	
0.4095	10,400 mm		12,0	102,0	55,0	45,0	45,0	63783	
0.4130	10,490 mm	Z	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51622	
0.4134	10,500 mm		12,0	102,0	55,0	40,0	45,0	63190	
0.4173	10,600 mm		12,0	102,0	55,0	40,0	45,0	63784	
0.4213	10,700 mm		12,0	102,0	55,0	40,0	45,0	63785	
0.4219	10,716 mm	27/64	1/2	4-1/16	2-3/16	1-19/32	1-49/64	51358	
0.4252	10,800 mm		12,0	102,0	55,0	40,0	45,0	63191	
0.4291	10,900 mm		12,0	102,0	55,0	40,0	45,0	63786	
0.4331	11,000 mm		12,0	102,0	55,0	39,0	45,0	63192	
0.4370	11,100 mm		12,0	102,0	55,0	39,0	45,0	63787	
0.4375	11,113 mm	7/16	1/2	4-1/16	2-3/16	1-37/64	1-49/64	51359	
0.4409	11,200 mm		12,0	102,0	55,0	39,0	45,0	63788	
0.4429	11,250 mm		12,0	102,0	55,0	39,0	45,0	63193	
0.4449	11,300 mm		12,0	102,0	55,0	39,0	45,0	63789	
0.4488	11,400 mm		12,0	102,0	55,0	38,0	45,0	63790	
0.4528	11,500 mm		12,0	102,0	55,0	38,0	45,0	63194	
0.4531	11,509 mm	29/64	1/2	4-1/16	2-3/16	1-33/64	1-49/64	51360	
0.4567	11,600 mm		12,0	102,0	55,0	38,0	45,0	63791	
0.4606	11,700 mm		12,0	102,0	55,0	37,0	45,0	63792	
0.4646	11,800 mm		12,0	102,0	55,0	37,0	45,0	63793	
0.4685	11,900 mm		12,0	102,0	55,0	37,0	45,0	63794	

continued on next page

TOLERANCES (inch)

$\leq .1181$ DIAMETER

DC = $\pm .00008/\pm .00047$

DCON = h_6

$> .1181-.2362$ DIAMETER

DC = $\pm .00016/\pm .00063$

DCON = h_6

$> .2362-.3937$ DIAMETER

DC = $\pm .00024/\pm .00083$

DCON = h_6

$> .3937-.7087$ DIAMETER

DC = $\pm .00028/\pm .00098$

DCON = h_6

$> .7087-1.1811$ DIAMETER

DC = $\pm .00031/\pm .00114$

DCON = h_6

TOLERANCES (mm)

≤ 3 DIAMETER

DC = $\pm 0,002/\pm 0,012$

DCON = h_6

$> 3-6$ DIAMETER

DC = $\pm 0,004/\pm 0,016$

DCON = h_6

$> 6-10$ DIAMETER

DC = $\pm 0,006/\pm 0,021$

DCON = h_6

$> 10-18$ DIAMETER

DC = $\pm 0,007/\pm 0,025$

DCON = h_6

$> 18-30$ DIAMETER

DC = $\pm 0,008/\pm 0,029$

DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent information visit
www.ksptpatents.com

135 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.4688	11,908 mm	15/32	1/2	4-1/16	2-3/16	1-31/64	1-49/64	51361
0.4724	12,000 mm		12,0	102,0	55,0	37,0	45,0	63195
0.4844	12,304 mm	31/64	1/2	4-1/4	2-5/16	1-19/32	1-49/64	51362
0.4921	12,500 mm		14,0	107,0	60,0	41,0	45,0	63196
0.5000	12,700 mm	1/2	1/2	4-1/4	2-5/16	1-9/16	1-49/64	51363
0.5039	12,800 mm		14,0	107,0	60,0	41,0	45,0	63197
0.5118	13,000 mm		14,0	107,0	60,0	41,0	45,0	63198
0.5156	13,096 mm	33/64	5/8	4-1/4	2-5/16	1-35/64	1-49/64	51364
0.5312	13,492 mm	17/32	5/8	4-1/4	2-5/16	1-33/64	1-49/64	51365
0.5315	13,500 mm		14,0	107,0	60,0	40,0	45,0	63199
0.5469	13,891 mm	35/64	5/8	4-1/4	2-5/16	1-1/2	1-49/64	51783
0.5512	14,000 mm		14,0	107,0	60,0	39,0	45,0	63200
0.5625	14,288 mm	9/16	5/8	4-9/16	2-1/2	1-21/32	1-57/64	51366
0.5709	14,500 mm		16,0	115,0	65,0	43,0	48,0	63201
0.5781	14,684 mm	37/64	5/8	4-9/16	2-1/2	1-41/64	1-57/64	51367
0.5906	15,000 mm		16,0	115,0	65,0	42,0	48,0	63202
0.5938	15,083 mm	19/32	5/8	4-9/16	2-1/2	1-39/64	1-57/64	51784
0.6094	15,479 mm	39/64	5/8	4-9/16	2-1/2	1-19/32	1-57/64	51785
0.6102	15,500 mm		16,0	115,0	65,0	42,0	48,0	63203
0.6250	15,875 mm	5/8	5/8	4-9/16	2-1/2	1-9/16	1-57/64	51368
0.6299	16,000 mm		16,0	115,0	65,0	41,0	48,0	63204
0.6406	16,271 mm	41/64	3/4	4-7/8	2-3/4	1-51/64	1-57/64	51786
0.6496	16,500 mm		18,0	123,0	73,0	48,0	48,0	63205
0.6562	16,667 mm	21/32	3/4	4-7/8	2-3/4	1-25/32	1-57/64	51369
0.6693	17,000 mm		18,0	123,0	73,0	47,0	48,0	63206
0.6719	17,066 mm	43/64	3/4	4-7/8	2-3/4	1-3/4	1-57/64	51787
0.6875	17,463 mm	11/16	3/4	4-7/8	2-3/4	1-47/64	1-57/64	51370
0.6890	17,500 mm		18,0	123,0	73,0	47,0	48,0	63207
0.7031	17,859 mm	45/64	3/4	4-7/8	2-3/4	1-45/64	1-57/64	51788
0.7087	18,000 mm		18,0	123,0	73,0	46,0	48,0	63208
0.7188	18,258 mm	23/32	3/4	4-7/8	2-3/4	1-43/64	1-57/64	51789
0.7283	18,500 mm		20,0	131,0	79,0	51,0	50,0	63209
0.7344	18,654 mm	47/64	3/4	4-7/8	2-3/4	1-21/32	1-57/64	51790
0.7480	19,000 mm		20,0	131,0	79,0	51,0	50,0	63210
0.7500	19,050 mm	3/4	3/4	5-1/4	3-1/16	1-15/16	1-31/32	51371
0.7656	19,446 mm	49/64	7/8	5-1/4	3-1/16	1-59/64	1-31/32	51372
0.7677	19,500 mm		20,0	131,0	79,0	50,0	50,0	63211
0.7812	19,842 mm	25/32	7/8	6	3-11/16	2-33/64	2-1/8	51791
0.7874	20,000 mm		20,0	131,0	79,0	49,0	50,0	63212
0.7969	20,241 mm	51/64	7/8	6	3-11/16	2-1/2	2-1/8	51792
0.8071	20,500 mm		22,0	150,0	93,0	62,0	53,0	64513
0.8125	20,638 mm	13/16	7/8	6	3-11/16	2-15/32	2-1/8	51373
0.8268	21,000 mm		22,0	150,0	93,0	61,0	53,0	64514
0.8661	22,000 mm		22,0	150,0	93,0	60,0	53,0	64515
0.8750	22,225 mm	7/8	7/8	6	3-11/16	2-3/8	2-1/8	51374
0.9219	23,416 mm	59/64	1	6	3-11/16	2-5/16	2-1/8	51375

CONTINUED

	Series 135 3D Fractional	Hardness	Vc (sfm)	DC • in								
				1/32	1/8	1/4	3/8	1/2	5/8	7/8		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	385	RPM	47062	11766	5883	3922	2941	2353	1681	
			(308-462)	Fr	0.0010	0.0038	0.0076	0.0115	0.0153	0.0191	0.0268	
				Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0	45.0	
		≤ 275 Bhn or ≤ 28 HRc	350	RPM	42784	10696	5348	3565	2674	2139	1528	
			(280-420)	Fr	0.0009	0.0036	0.0071	0.0107	0.0142	0.0178	0.0249	
				Feed (ipm)	38.0	38.0	38.0	38.0	38.0	38.0	38.0	
		≤ 425 Bhn or ≤ 45 HRc	200	RPM	24448	6112	3056	2037	1528	1222	873	
			(160-240)	Fr	0.0007	0.0029	0.0059	0.0088	0.0118	0.0147	0.0206	
				Feed (ipm)	18.0	18.0	18.0	18.0	18.0	18.0	18.0	
		ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	300	RPM	36672	9168	4584	3056	2292	1834	1310
				(240-360)	Fr	0.0007	0.0029	0.0059	0.0088	0.0118	0.0147	0.0206
					Feed (ipm)	27.0	27.0	27.0	27.0	27.0	27.0	27.0
	≤ 375 Bhn or ≤ 40 HRc		185	RPM	22614	5654	2827	1885	1413	1131	808	
			(148-222)	Fr	0.0006	0.0026	0.0051	0.0077	0.0103	0.0128	0.0180	
				Feed (ipm)	14.5	14.5	14.5	14.5	14.5	14.5	14.5	
	≤ 425 Bhn or ≤ 45 HRc		130	RPM	15891	3973	1986	1324	993	795	568	
			(104-156)	Fr	0.0004	0.0018	0.0035	0.0053	0.0070	0.0088	0.0123	
				Feed (ipm)	7.0	7.0	7.0	7.0	7.0	7.0	7.0	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		≤ 200 Bhn or ≤ 13 HRc	130	RPM	15891	3973	1986	1324	993	795	568
				(104-156)	Fr	0.0007	0.0026	0.0053	0.0079	0.0106	0.0132	0.0185
					Feed (ipm)	10.5	10.5	10.5	10.5	10.5	10.5	10.5
		≤ 375 Bhn or ≤ 40 HRc	90	RPM	11002	2750	1375	917	688	550	393	
			(72-108)	Fr	0.0003	0.0012	0.0023	0.0035	0.0047	0.0058	0.0081	
				Feed (ipm)	3.2	3.2	3.2	3.2	3.2	3.2	3.2	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	275	RPM	33616	8404	4202	2801	2101	1681	1201	
			(220-330)	Fr	0.0006	0.0026	0.0051	0.0077	0.0102	0.0128	0.0179	
				Feed (ipm)	21.5	21.5	21.5	21.5	21.5	21.5	21.5	
		≤ 275 Bhn or ≤ 28 HRc	170	RPM	20781	5195	2598	1732	1299	1039	742	
			(136-204)	Fr	0.0005	0.0020	0.0040	0.0061	0.0081	0.0101	0.0141	
				Feed (ipm)	10.5	10.5	10.5	10.5	10.5	10.5	10.5	
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	90	RPM	11002	2750	1375	917	688	550	393	
			(72-108)	Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140	
				Feed (ipm)	5.5	5.5	5.5	5.5	5.5	5.5	5.5	
		≤ 375 Bhn or ≤ 40 HRc	65	RPM	7946	1986	993	662	497	397	284	
			(52-78)	Fr	0.0004	0.0018	0.0035	0.0053	0.0070	0.0088	0.0123	
				Feed (ipm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	320	RPM	39117	9779	4890	3260	2445	1956	1397	
			(256-384)	Fr	0.0012	0.0046	0.0092	0.0138	0.0184	0.0230	0.0322	
				Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0	45.0	
		≤ 260 Bhn or ≤ 26 HRc	285	RPM	34838	8710	4355	2903	2177	1742	1244	
			(228-342)	Fr	0.0011	0.0046	0.0092	0.0138	0.0184	0.0230	0.0321	
				Feed (ipm)	40.0	40.0	40.0	40.0	40.0	40.0	40.0	

continued on next page

	Series 135 3D Fractional	Hardness	Vc (sfm)	DC • in							
				1/32	1/8	1/4	3/8	1/2	5/8	7/8	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	700	RPM	85568	21392	10696	7131	5348	4278	3056
			(560-840)	Fr	0.0012	0.0049	0.0098	0.0147	0.0196	0.0245	0.0344
				Feed (ipm)	105.0	105.0	105.0	105.0	105.0	105.0	105.0
		≤ 150 Bhn or ≤ 88 HRb	600	RPM	73344	18336	9168	6112	4584	3667	2619
			(480-720)	Fr	0.0012	0.0050	0.0099	0.0149	0.0199	0.0248	0.0347
				Feed (ipm)	91.0	91.0	91.0	91.0	91.0	91.0	91.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	500	RPM	61120	15280	7640	5093	3820	3056	2183
			(400-600)	Fr	0.0005	0.0020	0.0039	0.0059	0.0079	0.0098	0.0137
				Feed (ipm)	30.0	30.0	30.0	30.0	30.0	30.0	30.0
		≤ 200 Bhn or ≤ 23 HRc	400	RPM	48896	12224	6112	4075	3056	2445	1746
			(320-480)	Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (ipm)	24.5	24.5	24.5	24.5	24.5	24.5	24.5
S	HIGH TEMP ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	55	RPM	6723	1681	840	560	420	336	240
			(44-66)	Fr	0.0002	0.0008	0.0015	0.0023	0.0031	0.0039	0.0054
				Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3
		≤ 400 Bhn or ≤ 43 HRc	30	RPM	3667	917	458	306	229	183	131
			(24-36)	Fr	0.0002	0.0007	0.0013	0.0020	0.0026	0.0033	0.0046
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	135	RPM	16502	4126	2063	1375	1031	825	589
			(108-162)	Fr	0.0004	0.0018	0.0035	0.0053	0.0071	0.0088	0.0124
				Feed (ipm)	7.3	7.3	7.3	7.3	7.3	7.3	7.3
		≤ 350 Bhn or ≤ 38 HRc	100	RPM	12224	3056	1528	1019	764	611	437
			(80-120)	Fr	0.0004	0.0016	0.0033	0.0049	0.0065	0.0082	0.0115
				Feed (ipm)	5.0	5.0	5.0	5.0	5.0	5.0	5.0
		≤ 440 Bhn or ≤ 47 HRc	55	RPM	6723	1681	840	560	420	336	240
			(44-66)	Fr	0.0003	0.0012	0.0024	0.0036	0.0048	0.0059	0.0083
				Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	75	RPM	9168	2292	1146	764	573	458	327
			(60-90)	Fr	0.0002	0.0008	0.0016	0.0024	0.0031	0.0039	0.0055
				Feed (ipm)	1.8	1.8	1.8	1.8	1.8	1.8	1.8

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 135 3D Metric	Hardness	Vc (m/min)	DC • mm									
			1.5	3	6	8	10	12	16	20		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	117	RPM	24882	12441	6220	4665	3732	3110	2333	1866
			(94-141)	Fr	0.047	0.094	0.189	0.252	0.315	0.378	0.504	0.630
				Feed (mm/min)	1175	1175	1175	1175	1175	1175	1175	1175
		≤ 275 Bhn or ≤ 28 HRc	107	RPM	22620	11310	5655	4241	3393	2827	2121	1696
			(85-128)	Fr	0.043	0.086	0.172	0.229	0.286	0.343	0.457	0.572
				Feed (mm/min)	970	970	970	970	970	970	970	970
		≤ 475 Bhn or ≤ 45 HRc	61	RPM	12926	6463	3231	2424	1939	1616	1212	969
			(49-73)	Fr	0.036	0.071	0.142	0.190	0.237	0.285	0.380	0.475
				Feed (mm/min)	460	460	460	460	460	460	460	460
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	91	RPM	19388	9694	4847	3635	2908	2424	1818	1454
			(73-110)	Fr	0.036	0.071	0.142	0.190	0.237	0.285	0.380	0.475
				Feed (mm/min)	690	690	690	690	690	690	690	690
		≤ 375 Bhn or ≤ 40 HRc	56	RPM	11956	5978	2989	2242	1793	1495	1121	897
			(45-68)	Fr	0.031	0.061	0.122	0.163	0.204	0.244	0.326	0.407
				Feed (mm/min)	365	365	365	365	365	365	365	365
		≤ 425 Bhn or ≤ 45 HRc	40	RPM	8402	4201	2100	1575	1260	1050	788	630
			(32-48)	Fr	0.021	0.042	0.083	0.111	0.139	0.167	0.222	0.278
				Feed (mm/min)	175	175	175	175	175	175	175	175
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	40	RPM	8402	4201	2100	1575	1260	1050	788	630
			(32-48)	Fr	0.032	0.063	0.126	0.168	0.210	0.252	0.336	0.421
				Feed (mm/min)	265	265	265	265	265	265	265	265
		≤ 375 Bhn or ≤ 40 HRc	27	RPM	5816	2908	1454	1091	872	727	545	436
			(22-33)	Fr	0.014	0.028	0.055	0.073	0.092	0.110	0.147	0.183
				Feed (mm/min)	80	80	80	80	80	80	80	80
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	84	RPM	17773	8886	4443	3332	2666	2222	1666	1333
			(67-101)	Fr	0.031	0.061	0.123	0.164	0.204	0.245	0.327	0.409
				Feed (mm/min)	545	545	545	545	545	545	545	545
		≤ 275 Bhn or ≤ 28 HRc	52	RPM	10987	5493	2747	2060	1648	1373	1030	824
			(41-62)	Fr	0.024	0.047	0.095	0.126	0.158	0.189	0.252	0.316
				Feed (mm/min)	260	260	260	260	260	260	260	260
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	27	RPM	5816	2908	1454	1091	872	727	545	436
			(22-33)	Fr	0.023	0.046	0.093	0.124	0.155	0.186	0.248	0.309
				Feed (mm/min)	135	135	135	135	135	135	135	135
		≤ 375 Bhn or ≤ 40 HRc	20	RPM	4201	2100	1050	788	630	525	394	315
			(16-24)	Fr	0.020	0.040	0.081	0.108	0.135	0.162	0.216	0.270
				Feed (mm/min)	85	85	85	85	85	85	85	85
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	98	RPM	20681	10340	5170	3878	3102	2585	1939	1551
			(78-117)	Fr	0.055	0.110	0.220	0.293	0.366	0.439	0.585	0.732
				Feed (mm/min)	1135	1135	1135	1135	1135	1135	1135	1135
		≤ 260 Bhn or ≤ 26 HRc	87	RPM	18419	9209	4605	3454	2763	2302	1727	1381
			(69-104)	Fr	0.055	0.110	0.219	0.292	0.366	0.439	0.585	0.731
				Feed (mm/min)	1010	1010	1010	1010	1010	1010	1010	1010

continued on next page

Series 135 3D Metric		Hardness	Vc (m/min)	DC • mm								
				1.5	3	6	8	10	12	16	20	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	213	RPM	45239	22620	11310	8482	6786	5655	4241	3393
			(171-256)	Fr	0.059	0.119	0.238	0.317	0.396	0.476	0.634	0.793
				Feed (mm/min)	2690	2690	2690	2690	2690	2690	2690	2690
		≤ 150 Bhn or ≤ 8 HRb	183	RPM	38777	19388	9694	7271	5816	4847	3635	2908
			(146-219)	Fr	0.060	0.120	0.240	0.320	0.400	0.480	0.640	0.799
				Feed (mm/min)	2325	2325	2325	2325	2325	2325	2325	2325
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	152	RPM	32314	16157	8078	6059	4847	4039	3029	2424
			(122-183)	Fr	0.024	0.048	0.096	0.128	0.160	0.192	0.256	0.320
				Feed (mm/min)	776	776	776	776	776	776	776	776
		≤ 200 Bhn or ≤ 23 HRc	122	RPM	25851	12926	6463	4847	3878	3231	2424	1939
			(98-146)	Fr	0.024	0.049	0.097	0.130	0.162	0.195	0.260	0.325
				Feed (mm/min)	630	630	630	630	630	630	630	630
S	HIGH TEMP ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	17	RPM	3555	1777	889	666	533	444	333	267
			(13-20)	Fr	0.010	0.020	0.039	0.053	0.066	0.079	0.105	0.131
				Feed (mm/min)	35	35	35	35	35	35	35	35
		≤ 400 Bhn or ≤ 43 HRc	9	RPM	1939	969	485	364	291	242	182	145
			(7-11)	Fr	0.008	0.015	0.031	0.041	0.052	0.062	0.083	0.103
				Feed (mm/min)	15	15	15	15	15	15	15	15
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	41	RPM	8725	4362	2181	1636	1309	1091	818	654
			(33-49)	Fr	0.021	0.042	0.085	0.113	0.141	0.170	0.226	0.283
				Feed (mm/min)	185	185	185	185	185	185	185	185
		≤ 350 Bhn or ≤ 38 HRc	30	RPM	6463	3231	1616	1212	969	808	606	485
			(24-37)	Fr	0.019	0.039	0.077	0.103	0.129	0.155	0.206	0.258
				Feed (mm/min)	125	125	125	125	125	125	125	125
		≤ 440 Bhn or ≤ 47 HRc	17	RPM	3555	1777	889	666	533	444	333	267
			(13-20)	Fr	0.014	0.028	0.056	0.075	0.094	0.113	0.150	0.188
				Feed (mm/min)	50	50	50	50	50	50	50	50
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	23	RPM	4847	2424	1212	909	727	606	454	364
			(18-27)	Fr	0.009	0.019	0.037	0.050	0.062	0.074	0.099	0.124
				Feed (mm/min)	45	45	45	45	45	45	45	45

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)




5xD



135 5xD

FRACTIONAL & METRIC SERIES

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

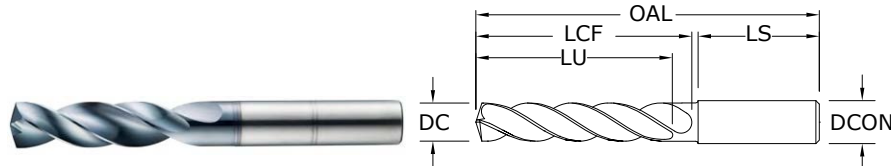

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AItin)
0.0156	0,396 mm	1/64	1/8	1 1/2	5/32	1/8	1	52300*
0.0312	0,792 mm	1/32	1/8	1 1/2	5/16	17/64	1	52301*
0.0469	1,191 mm	3/64	1/8	1 1/2	25/64	21/64	1	52302*
0.0492	1,250 mm		3,0	38,0	10,0	8,0	25,0	64520*
0.0571	1,450 mm		3,0	38,0	10,0	8,0	25,0	64521*
0.0595	1,511 mm	#53	1/8	1-1/2	25/64	5/16	1	64522*
0.0625	1,588 mm	1/16	1/8	2	15/32	3/8	1-1/4	52303*
0.0630	1,600 mm		3,0	50,0	12,0	10,0	32,0	64523*
0.0689	1,750 mm		3,0	50,0	12,0	9,0	32,0	64524*
0.0700	1,778 mm	#50	1/8	2	15/32	23/64	1-1/4	64525*
0.0781	1,984 mm	5/64	1/8	2	35/64	7/16	1-1/4	52304*
0.0785	1,994 mm	#47	1/8	2	35/64	7/16	1-1/4	64526*
0.0807	2,050 mm		3,0	50,0	14,0	11,0	32,0	64527*
0.0810	2,057 mm	#46	1/8	2	35/64	27/64	1-1/4	64528*
0.0890	2,261 mm	#43	1/8	2	19/32	15/32	1-1/4	64529*
0.0935	2,375 mm	#42	1/8	2	5/8	31/64	1-1/4	64530*
0.0938	2,383 mm	3/32	1/8	2	5/8	31/64	1-1/4	52305
0.0980	2,489 mm	#40	1/8	2	43/64	17/32	1-1/4	52306
0.0984	2,500 mm		3,0	50,0	17,0	13,0	32,0	64531
0.0995	2,527 mm	#39	1/8	2	43/64	17/32	1-1/4	52307
0.1015	2,578 mm	#38	1/8	2	43/64	17/32	1-1/4	52308
0.1040	2,642 mm	#37	1/8	2	45/64	35/64	1-1/4	52309
0.1065	2,705 mm	#36	1/8	2	45/64	35/64	1-1/4	52310
0.1094	2,779 mm	7/64	1/8	2	3/4	19/32	1-1/4	52311
0.1100	2,794 mm	#35	1/8	2	3/4	19/32	1-1/4	52312
0.1110	2,819 mm	#34	1/8	2	3/4	19/32	1-1/4	52313
0.1130	2,870 mm	#33	1/8	2	3/4	19/32	1-1/4	52314
0.1142	2,900 mm		3,0	50,0	19,0	15,0	32,0	64532
0.1160	2,946 mm	#32	1/8	2	3/4	37/64	1-1/4	52315
0.1181	3,000 mm		6,0	66,0	28,0	24,0	36,0	64100
0.1200	3,048 mm	#31	1/8	2	3/4	37/64	1-1/4	52316
0.1220	3,100 mm		6,0	66,0	28,0	23,0	36,0	64101
0.1250	3,175 mm	1/8	1/4	3	1	13/16	1-7/16	51580
0.1260	3,200 mm		6,0	66,0	28,0	23,0	36,0	64102
0.1285	3,264 mm	#30	1/4	3	1	13/16	1-7/16	51581
0.1299	3,300 mm		6,0	66,0	28,0	23,0	36,0	64103

*Single Margin

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h_6

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

135 5xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm		OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON					Ti-NAMITE-A (AITiN)
0.1339	3,400 mm		6,0	66,0	28,0	23,0	36,0	64104
0.1360	3,454 mm	#29	1/4	3	1	51/64	1-7/16	51582
0.1378	3,500 mm		6,0	66,0	28,0	23,0	36,0	64105
0.1405	3,569 mm	#28	1/4	3	1	51/64	1-7/16	52317
0.1406	3,571 mm	9/64	1/4	3	1	51/64	1-7/16	51583
0.1417	3,600 mm		6,0	66,0	28,0	23,0	36,0	64106
0.1440	3,658 mm	#27	1/4	3	1	51/64	1-7/16	52318
0.1457	3,700 mm		6,0	66,0	28,0	22,0	36,0	64107
0.1470	3,734 mm	#26	1/4	3	1	25/32	1-7/16	52319
0.1495	3,797 mm	#25	1/4	3-1/4	1-1/4	1-1/32	1-7/16	51584
0.1496	3,800 mm		6,0	74,0	36,0	30,0	36,0	64108
0.1520	3,861 mm	#24	1/4	3-1/4	1-1/4	1-1/32	1-7/16	52321
0.1535	3,900 mm		6,0	74,0	36,0	30,0	36,0	64109
0.1540	3,912 mm	#23	1/4	3-1/4	1-1/4	1-1/32	1-7/16	52322
0.1562	3,967 mm	5/32	1/4	3-1/4	1-1/4	1-1/64	1-7/16	51585
0.1570	3,988 mm	#22	1/4	3-1/4	1-1/4	1-1/64	1-7/16	52323
0.1575	4,000 mm		6,0	74,0	36,0	30,0	36,0	64110
0.1590	4,039 mm	#21	1/4	3-1/4	1-1/4	1-1/64	1-7/16	51586
0.1610	4,089 mm	#20	1/4	3-1/4	1-1/4	1	1-7/16	51587
0.1614	4,100 mm		6,0	74,0	36,0	30,0	36,0	64111
0.1654	4,200 mm		6,0	74,0	36,0	30,0	36,0	64112
0.1660	4,216 mm	#19	1/4	3-1/4	1-1/4	1	1-7/16	52324
0.1693	4,300 mm		6,0	74,0	36,0	30,0	36,0	64113
0.1695	4,305 mm	#18	1/4	3-1/4	1-1/4	1	1-7/16	52325
0.1719	4,366 mm	11/64	1/4	3-1/4	1-1/4	1	1-7/16	51588
0.1730	4,394 mm	#17	1/4	3-1/4	1-1/4	1	1-7/16	52326
0.1732	4,400 mm		6,0	74,0	36,0	29,0	36,0	64114
0.1772	4,500 mm		6,0	74,0	36,0	29,0	36,0	64115
0.1800	4,572 mm	#15	1/4	3-1/4	1-1/4	63/64	1-7/16	52327
0.1811	4,600 mm		6,0	74,0	36,0	29,0	36,0	64116
0.1820	4,623 mm	#14	1/4	3-1/4	1-1/4	63/64	1-7/16	52328
0.1850	4,699 mm	#13	1/4	3-1/4	1-1/4	63/64	1-7/16	52329
0.1850	4,699 mm	#13	6,0	74,0	36,0	29,0	36,0	64117
0.1875	4,763 mm	3/16	1/4	3-1/4	1-3/4	1-15/32	1-7/16	51589
0.1890	4,801 mm	#12	1/4	3-1/4	1-3/4	1-15/32	1-7/16	52330
0.1890	4,801 mm	#12	6,0	82,0	44,0	37,0	36,0	64118
0.1929	4,900 mm		6,0	82,0	44,0	37,0	36,0	64119
0.1935	4,915 mm	#10	1/4	3-1/4	1-3/4	1-15/32	1-7/16	52331
0.1960	4,978 mm	#9	1/4	3-1/4	1-3/4	1-15/32	1-7/16	52332
0.1969	5,000 mm		6,0	82,0	44,0	36,0	36,0	64120
0.1990	5,055 mm	#8	1/4	3-1/4	1-3/4	1-15/32	1-7/16	52333
0.2008	5,100 mm		6,0	82,0	44,0	36,0	36,0	64121
0.2010	5,105 mm	#7	1/4	3-1/4	1-3/4	1-29/64	1-7/16	51506
0.2031	5,159 mm	13/64	1/4	3-1/4	1-3/4	1-29/64	1-7/16	51507
0.2040	5,182 mm	#6	1/4	3 1/4	1 3/4	1-29/64	1 7/16	52334
0.2047	5,200 mm		6,0	82,0	44,0	36,0	36,0	64122

continued on next page

CONTINUED




5xD



135 5xD

FRACTIONAL & METRIC SERIES

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

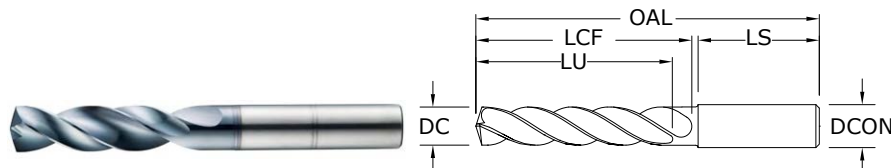

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITiN)	
0.2055	5,220 mm	#5	1/4	3-1/4	1-3/4	1-29/64	1-7/16	51590	
0.2067	5,250 mm		6,0	82,0	44,0	36,0	36,0	64123	
0.2087	5,300 mm		6,0	82,0	44,0	36,0	36,0	64124	
0.2090	5,309 mm	#4	1/4	3-1/4	1-3/4	1-7/16	1-7/16	51508	
0.2126	5,400 mm		6,0	82,0	44,0	36,0	36,0	64125	
0.2130	5,410 mm	#3	1/4	3-1/4	1-3/4	1-7/16	1-7/16	51509	
0.2165	5,500 mm		6,0	82,0	44,0	36,0	36,0	64126	
0.2188	5,558 mm	7/32	1/4	3-1/4	1-3/4	1-27/64	1-7/16	51510	
0.2205	5,600 mm		6,0	82,0	44,0	36,0	36,0	64127	
0.2210	5,613 mm	#2	1/4	3-1/4	1-3/4	1-27/64	1-7/16	52335	
0.2244	5,700 mm		6,0	82,0	44,0	35,0	36,0	64128	
0.2280	5,791 mm	#1	1/4	3-1/4	1-3/4	1-13/32	1-7/16	52336	
0.2283	5,800 mm		6,0	82,0	44,0	35,0	36,0	64129	
0.2323	5,900 mm		6,0	82,0	44,0	35,0	36,0	64130	
0.2340	5,944 mm	A	1/4	3-1/4	1-3/4	1-13/32	1-7/16	52337	
0.2344	5,954 mm	15/64	1/4	3-1/4	1-3/4	1-13/32	1-7/16	51591	
0.2362	6,000 mm		6,0	82,0	44,0	35,0	36,0	64131	
0.2380	6,045 mm	B	1/4	3 5/8	2-5/64	1-13/32	1-7/16	52338	
0.2402	6,100 mm		8,0	91,0	53,0	44,0	36,0	64132	
0.2420	6,147 mm	C	1/4	3 5/8	2-5/64	1-13/32	1-7/16	52339	
0.2441	6,200 mm		8,0	91,0	53,0	44,0	36,0	64133	
0.2460	6,248 mm	D	1/4	3 5/8	2-5/64	1-13/32	1-7/16	52340	
0.2461	6,250 mm		8,0	91,0	53,0	44,0	36,0	64134	
0.2480	6,300 mm		8,0	91,0	53,0	44,0	36,0	64135	
0.2500	6,350 mm	1/4 E	1/4	3-5/8	2-5/64	1-45/64	1-7/16	51511	
0.2520	6,400 mm		8,0	91,0	53,0	43,0	36,0	64136	
0.2559	6,500 mm		8,0	91,0	53,0	43,0	36,0	64137	
0.2570	6,528 mm	F	5/16	3-5/8	2-5/64	1-45/64	1-7/16	51512	
0.2598	6,600 mm		8,0	91,0	53,0	43,0	36,0	64138	
0.2610	6,629 mm	G	5/16	3 5/8	2 5/64	1-11/16	1 7/16	52341	
0.2638	6,700 mm		8,0	91,0	53,0	43,0	36,0	64139	
0.2656	6,746 mm	17/64	5/16	3-5/8	2-5/64	1-11/16	1-7/16	51513	
0.2660	6,756 mm	H	5/16	3-5/8	2-5/64	1-11/16	1-7/16	52342	
0.2677	6,800 mm		8,0	91,0	53,0	43,0	36,0	64140	
0.2717	6,900 mm		8,0	91,0	53,0	43,0	36,0	64141	
0.2720	6,909 mm	I	5/16	3-5/8	2-5/64	1-43/64	1-7/16	51514	

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+0.0114

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h_6

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.kspatents.com

135 5xD

FRACTIONAL & METRIC SERIES


DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2756	7,000 mm		8,0	91,0	53,0	42,0	36,0	64142
0.2770	7,036 mm	J	5/16	3 5/8	2-5/64	1-43/64	1-7/16	52343
0.2795	7,100 mm		8,0	91,0	53,0	42,0	36,0	64143
0.2810	7,137 mm	K	5/16	3 5/8	2-5/64	1-21/32	1-7/16	52344
0.2812	7,142 mm	9/32	5/16	3-5/8	2-5/64	1-21/32	1-7/16	51515
0.2835	7,200 mm		8,0	91,0	53,0	42,0	36,0	64144
0.2854	7,250 mm		8,0	91,0	53,0	42,0	36,0	64145
0.2874	7,300 mm		8,0	91,0	53,0	42,0	36,0	64146
0.2900	7,366 mm	L	5/16	3-5/8	2-5/64	1-41/64	1-7/16	52345
0.2913	7,400 mm		8,0	91,0	53,0	42,0	36,0	64147
0.2950	7,493 mm	M	5/16	3-5/8	2-5/64	1-41/64	1-7/16	52346
0.2953	7,500 mm		8,0	91,0	53,0	42,0	36,0	64148
0.2969	7,541 mm	19/64	5/16	3-5/8	2-5/64	1-41/64	1-7/16	51516
0.2992	7,600 mm		8,0	91,0	53,0	42,0	36,0	64149
0.3020	7,671 mm	N	5/16	3-5/8	2-5/64	1-5/8	1-7/16	52347
0.3031	7,700 mm		8,0	91,0	53,0	41,0	36,0	64150
0.3071	7,800 mm		8,0	91,0	53,0	41,0	36,0	64151
0.3110	7,900 mm		8,0	91,0	53,0	41,0	36,0	64152
0.3125	7,938 mm	5/16	5/16	3-5/8	2-5/64	1-39/64	1-7/16	51517
0.3150	8,000 mm		8,0	91,0	53,0	41,0	36,0	64153
0.3160	8,026 mm	O	3/8	4	2-13/32	1-15/16	1-9/16	52348
0.3189	8,100 mm		10,0	103,0	61,0	49,0	40,0	64154
0.3228	8,200 mm		10,0	103,0	61,0	49,0	40,0	64155
0.3230	8,204 mm	P	3/8	4	2-13/32	1-59/64	1-9/16	51518
0.3268	8,300 mm		10,0	103,0	61,0	49,0	40,0	64156
0.3281	8,334 mm	21/64	3/8	4	2-13/32	1-59/64	1-9/16	51519
0.3307	8,400 mm		10,0	103,0	61,0	48,0	40,0	64157
0.3320	8,433 mm	Q	3/8	4	2-13/32	1-59/64	1-9/16	51520
0.3346	8,500 mm		10,0	103,0	61,0	48,0	40,0	64158
0.3386	8,600 mm		10,0	103,0	61,0	48,0	40,0	64159
0.3390	8,611 mm	R	3/8	4	2-13/32	1-29/32	1-9/16	52349
0.3425	8,700 mm		10,0	103,0	61,0	48,0	40,0	64160
0.3438	8,733 mm	11/32	3/8	4	2-13/32	1-57/64	1-9/16	51521
0.3465	8,800 mm		10,0	103,0	61,0	48,0	40,0	64161
0.3480	8,839 mm	S	3/8	4	2-13/32	1-57/64	1-9/16	51522
0.3504	8,900 mm		10,0	103,0	61,0	48,0	40,0	64162
0.3543	9,000 mm		10,0	103,0	61,0	48,0	40,0	64163
0.3580	9,093 mm	T	3/8	4	2 13/32	1-7/8	1 9/16	52350
0.3583	9,100 mm		10,0	103,0	61,0	47,0	40,0	64164
0.3594	9,129 mm	23/64	3/8	4	2-13/32	1-7/8	1-9/16	51523
0.3622	9,200 mm		10,0	103,0	61,0	47,0	40,0	64165
0.3642	9,250 mm		10,0	103,0	61,0	47,0	40,0	64166
0.3661	9,300 mm		10,0	103,0	61,0	47,0	40,0	64167
0.3680	9,347 mm	U	3/8	4	2-13/32	1-55/64	1-9/16	51524
0.3701	9,400 mm		10,0	103,0	61,0	47,0	40,0	64168
0.3740	9,500 mm		10,0	103,0	61,0	47,0	40,0	64169

continued on next page

CONTINUED



5xD

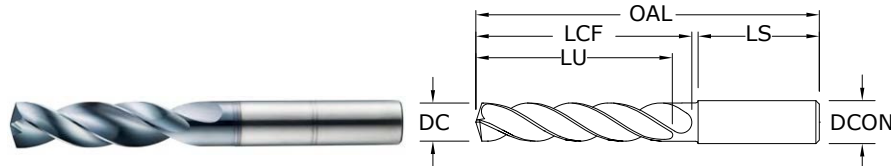

135 5xD

FRACTIONAL & METRIC SERIES

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITiN)
0.3750	9,525 mm	3/8	3/8	4	2-13/32	1-27/32	1-9/16	51525
0.3770	9,576 mm	V	1/2	4	2-13/32	1-27/32	1-9/16	52351
0.3780	9,600 mm		10,0	103,0	61,0	47,0	40,0	64170
0.3819	9,700 mm		10,0	103,0	61,0	46,0	40,0	64171
0.3858	9,800 mm		10,0	103,0	61,0	46,0	40,0	64172
0.3860	9,804 mm	W	1/2	4	2-13/32	1-53/64	1-9/16	51526
0.3898	9,900 mm		10,0	103,0	61,0	46,0	40,0	64173
0.3906	9,921 mm	25/64	1/2	4	2-13/32	1-53/64	1-9/16	51527
0.3937	10,000 mm		10,0	103,0	61,0	46,0	40,0	64174
0.3970	10,084 mm	X	1/2	4-11/16	2-3/4	2-5/32	1-49/64	52352
0.3976	10,100 mm		12,0	118,0	71,0	56,0	45,0	64175
0.4016	10,200 mm		12,0	118,0	71,0	56,0	45,0	64176
0.4040	10,262 mm	Y	1/2	4-11/16	2-3/4	2-5/32	1-49/64	52353
0.4055	10,300 mm		12,0	118,0	71,0	56,0	45,0	64177
0.4062	10,317 mm	13/32	1/2	4-11/16	2-3/4	2-9/64	1-49/64	51528
0.4095	10,400 mm		12,0	118,0	71,0	55,0	45,0	64178
0.4130	10,490 mm	Z	1/2	4-11/16	2-3/4	2-9/64	1-49/64	52354
0.4134	10,500 mm		12,0	118,0	71,0	55,0	45,0	64179
0.4173	10,600 mm		12,0	118,0	71,0	55,0	45,0	64180
0.4213	10,700 mm		12,0	118,0	71,0	55,0	45,0	64181
0.4219	10,716 mm	27/64	1/2	4-11/16	2-3/4	2-1/8	1-49/64	51529
0.4252	10,800 mm		12,0	118,0	71,0	55,0	45,0	64182
0.4291	10,900 mm		12,0	118,0	71,0	55,0	45,0	64183
0.4331	11,000 mm		12,0	118,0	71,0	54,0	45,0	64184
0.4370	11,100 mm		12,0	118,0	71,0	54,0	45,0	64185
0.4375	11,113 mm	7/16	1/2	4-11/16	2-3/4	2-3/32	1-49/64	51530
0.4409	11,200 mm		12,0	118,0	71,0	54,0	45,0	64186
0.4429	11,250 mm		12,0	118,0	71,0	54,0	45,0	64187
0.4449	11,300 mm		12,0	118,0	71,0	54,0	45,0	64188
0.4488	11,400 mm		12,0	118,0	71,0	54,0	45,0	64189
0.4528	11,500 mm		12,0	118,0	71,0	54,0	45,0	64190
0.4531	11,509 mm	29/64	1/2	4-11/16	2-3/4	2-5/64	1-49/64	51531
0.4567	11,600 mm		12,0	118,0	71,0	54,0	45,0	64191
0.4606	11,700 mm		12,0	118,0	71,0	53,0	45,0	64192
0.4646	11,800 mm		12,0	118,0	71,0	53,0	45,0	64193
0.4685	11,900 mm		12,0	118,0	71,0	53,0	45,0	64194

continued on next page

TOLERANCES (inch)

 $\leq .1181$ DIAMETERDC = $+0.0008/+0.0047$ DCON = h_6 $>.1181-.2362$ DIAMETERDC = $+0.0016/+0.0063$ DCON = h_6 $>.2362-.3937$ DIAMETERDC = $+0.0024/+0.0083$ DCON = h_6 $>.3937-.7087$ DIAMETERDC = $+0.0028/+0.0098$ DCON = h_6 $>.7087-1.1811$ DIAMETERDC = $+0.0031/+0.0114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $+0.002/+0.012$ DCON = h_6 $>3-6$ DIAMETERDC = $+0.004/+0.016$ DCON = h_6 $>6-10$ DIAMETERDC = $+0.006/+0.021$ DCON = h_6 $>10-18$ DIAMETERDC = $+0.007/+0.025$ DCON = h_6 $>18-30$ DIAMETERDC = $+0.008/+0.029$ DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.kspatents.com

135 5xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.4688	11,908 mm	15/32	1/2	4-11/16	2-3/4	2-3/64	1-49/64	51532
0.4724	12,000 mm		12,0	118,0	71,0	53,0	45,0	64195
0.4844	12,304 mm	31/64	1/2	4-7/8	3-1/32	1-5/16	1-49/64	51533
0.4921	12,500 mm		14,0	124,0	77,0	58,0	45,0	64196
0.5000	12,700 mm	1/2	1/2	4-7/8	3-1/32	2-9/32	1-49/64	51534
0.5039	12,800 mm		14,0	124,0	77,0	58,0	45,0	64197
0.5118	13,000 mm		14,0	124,0	77,0	58,0	45,0	64198
0.5156	13,096 mm	33/64	5/8	4-7/8	3-1/32	2-17/64	1-49/64	51535
0.5312	13,492 mm	17/32	5/8	4-7/8	3-1/32	2-15/64	1-49/64	51536
0.5315	13,500 mm		14,0	124,0	77,0	57,0	45,0	64199
0.5469	13,800 mm	35/64	5/8	4-7/8	3-1/32	2-7/32	1-49/64	51537
0.5512	14,000 mm		14,0	124,0	77,0	56,0	45,0	64200
0.5625	14,288 mm	9/16	5/8	5-1/4	3-1/4	2-13/32	1-57/64	51538
0.5709	14,500 mm		16,0	133,0	83,0	61,0	48,0	64201
0.5781	14,684 mm	37/64	5/8	5-1/4	3-1/4	2-25/64	1-57/64	51539
0.5906	15,000 mm		16,0	133,0	83,0	60,0	48,0	64202
0.5938	15,083 mm	19/32	5/8	5-1/4	3-1/4	2-23/64	1-57/64	51592
0.6094	15,479 mm	39/64	5/8	5-1/4	3-1/4	2-11/32	1-57/64	51593
0.6102	15,500 mm		16,0	133,0	83,0	60,0	48,0	64203
0.6250	15,875 mm	5/8	5/8	5-1/4	3-1/4	2-5/16	1-57/64	51540
0.6299	16,000 mm		16,0	133,0	83,0	59,0	48,0	64204
0.6406	16,271 mm	41/64	3/4	5-5/8	3-5/8	2-43/64	1-57/64	51594
0.6496	16,500 mm		18,0	143,0	93,0	68,0	48,0	64205
0.6562	16,667 mm	21/32	3/4	5-5/8	3-5/8	2-41/64	1-57/64	51541
0.6693	17,000 mm		18,0	143,0	93,0	67,0	48,0	64206
0.6719	17,066 mm	43/64	3/4	5-5/8	3-5/8	2-5/8	1-57/64	51595
0.6875	17,463 mm	11/16	3/4	5-5/8	3-5/8	2-19/32	1-57/64	51542
0.6890	17,500 mm		18,0	143,0	93,0	67,0	48,0	64207
0.7031	17,859 mm	45/64	3/4	5-5/8	3-5/8	2-37/64	1-57/64	51543
0.7087	18,000 mm		18,0	143,0	93,0	66,0	48,0	64208
0.7188	18,258 mm	23/32	3/4	6	4	2-59/64	1-31/32	51596
0.7283	18,500 mm		20,0	153,0	101,0	73,0	50,0	64209
0.7344	18,654 mm	47/64	3/4	6	4	2-29/32	1-31/32	51544
0.7480	19,000 mm		20,0	153,0	101,0	73,0	50,0	64210
0.7500	19,050 mm	3/4	3/4	6	4	2-7/8	1-31/32	51545
0.7656	19,446 mm	49/64	7/8	6	4	2-55/64	1-31/32	52355
0.7677	19,500 mm		20,0	153,0	101,0	72,0	50,0	64211
0.7812	19,842 mm	25/32	7/8	6	4	2-55/64	1-31/32	52356
0.7874	20,000 mm		20,0	153,0	101,0	71,0	50,0	64212
0.7969	20,241 mm	51/64	7/8	6	4	2-13/16	1-31/32	52357
0.8071	20,500 mm		22,0	153,0	101,0	70,0	50,0	64533
0.8125	20,638 mm	13/16	7/8	6-1/2	4-1/2	3-3/32	1-31/32	52358
0.8268	21,000 mm		22,0	153,0	101,0	69,0	50,0	64534
0.8661	22,000 mm		22,0	178,0	127,0	94,0	50,0	64535
0.8750	22,225 mm	7/8	7/8	6-1/2	4-1/2	3-3/16	1-31/32	52359
0.9219	23,416 mm	59/64	1	7	5	3-5/8	2-1/8	52360

CONTINUED

Series 135 5D Fractional	Hardness	Vc (sfm)	DC • in								
			1/32	1/8	1/4	3/8	1/2	5/8	7/8		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	345	RPM	42173	10543	5272	3514	2636	2109	1506
			(276-414)	Fr	0.0010	0.0040	0.0080	0.0120	0.0159	0.0199	0.0279
				Feed (ipm)	42.0	42.0	42.0	42.0	42.0	42.0	42.0
		≤ 275 Bhn or ≤ 28 HRc	310	RPM	37894	9474	4737	3158	2368	1895	1353
			(248-372)	Fr	0.0009	0.0036	0.0072	0.0108	0.0144	0.0179	0.0251
				Feed (ipm)	34.0	34.0	34.0	34.0	34.0	34.0	34.0
		≤ 425 Bhn or ≤ 45 HRc	180	RPM	22003	5501	2750	1834	1375	1100	786
			(144-216)	Fr	0.0007	0.0030	0.0060	0.0090	0.0120	0.0150	0.0210
				Feed (ipm)	16.5	16.5	16.5	16.5	16.5	16.5	16.5
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	270	RPM	33005	8251	4126	2750	2063	1650	1179
			(216-324)	Fr	0.0008	0.0030	0.0061	0.0091	0.0121	0.0151	0.0212
				Feed (ipm)	25.0	25.0	25.0	25.0	25.0	25.0	25.0
		≤ 375 Bhn or ≤ 40 HRc	165	RPM	20170	5042	2521	1681	1261	1008	720
			(132-198)	Fr	0.0006	0.0026	0.0052	0.0077	0.0103	0.0129	0.0180
				Feed (ipm)	13.0	13.0	13.0	13.0	13.0	13.0	13.0
		≤ 425 Bhn or ≤ 45 HRc	115	RPM	14058	3514	1757	1171	879	703	502
			(92-138)	Fr	0.0004	0.0018	0.0035	0.0053	0.0071	0.0088	0.0123
				Feed (ipm)	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	120	RPM	14669	3667	1834	1222	917	733	524
			(96-144)	Fr	0.0006	0.0026	0.0051	0.0077	0.0103	0.0128	0.0179
				Feed (ipm)	9.4	9.4	9.4	9.4	9.4	9.4	9.4
		≤ 375 Bhn or ≤ 40 HRc	80	RPM	9779	2445	1222	815	611	489	349
			(64-96)	Fr	0.0003	0.0012	0.0024	0.0036	0.0047	0.0059	0.0083
				Feed (ipm)	2.9	2.9	2.9	2.9	2.9	2.9	2.9
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	250	RPM	30560	7640	3820	2547	1910	1528	1091
			(200-300)	Fr	0.0006	0.0026	0.0051	0.0077	0.0102	0.0128	0.0179
				Feed (ipm)	19.5	19.5	19.5	19.5	19.5	19.5	19.5
		≤ 275 Bhn or ≤ 28 HRc	150	RPM	18336	4584	2292	1528	1146	917	655
			(120-180)	Fr	0.0005	0.0020	0.0039	0.0059	0.0079	0.0098	0.0137
				Feed (ipm)	9.0	9.0	9.0	9.0	9.0	9.0	9.0
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	80	RPM	9779	2445	1222	815	611	489	349
			(64-96)	Fr	0.0005	0.0020	0.0039	0.0059	0.0079	0.0098	0.0137
				Feed (ipm)	4.8	4.8	4.8	4.8	4.8	4.8	4.8
		≤ 375 Bhn or ≤ 40 HRc	55	RPM	6723	1681	840	560	420	336	240
			(44-66)	Fr	0.0004	0.0018	0.0036	0.0054	0.0071	0.0089	0.0125
				Feed (ipm)	3.0	3.0	3.0	3.0	3.0	3.0	3.0
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	300	RPM	36672	9168	4584	3056	2292	1834	1310
			(240-360)	Fr	0.0011	0.0045	0.0089	0.0134	0.0179	0.0224	0.0313
				Feed (ipm)	41.0	41.0	41.0	41.0	41.0	41.0	41.0
		≤ 260 Bhn or ≤ 26 HRc	265	RPM	32394	8098	4049	2699	2025	1620	1157
			(212-318)	Fr	0.0011	0.0046	0.0091	0.0137	0.0183	0.0228	0.0320
				Feed (ipm)	37.0	37.0	37.0	37.0	37.0	37.0	37.0

continued on next page

	Series 135 5D Fractional	Hardness	Vc (sfm)	DC • in							
				1/32	1/8	1/4	3/8	1/2	5/8	7/8	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	635	RPM	77622	19406	9703	6469	4851	3881	2772
			(508-762)	Fr	0.0012	0.0049	0.0099	0.0148	0.0198	0.0247	0.0346
				Feed (ipm)	96.0	96.0	96.0	96.0	96.0	96.0	96.0
		≤ 150 Bhn or ≤ 88 HRc	540	RPM	66010	16502	8251	5501	4126	3300	2357
			(432-648)	Fr	0.0012	0.0050	0.0099	0.0149	0.0199	0.0248	0.0348
				Feed (ipm)	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	450	RPM	55008	13752	6876	4584	3438	2750	1965
			(360-540)	Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (ipm)	27.5	27.5	27.5	27.5	27.5	27.5	27.5
		≤ 200 Bhn or ≤ 23 HRc	360	RPM	44006	11002	5501	3667	2750	2200	1572
			(288-432)	Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (ipm)	22.0	22.0	22.0	22.0	22.0	22.0	22.0
S	HIGH TEMP ALLOYS (Nickel , Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	40	RPM	4890	1222	611	407	306	244	175
			(32-48)	Fr	0.0002	0.0008	0.0016	0.0025	0.0033	0.0041	0.0057
				Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
		≤ 400 Bhn or ≤ 43 HRc	20	RPM	2445	611	306	204	153	122	87
			(16-24)	Fr	0.0002	0.0007	0.0013	0.0020	0.0026	0.0033	0.0046
				Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	105	RPM	12835	3209	1604	1070	802	642	458
			(84-126)	Fr	0.0005	0.0018	0.0036	0.0054	0.0072	0.0090	0.0127
				Feed (ipm)	5.8	5.8	5.8	5.8	5.8	5.8	5.8
		≤ 350 Bhn or ≤ 38 HRc	80	RPM	9779	2445	1222	815	611	489	349
			(64-96)	Fr	0.0004	0.0016	0.0032	0.0048	0.0064	0.0080	0.0112
				Feed (ipm)	3.9	3.9	3.9	3.9	3.9	3.9	3.9
		≤ 440 Bhn or ≤ 47 HRc	42	RPM	5134	1284	642	428	321	257	183
			(34-50)	Fr	0.0003	0.0012	0.0025	0.0037	0.0050	0.0062	0.0087
				Feed (ipm)	1.6	1.6	1.6	1.6	1.6	1.6	1.6
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	70	RPM	8557	2139	1070	713	535	428	306
			(56-84)	Fr	0.0002	0.0008	0.0016	0.0024	0.0032	0.0040	0.0056
				Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 135M 5D Metric	Hardness	Vc (m/min)	DC • mm									
			1.5	3	6	8	10	12	16	20		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	105	RPM	22297	11148	5574	4181	3344	2787	2090	1672
			(84-126)	Fr	0.048	0.095	0.190	0.254	0.317	0.380	0.507	0.634
				Feed (mm/min)	1060	1060	1060	1060	1060	1060	1060	1060
		≤ 275 Bhn or ≤ 28 HRc	94	RPM	20035	10017	5009	3756	3005	2504	1878	1503
			(76-113)	Fr	0.043	0.085	0.171	0.228	0.285	0.341	0.455	0.569
				Feed (mm/min)	855	855	855	855	855	855	855	855
		≤ 425 Bhn or ≤ 45 HRc	55	RPM	11633	5816	2908	2181	1745	1454	1091	872
			(44-66)	Fr	0.036	0.071	0.143	0.190	0.238	0.285	0.381	0.476
				Feed (mm/min)	415	415	415	415	415	415	415	415
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	82	RPM	17449	8725	4362	3272	2617	2181	1636	1309
			(66-99)	Fr	0.036	0.072	0.143	0.191	0.239	0.287	0.382	0.478
				Feed (mm/min)	625	625	625	625	625	625	625	625
		≤ 375 Bhn or ≤ 40 HRc	50	RPM	10664	5332	2666	1999	1600	1333	1000	800
			(40-60)	Fr	0.031	0.062	0.124	0.165	0.206	0.248	0.330	0.413
				Feed (mm/min)	330	330	330	330	330	330	330	330
		≤ 425 Bhn or ≤ 45 HRc	35	RPM	7432	3716	1858	1394	1115	929	697	557
			(28-42)	Fr	0.022	0.043	0.086	0.115	0.144	0.172	0.230	0.287
				Feed (mm/min)	160	160	160	160	160	160	160	160
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	37	RPM	7755	3878	1939	1454	1163	969	727	582
			(29-44)	Fr	0.031	0.062	0.124	0.165	0.206	0.248	0.330	0.413
				Feed (mm/min)	240	240	240	240	240	240	240	240
		≤ 375 Bhn or ≤ 40 HRc	24	RPM	5170	2585	1293	969	776	646	485	388
			(20-29)	Fr	0.015	0.029	0.058	0.077	0.097	0.116	0.155	0.193
				Feed (mm/min)	75	75	75	75	75	75	75	75
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	76	RPM	16157	8078	4039	3029	2424	2020	1515	1212
			(61-91)	Fr	0.031	0.061	0.123	0.163	0.204	0.245	0.327	0.408
				Feed (mm/min)	495	495	495	495	495	495	495	495
		≤ 275 Bhn or ≤ 28 HRc	46	RPM	9694	4847	2424	1818	1454	1212	909	727
			(37-55)	Fr	0.024	0.047	0.095	0.127	0.158	0.190	0.253	0.316
				Feed (mm/min)	230	230	230	230	230	230	230	230
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	24	RPM	5170	2585	1293	969	776	646	485	388
			(20-29)	Fr	0.023	0.046	0.093	0.124	0.155	0.186	0.248	0.309
				Feed (mm/min)	120	120	120	120	120	120	120	120
		≤ 375 Bhn or ≤ 40 HRc	17	RPM	3555	1777	889	666	533	444	333	267
			(13-20)	Fr	0.021	0.042	0.084	0.113	0.141	0.169	0.225	0.281
				Feed (mm/min)	75	75	75	75	75	75	75	75
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	91	RPM	19388	9694	4847	3635	2908	2424	1818	1454
			(73-110)	Fr	0.054	0.108	0.217	0.289	0.361	0.433	0.578	0.722
				Feed (mm/min)	1050	1050	1050	1050	1050	1050	1050	1050
		≤ 260 Bhn or ≤ 26 HRc	81	RPM	17126	8563	4282	3211	2569	2141	1606	1284
			(65-97)	Fr	0.055	0.109	0.218	0.291	0.364	0.437	0.582	0.728
				Feed (mm/min)	935	935	935	935	935	935	935	935

continued on next page

	Series 135M 5D Metric	Hardness	Vc (m/min)	DC • mm							
				1.5	3	6	8	10	12	16	20
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	194	RPM	41039	20519	10260	7695	6156	5130	3078
			(155-232)	Fr	0.059	0.118	0.237	0.316	0.395	0.474	0.632
				Feed (mm/min)	2430	2430	2430	2430	2430	2430	2430
		≤ 150 Bhn or ≤ 88 HRc	165	RPM	34899	17449	8725	6544	5235	4362	2617
			(132-198)	Fr	0.059	0.118	0.237	0.316	0.394	0.473	0.631
				Feed (mm/min)	2065	2065	2065	2065	2065	2065	2065
	Copper Alloys Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	137	RPM	29082	14541	7271	5453	4362	3635	2181
			(110-165)	Fr	0.027	0.053	0.107	0.142	0.178	0.213	0.284
				Feed (mm/min)	775	775	775	775	775	775	775
		≤ 200 Bhn or ≤ 23 HRc	110	RPM	23266	11633	5816	4362	3490	2908	1745
			(88-132)	Fr	0.027	0.054	0.108	0.144	0.181	0.217	0.289
				Feed (mm/min)	630	630	630	630	630	630	630
S	HIGH TEMP ALLOYS (Nickel, Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	12	RPM	2585	1293	646	485	388	323	194
			(10-15)	Fr	0.010	0.019	0.039	0.052	0.064	0.077	0.103
				Feed (mm/min)	25	25	25	25	25	25	25
		≤ 400 Bhn or ≤ 43 HRc	6	RPM	1293	646	323	242	194	162	121
			(5-7)	Fr	0.007	0.014	0.028	0.037	0.046	0.056	0.074
				Feed (mm/min)	9	9	9	9	9	9	9
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	32	RPM	6786	3393	1696	1272	1018	848	636
			(26-38)	Fr	0.021	0.043	0.085	0.114	0.142	0.171	0.228
				Feed (mm/min)	145	145	145	145	145	145	145
		≤ 350 Bhn or ≤ 38 HRc	24	RPM	5170	2585	1293	969	776	646	485
			(20-29)	Fr	0.019	0.039	0.077	0.103	0.129	0.155	0.206
				Feed (mm/min)	100	100	100	100	100	100	100
		≤ 440 Bhn or ≤ 47 HRc	13	RPM	2714	1357	679	509	407	339	254
			(10-15)	Fr	0.015	0.029	0.059	0.079	0.098	0.118	0.157
				Feed (mm/min)	40	40	40	40	40	40	40
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	21	RPM	4524	2262	1131	848	679	565	424
			(17-26)	Fr	0.010	0.019	0.038	0.051	0.064	0.076	0.102
				Feed (mm/min)	43	43	43	43	43	43	43

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)




3xD



146U 3xD

FRACTIONAL & METRIC SERIES

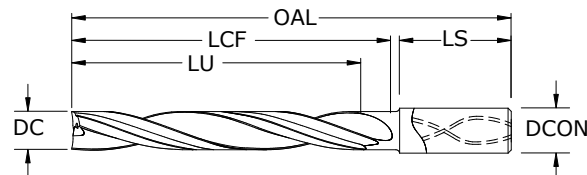

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.1181	3,000 mm		6,0	55,0	13,0	9,0	34,0	67705
0.1220	3,100 mm		6,0	55,0	14,0	9,0	34,0	67706
0.1250	3,175 mm	1/8	6,0	55,0	14,0	10,0	34,0	58800
0.1260	3,200 mm		6,0	55,0	14,0	10,0	34,0	67707
0.1299	3,300 mm		6,0	55,0	15,0	10,0	34,0	67708
0.1339	3,400 mm		6,0	55,0	15,0	10,0	34,0	67709
0.1360	3,454 mm	#29	6,0	55,0	16,0	10,0	34,0	58801
0.1378	3,500 mm		6,0	55,0	16,0	11,0	34,0	67710
0.1405	3,569 mm	#28	6,0	55,0	16,0	11,0	34,0	58802
0.1406	3,571 mm	9/64	6,0	55,0	16,0	11,0	34,0	58803
0.1417	3,600 mm		6,0	55,0	16,0	11,0	34,0	67711
0.1457	3,700 mm		6,0	60,0	17,0	11,0	34,0	67712
0.1470	3,734 mm	#26	6,0	60,0	17,0	11,0	34,0	58804
0.1495	3,797 mm	#25	6,0	60,0	17,0	11,0	34,0	58805
0.1496	3,800 mm		6,0	60,0	17,0	11,0	34,0	67713
0.1520	3,861 mm	#24	6,0	60,0	17,0	12,0	34,0	58806
0.1535	3,900 mm		6,0	60,0	18,0	12,0	34,0	67714
0.1562	3,967 mm	5/32	6,0	60,0	18,0	12,0	34,0	58807
0.1570	3,988 mm	#22	6,0	60,0	18,0	12,0	34,0	58808
0.1575	4,000 mm		6,0	60,0	18,0	12,0	34,0	67715
0.1590	4,039 mm	#21	6,0	60,0	18,0	12,0	34,0	58809
0.1610	4,089 mm	#20	6,0	60,0	18,0	12,0	34,0	58810
0.1614	4,100 mm		6,0	60,0	18,0	12,0	34,0	67716
0.1654	4,200 mm		6,0	60,0	19,0	13,0	34,0	67717
0.1693	4,300 mm		6,0	60,0	19,0	13,0	34,0	67718
0.1719	4,366 mm	11/64	6,0	60,0	20,0	13,0	34,0	58811
0.1732	4,400 mm		6,0	60,0	20,0	13,0	34,0	67719
0.1770	4,496 mm	#16	6,0	60,0	20,0	13,0	34,0	58812
0.1772	4,500 mm		6,0	60,0	20,0	14,0	34,0	67720
0.1811	4,600 mm		6,0	60,0	21,0	14,0	34,0	67721
0.1850	4,699 mm	#13	6,0	60,0	21,0	14,0	34,0	58813
0.1875	4,763 mm	3/16	6,0	60,0	21,0	14,0	34,0	58814
0.1890	4,801 mm	#12	6,0	65,0	22,0	14,0	33,0	58815
0.1929	4,900 mm		6,0	65,0	22,0	15,0	33,0	67724
0.1935	4,915 mm	#10	6,0	65,0	22,0	15,0	33,0	58816
0.1969	5,000 mm		6,0	65,0	23,0	15,0	33,0	67725

continued on next page

TOLERANCES (inch)

 $\leq .1181$ DIAMETERDC = $+0.0008/+0.0047$ DCON = h_6 $>.1181-.2362$ DIAMETERDC = $+0.0016/+0.0063$ DCON = h_6 $>.2362-.3937$ DIAMETERDC = $+0.0024/+0.0083$ DCON = h_6 $>.3937-.7087$ DIAMETERDC = $+0.0028/+0.0098$ DCON = h_6 $>.7087-1.1811$ DIAMETERDC = $+0.0031/+0.0114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $+0,002/+0,012$ DCON = h_6 $>3-6$ DIAMETERDC = $+0,004/+0,016$ DCON = h_6 $>6-10$ DIAMETERDC = $+0,006/+0,021$ DCON = h_6 $>10-18$ DIAMETERDC = $+0,007/+0,025$ DCON = h_6 $>18-30$ DIAMETERDC = $+0,008/+0,029$ DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

146U 3xD

FRACTIONAL & METRIC SERIES


DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2008	5,100 mm		6,0	65,0	23,0	15,0	33,0	67726
0.2010	5,105 mm	#7	6,0	65,0	23,0	15,0	33,0	58817
0.2031	5,159 mm	13/64	6,0	65,0	23,0	15,0	33,0	58818
0.2047	5,200 mm		6,0	65,0	23,0	16,0	33,0	67727
0.2087	5,300 mm		6,0	65,0	24,0	16,0	33,0	67728
0.2090	5,309 mm	#4	6,0	65,0	24,0	16,0	33,0	58819
0.2126	5,400 mm		6,0	65,0	24,0	16,0	33,0	67729
0.2130	5,410 mm	#3	6,0	65,0	24,0	16,0	33,0	58820
0.2165	5,500 mm		6,0	65,0	25,0	16,0	33,0	67730
0.2188	5,558 mm	7/32	6,0	65,0	25,0	17,0	33,0	58821
0.2205	5,600 mm		6,0	65,0	25,0	17,0	33,0	67731
0.2244	5,700 mm		6,0	65,0	26,0	17,0	33,0	67732
0.2283	5,800 mm		6,0	65,0	26,0	17,0	33,0	67733
0.2323	5,900 mm		6,0	65,0	27,0	18,0	33,0	67734
0.2344	5,954 mm	15/64	6,0	65,0	27,0	18,0	33,0	58822
0.2362	6,000 mm		6,0	65,0	27,0	18,0	33,0	67735
0.2402	6,100 mm		8,0	70,0	28,0	19,0	34,0	67736
0.2441	6,200 mm		8,0	70,0	28,0	19,0	34,0	67737
0.2461	6,250 mm		8,0	70,0	28,0	19,0	34,0	67738
0.2480	6,300 mm		8,0	70,0	28,0	19,0	34,0	67739
0.2500	6,350 mm	1/4 E	8,0	70,0	29,0	19,0	34,0	58823
0.2520	6,400 mm		8,0	70,0	29,0	19,0	34,0	67740
0.2559	6,500 mm		8,0	70,0	29,0	19,0	34,0	67741
0.2570	6,528 mm	F	8,0	70,0	29,0	20,0	34,0	58824
0.2598	6,600 mm		8,0	70,0	30,0	20,0	34,0	67742
0.2638	6,700 mm		8,0	70,0	30,0	20,0	34,0	67743
0.2656	6,746 mm	17/64	8,0	70,0	30,0	20,0	34,0	58825
0.2677	6,800 mm		8,0	70,0	31,0	20,0	34,0	67744
0.2717	6,900 mm		8,0	70,0	31,0	21,0	34,0	67745
0.2720	6,909 mm	I	8,0	70,0	31,0	21,0	34,0	58826
0.2756	7,000 mm		8,0	75,0	32,0	21,0	34,0	67746
0.2795	7,100 mm		8,0	75,0	32,0	21,0	34,0	67747
0.2812	7,142 mm	9/32	8,0	75,0	32,0	21,0	34,0	58827
0.2835	7,200 mm		8,0	75,0	32,0	22,0	34,0	67748
0.2854	7,250 mm		8,0	75,0	33,0	22,0	34,0	67749
0.2874	7,300 mm		8,0	75,0	33,0	22,0	34,0	67750
0.2913	7,400 mm		8,0	75,0	33,0	22,0	34,0	67751
0.2953	7,500 mm		8,0	75,0	34,0	23,0	34,0	67752
0.2969	7,541 mm	19/64	8,0	75,0	34,0	23,0	34,0	58828
0.2992	7,600 mm		8,0	75,0	34,0	23,0	34,0	67753
0.3031	7,700 mm		8,0	75,0	35,0	23,0	34,0	67754
0.3071	7,800 mm		8,0	75,0	35,0	23,0	34,0	67755
0.3110	7,900 mm		8,0	75,0	36,0	24,0	34,0	67756
0.3125	7,938 mm	5/16	8,0	75,0	36,0	24,0	34,0	58829
0.3150	8,000 mm		8,0	75,0	36,0	24,0	34,0	67757
0.3189	8,100 mm		10,0	80,0	36,0	24,0	34,0	67758

continued on next page

CONTINUED



3xD

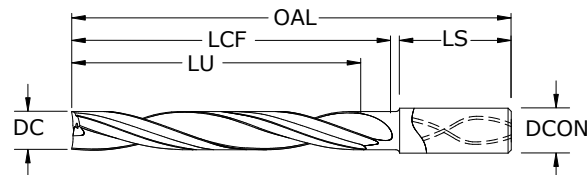

146U 3xD

FRACTIONAL & METRIC SERIES

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.3228	8,200 mm		10,0	80,0	37,0	25,0	34,0	67759
0.3268	8,300 mm		10,0	80,0	37,0	25,0	34,0	67760
0.3281	8,334 mm	21/64	10,0	80,0	38,0	25,0	34,0	58830
0.3307	8,400 mm		10,0	80,0	38,0	25,0	34,0	67761
0.3320	8,433 mm	Q	10,0	80,0	38,0	25,0	34,0	58831
0.3346	8,500 mm		10,0	80,0	38,0	25,0	34,0	67762
0.3386	8,600 mm		10,0	80,0	39,0	26,0	34,0	67763
0.3425	8,700 mm		10,0	80,0	39,0	26,0	34,0	67764
0.3438	8,733 mm	11/32	10,0	80,0	39,0	26,0	34,0	58832
0.3465	8,800 mm		10,0	80,0	40,0	26,0	34,0	67765
0.3504	8,900 mm		10,0	80,0	40,0	27,0	34,0	67766
0.3543	9,000 mm		10,0	80,0	40,0	27,0	34,0	67767
0.3583	9,100 mm		10,0	80,0	41,0	27,0	34,0	67768
0.3594	9,129 mm	23/64	10,0	80,0	41,0	27,0	34,0	58833
0.3622	9,200 mm		10,0	80,0	41,0	28,0	35,0	67769
0.3661	9,300 mm		10,0	85,0	42,0	28,0	35,0	67770
0.3680	9,347 mm	U	10,0	85,0	42,0	28,0	35,0	58834
0.3701	9,400 mm		10,0	85,0	42,0	28,0	35,0	67771
0.3740	9,500 mm		10,0	85,0	43,0	28,0	35,0	67772
0.3750	9,525 mm	3/8	10,0	85,0	43,0	29,0	35,0	58835
0.3780	9,600 mm		10,0	85,0	43,0	29,0	35,0	67773
0.3819	9,700 mm		10,0	85,0	44,0	29,0	35,0	67774
0.3858	9,800 mm		10,0	85,0	44,0	29,0	35,0	67775
0.3898	9,900 mm		10,0	85,0	45,0	30,0	35,0	67776
0.3906	9,921 mm	25/64	10,0	85,0	45,0	30,0	35,0	58836
0.3937	10,000 mm		10,0	85,0	45,0	30,0	35,0	67777
0.3970	10,084 mm	X	12,0	90,0	46,0	31,0	36,0	58837
0.3976	10,100 mm		12,0	90,0	46,0	31,0	36,0	67778
0.4016	10,200 mm		12,0	90,0	46,0	31,0	36,0	67779
0.4040	10,262 mm	Y	12,0	90,0	46,0	31,0	36,0	58838
0.4055	10,300 mm		12,0	90,0	46,0	31,0	36,0	67780
0.4062	10,317 mm	13/32	12,0	90,0	46,0	31,0	36,0	58839
0.4094	10,400 mm		12,0	90,0	47,0	31,0	36,0	67781
0.4134	10,500 mm		12,0	90,0	47,0	32,0	36,0	67782
0.4173	10,600 mm		12,0	90,0	48,0	32,0	36,0	67783
0.4213	10,700 mm		12,0	90,0	48,0	32,0	36,0	67784

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h_6

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com


146U 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.4219	10,716 mm	27/64	12,0	90,0	48,0	32,0	36,0	58840
0.4252	10,800 mm		12,0	90,0	49,0	32,0	36,0	67785
0.4291	10,900 mm		12,0	90,0	49,0	33,0	36,0	67786
0.4331	11,000 mm		12,0	95,0	50,0	33,0	36,0	67787
0.4370	11,100 mm		12,0	95,0	50,0	33,0	36,0	67788
0.4375	11,113 mm	7/16	12,0	95,0	50,0	33,0	36,0	58841
0.4409	11,200 mm		12,0	95,0	50,0	34,0	36,0	67789
0.4449	11,300 mm		12,0	95,0	51,0	34,0	36,0	67790
0.4488	11,400 mm		12,0	95,0	51,0	34,0	36,0	67791
0.4528	11,500 mm		12,0	95,0	52,0	35,0	36,0	67792
0.4531	11,509 mm	29/64	12,0	95,0	52,0	35,0	36,0	58842
0.4567	11,600 mm		12,0	95,0	52,0	35,0	36,0	67793
0.4606	11,700 mm		12,0	95,0	53,0	35,0	36,0	67794
0.4646	11,800 mm		12,0	95,0	53,0	35,0	36,0	67795
0.4685	11,900 mm		12,0	95,0	54,0	36,0	36,0	67796
0.4688	11,908 mm	15/32	12,0	95,0	54,0	36,0	36,0	58843
0.4724	12,000 mm		12,0	95,0	54,0	36,0	36,0	67797
0.4844	12,304 mm	31/64	14,0	105,0	55,0	37,0	37,0	58844
0.4921	12,500 mm		14,0	105,0	56,0	37,0	37,0	67798
0.5000	12,700 mm	1/2	14,0	105,0	57,0	38,0	37,0	58845
0.5039	12,800 mm		14,0	105,0	58,0	38,0	37,0	67799
0.5118	13,000 mm		14,0	105,0	58,0	39,0	37,0	67800
0.5156	13,096 mm	33/64	14,0	105,0	59,0	39,0	37,0	58846
0.5312	13,492 mm	17/32	14,0	105,0	61,0	40,0	37,0	58847
0.5315	13,500 mm		14,0	105,0	61,0	41,0	37,0	67801
0.5469	13,891 mm	35/64	14,0	105,0	63,0	42,0	37,0	58848
0.5512	14,000 mm		14,0	105,0	63,0	42,0	37,0	67802
0.5625	14,288 mm	9/16	16,0	115,0	64,0	43,0	38,0	58849
0.5709	14,500 mm		16,0	115,0	65,0	44,0	38,0	67803
0.5781	14,684 mm	37/64	16,0	115,0	66,0	44,0	38,0	58850
0.5906	15,000 mm		16,0	115,0	68,0	45,0	38,0	67804
0.5938	15,083 mm	19/32	16,0	115,0	68,0	45,0	38,0	58851
0.6094	15,479 mm	39/64	16,0	115,0	70,0	46,0	38,0	58852
0.6102	15,500 mm		16,0	115,0	70,0	46,0	38,0	67805
0.6250	15,875 mm	5/8	16,0	115,0	71,0	48,0	38,0	58853
0.6299	16,000 mm		16,0	115,0	72,0	48,0	38,0	67806
0.6406	16,271 mm	41/64	18,0	130,0	73,0	49,0	44,0	58854
0.6496	16,500 mm		18,0	130,0	74,0	49,0	44,0	67807
0.6562	16,667 mm	21/32	18,0	130,0	75,0	50,0	44,0	58855
0.6693	17,000 mm		18,0	130,0	77,0	51,0	44,0	67808
0.6719	17,066 mm	43/64	18,0	130,0	77,0	51,0	44,0	58856
0.6875	17,463 mm	11/16	18,0	130,0	79,0	52,0	44,0	58857
0.6890	17,500 mm		18,0	130,0	79,0	53,0	44,0	67809
0.7031	17,859 mm	45/64	18,0	130,0	80,0	54,0	44,0	58858


continued on next page

CONTINUED



146U 3xD

FRACTIONAL & METRIC SERIES

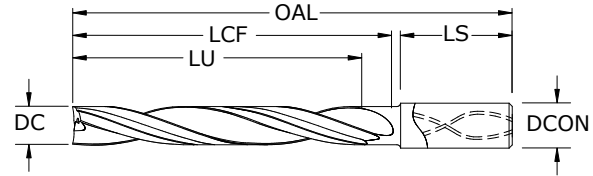

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.7087	18,000 mm		18,0	130,0	81,0	54,0	44,0	67810
0.7188	18,258 mm	23/32	20,0	140,0	82,0	55,0	45,0	58859
0.7283	18,500 mm		20,0	140,0	83,0	55,0	45,0	67811
0.7344	18,654 mm	47/64	20,0	140,0	84,0	56,0	45,0	58860
0.7480	19,000 mm		20,0	140,0	85,0	57,0	45,0	67812
0.7500	19,050 mm	3/4	20,0	140,0	86,0	57,0	45,0	58861
0.7656	19,446 mm	49/64	20,0	140,0	88,0	58,0	45,0	58862
0.7677	19,500 mm		20,0	140,0	88,0	58,0	45,0	67813
0.7812	19,842 mm	25/32	20,0	140,0	89,0	60,0	45,0	58863
0.7874	20,000 mm		20,0	140,0	90,0	60,0	45,0	67814
0.7969	20,241 mm	51/64	22,0	150,0	91,0	61,0	52,0	58864
0.8071	20,500 mm		22,0	150,0	92,0	62,0	52,0	67815
0.8125	20,638 mm	13/16	22,0	150,0	93,0	62,0	52,0	58865

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h_6


>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

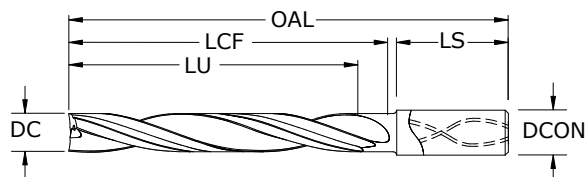

146U 5xD

FRACTIONAL & METRIC SERIES

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0.002/+0.012

DCON = h₆

>3-6 DIAMETER

DC = +0.004/+0.016

DCON = h₆

>6-10 DIAMETER

DC = +0.006/+0.021

DCON = h₆

>10-18 DIAMETER

DC = +0.007/+0.025

DCON = h₆

>18-30 DIAMETER

DC = +0.008/+0.029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS


NON-FERROUS

For patent
information visit
www.ksptpatents.com

		inch & mm							EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)	
0.1181	3,000 mm		6,0	75,0	19,0	15,0	51,0	67816	
0.1220	3,100 mm		6,0	80,0	20,0	15,0	49,0	67817	
0.1250	3,175 mm	1/8	6,0	80,0	21,0	16,0	49,0	58866	
0.1260	3,200 mm		6,0	80,0	21,0	16,0	49,0	67818	
0.1299	3,300 mm		6,0	80,0	21,0	16,0	49,0	67819	
0.1339	3,400 mm		6,0	80,0	22,0	17,0	49,0	67820	
0.1360	3,454 mm	#29	6,0	80,0	22,0	17,0	49,0	58867	
0.1378	3,500 mm		6,0	80,0	23,0	18,0	49,0	67821	
0.1405	3,569 mm	#28	6,0	80,0	23,0	18,0	49,0	58868	
0.1406	3,571 mm	9/64	6,0	80,0	23,0	18,0	49,0	58869	
0.1417	3,600 mm		6,0	80,0	23,0	18,0	49,0	67822	
0.1457	3,700 mm		6,0	80,0	24,0	19,0	49,0	67823	
0.1470	3,734 mm	#26	6,0	80,0	24,0	19,0	49,0	58870	
0.1495	3,797 mm	#25	6,0	80,0	25,0	19,0	49,0	58871	
0.1496	3,800 mm		6,0	80,0	25,0	19,0	49,0	67824	
0.1520	3,861 mm	#24	6,0	80,0	25,0	19,0	49,0	58872	
0.1535	3,900 mm		6,0	80,0	25,0	19,0	49,0	67825	
0.1562	3,967 mm	5/32	6,0	80,0	26,0	20,0	49,0	58873	
0.1570	3,988 mm	#22	6,0	80,0	26,0	20,0	49,0	58874	
0.1575	4,000 mm		6,0	80,0	26,0	20,0	49,0	67826	
0.1590	4,039 mm	#21	6,0	80,0	26,0	20,0	49,0	58875	
0.1610	4,089 mm	#20	6,0	90,0	27,0	20,0	53,0	58876	
0.1614	4,100 mm		6,0	90,0	27,0	20,0	53,0	67827	
0.1654	4,200 mm		6,0	90,0	27,0	21,0	53,0	67828	
0.1693	4,300 mm		6,0	90,0	28,0	22,0	53,0	67829	
0.1719	4,366 mm	11/64	6,0	90,0	28,0	22,0	53,0	58877	
0.1732	4,400 mm		6,0	90,0	29,0	22,0	53,0	67830	
0.1770	4,496 mm	#16	6,0	90,0	29,0	22,0	53,0	58878	
0.1772	4,500 mm		6,0	90,0	29,0	23,0	53,0	67831	
0.1811	4,600 mm		6,0	90,0	30,0	23,0	53,0	67832	
0.1850	4,699 mm	#13	6,0	90,0	31,0	23,0	53,0	58879	
0.1875	4,763 mm	3/16	6,0	90,0	31,0	24,0	53,0	58880	
0.1890	4,801 mm	#12	6,0	90,0	31,0	24,0	53,0	58881	
0.1929	4,900 mm		6,0	90,0	32,0	24,0	53,0	67835	
0.1935	4,915 mm	#10	6,0	90,0	32,0	25,0	53,0	58882	
0.1969	5,000 mm		6,0	95,0	33,0	25,0	51,0	67836	
0.2008	5,100 mm		6,0	95,0	33,0	26,0	51,0	67837	
0.2010	5,105 mm	#7	6,0	95,0	33,0	26,0	51,0	58883	
0.2031	5,159 mm	13/64	6,0	95,0	34,0	26,0	51,0	58884	
0.2047	5,200 mm		6,0	95,0	34,0	26,0	51,0	67838	
0.2087	5,300 mm		6,0	95,0	34,0	27,0	51,0	67839	
0.2090	5,309 mm	#4	6,0	95,0	35,0	27,0	51,0	58885	

continued on next page

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point reduces the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

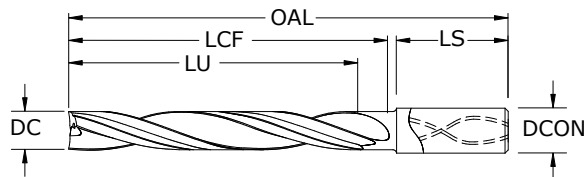

146U 5xD

FRACTIONAL & METRIC SERIES

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point reduces the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.2126	5,400 mm		6,0	95,0	35,0	27,0	51,0	67840
0.2130	5,410 mm	#3	6,0	95,0	35,0	27,0	51,0	58886
0.2165	5,500 mm		6,0	95,0	36,0	27,0	51,0	67841
0.2188	5,558 mm	7/32	6,0	95,0	36,0	28,0	51,0	58887
0.2205	5,600 mm		6,0	95,0	36,0	28,0	51,0	67842
0.2244	5,700 mm		6,0	95,0	37,0	28,0	51,0	67843
0.2283	5,800 mm		6,0	95,0	38,0	29,0	51,0	67844
0.2323	5,900 mm		6,0	95,0	38,0	30,0	51,0	67845
0.2344	5,954 mm	15/64	6,0	95,0	39,0	30,0	51,0	58888
0.2362	6,000 mm		6,0	95,0	39,0	30,0	51,0	67846
0.2402	6,100 mm		8,0	100,0	40,0	31,0	49,0	67847
0.2441	6,200 mm		8,0	100,0	40,0	31,0	49,0	67848
0.2461	6,250 mm		8,0	100,0	41,0	31,0	49,0	67849
0.2480	6,300 mm		8,0	100,0	41,0	31,0	49,0	67850
0.2500	6,350 mm	1/4 E	8,0	100,0	41,0	32,0	49,0	58889
0.2520	6,400 mm		8,0	100,0	42,0	32,0	49,0	67851
0.2559	6,500 mm		8,0	100,0	42,0	32,0	49,0	67852
0.2570	6,528 mm	F	8,0	100,0	42,0	33,0	49,0	58890
0.2598	6,600 mm		8,0	100,0	43,0	33,0	49,0	67853
0.2638	6,700 mm		8,0	100,0	44,0	34,0	49,0	67854
0.2656	6,746 mm	17/64	8,0	100,0	44,0	34,0	49,0	58891
0.2677	6,800 mm		8,0	100,0	44,0	34,0	49,0	67855
0.2717	6,900 mm		8,0	100,0	45,0	35,0	49,0	67856
0.2720	6,909 mm	I	8,0	100,0	45,0	35,0	49,0	58892
0.2756	7,000 mm		8,0	100,0	46,0	35,0	49,0	67857
0.2795	7,100 mm		8,0	100,0	46,0	35,0	49,0	67858
0.2812	7,142 mm	9/32	8,0	100,0	46,0	36,0	49,0	58893
0.2835	7,200 mm		8,0	110,0	47,0	36,0	53,0	67859
0.2854	7,250 mm		8,0	110,0	47,0	36,0	53,0	67860
0.2874	7,300 mm		8,0	110,0	47,0	36,0	53,0	67861
0.2913	7,400 mm		8,0	110,0	48,0	37,0	53,0	67862
0.2953	7,500 mm		8,0	110,0	49,0	38,0	53,0	67863
0.2969	7,541 mm	19/64	8,0	110,0	49,0	38,0	53,0	58894
0.2992	7,600 mm		8,0	110,0	49,0	38,0	53,0	67864
0.3031	7,700 mm		8,0	110,0	50,0	38,0	53,0	67865
0.3071	7,800 mm		8,0	110,0	51,0	39,0	53,0	67866
0.3110	7,900 mm		8,0	110,0	51,0	39,0	53,0	67867
0.3125	7,938 mm	5/16	8,0	110,0	52,0	40,0	53,0	58895
0.3150	8,000 mm		8,0	110,0	52,0	40,0	53,0	67868
0.3189	8,100 mm		10,0	115,0	53,0	41,0	51,0	67869
0.3228	8,200 mm		10,0	115,0	53,0	41,0	51,0	67870
0.3268	8,300 mm		10,0	115,0	54,0	42,0	51,0	67871

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+.00047

DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+.00063

DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00024/+.00083

DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+.00098

DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+.00114

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h_6

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

146U 5xD

FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC	METRIC DC	inch & mm		OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON					Ti-NAMITE®-X (TX)
0.3281	8,334 mm	21/64	10,0	115,0	54,0	42,0	51,0	58896
0.3307	8,400 mm		10,0	115,0	55,0	42,0	51,0	67872
0.3320	8,433 mm	Q	10,0	115,0	55,0	42,0	51,0	58897
0.3346	8,500 mm		10,0	115,0	55,0	42,0	51,0	67873
0.3386	8,600 mm		10,0	115,0	56,0	43,0	51,0	67874
0.3425	8,700 mm		10,0	115,0	57,0	43,0	51,0	67875
0.3438	8,733 mm	11/32	10,0	115,0	57,0	44,0	51,0	58898
0.3465	8,800 mm		10,0	115,0	57,0	44,0	51,0	67876
0.3504	8,900 mm		10,0	115,0	58,0	45,0	51,0	67877
0.3543	9,000 mm		10,0	115,0	58,0	45,0	51,0	67878
0.3583	9,100 mm		10,0	115,0	59,0	46,0	51,0	67879
0.3594	9,129 mm	23/64	10,0	115,0	59,0	46,0	51,0	58899
0.3622	9,200 mm		10,0	125,0	60,0	46,0	55,0	67880
0.3661	9,300 mm		10,0	125,0	60,0	46,0	55,0	67881
0.3680	9,347 mm	U	10,0	125,0	61,0	47,0	55,0	58900
0.3701	9,400 mm		10,0	125,0	61,0	47,0	55,0	67882
0.3740	9,500 mm		10,0	125,0	62,0	47,0	55,0	67883
0.3750	9,525 mm	3/8	10,0	125,0	62,0	48,0	55,0	58901
0.3780	9,600 mm		10,0	125,0	62,0	48,0	55,0	67884
0.3819	9,700 mm		10,0	125,0	63,0	49,0	55,0	67885
0.3858	9,800 mm		10,0	125,0	64,0	49,0	55,0	67886
0.3898	9,900 mm		10,0	125,0	64,0	50,0	55,0	67887
0.3906	9,921 mm	25/64	10,0	125,0	64,0	50,0	55,0	58902
0.3937	10,000 mm		10,0	125,0	65,0	50,0	55,0	67888
0.3970	10,084 mm	X	12,0	135,0	66,0	50,0	57,0	58903
0.3976	10,100 mm		12,0	135,0	66,0	50,0	57,0	67889
0.4016	10,200 mm		12,0	135,0	66,0	51,0	57,0	67890
0.4040	10,262 mm	Y	12,0	135,0	67,0	51,0	57,0	58904
0.4055	10,300 mm		12,0	135,0	67,0	51,0	57,0	67891
0.4062	10,317 mm	13/32	12,0	135,0	67,0	52,0	57,0	58905
0.4094	10,400 mm		12,0	135,0	68,0	52,0	57,0	67892
0.4134	10,500 mm		12,0	135,0	68,0	53,0	57,0	67893
0.4173	10,600 mm		12,0	135,0	69,0	53,0	57,0	67894
0.4213	10,700 mm		12,0	135,0	70,0	54,0	57,0	67895
0.4219	10,716 mm	27/64	12,0	135,0	70,0	54,0	57,0	58906
0.4252	10,800 mm		12,0	135,0	70,0	54,0	57,0	67896
0.4291	10,900 mm		12,0	135,0	71,0	54,0	57,0	67897
0.4331	11,000 mm		12,0	135,0	72,0	55,0	57,0	67898
0.4370	11,100 mm		12,0	135,0	72,0	55,0	57,0	67899
0.4375	11,113 mm	7/16	12,0	135,0	72,0	56,0	57,0	58907
0.4409	11,200 mm		12,0	135,0	73,0	56,0	57,0	67900
0.4449	11,300 mm		12,0	135,0	73,0	57,0	57,0	67901
0.4488	11,400 mm		12,0	145,0	74,0	57,0	62,0	67902
0.4528	11,500 mm		12,0	145,0	75,0	58,0	62,0	67903
0.4531	11,509 mm	29/64	12,0	145,0	75,0	58,0	62,0	58908
0.4567	11,600 mm		12,0	145,0	75,0	58,0	62,0	67904
0.4606	11,700 mm		12,0	145,0	76,0	58,0	62,0	67905
0.4646	11,800 mm		12,0	145,0	77,0	59,0	62,0	67906
0.4685	11,900 mm		12,0	145,0	77,0	59,0	62,0	67907
0.4688	11,908 mm	15/32	12,0	145,0	77,0	60,0	62,0	58909

continued on next page




5xD



146U 5xD

FRACTIONAL & METRIC SERIES

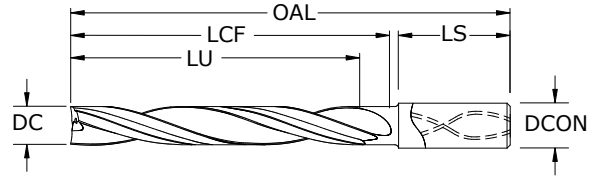

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point reduces the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.4724	12,000 mm		12,0	145,0	78,0	60,0	62,0	67908
0.4844	12,304 mm	31/64	14,0	155,0	80,0	62,0	59,0	58910
0.4921	12,500 mm		14,0	155,0	81,0	62,0	59,0	67909
0.5000	12,700 mm	1/2	14,0	155,0	83,0	64,0	59,0	58911
0.5039	12,800 mm		14,0	155,0	83,0	64,0	59,0	67910
0.5118	13,000 mm		14,0	155,0	84,0	65,0	59,0	67911
0.5156	13,096 mm	33/64	14,0	155,0	85,0	65,0	59,0	58912
0.5312	13,492 mm	17/32	14,0	155,0	88,0	67,0	59,0	58913
0.5315	13,500 mm		14,0	155,0	88,0	68,0	59,0	67912
0.5469	13,891 mm	35/64	14,0	155,0	90,0	69,0	59,0	58914
0.5512	14,000 mm		14,0	155,0	91,0	70,0	59,0	67913
0.5625	14,288 mm	9/16	16,0	175,0	93,0	71,0	66,0	58915
0.5709	14,500 mm		16,0	175,0	94,0	73,0	66,0	67914
0.5781	14,684 mm	37/64	16,0	175,0	95,0	73,0	66,0	58916
0.5906	15,000 mm		16,0	175,0	98,0	75,0	66,0	67915
0.5938	15,083 mm	19/32	16,0	175,0	98,0	75,0	66,0	58917
0.6094	15,479 mm	39/64	16,0	175,0	101,0	77,0	66,0	58918
0.6102	15,500 mm		16,0	175,0	101,0	77,0	66,0	67916
0.6250	15,875 mm	5/8	16,0	175,0	103,0	79,0	66,0	58919
0.6299	16,000 mm		16,0	175,0	104,0	80,0	66,0	67917
0.6406	16,271 mm	41/64	18,0	195,0	106,0	81,0	73,0	58920
0.6496	16,500 mm		18,0	195,0	107,0	82,0	73,0	67918
0.6562	16,667 mm	21/32	18,0	195,0	108,0	83,0	73,0	58921
0.6693	17,000 mm		18,0	195,0	111,0	85,0	73,0	67919
0.6719	17,066 mm	43/64	18,0	195,0	111,0	85,0	73,0	58922
0.6875	17,463 mm	11/16	18,0	195,0	114,0	87,0	73,0	58923
0.6890	17,500 mm		18,0	195,0	114,0	88,0	73,0	67920
0.7031	17,859 mm	45/64	18,0	195,0	116,0	89,0	73,0	58924
0.7087	18,000 mm		18,0	195,0	117,0	90,0	73,0	67921
0.7188	18,258 mm	23/32	20,0	215,0	119,0	91,0	80,0	58925
0.7283	18,500 mm		20,0	215,0	120,0	92,0	80,0	67922
0.7344	18,654 mm	47/64	20,0	215,0	121,0	93,0	80,0	58926
0.7480	19,000 mm		20,0	215,0	123,0	95,0	80,0	67923
0.7500	19,050 mm	3/4	20,0	215,0	124,0	95,0	80,0	58927
0.7656	19,446 mm	49/64	20,0	215,0	126,0	97,0	80,0	58928
0.7677	19,500 mm		20,0	215,0	127,0	97,0	80,0	67924
0.7812	19,842 mm	25/32	20,0	215,0	129,0	99,0	80,0	58929
0.7874	20,000 mm		20,0	215,0	130,0	100,0	80,0	67925
0.7969	20,241 mm	51/64	22,0	220,0	132,0	101,0	81,0	58930
0.8071	20,500 mm		22,0	220,0	133,0	103,0	81,0	67926
0.8125	20,638 mm	13/16	22,0	220,0	134,0	103,0	81,0	58931

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS



CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

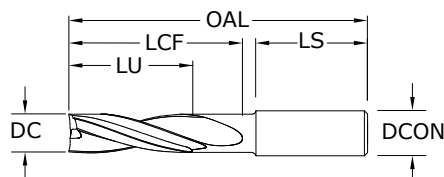

136U 2xD

FRACTIONAL & METRIC SERIES

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0.002/+0.012

DCON = h₆

>3-6 DIAMETER

DC = +0.004/+0.016

DCON = h₆

>6-10 DIAMETER

DC = +0.006/+0.021

DCON = h₆

>10-18 DIAMETER

DC = +0.007/+0.025

DCON = h₆

>18-30 DIAMETER

DC = +0.008/+0.029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

NON-FERROUS

For patent
information visit
www.ksptpatents.com

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)	
0.0591	1,500 mm		6,0	45,0	5,0	3,0	33,0	67060	
0.0625	1,588 mm	1/16	6,0	45,0	6,0	3,0	33,0	58480	
0.0630	1,600 mm		6,0	45,0	6,0	3,0	33,0	67061	
0.0669	1,700 mm		6,0	45,0	6,0	3,0	33,0	67062	
0.0709	1,800 mm		6,0	45,0	6,0	4,0	33,0	67063	
0.0748	1,900 mm		6,0	45,0	7,0	4,0	33,0	67064	
0.0781	1,984 mm	5/64	6,0	45,0	7,0	4,0	33,0	58481	
0.0787	2,000 mm		6,0	45,0	7,0	4,0	33,0	67065	
0.0827	2,100 mm		6,0	45,0	7,0	4,0	33,0	67066	
0.0866	2,200 mm		6,0	50,0	8,0	4,0	31,0	67067	
0.0906	2,300 mm		6,0	50,0	8,0	5,0	31,0	67068	
0.0938	2,383 mm	3/32	6,0	50,0	8,0	5,0	31,0	58482	
0.0945	2,400 mm		6,0	50,0	8,0	5,0	31,0	67069	
0.0984	2,500 mm		6,0	50,0	9,0	5,0	31,0	67070	
0.1015	2,578 mm	#38	6,0	50,0	9,0	5,0	31,0	58483	
0.1024	2,600 mm		6,0	50,0	9,0	5,0	31,0	67071	
0.1040	2,642 mm	#37	6,0	50,0	9,0	5,0	31,0	58484	
0.1063	2,700 mm		6,0	50,0	9,0	5,0	31,0	67072	
0.1065	2,705 mm	#36	6,0	50,0	9,0	5,0	31,0	58485	
0.1094	2,779 mm	7/64	6,0	50,0	10,0	6,0	31,0	58486	
0.1102	2,800 mm		6,0	50,0	10,0	6,0	31,0	67073	
0.1130	2,870 mm	#33	6,0	50,0	10,0	6,0	31,0	58487	
0.1142	2,900 mm		6,0	50,0	10,0	6,0	31,0	67074	
0.1181	3,000 mm		6,0	50,0	10,0	6,0	31,0	67075	
0.1220	3,100 mm		6,0	50,0	11,0	6,0	31,0	67076	
0.1250	3,175 mm	1/8	6,0	50,0	11,0	6,0	31,0	58488	
0.1260	3,200 mm		6,0	50,0	11,0	6,0	31,0	67077	
0.1299	3,300 mm		6,0	50,0	12,0	7,0	31,0	67078	
0.1339	3,400 mm		6,0	50,0	12,0	7,0	31,0	67079	
0.1360	3,454 mm	#29	6,0	50,0	12,0	7,0	31,0	58489	
0.1378	3,500 mm		6,0	50,0	12,0	7,0	31,0	67080	
0.1405	3,569 mm	#28	6,0	50,0	12,0	7,0	31,0	58490	
0.1406	3,571 mm	9/64	6,0	50,0	12,0	7,0	31,0	58491	
0.1417	3,600 mm		6,0	50,0	13,0	7,0	31,0	67081	
0.1457	3,700 mm		6,0	50,0	13,0	7,0	31,0	67082	
0.1470	3,734 mm	#26	6,0	50,0	13,0	7,0	31,0	58492	
0.1495	3,797 mm	#25	6,0	50,0	13,0	8,0	31,0	58493	
0.1496	3,800 mm		6,0	50,0	13,0	8,0	31,0	67083	


continued on next page

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)



136U 2xD

FRACTIONAL & METRIC SERIES

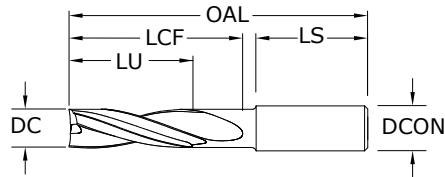

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.1520	3,861 mm	#24	6,0	50,0	14,0	8,0	31,0	58494
0.1535	3,900 mm		6,0	50,0	14,0	8,0	31,0	67084
0.1562	3,967 mm	5/32	6,0	50,0	14,0	8,0	31,0	58495
0.1570	3,988 mm	#22	6,0	50,0	14,0	8,0	31,0	58496
0.1575	4,000 mm		6,0	50,0	14,0	8,0	31,0	67085
0.1590	4,039 mm	#21	6,0	50,0	14,0	8,0	31,0	58497
0.1610	4,089 mm	#20	6,0	50,0	14,0	8,0	31,0	58498
0.1614	4,100 mm		6,0	50,0	14,0	8,0	31,0	67086
0.1654	4,200 mm		6,0	60,0	15,0	8,0	34,0	67087
0.1693	4,300 mm		6,0	60,0	15,0	9,0	34,0	67088
0.1719	4,366 mm	11/64	6,0	60,0	15,0	9,0	34,0	58499
0.1732	4,400 mm		6,0	60,0	15,0	9,0	34,0	67089
0.1770	4,496 mm	#16	6,0	60,0	16,0	9,0	34,0	58500
0.1772	4,500 mm		6,0	60,0	16,0	9,0	34,0	67090
0.1811	4,600 mm		6,0	60,0	16,0	9,0	34,0	67091
0.1850	4,699 mm	#13	6,0	60,0	16,0	9,0	34,0	58501
0.1875	4,763 mm	3/16	6,0	60,0	17,0	10,0	34,0	58502
0.1890	4,801 mm	#12	6,0	60,0	17,0	10,0	34,0	58503
0.1929	4,900 mm		6,0	60,0	17,0	10,0	34,0	67094
0.1935	4,915 mm	#10	6,0	60,0	17,0	10,0	34,0	58504
0.1969	5,000 mm		6,0	60,0	18,0	10,0	34,0	67095
0.2008	5,100 mm		6,0	60,0	18,0	10,0	34,0	67096
0.2010	5,105 mm	#7	6,0	60,0	18,0	10,0	34,0	58505
0.2031	5,159 mm	13/64	6,0	60,0	18,0	10,0	34,0	58506
0.2047	5,200 mm		6,0	60,0	18,0	10,0	34,0	67097
0.2087	5,300 mm		6,0	60,0	19,0	11,0	34,0	67098
0.2090	5,309 mm	#4	6,0	60,0	19,0	11,0	34,0	58507
0.2126	5,400 mm		6,0	60,0	19,0	11,0	34,0	67099
0.2130	5,410 mm	#3	6,0	60,0	19,0	11,0	34,0	58508
0.2165	5,500 mm		6,0	60,0	19,0	11,0	34,0	67100
0.2188	5,558 mm	7/32	6,0	60,0	19,0	11,0	34,0	58509
0.2205	5,600 mm		6,0	60,0	20,0	11,0	34,0	67101
0.2244	5,700 mm		6,0	60,0	20,0	11,0	34,0	67102
0.2283	5,800 mm		6,0	60,0	20,0	12,0	34,0	67103
0.2323	5,900 mm		6,0	60,0	21,0	12,0	34,0	67104
0.2344	5,954 mm	15/64	6,0	60,0	21,0	12,0	34,0	58510
0.2362	6,000 mm		6,0	60,0	21,0	12,0	34,0	67105
0.2402	6,100 mm		8,0	70,0	22,0	13,0	37,0	67106

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = $\pm 0.0008/\pm 0.0047$
DCON = h_6

>.1181-.2362 DIAMETER

DC = $\pm 0.0016/\pm 0.0063$
DCON = h_6

>.2362-.3937 DIAMETER

DC = $\pm 0.0024/\pm 0.0083$
DCON = h_6

>.3937-.7087 DIAMETER

DC = $\pm 0.0028/\pm 0.0098$
DCON = h_6

>.7087-1.1811 DIAMETER

DC = $\pm 0.0031/\pm 0.0114$
DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = $\pm 0.002/\pm 0.012$
DCON = h_6

>3-6 DIAMETER

DC = $\pm 0.004/\pm 0.016$
DCON = h_6

>6-10 DIAMETER

DC = $\pm 0.006/\pm 0.021$
DCON = h_6

>10-18 DIAMETER

DC = $\pm 0.007/\pm 0.025$
DCON = h_6

>18-30 DIAMETER

DC = $\pm 0.008/\pm 0.029$
DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

136U 2xD
FRACTIONAL & METRIC SERIES

CONTINUED


DECIMAL DC	METRIC DC	inch & mm						EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.2441	6,200 mm		8,0	70,0	22,0	12,0	37,0	67107
0.2461	6,250 mm		8,0	70,0	22,0	13,0	37,0	67108
0.2480	6,300 mm		8,0	70,0	22,0	13,0	37,0	67109
0.2500	6,350 mm	1/4 E	8,0	70,0	22,0	13,0	37,0	58511
0.2520	6,400 mm		8,0	70,0	22,0	13,0	37,0	67110
0.2559	6,500 mm		8,0	70,0	23,0	13,0	37,0	67111
0.2570	6,528 mm	F	8,0	70,0	23,0	13,0	37,0	58512
0.2598	6,600 mm		8,0	70,0	23,0	13,0	37,0	67112
0.2638	6,700 mm		8,0	70,0	23,0	13,0	37,0	67113
0.2656	6,746 mm	17/64	8,0	70,0	24,0	13,0	37,0	58513
0.2677	6,800 mm		8,0	70,0	24,0	14,0	37,0	67114
0.2717	6,900 mm		8,0	70,0	24,0	14,0	37,0	67115
0.2720	6,909 mm	I	8,0	70,0	24,0	14,0	37,0	58514
0.2756	7,000 mm		8,0	70,0	25,0	14,0	37,0	67116
0.2795	7,100 mm		8,0	70,0	25,0	14,0	37,0	67117
0.2812	7,142 mm	9/32	8,0	70,0	25,0	14,0	37,0	58515
0.2835	7,200 mm		8,0	70,0	25,0	14,0	37,0	67118
0.2854	7,250 mm		8,0	70,0	25,0	14,0	37,0	67119
0.2874	7,300 mm		8,0	70,0	26,0	15,0	37,0	67120
0.2913	7,400 mm		8,0	70,0	26,0	15,0	37,0	67121
0.2953	7,500 mm		8,0	70,0	26,0	15,0	37,0	67122
0.2969	7,541 mm	19/64	8,0	70,0	26,0	15,0	37,0	58516
0.2992	7,600 mm		8,0	70,0	27,0	15,0	37,0	67123
0.3031	7,700 mm		8,0	70,0	27,0	15,0	37,0	67124
0.3071	7,800 mm		8,0	70,0	27,0	16,0	37,0	67125
0.3110	7,900 mm		8,0	70,0	28,0	16,0	37,0	67126
0.3125	7,938 mm	5/16	8,0	70,0	28,0	16,0	37,0	58517
0.3150	8,000 mm		8,0	70,0	28,0	16,0	37,0	67127
0.3189	8,100 mm		10,0	80,0	29,0	17,0	40,0	67128
0.3228	8,200 mm		10,0	80,0	29,0	16,0	40,0	67129
0.3268	8,300 mm		10,0	80,0	29,0	17,0	40,0	67130
0.3281	8,334 mm	21/64	10,0	80,0	29,0	17,0	40,0	58518
0.3307	8,400 mm		10,0	80,0	29,0	17,0	40,0	67131
0.3320	8,433 mm	Q	10,0	80,0	30,0	17,0	40,0	58519
0.3346	8,500 mm		10,0	80,0	30,0	17,0	40,0	67132
0.3386	8,600 mm		10,0	80,0	30,0	17,0	40,0	67133
0.3425	8,700 mm		10,0	80,0	30,0	17,0	40,0	67134
0.3438	8,733 mm	11/32	10,0	80,0	31,0	17,0	40,0	58520
0.3465	8,800 mm		10,0	80,0	31,0	18,0	40,0	67135
0.3504	8,900 mm		10,0	80,0	31,0	18,0	40,0	67136
0.3543	9,000 mm		10,0	80,0	31,0	18,0	40,0	67137
0.3583	9,100 mm		10,0	80,0	32,0	18,0	40,0	67138
0.3594	9,129 mm	23/64	10,0	80,0	32,0	18,0	40,0	58521
0.3622	9,200 mm		10,0	80,0	32,0	18,0	40,0	67139
0.3661	9,300 mm		10,0	80,0	33,0	19,0	40,0	67140
0.3680	9,347 mm	U	10,0	80,0	33,0	19,0	40,0	58522

continued on next page



136U 2xD

FRACTIONAL & METRIC SERIES

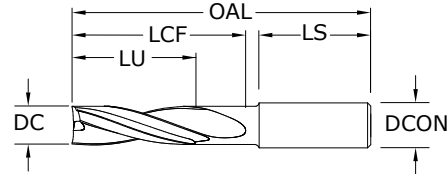

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.3701	9,400 mm		10,0	80,0	33,0	19,0	40,0	67141
0.3740	9,500 mm		10,0	80,0	33,0	19,0	40,0	67142
0.3750	9,525 mm	3/8	10,0	80,0	33,0	19,0	40,0	58523
0.3780	9,600 mm		10,0	80,0	34,0	19,0	40,0	67143
0.3819	9,700 mm		10,0	80,0	34,0	19,0	40,0	67144
0.3858	9,800 mm		10,0	80,0	34,0	20,0	40,0	67145
0.3898	9,900 mm		10,0	80,0	35,0	20,0	40,0	67146
0.3906	9,921 mm	25/64	10,0	80,0	35,0	20,0	40,0	58524
0.3937	10,000 mm		10,0	80,0	35,0	20,0	40,0	67147
0.3970	10,084 mm	X	12,0	90,0	36,0	21,0	43,0	58525
0.3976	10,100 mm		12,0	90,0	36,0	21,0	43,0	67148
0.4016	10,200 mm		12,0	90,0	36,0	20,0	43,0	67149
0.4040	10,262 mm	Y	12,0	90,0	36,0	21,0	43,0	58526
0.4055	10,300 mm		12,0	90,0	36,0	21,0	43,0	67150
0.4062	10,317 mm	13/32	12,0	90,0	36,0	21,0	43,0	58527
0.4094	10,400 mm		12,0	90,0	36,0	21,0	43,0	67151
0.4134	10,500 mm		12,0	90,0	37,0	21,0	43,0	67152
0.4173	10,600 mm		12,0	90,0	37,0	21,0	43,0	67153
0.4213	10,700 mm		12,0	90,0	37,0	21,0	43,0	67154
0.4219	10,716 mm	27/64	12,0	90,0	38,0	21,0	43,0	58528
0.4252	10,800 mm		12,0	90,0	38,0	22,0	43,0	67155
0.4291	10,900 mm		12,0	90,0	38,0	22,0	43,0	67156
0.4331	11,000 mm		12,0	90,0	39,0	22,0	43,0	67157
0.4370	11,100 mm		12,0	90,0	39,0	22,0	43,0	67158
0.4375	11,113 mm	7/16	12,0	90,0	39,0	22,0	43,0	58529
0.4409	11,200 mm		12,0	90,0	39,0	22,0	43,0	67159
0.4449	11,300 mm		12,0	90,0	40,0	23,0	43,0	67160
0.4488	11,400 mm		12,0	90,0	40,0	23,0	43,0	67161
0.4528	11,500 mm		12,0	90,0	40,0	23,0	43,0	67162
0.4531	11,509 mm	29/64	12,0	90,0	40,0	23,0	43,0	58530
0.4567	11,600 mm		12,0	90,0	41,0	23,0	43,0	67163
0.4606	11,700 mm		12,0	90,0	41,0	23,0	43,0	67164
0.4646	11,800 mm		12,0	90,0	41,0	24,0	43,0	67165
0.4685	11,900 mm		12,0	90,0	42,0	24,0	43,0	67166
0.4688	11,908 mm	15/32	12,0	90,0	42,0	24,0	43,0	58531
0.4724	12,000 mm		12,0	90,0	42,0	24,0	43,0	67167
0.4844	12,304 mm	31/64	14,0	100,0	43,0	25,0	46,0	58532
0.4921	12,500 mm		14,0	100,0	44,0	25,0	46,0	67168

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114
DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h_6

>18-30 DIAMETER

DC = +0,008/+0,029
DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

136U 2xD
FRACTIONAL & METRIC SERIES

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.5000	12,700 mm	1/2	14,0	100,0	44,0	25,0	46,0	58533
0.5039	12,800 mm		14,0	100,0	45,0	26,0	46,0	67169
0.5118	13,000 mm		14,0	100,0	45,0	26,0	46,0	67170
0.5156	13,096 mm	33/64	14,0	100,0	46,0	26,0	46,0	58534
0.5312	13,492 mm	17/32	14,0	100,0	47,0	27,0	46,0	58535
0.5315	13,500 mm		14,0	100,0	47,0	27,0	46,0	67171
0.5469	13,891 mm	35/64	14,0	100,0	49,0	28,0	46,0	58536
0.5512	14,000 mm		14,0	100,0	49,0	28,0	46,0	67172
0.5625	14,288 mm	9/16	16,0	110,0	50,0	29,0	49,0	58537
0.5709	14,500 mm		16,0	110,0	51,0	29,0	49,0	67173
0.5781	14,684 mm	37/64	16,0	110,0	51,0	29,0	49,0	58538
0.5906	15,000 mm		16,0	110,0	53,0	30,0	49,0	67174
0.5938	15,083 mm	19/32	16,0	110,0	53,0	30,0	49,0	58539
0.6094	15,479 mm	39/64	16,0	110,0	54,0	31,0	49,0	58540
0.6102	15,500 mm		16,0	110,0	54,0	31,0	49,0	67175
0.6250	15,875 mm	5/8	16,0	110,0	56,0	32,0	49,0	58541
0.6299	16,000 mm		16,0	110,0	56,0	32,0	49,0	67176
0.6406	16,271 mm	41/64	18,0	125,0	57,0	33,0	57,0	58542
0.6496	16,500 mm		18,0	125,0	58,0	33,0	57,0	67177
0.6562	16,667 mm	21/32	18,0	125,0	58,0	33,0	57,0	58543
0.6693	17,000 mm		18,0	125,0	60,0	34,0	57,0	67178
0.6719	17,066 mm	43/64	18,0	125,0	60,0	34,0	57,0	58544
0.6875	17,463 mm	11/16	18,0	125,0	61,0	35,0	57,0	58545
0.6890	17,500 mm		18,0	125,0	61,0	35,0	57,0	67179
0.7031	17,859 mm	45/64	18,0	125,0	63,0	36,0	57,0	58546
0.7087	18,000 mm		18,0	125,0	63,0	36,0	57,0	67180
0.7188	18,258 mm	23/32	20,0	135,0	64,0	37,0	60,0	58547
0.7283	18,500 mm		20,0	135,0	65,0	37,0	60,0	67181
0.7344	18,654 mm	47/64	20,0	135,0	65,0	37,0	60,0	58548
0.7480	19,000 mm		20,0	135,0	66,0	38,0	60,0	67182
0.7500	19,050 mm	3/4	20,0	135,0	67,0	38,0	60,0	58549
0.7656	19,446 mm	49/64	20,0	135,0	68,0	39,0	60,0	58550
0.7677	19,500 mm		20,0	135,0	68,0	39,0	60,0	67183
0.7812	19,842 mm	25/32	20,0	135,0	69,0	40,0	60,0	58551
0.7874	20,000 mm		20,0	135,0	70,0	40,0	60,0	67184
0.7969	20,241 mm	51/64	22,0	145,0	71,0	40,0	68,0	58552
0.8071	20,500 mm		22,0	145,0	72,0	41,0	68,0	67185
0.8125	20,638 mm	13/16	22,0	145,0	72,0	41,0	68,0	58553

CONTINUED

Series 146U, 136U Fractional				DC • in								
Hardness		Vc (sfm)		1/16	1/8	1/4	3/8	1/2	5/8	3/4	13/16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	285	RPM	17419	8710	4355	2903	2177	1742	1452	1340
			(228-342)	Fr	0.0016	0.0031	0.0062	0.0093	0.0124	0.0155	0.0186	0.0202
				Feed (ipm)	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0
		≤ 275 Bhn or ≤ 28 HRc	255	RPM	15586	7793	3896	2598	1948	1559	1299	1199
			(204-306)	Fr	0.0013	0.0027	0.0054	0.0081	0.0108	0.0135	0.0162	0.0175
				Feed (ipm)	21.0	21.0	21.0	21.0	21.0	21.0	21.0	21.0
		≤ 425 Bhn or ≤ 45 HRc	145	RPM	8862	4431	2216	1477	1108	886	739	682
			(116-174)	Fr	0.0011	0.0023	0.0045	0.0068	0.0090	0.0113	0.0135	0.0147
				Feed (ipm)	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	220	RPM	13446	6723	3362	2241	1681	1345	1121	1034
			(176-264)	Fr	0.0015	0.0030	0.0059	0.0089	0.0119	0.0149	0.0178	0.0193
				Feed (ipm)	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
		≤ 375 Bhn or ≤ 40 HRc	135	RPM	8251	4126	2063	1375	1031	825	688	635
			(108-162)	Fr	0.0013	0.0027	0.0053	0.0080	0.0107	0.0133	0.0160	0.0173
				Feed (ipm)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	125	RPM	7640	3820	1910	1273	955	764	637	588	
		(100-150)	Fr	0.0012	0.0025	0.0050	0.0075	0.0099	0.0124	0.0149	0.0162	
			Feed (ipm)	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	
	≤ 375 Bhn or ≤ 40 HRc	90	RPM	5501	2750	1375	917	688	550	458	423	
		(72-108)	Fr	0.0005	0.0011	0.0022	0.0033	0.0044	0.0055	0.0065	0.0071	
			Feed (ipm)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	265	RPM	16197	8098	4049	2699	2025	1620	1350	1246
			(212-318)	Fr	0.0008	0.0016	0.0032	0.0048	0.0064	0.0080	0.0096	0.0104
				Feed (ipm)	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0
		≤ 275 Bhn or ≤ 28 HRc	170	RPM	10390	5195	2598	1732	1299	1039	866	799
			(136-204)	Fr	0.0006	0.0013	0.0025	0.0038	0.0050	0.0063	0.0075	0.0081
				Feed (ipm)	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	130	RPM	7946	3973	1986	1324	993	795	662	611
			(104-156)	Fr	0.0006	0.0013	0.0025	0.0038	0.0050	0.0063	0.0076	0.0082
				Feed (ipm)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
		≤ 375 Bhn or ≤ 40 HRc	95	RPM	5806	2903	1452	968	726	581	484	447
			(76-114)	Fr	0.0006	0.0011	0.0023	0.0034	0.0045	0.0057	0.0068	0.0074
				Feed (ipm)	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
K	GRAY CAST IRONS	≤ 220 Bhn or ≤ 19 HRc	250	RPM	15280	7640	3820	2547	1910	1528	1273	1175
			(200-300)	Fr	0.0016	0.0031	0.0063	0.0094	0.0126	0.0157	0.0188	0.0204
				Feed (ipm)	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
	DUCTILE CAST IRONS	≤ 260 Bhn or ≤ 26 HRc	220	RPM	13446	6723	3362	2241	1681	1345	1121	1034
			(176-264)	Fr	0.0015	0.0030	0.0059	0.0089	0.0119	0.0149	0.0178	0.0193
				Feed (ipm)	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0

continued on next page

Series 146U, 136U Fractional				DC • in								
		Hardness	Vc (sfm)	1/16	1/8	1/4	3/8	1/2	5/8	3/4	13/16	
N	ALUMINUM ALLOYS (WROUGHT) 2024, 6061, 7075	≤ 150 Bhn or ≤ 88 HRb	475	RPM	29032	14516	7258	4839	3629	2903	2419	2233
				Fr	0.0016	0.0031	0.0062	0.0093	0.0124	0.0155	0.0186	0.0202
				Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0
	ALUMINUM ALLOYS (CAST) A356, A380, 390	≤ 140 Bhn or ≤ 3 HRc	380	RPM	23226	11613	5806	3871	2903	2323	1935	1787
				Fr	0.0014	0.0028	0.0055	0.0083	0.0110	0.0138	0.0165	0.0179
				Feed (ipm)	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	175	RPM	10696	5348	2674	1783	1337	1070	891	823
				Fr	0.0007	0.0014	0.0028	0.0042	0.0055	0.0069	0.0083	0.0090
				Feed (ipm)	7.4	7.4	7.4	7.4	7.4	7.4	7.4	7.4
		≤ 350 Bhn or ≤ 38 HRc	130	RPM	7946	3973	1986	1324	993	795	662	611
				Fr	0.0006	0.0013	0.0025	0.0038	0.0050	0.0063	0.0076	0.0082
				Feed (ipm)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
		≤ 440 Bhn or ≤ 47 HRc	70	RPM	4278	2139	1070	713	535	428	357	329
				Fr	0.0005	0.0009	0.0019	0.0028	0.0037	0.0047	0.0056	0.0061
				Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
H	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 450 Bhn or ≤ 48 HRc	95	RPM	5806	2903	1452	968	726	581	484	447
				Fr	0.0008	0.0016	0.0031	0.0047	0.0062	0.0078	0.0093	0.0101
				Feed (ipm)	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	80	RPM	4890	2445	1222	815	611	489	407	376
				Fr	0.0007	0.0014	0.0029	0.0043	0.0057	0.0072	0.0086	0.0093
				Feed (ipm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5

reduce rates when material is harder than listed, when drilling conditions are not optimum, or coolant is not available
 rates shown are for drilling into a flat surface and should be lowered using the reduction multiplier when the workpiece is angled or curved
 reduce rates 10 to 20 percent when using drills without internal coolant
 always use the shortest overhang possible
 longer drills may require a spot drill operation to avoid walking on entry
 internal coolant required in ISO S and M material groups or when drilling depth exceeds 3xD
 Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fr} \times \text{rpm}$
 speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

angle °	reduction multiplier	
	speed x	feed x
up to 30	1.0	0.6
over 30	0.7	0.4

Series 146U, 136U Metric		Hardness	Vc (m/mm)	DC • mm								
				1.5	3	6	8	10	12	16	20	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	87	RPM	18419	9209	4605	3454	2763	2302	1727	1381
			(69-104)	Fr	0.037	0.074	0.149	0.199	0.248	0.298	0.397	0.496
				Feed (mm/min)	686	686	686	686	686	686	686	686
		≤ 275 Bhn or ≤ 28 HRc	78	RPM	16480	8240	4120	3090	2472	2060	1545	1236
			(62-93)	Fr	0.032	0.065	0.129	0.173	0.216	0.259	0.345	0.432
				Feed (mm/min)	533	533	533	533	533	533	533	533
		≤ 425 Bhn or ≤ 45 HRc	44	RPM	9371	4686	2343	1757	1406	1171	879	703
			(35-53)	Fr	0.027	0.054	0.108	0.145	0.181	0.217	0.289	0.361
				Feed (mm/min)	254	254	254	254	254	254	254	254
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	67	RPM	14218	7109	3555	2666	2133	1777	1333	1066
			(54-80)	Fr	0.036	0.071	0.143	0.191	0.238	0.286	0.381	0.476
				Feed (mm/min)	508	508	508	508	508	508	508	508
		≤ 375 Bhn or ≤ 40 HRc	41	RPM	8725	4362	2181	1636	1309	1091	818	654
			(33-49)	Fr	0.032	0.064	0.128	0.171	0.213	0.256	0.342	0.427
				Feed (mm/min)	279	279	279	279	279	279	279	279
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	38	RPM	8078	4039	2020	1515	1212	1010	757	606
			(30-46)	Fr	0.030	0.060	0.119	0.159	0.199	0.239	0.319	0.398
				Feed (mm/min)	241	241	241	241	241	241	241	241
		≤ 375 Bhn or ≤ 40 HRc	27	RPM	5816	2908	1454	1091	872	727	545	436
			(22-33)	Fr	0.013	0.026	0.052	0.070	0.087	0.105	0.140	0.175
				Feed (mm/min)	76	76	76	76	76	76	76	76
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	81	RPM	17126	8563	4282	3211	2569	2141	1606	1284
			(65-97)	Fr	0.019	0.039	0.077	0.103	0.129	0.154	0.206	0.257
				Feed (mm/min)	330	330	330	330	330	330	330	330
		≤ 275 Bhn or ≤ 28 HRc	52	RPM	10987	5493	2747	2060	1648	1373	1030	824
			(41-62)	Fr	0.015	0.030	0.060	0.080	0.100	0.120	0.160	0.200
				Feed (mm/min)	165	165	165	165	165	165	165	165
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	40	RPM	8402	4201	2100	1575	1260	1050	788	630
			(32-48)	Fr	0.015	0.030	0.060	0.081	0.101	0.121	0.161	0.202
				Feed (mm/min)	127	127	127	127	127	127	127	127
		≤ 375 Bhn or ≤ 40 HRc	29	RPM	6140	3070	1535	1151	921	767	576	460
			(23-35)	Fr	0.014	0.027	0.055	0.073	0.091	0.109	0.146	0.182
				Feed (mm/min)	84	84	84	84	84	84	84	84
K	GRAY CAST IRONS	≤ 220 Bhn or ≤ 19 HRc	76	RPM	16157	8078	4039	3029	2424	2020	1515	1212
			(61-91)	Fr	0.038	0.075	0.151	0.201	0.252	0.302	0.402	0.503
				Feed (mm/min)	610	610	610	610	610	610	610	610
	DUCTILE CAST IRONS	≤ 260 Bhn or ≤ 26 HRc	67	RPM	14218	7109	3555	2666	2133	1777	1333	1066
			(54-80)	Fr	0.036	0.071	0.143	0.191	0.238	0.286	0.381	0.476
				Feed (mm/min)	508	508	508	508	508	508	508	508

continued on next page

Series 146U, 136U Metric			Vc (m/mm)	DC • mm								
Hardness				1.5	3	6	8	10	12	16	20	
N	ALUMINUM ALLOYS (WROUGHT) 2024, 6061, 7075	≤ 150 Bhn or ≤ 88 HRb	145 (116-174)	RPM	30698	15349	7675	5756	4605	3837	2878	2302
				Fr	0.037	0.074	0.149	0.199	0.248	0.298	0.397	0.496
				Feed (mm/min)	1143	1143	1143	1143	1143	1143	1143	1143
	ALUMINUM ALLOYS (CAST) A356, A380, 390	≤ 140 Bhn or ≤ 3 HRc	116 (93-139)	RPM	24559	12279	6140	4605	3684	3070	2302	1842
				Fr	0.033	0.066	0.132	0.177	0.221	0.265	0.353	0.441
				Feed (mm/min)	813	813	813	813	813	813	813	813
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	53 (43-64)	RPM	11310	5655	2827	2121	1696	1414	1060	848
				Fr	0.017	0.033	0.066	0.089	0.111	0.133	0.177	0.222
				Feed (mm/min)	188	188	188	188	188	188	188	188
		≤ 350 Bhn or ≤ 38 HRc	40 (32-48)	RPM	8402	4201	2100	1575	1260	1050	788	630
				Fr	0.015	0.030	0.060	0.081	0.101	0.121	0.161	0.202
				Feed (mm/min)	127	127	127	127	127	127	127	127
		≤ 440 Bhn or ≤ 47 HRc	21 (17-26)	RPM	4524	2262	1131	848	679	565	424	339
				Fr	0.011	0.022	0.045	0.060	0.075	0.090	0.120	0.150
				Feed (mm/min)	51	51	51	51	51	51	51	51
H	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 450 Bhn or ≤ 48 HRc	29 (23-35)	RPM	6140	3070	1535	1151	921	767	576	460
				Fr	0.019	0.037	0.074	0.099	0.124	0.149	0.199	0.248
				Feed (mm/min)	114	114	114	114	114	114	114	114
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	24 (20-29)	RPM	5170	2585	1293	969	776	646	485	388
				Fr	0.017	0.034	0.069	0.092	0.115	0.138	0.183	0.229
				Feed (mm/min)	89	89	89	89	89	89	89	89

reduce rates when material is harder than listed, when drilling conditions are not optimum, or coolant is not available
 rates shown are for drilling into a flat surface and should be lowered using the reduction multiplier when the workpiece is angled or curved
 reduce rates 10 to 20 percent when using drills without internal coolant
 always use the shortest overhang possible
 longer drills may require a spot drill operation to avoid walking on entry
 internal coolant required in ISO S and M material groups or when drilling depth exceeds 3xD
 Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{rpm}$
 speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

angle °	reduction multiplier	
	speed x	feed x
up to 30	1.0	0.6
over 30	0.7	0.4

General Application End Mills





Milling

SERIES	GENERAL APPLICATION END MILLS DESCRIPTION	PAGE	S&F PAGE
3	2 Flute Square End Standard Length Fractional	280	320, 321
3L	2 Flute Square End Long Reach Fractional	280	320, 321
3EL	2 Flute Square End Extended Length Fractional	280	320, 321
3CR	2 Flute Corner Radius Standard Length Fractional	280	320, 321
3M	2 Flute Square End Standard Length Metric	285	326
3XLM	2 Flute Square End Extra Long Reach Metric	285	326
3B	2 Flute Ball End Standard Length Fractional	283	320
3LB	2 Flute Ball End Long Reach Fractional	283	320
3ELB	2 Flute Ball End Extended Length Fractional	283	320
3MB	2 Flute Ball End Standard Length Metric	286	326
3XLMB	2 Flute Ball End Extra Long Reach Metric	286	326
15	2 Flute Double End Square Stub Fractional	287	321
15M	2 Flute Double End Square Stub Metric	289	326
15B	2 Flute Double End Ball Stub Fractional	288	322
15MB	2 Flute Double End Ball Stub Metric	290	326
17	2 Flute Square End Stub Fractional	291	321
17M	2 Flute Square End Stub Metric	291	326
52	2 Flute High Shear Square End Standard Length Fractional	292	323
52M	2 Flute High Shear Square End Standard Length Metric	292	328
59	2 Flute Square End Long Reach Fractional	293	321
59M	2 Flute Square End Long Reach Metric	295	326
59B	2 Flute Ball End Long Reach Fractional	294	321
59MB	2 Flute Ball End Long Reach Metric	296	327
5	3 Flute Square End Standard Length Fractional	297	321
5M	3 Flute Square End Standard Length Metric	299	326
5XLM	3 Flute Square End Extra Long Reach Metric	299	326
5B	3 Flute Ball End Standard Length Fractional	298	321
5MB	3 Flute Ball End Standard Length Metric	300	326
5XLMB	3 Flute Ball End Extra Long Reach Metric	300	326
23	3 Flute Tapered Square End Standard Length Fractional	301	321
24	3 Flute Tapered Corner Radius Standard Length Fractional	302	321
1	4 Flute Square End Standard Length Fractional	303	320, 321
1L	4 Flute Square End Long Reach Fractional	303	320, 321
1EL	4 Flute Square End Extended Length Fractional	303	320, 321
1CR	4 Flute Corner Radius Standard Length Fractional	303	320, 321
1M	4 Flute Square End Standard Length Metric	309	326
1XLM	4 Flute Square End Extra Long Reach Metric	309	326
1MCR	4 Flute Corner Radius Standard Length Metric	309	326

Speed & Feed Recommendations listed at the end of this section

SERIES	GENERAL APPLICATION END MILLS DESCRIPTION	PAGE	S&F PAGE
1B	4 Flute Ball End Standard Length Fractional	307	320
1LB	4 Flute Ball End Long Reach Fractional	307	320
1ELB	4 Flute Ball End Extended Length Fractional	307	320
1MB	4 Flute Ball End Standard Length Metric	312	326
1XLMB	4 Flute Ball End Extra Long Reach Metric	312	326
14	4 Flute Double End Square Stub Fractional	313	321
14M	4 Flute Double End Square Stub Metric	313	326
14B	4 Flute Double End Ball Stub Fractional	314	321
14MB	4 Flute Double End Ball Stub Metric	314	326
16	4 Flute Square End Stub Fractional	303	321
16M	4 Flute Square End Stub Metric	309	326
54	4 Flute High Shear Square End Standard Length Fractional	315	323
54M	4 Flute High Shear Square End Standard Length Metric	315	328
61	Multi-Flute Coarse Pitch Rougher Fractional	316	324
61M	Multi-Flute Coarse Pitch Rougher Metric	316	330
62	Multi-Flute Fine Pitch Rougher Fractional	317	325
62M	Multi-Flute Fine Pitch Rougher Metric	317	331
End Mill Sets	2, 3, & 4 Flute Square End Series 1, 3, 5, 14, 15	318	320, 321
	2, 3, & 4 Flute Ball End Series 1B, 3B, 5B, 14B ,15B	319	320, 321

Speed & Feed Recommendations listed at the end of this section

Fresado

SERIE	DESCRIPCIÓN DE FRESAS DE USO GENERAL	PÁGINA	S&F PÁGINA
3	2 filos, punta cuadrada, longitud estándar, fraccional	280	320, 321
3L	2 filos, punta cuadrada, largo alcance, fraccional	280	320, 321
3EL	2 filos, punta cuadrada, longitud extendida, fraccional	280	320, 321
3CR	2 filos, radio angulado, longitud estándar, fraccional	280	320, 321
3M	2 filos, punta cuadrada, longitud estándar, métrico	285	326
3XLM	2 filos, punta cuadrada, alcance extralargo, métrico	285	326
3B	2 filos, punta esférica, longitud estándar, fraccional	283	320
3LB	2 filos, punta esférica, largo alcance, fraccional	283	320
3ELB	2 filos, punta esférica, longitud extendida, fraccional	283	320
3MB	2 filos, punta esférica, longitud estándar, métrico	286	326
3XLMB	2 filos, punta esférica, alcance extralargo, métrico	286	326
15	2 filos, pieza doble de punta cuadrada, fraccional	287	321
15M	2 filos, pieza doble de punta cuadrada, métrico	289	326
15B	2 filos, pieza doble de punta esférica, fraccional	288	322
15MB	2 filos, pieza doble de punta esférica, métrico	290	326
17	2 filos, pieza de punta cuadrada, fraccional	291	321

SERIE	DESCRIPCIÓN DE FRESAS DE USO GENERAL	PÁGINA	S&F PÁGINA
17M	2 filos, pieza de punta cuadrada, métrico	291	326
52	2 filos, alto rendimiento, punta cuadrada, longitud estándar, fraccional	292	323
52M	2 filos, alto rendimiento, punta cuadrada, longitud estándar, métrico	292	328
59	2 filos, punta cuadrada, largo alcance, fraccional	293	321
59M	2 filos, punta cuadrada, largo alcance, métrico	295	326
59B	2 filos, punta esférica, largo alcance, fraccional	294	321
59MB	2 filos, punta esférica, largo alcance, métrico	296	327
5	3 filos, punta cuadrada, longitud estándar, fraccional	297	321
5M	3 filos, punta cuadrada, longitud estándar, métrico	299	326
5XLM	3 filos, punta cuadrada, alcance extralargo, métrico	299	326
5B	3 filos, punta esférica, longitud estándar, fraccional	298	321
5MB	3 filos, punta esférica, longitud estándar, métrico	300	326
5XLMB	3 filos, punta esférica, alcance extralargo, métrico	300	326
23	3 filos, cónico, punta cuadrada, longitud estándar, fraccional	301	321
24	3 filos, cónico, radio angulado, longitud estándar, fraccional	302	321
1	4 filos, punta cuadrada, longitud estándar, fraccional	303	320, 321
1L	4 filos, punta cuadrada, largo alcance, fraccional	303	320, 321
1EL	4 filos, punta cuadrada, longitud extendida, fraccional	303	320, 321
1CR	4 filos, radio angulado, longitud estándar, fraccional	303	320, 321
1M	4 filos, punta cuadrada, longitud estándar, métrico	309	326
1XLM	4 filos, punta cuadrada, alcance extralargo, métrico	309	326
1MCR	4 filos, radio angulado, longitud estándar, métrico	309	326
1B	4 filos, punta esférica, longitud estándar, fraccional	307	320
1LB	4 filos, punta esférica, largo alcance, fraccional	307	320
1ELB	4 filos, punta esférica, longitud extendida, fraccional	307	320
1MB	4 filos, punta esférica, longitud estándar, métrico	312	326
1XLMB	4 filos, punta esférica, alcance extralargo, métrico	312	326
14	4 filos, pieza doble de punta cuadrada, fraccional	313	321
14M	4 filos, pieza doble de punta cuadrada, métrico	313	326
14B	4 filos, pieza doble de punta esférica, fraccional	314	321
14MB	4 filos, pieza doble de punta esférica, métrico	314	326
16	4 filos, pieza de punta cuadrada, fraccional	303	321
16M	4 filos, pieza de punta cuadrada, métrico	309	326
54	4 filos, alto rendimiento, punta cuadrada, longitud estándar, fraccional	315	323
54M	4 filos, alto rendimiento, punta cuadrada, longitud estándar, métrico	315	328
61	Filo múltiple, paso grueso, desbastador, fraccional	316	324
61M	Filo múltiple, paso grueso, desbastador, métrico	316	330
62	Filo múltiple, paso fino, desbastador, fraccional	317	325
62M	Filo múltiple, paso fino, desbastador, métrico	317	331
Juegos de fresas	2, 3 y 4 filos, punta cuadrada, series 1, 3, 5, 14, 15	318	320, 321
	2, 3 y 4 filos, punta esférica, series 1B, 3B, 5B, 14B, 15B	319	320, 321

Recomendaciones de Velocidad y Avance mostrados al final de esta sección.

SÉRIES	DESCRIPTION DE FRAISES À USAGE GÉNÉRAL	PAGE	S&F PAGE
3	2 dents non rayonné longueur standard (fractionnel)	280	320, 321
3L	2 dents non rayonné longue portée (fractionnel)	280	320, 321
3EL	2 dents non rayonné extra-long (fractionnel)	280	320, 321
3CR	2 dents rayonné longueur standard (fractionnel)	280	320, 321
3M	2 dents non rayonné longueur standard (métrique)	285	326
3XLM	2 dents non rayonné portée extra-longue (métrique)	285	326
3B	2 dents à bout hémisphérique longueur standard (fractionnel)	283	320
3LB	2 dents à bout hémisphérique longue portée (fractionnel)	283	320
3ELB	2 dents à bout hémisphérique extra-long (fractionnel)	283	320
3MB	2 dents à bout hémisphérique longueur standard (métrique)	286	326
3XLMB	2 dents à bout hémisphérique portée extra-longue (métrique)	286	326
15	2 dents à double bouts plats court (fractionnel)	287	321
15M	2 dents à double bouts plats court (métrique)	289	326
15B	2 dents à double bouts hémisphériques court (fractionnel)	288	322
15MB	2 dents à double bouts hémisphériques court (métrique)	290	326
17	2 dents non rayonné court (fractionnel)	291	321
17M	2 dents non rayonné court (métrique)	291	326
52	2 dents cisaillement élevé non rayonné longueur standard (fractionnel)	292	323
52M	2 dents cisaillement élevé non rayonné longueur standard (métrique)	292	328
59	2 dents non rayonné longue portée (fractionnel)	293	321
59M	2 dents non rayonné longue portée (métrique)	295	326
59B	2 dents à bout hémisphérique longue portée (fractionnel)	294	321
59MB	2 dents à bout hémisphérique longue portée (métrique)	296	327
5	3 dents non rayonné longueur standard (fractionnel)	297	321
5M	3 dents non rayonné longueur standard (métrique)	299	326
5XLM	3 dents non rayonné portée extra-longue (métrique)	299	326
5B	3 dents à bout hémisphérique longueur standard (fractionnel)	298	321
5MB	3 dents à bout hémisphérique longueur standard (métrique)	300	326
5XLMB	3 dents à bout hémisphérique portée extra-longue (métrique)	300	326
23	3 dents conique non rayonné longueur standard (fractionnel)	301	321
24	3 dents conique rayonné longueur standard (fractionnel)	302	321
1	4 dents non rayonné longueur standard (fractionnel)	303	320, 321
1L	4 dents non rayonné longue portée (fractionnel)	303	320, 321
1EL	4 dents non rayonné extra-long (fractionnel)	303	320, 321
1CR	4 dents rayonné longueur standard (fractionnel)	303	320, 321
1M	4 dents non rayonné longueur standard (métrique)	309	326
1XLM	4 dents non rayonné portée extra-longue (métrique)	309	326
1MCR	4 dents rayonné longueur standard (métrique)	309	326
1B	4 dents à bout hémisphérique longueur standard (fractionnel)	307	320
1LB	4 dents à bout hémisphérique longue portée (fractionnel)	307	320

SÉRIES	DESCRIPTION DE FRAISES À USAGE GÉNÉRAL	PAGE	S&F PAGE
1ELB	4 dents à bout hémisphérique extra-long (fractionnel)	307	320
1MB	4 dents à bout hémisphérique longueur standard (métrique)	312	326
1XLMB	4 dents à bout hémisphérique portée extra-longue (métrique)	312	326
14	4 dents à double bouts plats court (fractionnel)	313	321
14M	4 dents à double bouts plats court (métrique)	313	326
14B	4 dents à double bouts hémisphériques court (fractionnel)	314	321
14MB	4 dents à double bouts hémisphériques court (métrique)	314	326
16	4 dents non rayonné court (fractionnel)	303	321
16M	4 dents non rayonné court (métrique)	309	326
54	4 dents cisaillement élevé non rayonné longueur standard (fractionnel)	315	323
54M	4 dents cisaillement élevé non rayonné longueur standard (métrique)	315	328
61	Multi-dents à pas gros d'ébauche (fractionnel)	316	324
61M	Multi-dents à pas gros d'ébauche (métrique)	316	330
62	Multi-dents à pas fin d'ébauche (fractionnel)	317	325
62M	Multi-dents à pas fin d'ébauche (métrique)	317	331
Jeux de fraises	2, 3, & 4 Série goujure non rayonné 1,3,5,14,15	318	320, 321
	2, 3, & 4 Série goujure à bout hémisphérique 15B, 15MB, 15B, 15MB, 15B, 15MB	319	320, 321


Les avances et les vitesses recommandées se trouvent à la fin du chapitre.

SERIE	BESCHREIBUNG DER STANDARD-SCHAFTFRÄSER	SEITE	S&F SEITE
3	Zölliger Schaftfräser mit 2 Schneiden ohne Eckenradien, Standardlänge	280	320, 321
3L	Zölliger Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	280	320, 321
3EL	Zölliger Schaftfräser mit 2 Schneiden ohne Eckenradien, extra lang	280	320, 321
3CR	Zölliger Schaftfräser mit 2 Schneiden mit Eckenradien, Standardlänge	280	320, 321
3M	Schaftfräser mit 2 Schneiden ohne Eckenradien, Standardlänge	285	326
3XLM	Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	285	326
3B	Zölliger Radiuschaftfräser mit 2 Schneiden, Standardlänge	283	320
3LB	Zölliger Langloch-Radiuschaftfräser mit 2 Schneiden	283	320
3ELB	Zölliger Schaftfräser mit 2 Schneiden, Extra lang	283	320
3MB	Schaftfräser mit 2 Schneiden, Standardlänge	286	326
3XLMB	Superlangloch-Schaftfräser mit 2 Schneiden	286	326
15	Zölliger Schaftfräser mit 2 Schneiden, kurze Ausführung	287	321
15M	Schaftfräser mit 2 Schneiden, kurze Ausführung	289	326
15B	Zölliger Doppelend-Radiuschaftfräser mit 2 Schneiden, kurze Ausführung	288	322
15MB	Doppelend-Radiuschaftfräser mit 2 Schneiden, kurze Ausführung	290	326
17	Zölliger Schaftfräser mit 2 Schneiden ohne Eckenradien, kurze Ausführung	291	321
17M	Schaftfräser mit 2 Schneiden ohne Eckenradien, kurze Ausführung	291	326
52	Zölliger Schaftfräser hoher Scherfestigkeit mit 2 Schneiden ohne Eckenradien, Standardlänge	292	323
52M	Schaftfräser hoher Scherfestigkeit mit 2 Schneiden ohne Eckenradien, Standardlänge	292	328
59	Zölliger Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	293	321
59M	Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	295	326
59B	Zölliger Langloch-Radiuschaftfräser mit 2 Schneiden	294	321
59MB	Langloch-Radiuschaftfräser mit 2 Schneiden	296	327
5	Zölliger Schaftfräser mit 3 Schneiden ohne Eckenradien, Standardlänge	297	321
5M	Schaftfräser mit 3 Schneiden ohne Eckenradien, Standardlänge	299	326
5XLM	Langloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	299	326
5B	Zölliger Schaftfräser mit 3 Schneiden, Standardlänge	298	321
5MB	Schaftfräser mit 3 Schneiden, Standardlänge	300	326
5XLMB	Langloch-Schaftfräser mit 3 Schneiden	300	326
23	Zölliger Schaftfräser mit 3 Schneiden ohne Eckenradien, Standardlänge	301	321
24	Zölliger Schaftfräser mit 3 Schneiden mit Eckenradien, Standardlänge	302	321
1	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien, Standardlänge	303	320, 321
1L	Zölliger Langloch-Schaftfräser mit 4 Schneiden ohne Eckenradien	303	320, 321
1EL	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien, extra lang	303	320, 321
1CR	Zölliger Schaftfräser mit 4 Schneiden mit Eckenradien, Standardlänge	303	320, 321
1M	Schaftfräser mit 4 Schneiden ohne Eckenradien, Standardlänge	309	326
1XLM	Superlangloch-Schaftfräser mit 4 Schneiden ohne Eckenradien	309	326
1MCR	Schaftfräser mit 4 Schneiden mit Eckenradien, Standardlänge	309	326
1B	Zölliger Schaftfräser mit 4 Schneiden, Standardlänge	307	320


SERIE	BESCHREIBUNG DER STANDARD-SCHAFTFRÄSER	SEITE	S&F SEITE
1LB	Zölliger Langloch-Radiusschaftfräser mit 4 Schneiden	307	320
1ELB	Zölliger Schaftfräser mit 4 Schneiden, Extra lang	307	320
1MB	Schaftfräser mit 4 Schneiden, Standardlänge	312	326
1XLMB	Langloch-Radiusschaftfräser mit 4 Schneiden	312	326
14	Zölliger Schaftfräser mit 4 Schneiden, kurze Ausführung	313	321
14M	Schaftfräser mit 4 Schneiden, kurze Ausführung	313	326
14B	Zölliger Doppelend-Radiusschaftfräser mit 4 Schneiden, kurze Ausführung	314	321
14MB	Doppelend-Radiusschaftfräser mit 4 Schneiden, kurze Ausführung	314	326
16	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien, kurze Ausführung	303	321
16M	Schaftfräser mit 4 Schneiden ohne Eckenradien, kurze Ausführung	309	326
54	Zölliger Schaftfräser hoher Scherfestigkeit mit 4 Schneiden ohne Eckenradien, Standardlänge	315	323
54M	Schaftfräser hoher Scherfestigkeit mit 4 Schneiden ohne Eckenradien, Standardlänge	315	328
61	Zölliger mehrschneidiger fein verzahnter Schruppfräser	316	324
61M	Mehrschneidiger fein verzahnter Schruppfräser	316	330
62	Zölliger mehrschneidiger fein verzahnter Schruppfräser	317	325
62M	Mehrschneidiger fein verzahnter Schruppfräser	317	331
Richtwerte zum Fräsen	Schaftfräser mit 2, 3 und 4 Schneiden ohne Eckenradien, Serien 1, 3, 5, 14, 15	318	320, 321
	Radiusschaftfräser mit 2, 3 und 4 Schneiden, Serien 1B, 3B, 5B, 14B, 15B	319	320, 321

Schnittwertempfehlungen finden Sie am Ende dieses Abschnitts

2 Flute Square End • 2 Flute Corner Radius



**3•3L•
3EL•3CR**
FRACTIONAL SERIES

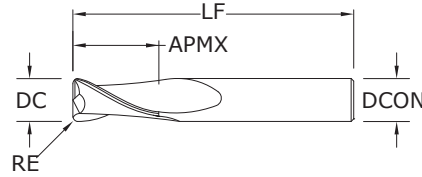

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6


≥1/8 DIAMETER

DC = +0.000/-0.002

3CR DC = -0.001/-0.002

DCON = h_6

RE = +0.000/-0.002




For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch		CORNER RADIUS RE	WELDON FLAT	EDP NO.				SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON			UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/64	1/32	1-1/2	1/8	—	—	30301	39301	39501	30397	3
1/32	5/64	1-1/2	1/8	—	—	30303	39303	39503	30398	3
3/64	7/64	1-1/2	1/8	—	—	30305	39305	39505	30399	3
*1/16	3/16	1-1/2	1/8	—	—	30307	39307	39507	30400	3
5/64	3/16	1-1/2	1/8	—	—	30309	39309	39509	30435	3
3/32	9/32	1-1/2	1/8	—	—	30311	39311	39511	30436	3
7/64	3/8	1-1/2	1/8	—	—	30313	39313	39513	30437	3
1/8	3/8	1-1/2	1/8	—	—	30377	39377	39577	30469	3
*1/8	1/2	1-1/2	1/8	—	—	30315	39315	39515	30438	3
1/8	1/2	1-1/2	1/8	.015	—	38201	38202	38315	38357	3CR
1/8	1/2	1-1/2	1/8	.020	—	38203	38204	38316	38358	3CR
1/8	3/4	2-1/4	1/8	—	—	33341	31800	31810	31850	3L
1/8	1	3	1/8	—	—	33343	31938	31948	31958	3EL
9/64	1/2	2	3/16	—	—	30317	39317	39517	30439	3
5/32	1/2	2	3/16	—	—	30319	39319	39519	30440	3
11/64	5/8	2	3/16	—	—	30321	39321	39521	30441	3
*3/16	5/8	2	3/16	—	—	30323	39323	39523	30442	3
3/16	5/8	2	3/16	.015	—	38209	38210	38317	38359	3CR
3/16	5/8	2	3/16	.020	—	38211	38212	38318	38360	3CR
3/16	5/8	2	3/16	.030	—	38213	38214	38319	38361	3CR
3/16	3/4	2-1/2	3/16	—	—	33301	31820	31825	31851	3L
3/16	1-1/8	3	3/16	—	—	33321	31939	31949	31959	3EL
13/64	5/8	2-1/2	1/4	—	—	30325	39325	39525	30443	3
7/32	5/8	2-1/2	1/4	—	—	30327	39327	39527	30444	3
15/64	3/4	2-1/2	1/4	—	—	30329	39329	39529	30445	3
*1/4	3/4	2-1/2	1/4	—	—	30331	39331	39531	30446	3
1/4	3/4	2-1/2	1/4	.015	—	38219	38220	38320	38362	3CR
1/4	3/4	2-1/2	1/4	.020	—	38221	38222	38321	38363	3CR
1/4	3/4	2-1/2	1/4	.030	—	38223	38224	38322	38364	3CR
1/4	3/4	2-1/2	1/4	.045	—	38225	38226	38323	38365	3CR
1/4	1-1/8	3	1/4	—	—	33303	31802	31812	31852	3L
1/4	1-1/2	4	1/4	—	—	33323	31940	31950	31960	3EL
17/64	3/4	2-1/2	5/16	—	—	30333	39333	39533	30447	3
9/32	3/4	2-1/2	5/16	—	—	30335	39335	39535	30448	3

continued on next page

2 Flute Square End • 2 Flute Corner Radius



TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6


≥1/8 DIAMETER

DC = +0.000 / -0.002

3CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

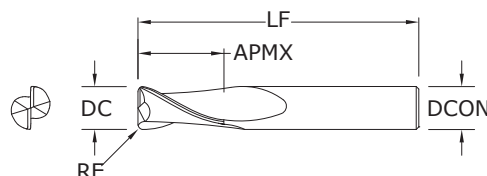

**3•3L•
3EL•3CR**
FRACTIONAL SERIES

inch						EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	WELDON FLAT	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
19/64	13/16	2-1/2	5/16	—		30337	39337	39537	30449	3
*15/16	13/16	2-1/2	5/16	—		30339	39339	39539	30450	3
5/16	13/16	2-1/2	5/16	.015		38231	38232	38324	38366	3CR
5/16	13/16	2-1/2	5/16	.020		38233	38234	38325	38367	3CR
5/16	13/16	2-1/2	5/16	.030		38235	38236	38326	38368	3CR
5/16	13/16	2-1/2	5/16	.045		38237	38238	38327	38369	3CR
5/16	1-1/8	3	5/16	—		33305	31821	31826	31853	3L
5/16	1-5/8	4	5/16	—		33325	31941	31951	31961	3EL
21/64	1	2-1/2	3/8	—		30341	39341	39541	30451	3
11/32	1	2-1/2	3/8	—		30343	39343	39543	30452	3
23/64	1	2-1/2	3/8	—		30345	39345	39545	30453	3
*13/8	1	2-1/2	3/8	—		30347	39347	39547	30454	3
3/8	1	2-1/2	3/8	.015	•	38245	38246	38328	38370	3CR
3/8	1	2-1/2	3/8	.020	•	38247	38248	38329	38371	3CR
3/8	1	2-1/2	3/8	.030	•	38249	38250	38330	38372	3CR
3/8	1	2-1/2	3/8	.045	•	38251	38252	38331	38373	3CR
3/8	1-1/8	3	3/8	—		33307	31804	31814	31854	3L
3/8	1-3/4	4	3/8	—		33327	31942	31952	31962	3EL
25/64	1	2-3/4	7/16	—		30349	39349	39549	30455	3
13/32	1	2-3/4	7/16	—		30351	39351	39551	30456	3
27/64	1	2-3/4	7/16	—		30353	39353	39553	30457	3
7/16	1	2-3/4	7/16	—		30355	39355	39555	30458	3
7/16	2	4-1/2	7/16	—		33309	31822	31827	31855	3L
7/16	3	6	7/16	—		33329	31943	31953	31963	3EL
29/64	1	3	1/2	—		30357	39357	39557	30459	3
15/32	1	3	1/2	—		30359	39359	39559	30460	3
31/64	1	3	1/2	—		30361	39361	39561	30461	3
*11/2	1	3	1/2	—		30363	39363	39563	30462	3
1/2	1	3	1/2	.015	•	38259	38260	38332	38374	3CR
1/2	1	3	1/2	.020	•	38261	38262	38333	38375	3CR
1/2	1	3	1/2	.030	•	38263	38264	38334	38376	3CR
1/2	1	3	1/2	.045	•	38265	38266	38335	38377	3CR
1/2	1	3	1/2	.060	•	38267	38268	38336	38378	3CR
1/2	2	4-1/2	1/2	—		33311	31806	31816	31856	3L

continued on next page

CONTINUED

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS


HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

2 Flute Square End • 2 Flute Corner Radius



**3•3L•
3EL•3CR**
FRACTIONAL SERIES

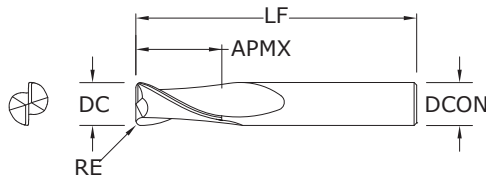

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

≥1/8 DIAMETER


DC = +0.000 / -0.002

3CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

CONTINUED




For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch				WELDON FLAT	EDP NO.				SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE			UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/2	3	6	1/2	—			33331	31944	31954	31964	3EL
9/16	1-1/8	3-1/2	9/16	—			30365	39365	39565	30463	3
5/8	1-1/4	3-1/2	5/8	—			30367	39367	39567	30464	3
5/8	1-1/4	3-1/2	5/8	.015	•		38273	38274	38337	38379	3CR
5/8	1-1/4	3-1/2	5/8	.020	•		38275	38276	38338	38380	3CR
5/8	1-1/4	3-1/2	5/8	.030	•		38277	38278	38339	38381	3CR
5/8	1-1/4	3-1/2	5/8	.045	•		38279	38280	38340	38382	3CR
5/8	1-1/4	3-1/2	5/8	.060	•		38281	38282	38341	38383	3CR
5/8	1-1/4	3-1/2	5/8	.090	•		38283	38284	38342	38384	3CR
5/8	2-1/4	5	5/8	—			33313	31823	31817	31857	3L
5/8	3	6	5/8	—			33333	31945	31955	31965	3EL
11/16	1-3/8	4	3/4	—			30369	39369	39569	30465	3
3/4	1-1/2	4	3/4	—			30371	39371	39571	30466	3
3/4	1-1/2	4	3/4	.015	•		38287	38288	38343	38385	3CR
3/4	1-1/2	4	3/4	.020	•		38289	38290	38344	38386	3CR
3/4	1-1/2	4	3/4	.030	•		38291	38292	38345	38387	3CR
3/4	1-1/2	4	3/4	.045	•		38293	38294	38346	38388	3CR
3/4	1-1/2	4	3/4	.060	•		38295	38296	38347	38389	3CR
3/4	1-1/2	4	3/4	.090	•		38297	38298	38348	38390	3CR
3/4	1-1/2	4	3/4	.125	•		38299	38300	38349	38391	3CR
3/4	2-1/4	5	3/4	—			33315	31808	31818	31858	3L
3/4	3	6	3/4	—			33335	31946	31956	31966	3EL
7/8	1-1/2	4	7/8	—			30373	39373	39573	30467	3
1	1-1/2	4	1	—			30375	39375	39575	30468	3
1	1-1/2	4	1	.015	•		38301	38302	38350	38392	3CR
1	1-1/2	4	1	.020	•		38303	38304	38351	38393	3CR
1	1-1/2	4	1	.030	•		38305	38306	38352	38394	3CR
1	1-1/2	4	1	.045	•		38307	38308	38353	38395	3CR
1	1-1/2	4	1	.060	•		38309	38310	38354	38396	3CR
1	1-1/2	4	1	.090	•		38311	38312	38355	38397	3CR
1	1-1/2	4	1	.125	•		38313	38314	38356	38398	3CR
1	2-1/4	5	1	—			33317	31824	31819	31859	3L
1	3	6	1	—			33337	31947	31957	31967	3EL
*Series 3 Set				—			30389	39389	39589	30470	3

† Di-NAMITE® coating offered standard for this configuration. Please contact your KSPT Representative for more information.

FRACTIONAL 2 Flute Ball End



TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6


RE = +0.000/-0.0005

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6


RE = +0.000/-0.001

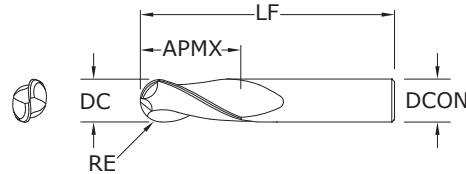

**3B•3LB•
3ELB**
FRACTIONAL SERIES



inch				EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/64	1/32	1-1/2	1/8	30302	39302	39502	30471	3B
1/32	5/64	1-1/2	1/8	30304	39304	39504	30472	3B
3/64	7/64	1-1/2	1/8	30306	39306	39506	30473	3B
1/16	3/16	1-1/2	1/8	30308	39308	39508	30474	3B
5/64	3/16	1-1/2	1/8	30310	39310	39510	30475	3B
3/32	9/32	1-1/2	1/8	30312	39312	39512	30476	3B
7/64	3/8	1-1/2	1/8	30314	39314	39514	30477	3B
1/8	3/8	1-1/2	1/8	30378	39378	39578	30599	3B
*1/8	1/2	1-1/2	1/8	30316	39316	39516	30478	3B
1/8	3/4	2-1/4	1/8	33342	31830	31840	31890	3LB
1/8	1	3	1/8	33344	31968	31978	31988	3ELB
9/64	1/2	2	3/16	30318	39318	39518	30479	3B
5/32	1/2	2	3/16	30320	39320	39520	30480	3B
11/64	5/8	2	3/16	30322	39322	39522	30481	3B
*3/16	5/8	2	3/16	30324	39324	39524	30482	3B
3/16	3/4	2-1/2	3/16	33302	31831	31841	31891	3LB
3/16	1-1/8	3	3/16	33322	31969	31979	31989	3ELB
13/64	5/8	2-1/2	1/4	30326	39326	39526	30483	3B
7/32	5/8	2-1/2	1/4	30328	39328	39528	30484	3B
15/64	3/4	2-1/2	1/4	30330	39330	39530	30485	3B
*1/4	3/4	2-1/2	1/4	30332	39332	39532	30486	3B
1/4	1-1/8	3	1/4	33304	31832	31842	31892	3LB
1/4	1-1/2	4	1/4	33324	31970	31980	31990	3ELB
17/64	3/4	2-1/2	5/16	30334	39334	39534	30487	3B
9/32	3/4	2-1/2	5/16	30336	39336	39536	30488	3B
19/64	13/16	2-1/2	5/16	30338	39338	39538	30489	3B
*5/16	13/16	2-1/2	5/16	30340	39340	39540	30490	3B
5/16	1-1/8	3	5/16	33306	31833	31843	31893	3LB
5/16	1-5/8	4	5/16	33326	31971	31981	31991	3ELB
21/64	1	2-1/2	3/8	30342	39342	39542	30491	3B
11/32	1	2-1/2	3/8	30344	39344	39544	30492	3B
23/64	1	2-1/2	3/8	30346	39346	39546	30493	3B

continued on next page



For patent
information visit
www.ksptpatents.com

2 Flute Ball End

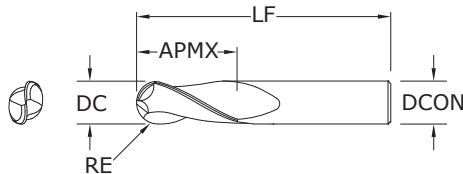
**3B•3LB•
3ELB**
FRACTIONAL SERIES
**TOLERANCES (inch)****<1/8 DIAMETER**

DC = +0.000 / -0.001

DCON = h_6


RE = +0.000 / -0.0005

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h_6

RE = +0.000 / -0.001




For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.				SERIES
				UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
*3/8	1	2-1/2	3/8	30348	39348	39548	30494	3B
3/8	1-1/8	3	3/8	33308	31834	31844	31894	3LB
3/8	1-3/4	4	3/8	33328	31972	31982	31992	3ELB
25/64	1	2-3/4	7/16	30350	39350	39550	30495	3B
13/32	1	2-3/4	7/16	30352	39352	39552	30496	3B
27/64	1	2-3/4	7/16	30354	39354	39554	30497	3B
7/16	1	2-3/4	7/16	30356	39356	39556	30498	3B
7/16	2	4-1/2	7/16	33310	31835	31845	31895	3LB
7/16	3	6	7/16	33330	31973	31983	31993	3ELB
29/64	1	3	1/2	30358	39358	39558	30499	3B
15/32	1	3	1/2	30360	39360	39560	30500	3B
31/64	1	3	1/2	30362	39362	39562	30591	3B
*1/2	1	3	1/2	30364	39364	39564	30592	3B
1/2	2	4-1/2	1/2	33312	31836	31846	31896	3LB
1/2	3	6	1/2	33332	31974	31984	31994	3ELB
9/16	1-1/8	3-1/2	9/16	30366	39366	39566	30593	3B
5/8	1-1/4	3-1/2	5/8	30368	39368	39568	30594	3B
5/8	2-1/4	5	5/8	33314	31837	31847	31897	3LB
5/8	3	6	5/8	33334	31975	31985	31995	3ELB
11/16	1-3/8	4	3/4	30370	39370	39570	30595	3B
3/4	1-1/2	4	3/4	30372	39372	39572	30596	3B
3/4	2-1/4	5	3/4	33316	31838	31848	31898	3LB
3/4	3	6	3/4	33336	31976	31986	31996	3ELB
7/8	1-1/2	4	7/8	30374	39374	39574	30597	3B
1	1-1/2	4	1	30376	39376	39576	30598	3B
1	2-1/4	5	1	33318	31839	31849	31899	3LB
1	3	6	1	33338	31977	31987	31997	3ELB
*Series 3B Set				30390	39390	39590	30600	3B

RE = 1/2 Cutting Diameter (DC)

2 Flute Square End



TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000/-0.0254


DCON = h_6

≥3 DIAMETER

DC = +0,0000/-0.0508

DCON = h_6

RE = +0,0000/-0.0508

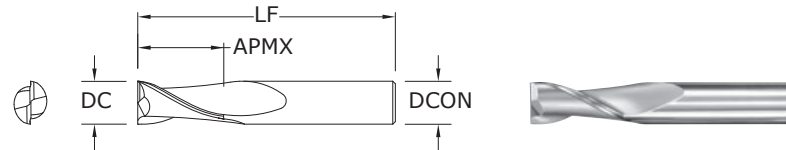

**3M·
3XLM**
METRIC SERIES

mm				EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	4,0	38,0	3,0	40305	48628	48650	48671	3M
1,5	4,5	38,0	3,0	40309	48629	48651	48672	3M
2,0	6,3	38,0	3,0	40313	48630	48652	48673	3M
2,5	9,5	38,0	3,0	40317	48631	48653	48674	3M
3,0	12,0	38,0	3,0	40321	48632	48654	48675	3M
3,0	25,0	75,0	3,0	43301	49427	49440	49453	3XLM
3,5	12,0	50,0	4,0	40325	48633	48655	48676	3M
4,0	14,0	50,0	4,0	40329	48634	48656	48677	3M
4,0	25,0	75,0	4,0	43303	49428	49441	49454	3XLM
4,5	16,0	50,0	6,0	40333	48635	48657	48678	3M
5,0	16,0	50,0	6,0	40337	48636	48658	48679	3M
5,0	25,0	75,0	5,0	43307	49430	49443	49456	3XLM
6,0	19,0	50,0	6,0	40341	48637	48659	48680	3M
6,0	25,0	75,0	6,0	43305	49429	49442	49455	3XLM
7,0	19,0	63,0	8,0	40345	48638	48660	48681	3M
8,0	20,0	63,0	8,0	40349	48639	48661	48682	3M
8,0	25,0	75,0	8,0	43315	49431	49444	49457	3XLM
9,0	22,0	75,0	10,0	40353	48640	48662	48683	3M
10,0	22,0	75,0	10,0	40357	48641	48663	48684	3M
10,0	38,0	100,0	10,0	43325	49432	49445	49458	3XLM
11,0	25,0	75,0	12,0	40361	48642	48664	48685	3M
12,0	25,0	75,0	12,0	40365	48643	48665	48686	3M
12,0	50,0	100,0	12,0	43335	49433	49446	49459	3XLM
12,0	75,0	150,0	12,0	43345	49434	49447	49460	3XLM
14,0	32,0	89,0	14,0	40369	48644	48666	48687	3M
14,0	75,0	150,0	14,0	43355	49435	49448	49461	3XLM
16,0	32,0	89,0	16,0	40373	48645	48667	48688	3M
16,0	75,0	150,0	16,0	43365	49436	49449	49462	3XLM
18,0	38,0	100,0	18,0	40377	48646	48668	48689	3M
18,0	75,0	150,0	18,0	43375	49437	49450	49463	3XLM
20,0	38,0	100,0	20,0	40381	48647	48669	48690	3M
20,0	75,0	150,0	20,0	43385	49438	49451	49464	3XLM
25,0	38,0	100,0	25,0	40385	48648	48670	48691	3M
25,0	75,0	150,0	25,0	43395	49439	49452	49465	3XLM

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

2 Flute Ball End



3MB• 3XLMB

METRIC SERIES

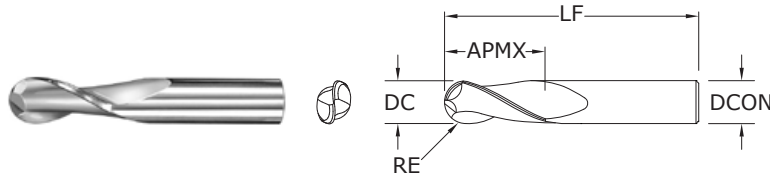

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0,0254

DCON = h_6

RE = +0,0000 / -0,0127

≥3 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

RE = +0,0000 / -0,0254

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	4,0	38,0	3,0	40306	48692	48714	48735	3MB
1,5	4,5	38,0	3,0	40310	48693	48715	48736	3MB
2,0	6,3	38,0	3,0	40314	48694	48716	48737	3MB
2,5	9,5	38,0	3,0	40318	48695	48717	48738	3MB
3,0	12,0	38,0	3,0	40322	48696	48718	48739	3MB
3,0	25,0	75,0	3,0	43302	49544	49557	49570	3XLMB
3,5	12,0	50,0	4,0	40326	48697	48719	48740	3MB
4,0	14,0	50,0	4,0	40330	48698	48720	48741	3MB
4,0	25,0	75,0	4,0	43304	49545	49558	49571	3XLMB
4,5	16,0	50,0	6,0	40334	48699	48721	48742	3MB
5,0	16,0	50,0	6,0	40338	48700	48722	48743	3MB
5,0	25,0	75,0	5,0	43308	49547	49560	49573	3XLMB
6,0	19,0	50,0	6,0	40342	48701	48723	48744	3MB
6,0	25,0	75,0	6,0	43306	49546	49559	49572	3XLMB
7,0	19,0	63,0	8,0	40346	48702	48724	48745	3MB
8,0	20,0	63,0	8,0	40350	48703	48725	48746	3MB
8,0	25,0	75,0	8,0	43316	49548	49561	49574	3XLMB
9,0	22,0	75,0	10,0	40354	48704	48726	48747	3MB
10,0	22,0	75,0	10,0	40358	48705	48727	48748	3MB
10,0	38,0	100,0	10,0	43326	49549	49562	49575	3XLMB
11,0	25,0	75,0	12,0	40362	48706	48728	48749	3MB
12,0	25,0	75,0	12,0	40366	48707	48729	48750	3MB
12,0	50,0	100,0	12,0	43336	49550	49563	49576	3XLMB
12,0	75,0	150,0	12,0	43346	49551	49564	49577	3XLMB
14,0	32,0	89,0	14,0	40370	48708	48730	48751	3MB
14,0	75,0	150,0	14,0	43356	49552	49565	49578	3XLMB
16,0	32,0	89,0	16,0	40374	48709	48731	48752	3MB
16,0	75,0	150,0	16,0	43366	49553	49566	49579	3XLMB
18,0	38,0	100,0	18,0	40378	48710	48732	48753	3MB
18,0	75,0	150,0	18,0	43376	49554	49567	49580	3XLMB
20,0	38,0	100,0	20,0	40382	48711	48733	48754	3MB
20,0	75,0	150,0	20,0	43386	49555	49568	49581	3XLMB
25,0	38,0	100,0	25,0	40386	48712	48734	48755	3MB
25,0	75,0	150,0	25,0	43396	49556	49569	49582	3XLMB

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL 2 Flute Double End

TOLERANCES (inch)

<1/8 DIAMETER


DC = +0.000/-0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6

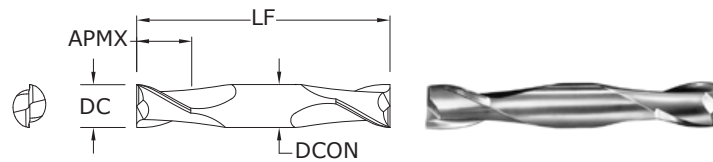


15
FRACTIONAL SERIES

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/32	1/16	1-1/2	1/8	31501	31541	39651	31316
3/64	3/32	1-1/2	1/8	31503	31543	39653	31317
1/16	1/8	1-1/2	1/8	31505	31545	39655	31318
5/64	1/8	1-1/2	1/8	31507	31547	39657	31319
3/32	3/16	1-1/2	1/8	31509	31549	39659	31320
7/64	3/16	1-1/2	1/8	31511	31551	39661	31321
*1/8	1/4	1-1/2	1/8	31513	31553	39663	31322
9/64	5/16	2	3/16	31515	31555	39665	31323
5/32	5/16	2	3/16	31517	31557	39667	31324
11/64	5/16	2	3/16	31519	31559	39669	31325
*3/16	3/8	2	3/16	31521	31561	39671	31326
13/64	1/2	2-1/2	1/4	31523	31563	39673	31327
7/32	1/2	2-1/2	1/4	31525	31565	39675	31328
15/64	1/2	2-1/2	1/4	31527	31567	39677	31329
*1/4	1/2	2-1/2	1/4	31529	31569	39679	31330
9/32	1/2	2-1/2	5/16	31531	31571	39681	31331
*5/16	1/2	2-1/2	5/16	31533	31573	39683	31332
*3/8	9/16	2-1/2	3/8	31535	31575	39685	31333
7/16	9/16	2-3/4	7/16	31537	31577	39687	31334
*1/2	5/8	3	1/2	31539	31579	39689	31335
*Series 15 Set				31589	31581	39691	31336

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

2 Flute Double End Ball End



15B

FRACTIONAL SERIES

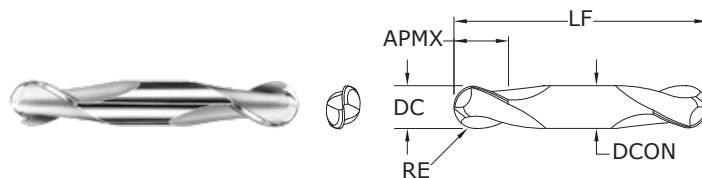

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

RE = +0.000 / -0.0005

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h_6

RE = +0.000 / -0.001

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/32	1/16	1-1/2	1/8	31502	31542	39652	31337
3/64	3/32	1-1/2	1/8	31504	31544	39654	31338
1/16	1/8	1-1/2	1/8	31506	31546	39656	31339
5/64	1/8	1-1/2	1/8	31508	31548	39658	31340
3/32	3/16	1-1/2	1/8	31510	31550	39660	31341
7/64	3/16	1-1/2	1/8	31512	31552	39662	31342
*1/8	1/4	1-1/2	1/8	31514	31554	39664	31343
9/64	5/16	2	3/16	31516	31556	39666	31344
5/32	5/16	2	3/16	31518	31558	39668	31345
11/64	5/16	2	3/16	31520	31560	39670	31346
*3/16	3/8	2	3/16	31522	31562	39672	31347
13/64	1/2	2-1/2	1/4	31524	31564	39674	31348
7/32	1/2	2-1/2	1/4	31526	31566	39676	31349
15/64	1/2	2-1/2	1/4	31528	31568	39678	31350
*1/4	1/2	2-1/2	1/4	31530	31570	39680	31351
9/32	1/2	2-1/2	5/16	31532	31572	39682	31352
*5/16	1/2	2-1/2	5/16	31534	31574	39684	31353
*3/8	9/16	2-1/2	3/8	31536	31576	39686	31354
7/16	9/16	2-3/4	7/16	31538	31578	39688	31355
*1/2	5/8	3	1/2	31540	31580	39690	31356
*Series 15B Set				31590	31582	39692	31357

RE = 1/2 Cutting Diameter (DC)

METRIC

2 Flute Double End



TOLERANCES (mm)

<3 DIAMETER


DC = +0,0000 / -0,0254

DCON = h_6

≥3 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

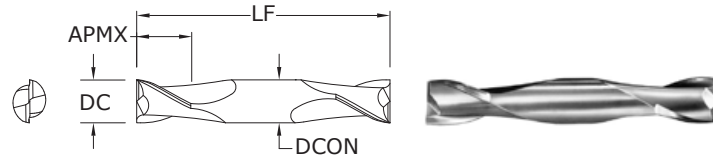


15M
METRIC SERIES

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1,0	2,0	38,0	3,0	41505	49010	49031	49052
1,5	3,0	38,0	3,0	41509	49011	49032	49053
2,0	4,0	38,0	3,0	41513	49012	49033	49054
2,5	5,0	38,0	3,0	41517	49013	49034	49055
3,0	6,0	38,0	3,0	41521	49014	49035	49056
3,5	7,0	50,0	4,0	41525	49015	49036	49057
4,0	8,0	50,0	4,0	41529	49016	49037	49058
4,5	9,5	63,0	4,5	41533	49017	49038	49059
5,0	10,0	63,0	5,0	41537	49018	49039	49060
6,0	12,0	63,0	6,0	41541	49019	49040	49061
7,0	12,0	63,0	8,0	41545	49020	49041	49062
8,0	12,0	63,0	8,0	41549	49021	49042	49063
9,0	14,0	75,0	9,0	41553	49022	49043	49064
10,0	14,0	75,0	10,0	41557	49023	49044	49065
11,0	14,0	75,0	12,0	41561	49024	49045	49066
12,0	16,0	75,0	12,0	41565	49025	49046	49067


STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

2 Flute Double End Ball End



15MB
METRIC SERIES

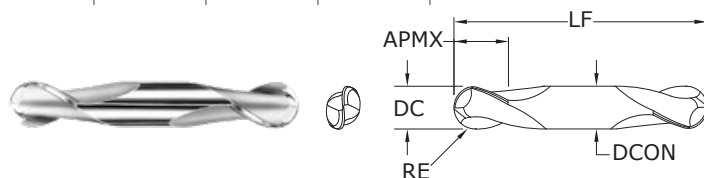

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0.0254

DCON = h_6


RE = +0,0000 / -0.0127

≥3 DIAMETER

DC = +0,0000 / -0.0508

DCON = h_6

RE = +0,0000 / -0.0254



For patent
information visit
www.ksptpatents.com

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1,0	2,0	38,0	3,0	41506	49073	49094	49115
1,5	3,0	38,0	3,0	41510	49074	49095	49116
2,0	4,0	38,0	3,0	41514	49075	49096	49117
2,5	5,0	38,0	3,0	41518	49076	49097	49118
3,0	6,0	38,0	3,0	41522	49077	49098	49119
3,5	7,0	50,0	4,0	41526	49078	49099	49120
4,0	8,0	50,0	4,0	41530	49079	49100	49121
4,5	9,5	63,0	4,5	41534	49080	49101	49122
5,0	10,0	63,0	5,0	41538	49081	49102	49123
6,0	12,0	63,0	6,0	41542	49082	49103	49124
7,0	12,0	63,0	8,0	41546	49083	49104	49125
8,0	12,0	63,0	8,0	41550	49084	49105	49126
9,0	14,0	75,0	9,0	41554	49085	49106	49127
10,0	14,0	75,0	10,0	41558	49086	49107	49128
11,0	14,0	75,0	12,0	41562	49087	49108	49129
12,0	16,0	75,0	12,0	41566	49088	49109	49130

RE = 1/2 Cutting Diameter (DC)

2 Flute Square End Stub

TOLERANCES (inch)


<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000/-0.002

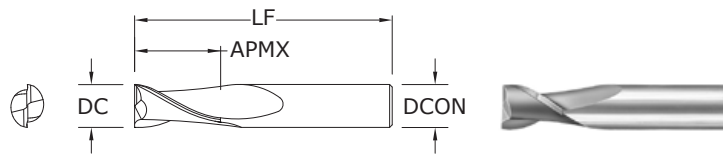DCON = h_6 
17
FRACTIONAL SERIES

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/16	1/8	1-1/2	1/8	31701	31750	31303	31358
3/32	3/16	1-1/2	1/8	31703	31751	31304	31359
1/8	1/4	1-1/2	1/8	31705	31752	31305	31360
5/32	5/16	2	3/16	31707	31753	31306	31361
3/16	3/8	2	3/16	31709	31754	31307	31362
7/32	7/16	2	1/4	31711	31755	31308	31363
1/4	1/2	2	1/4	31713	31756	31309	31364
5/16	1/2	2	5/16	31715	31757	31310	31365
3/8	5/8	2	3/8	31717	31758	31311	31366
7/16	5/8	2-1/2	7/16	31719	31759	31312	31367
1/2	5/8	2-1/2	1/2	31721	31760	31313	31368
5/8	3/4	3	5/8	31723	31761	31314	31369
3/4	1	3	3/4	31725	31762	31315	31370

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

TOLERANCES (mm)


<3 DIAMETER

DC = +0.0000/-0.0254

DCON = h_6

≥3 DIAMETER

DC = +0.0000/-0.0508

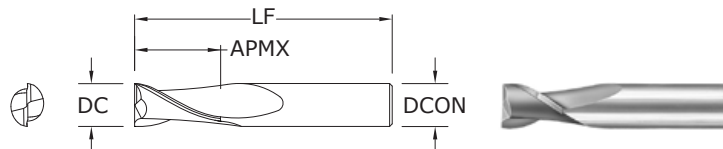
DCON = h_6 
17M
METRIC SERIES

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1,0	2,0	38,0	3,0	41705	49262	49283	49304
1,5	3,0	38,0	3,0	41709	49263	49284	49305
2,0	4,0	38,0	3,0	41713	49264	49285	49306
2,5	5,0	38,0	3,0	41717	49265	49286	49307
3,0	6,0	38,0	3,0	41721	49266	49287	49308
3,5	7,0	50,0	4,0	41725	49267	49288	49309
4,0	8,0	50,0	4,0	41729	49268	49289	49310
4,5	9,5	50,0	4,5	41733	49269	49290	49311
5,0	10,0	50,0	5,0	41737	49270	49291	49312
6,0	12,0	50,0	6,0	41741	49271	49292	49313
7,0	12,0	50,0	8,0	41745	49272	49293	49314
8,0	12,0	50,0	8,0	41749	49273	49294	49315
9,0	14,0	50,0	9,0	41753	49274	49295	49316
10,0	16,0	50,0	10,0	41757	49275	49296	49317
11,0	19,0	63,0	12,0	41761	49276	49297	49318
12,0	19,0	63,0	12,0	41765	49277	49298	49319

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

2 Flute High Shear



52

FRACTIONAL SERIES

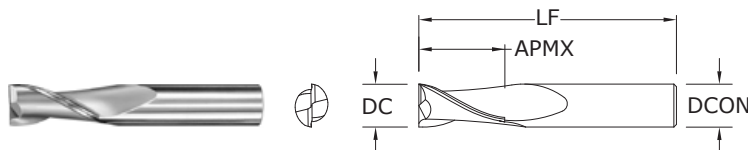

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h_6

inch

EDP NO.


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-C (TiCN)
1/16	3/16	1-1/2	1/8	35273	35300
3/32	3/8	1-1/2	1/8	35275	35301
1/8	7/16	1-1/2	1/8	35277	35302
5/32	9/16	2	3/16	35278	35303
3/16	9/16	2	3/16	35279	35304
7/32	5/8	2-1/2	1/4	35280	35305
1/4	3/4	2-1/2	1/4	35281	35306
9/32	3/4	2-1/2	5/16	35282	35307
5/16	13/16	2-1/2	5/16	35283	35308
3/8	7/8	2-1/2	3/8	35285	35309
7/16	1	2-3/4	7/16	35287	35310
1/2	1	3	1/2	35289	35311
9/16	1-1/8	3-1/2	9/16	35291	35312
5/8	1-1/4	3-1/2	5/8	35293	35313
3/4	1-1/2	4	3/4	35295	35314
1	1-1/2	4	1	35297	35315

NON-FERROUS

For patent
information visit
www.ksptpatents.com

52M

METRIC SERIES

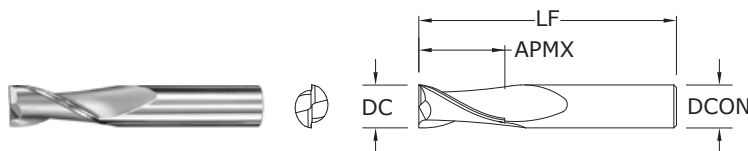

TOLERANCES (mm)

<3 DIAMETER

DC = +0.0000 / -0.0254

DCON = h_6

≥3 DIAMETER

DC = +0.0000 / -0.0508

DCON = h_6

mm


EDP NO.

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-C (TiCN)
3,0	7,0	38,0	3,0	45277	49829
3,5	7,0	57,0	6,0	45279	49830
4,0	8,0	57,0	6,0	45281	49831
4,5	8,0	57,0	6,0	45283	49832
5,0	10,0	57,0	6,0	45285	49833
6,0	10,0	57,0	6,0	45287	49834
8,0	16,0	63,0	8,0	45289	49835
10,0	19,0	72,0	10,0	45291	49836
12,0	22,0	83,0	12,0	45293	49837
14,0	22,0	83,0	14,0	45295	49838
16,0	26,0	92,0	16,0	45297	49839
20,0	32,0	104,0	20,0	45299	49840

NON-FERROUS

For patent
information visit
www.ksptpatents.com

2 Flute Square End Long Reach

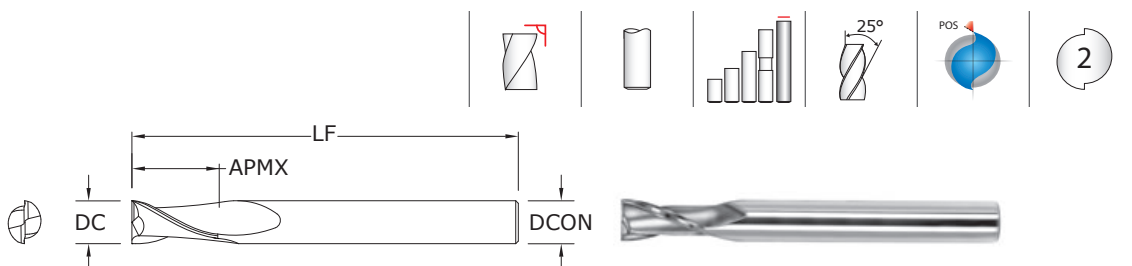TOLERANCES (inch)
1/8–1/4 DIAMETER
 $DC = +0.0000 / -0.0012$
 $DCON = h_6$
>1/4–3/8 DIAMETER
 $DC = +0.0000 / -0.0016$
 $DCON = h_6$
>3/8–3/4 DIAMETER
 $DC = +0.0000 / -0.0020$
 $DCON = h_6$

59
FRACTIONAL SERIES



inch				EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/8	3/8	2-1/2	1/4	32280	32260	32270
3/16	9/16	3	1/4	32281	32261	32271
1/4	5/8	3-1/2	1/4	32282	32262	32272
5/16	11/16	4	5/16	32283	32263	32273
3/8	7/8	4	3/8	32284	32264	32274
1/2	1	4-1/2	1/2	32285	32265	32275
5/8	1-1/8	5	5/8	32286	32266	32276
3/4	1-3/8	5-1/4	3/4	32287	32267	32277

Neck Option Available

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

 For patent
information visit
www.ksptpatents.com

2 Flute Ball End Long Reach

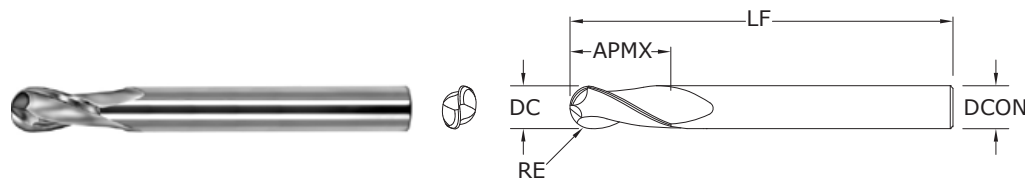

59B

FRACTIONAL SERIES

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0006

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6

RE = +0.0000/–0.0008

>3/8–3/4 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0010

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

inch				EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/8	3/8	2-1/2	1/4	32210	32290	32200
3/16	9/16	3	1/4	32211	32291	32201
1/4	5/8	3-1/2	1/4	32212	32292	32202
5/16	11/16	4	5/16	32213	32293	32203
3/8	7/8	4	3/8	32214	32294	32204
1/2	1	4-1/2	1/2	32215	32295	32205
5/8	1-1/8	5	5/8	32216	32296	32206
3/4	1-3/8	5-1/4	3/4	32217	32297	32207

Neck Option Available

RE = 1/2 Cutting Diameter (DC)

2 Flute Square End Long Reach



TOLERANCES (mm)

3-6 DIAMETER

DC = +0,0000 / -0,0254

DCON = h_6

>6-10 DIAMETER


DC = +0,0000 / -0,0406

DCON = h_6

>10-20 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

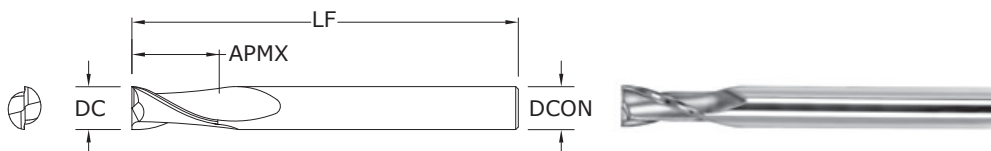

59M

METRIC SERIES

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
3,0	9,0	60,0	6,0	43910	43920	43930	43950
4,0	12,0	70,0	6,0	43911	43921	43931	43951
6,0	15,0	80,0	6,0	43912	43922	43932	43952
8,0	20,0	89,0	8,0	43913	43923	43933	43953
10,0	25,0	100,0	10,0	43914	43924	43934	43954
12,0	30,0	110,0	12,0	43915	43925	43935	43955
14,0	35,0	120,0	16,0	43916	43926	43936	43956
16,0	40,0	120,0	16,0	43917	43927	43937	43957
18,0	40,0	130,0	20,0	43918	43928	43938	43958
20,0	45,0	130,0	20,0	43919	43929	43939	43959

Neck Option Available

STEELS

STAINLESS STEELS



CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

2 Flute Ball End Long Reach

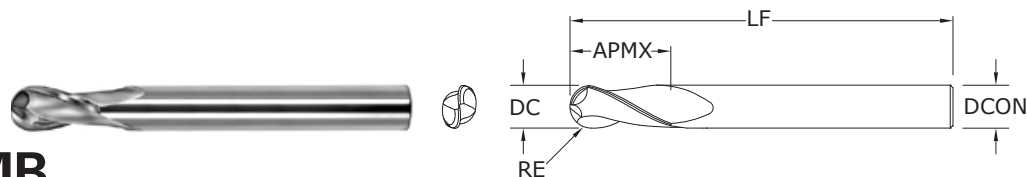

59MB
METRIC SERIES

TOLERANCES (mm)

3–6 DIAMETER

DC = +0,0000 / -0,0254

DCON = h_6

RE = +0,0000 / -0,0127

>6–10 DIAMETER

DC = +0,0000 / -0,0406

DCON = h_6


RE = +0,0000 / -0,0203

>10–20 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

RE = +0,0000 / -0,0254




For patent
information visit
www.ksptpatents.com

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
3,0	9,0	60,0	6,0	43900	49622	49632	49642
4,0	12,0	70,0	6,0	43901	49623	49633	49643
6,0	15,0	80,0	6,0	43902	49624	49634	49644
8,0	20,0	89,0	8,0	43903	49625	49635	49645
10,0	25,0	100,0	10,0	43904	49626	49636	49646
12,0	30,0	110,0	12,0	43905	49627	49637	49647
14,0	35,0	120,0	16,0	43906	49628	49638	49648
16,0	40,0	120,0	16,0	43907	49629	49639	49649
18,0	40,0	130,0	20,0	43908	49630	49640	49650
20,0	45,0	130,0	20,0	43909	49631	49641	49651

Neck Option Available

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL 3 Flute Square End



TOLERANCES (inch)

<1/8 DIAMETER


DC = +0.000/-0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6

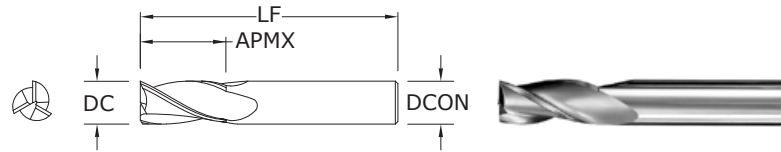

5

FRACTIONAL SERIES

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/64	1/32	1-1/2	1/8	30501	39701	30771	30811
1/32	5/64	1-1/2	1/8	30503	39703	30772	30812
3/64	7/64	1-1/2	1/8	30505	39705	30773	30813
1/16	3/16	1-1/2	1/8	30507	39707	30774	30814
5/64	3/16	1-1/2	1/8	30509	39709	30775	30815
3/32	9/32	1-1/2	1/8	30511	39711	30776	30816
7/64	3/8	1-1/2	1/8	30513	39713	30777	30817
1/8	3/8	1-1/2	1/8	30577	39777	30809	30849
*1/8	1/2	1-1/2	1/8	30515	39715	30778	30818
9/64	1/2	2	3/16	30517	39717	30779	30819
5/32	1/2	2	3/16	30519	39719	30780	30820
11/64	5/8	2	3/16	30521	39721	30781	30821
*3/16	5/8	2	3/16	30523	39723	30782	30822
13/64	5/8	2-1/2	1/4	30525	39725	30783	30823
7/32	5/8	2-1/2	1/4	30527	39727	30784	30824
15/64	3/4	2-1/2	1/4	30529	39729	30785	30825
*1/4	3/4	2-1/2	1/4	30531	39731	30786	30826
17/64	3/4	2-1/2	5/16	30533	39733	30787	30827
9/32	3/4	2-1/2	5/16	30535	39735	30788	30828
19/64	13/16	2-1/2	5/16	30537	39737	30789	30829
*5/16	13/16	2-1/2	5/16	30539	39739	30790	30830
21/64	1	2-1/2	3/8	30541	39741	30791	30831
11/32	1	2-1/2	3/8	30543	39743	30792	30832
23/64	1	2-1/2	3/8	30545	39745	30793	30833
*3/8	1	2-1/2	3/8	30547	39747	30794	30834
25/64	1	2-3/4	7/16	30549	39749	30795	30835
13/32	1	2-3/4	7/16	30551	39751	30796	30836
27/64	1	2-3/4	7/16	30553	39753	30797	30837
7/16	1	2-3/4	7/16	30555	39755	30798	30838
29/64	1	3	1/2	30557	39757	30799	30839
15/32	1	3	1/2	30559	39759	30800	30840
31/64	1	3	1/2	30561	39761	30801	30841
*1/2	1	3	1/2	30563	39763	30802	30842
9/16	1-1/8	3-1/2	9/16	30565	39765	30803	30843
5/8	1-1/4	3-1/2	5/8	30567	39767	30804	30844
11/16	1-3/8	4	3/4	30569	39769	30805	30845
3/4	1-1/2	4	3/4	30571	39771	30806	30846
7/8	1-1/2	4	7/8	30573	39773	30807	30847
1	1-1/2	4	1	30575	39775	30808	30848
*Series 5 Set				30589	39789	30810	30850


- STEELS
- STAINLESS STEELS
- CAST IRON
- NON-FERROUS
- HIGH TEMP ALLOYS

For patent information visit www.ksptpatents.com

3 Flute Ball End

**5B**

FRACTIONAL SERIES

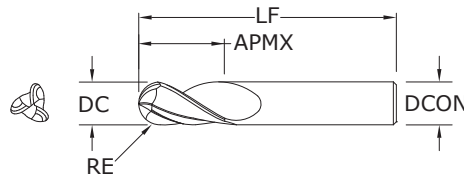**TOLERANCES (inch)****<1/8 DIAMETER**

DC = +0.000/-0.001

DCON = h_6

RE = +0.000/-0.0005

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6

RE = +0.000/-0.001

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/64	1/32	1-1/2	1/8	30502	30851	30602	31130
1/32	5/64	1-1/2	1/8	30504	30852	30604	31131
3/64	7/64	1-1/2	1/8	30506	30853	30606	31132
1/16	3/16	1-1/2	1/8	30508	30854	30608	31133
5/64	3/16	1-1/2	1/8	30510	30855	30610	31134
3/32	9/32	1-1/2	1/8	30512	30856	30612	31135
7/64	3/8	1-1/2	1/8	30514	30857	30902	31136
1/8	3/8	1-1/2	1/8	30578	30889	30943	31168
*1/8	1/2	1-1/2	1/8	30516	30858	30904	31137
9/64	1/2	2	3/16	30518	30859	30906	31138
5/32	1/2	2	3/16	30520	30860	30908	31139
11/64	5/8	2	3/16	30522	30861	30910	31140
*3/16	5/8	2	3/16	30524	30862	30912	31141
13/64	5/8	2-1/2	1/4	30526	30863	30914	31142
7/32	5/8	2-1/2	1/4	30528	30864	30916	31143
15/64	3/4	2-1/2	1/4	30530	30865	30918	31144
*1/4	3/4	2-1/2	1/4	30532	30866	30920	31145
17/64	3/4	2-1/2	5/16	30534	30867	30921	31146
9/32	3/4	2-1/2	5/16	30536	30868	30922	31147
19/64	13/16	2-1/2	5/16	30538	30869	30923	31148
*5/16	13/16	2-1/2	5/16	30540	30870	30924	31149
21/64	1	2-1/2	3/8	30542	30871	30925	31150
11/32	1	2-1/2	3/8	30544	30872	30926	31151
23/64	1	2-1/2	3/8	30546	30873	30927	31152
*3/8	1	2-1/2	3/8	30548	30874	30928	31153
25/64	1	2-3/4	7/16	30550	30875	30929	31154
13/32	1	2-3/4	7/16	30552	30876	30930	31155
27/64	1	2-3/4	7/16	30554	30877	30931	31156
7/16	1	2-3/4	7/16	30556	30878	30932	31157
29/64	1	3	1/2	30558	30879	30933	31158
15/32	1	3	1/2	30560	30880	30934	31159
31/64	1	3	1/2	30562	30881	30935	31160
*1/2	1	3	1/2	30564	30882	30936	31161
9/16	1-1/8	3-1/2	9/16	30566	30883	30937	31162
5/8	1-1/4	3-1/2	5/8	30568	30884	30938	31163
11/16	1-3/8	4	3/4	30570	30885	30939	31164
3/4	1-1/2	4	3/4	30572	30886	30940	31165
7/8	1-1/2	4	7/8	30574	30887	30941	31166
1	1-1/2	4	1	30576	30888	30942	31167
*Series 5B Set				30590	30900	30944	31169

RE = 1/2 Cutting Diameter (DC)

3 Flute Square End



TOLERANCES (mm)

<3 DIAMETER


DC = +0,0000/-0,0254

DCON = h_6

≥3 DIAMETER


DC = +0,0000/-0,0508

DCON = h_6

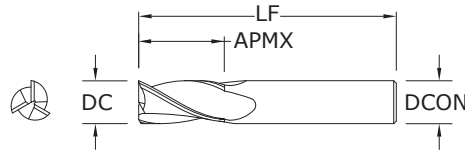


**5M•
5XLM**
METRIC SERIES

mm				EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	4,0	38,0	3,0	40505	48756	48778	48799	5M
1,5	4,5	38,0	3,0	40509	48757	48779	48800	5M
2,0	6,3	38,0	3,0	40513	48758	48780	48801	5M
2,5	9,5	38,0	3,0	40517	48759	48781	48802	5M
3,0	12,0	38,0	3,0	40521	48760	48782	48803	5M
3,0	25,0	75,0	3,0	43501	49466	49479	49492	5XLM
3,5	12,0	50,0	4,0	40525	48761	48783	48804	5M
4,0	14,0	50,0	4,0	40529	48762	48784	48805	5M
4,0	25,0	75,0	4,0	43503	49467	49480	49493	5XLM
4,5	16,0	50,0	6,0	40533	48763	48785	48806	5M
5,0	16,0	50,0	6,0	40537	48764	48786	48807	5M
5,0	25,0	75,0	5,0	43507	49469	49482	49495	5XLM
6,0	19,0	50,0	6,0	40541	48765	48787	48808	5M
6,0	25,0	75,0	6,0	43505	49468	49481	49494	5XLM
7,0	19,0	63,0	8,0	40545	48766	48788	48809	5M
8,0	20,0	63,0	8,0	40549	48767	48789	48810	5M
8,0	25,0	75,0	8,0	43515	49470	49483	49496	5XLM
9,0	22,0	75,0	10,0	40553	48768	48790	48811	5M
10,0	22,0	75,0	10,0	40557	48769	48791	48812	5M
10,0	38,0	100,0	10,0	43525	49471	49484	49497	5XLM
11,0	25,0	75,0	12,0	40561	48770	48792	48813	5M
12,0	25,0	75,0	12,0	40565	48771	48793	48814	5M
12,0	50,0	100,0	12,0	43535	49472	49485	49498	5XLM
12,0	75,0	150,0	12,0	43545	49473	49486	49499	5XLM
14,0	32,0	89,0	14,0	40569	48772	48794	48815	5M
14,0	75,0	150,0	14,0	43555	49474	49487	49500	5XLM
16,0	32,0	89,0	16,0	40573	48773	48795	48816	5M
16,0	75,0	150,0	16,0	43565	49475	49488	49501	5XLM
18,0	38,0	100,0	18,0	40577	48774	48796	48817	5M
18,0	75,0	150,0	18,0	43575	49476	49489	49502	5XLM
20,0	38,0	100,0	20,0	40581	48775	48797	48818	5M
20,0	75,0	150,0	20,0	43585	49477	49490	49503	5XLM
25,0	38,0	100,0	25,0	40585	48776	48798	48819	5M
25,0	75,0	150,0	25,0	43595	49478	49491	49504	5XLM




For patent
information visit
www.ksptpatents.com

3 Flute Ball End



5MB• 5XLMB

METRIC SERIES

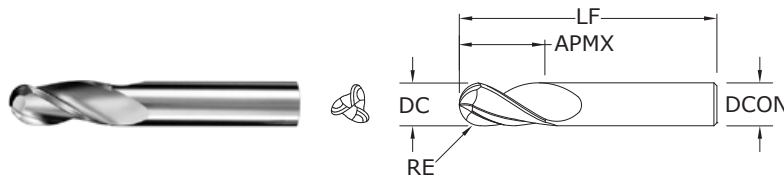

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0.0254

DCON = h_8


RE = +0,0000 / -0.0127

≥3 DIAMETER

DC = +0,0000 / -0.0508

DCON = h_8

RE = +0,0000 / -0.0254




For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.				SERIES
				UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	4,0	38,0	3,0	40506	48820	48842	48863	5MB
1,5	4,5	38,0	3,0	40510	48821	48843	48864	5MB
2,0	6,3	38,0	3,0	40514	48822	48844	48865	5MB
2,5	9,5	38,0	3,0	40518	48823	48845	48866	5MB
3,0	12,0	38,0	3,0	40522	48824	48846	48867	5MB
3,0	25,0	75,0	3,0	43502	49583	49596	49609	5XLMB
3,5	12,0	50,0	4,0	40526	48825	48847	48868	5MB
4,0	14,0	50,0	4,0	40530	48826	48848	48869	5MB
4,0	25,0	75,0	4,0	43504	49584	49597	49610	5XLMB
4,5	16,0	50,0	6,0	40534	48827	48849	48870	5MB
5,0	16,0	50,0	6,0	40538	48828	48850	48871	5MB
5,0	25,0	75,0	5,0	43508	49586	49599	49612	5XLMB
6,0	19,0	50,0	6,0	40542	48829	48851	48872	5MB
6,0	25,0	75,0	6,0	43506	49585	49598	49611	5XLMB
7,0	19,0	63,0	8,0	40546	48830	48852	48873	5MB
8,0	20,0	63,0	8,0	40550	48831	48853	48874	5MB
8,0	25,0	75,0	8,0	43516	49587	49600	49613	5XLMB
9,0	22,0	75,0	10,0	40554	48832	48854	48875	5MB
10,0	22,0	75,0	10,0	40558	48833	48855	48876	5MB
10,0	38,0	100,0	10,0	43526	49588	49601	49614	5XLMB
11,0	25,0	75,0	12,0	40562	48834	48856	48877	5MB
12,0	25,0	75,0	12,0	40566	48835	48857	48878	5MB
12,0	50,0	100,0	12,0	43536	49589	49602	49615	5XLMB
12,0	75,0	150,0	12,0	43546	49590	49603	49616	5XLMB
14,0	32,0	89,0	14,0	40570	48836	48858	48879	5MB
14,0	75,0	150,0	14,0	43556	49591	49604	49617	5XLMB
16,0	32,0	89,0	16,0	40574	48837	48859	48880	5MB
16,0	75,0	150,0	16,0	43566	49592	49605	49618	5XLMB
18,0	38,0	100,0	18,0	40578	48838	48860	48881	5MB
18,0	75,0	150,0	18,0	43576	49593	49606	49619	5XLMB
20,0	38,0	100,0	20,0	40582	48839	48861	48882	5MB
20,0	75,0	150,0	20,0	43586	49594	49607	49620	5XLMB
25,0	38,0	100,0	25,0	40586	48840	48862	48883	5MB
25,0	75,0	150,0	25,0	43596	49595	49608	49621	5XLMB

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL Tapered Square End




TOLERANCES (inch)

DC = +0.001 / -0.002

DCON = h_6

α = +10' / -10'

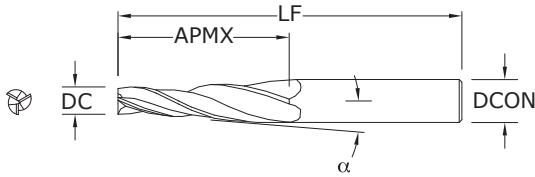

23


FRACTIONAL SERIES

inch					EDP NO.			
SHANK DIAMETER DCON	CENTER LINE ANGLE α	SMALL DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/4	1°	1/8	1-1/2	3	32301	32370	32302	32345
1/4	1°30'	1/8	1-1/2	3	32303	32371	32304	32346
1/4	2°	1/8	1-1/4	3	32305	32372	32306	32347
1/4	3°	1/8	1	3	32307	32373	32308	32348
1/4	5°	1/8	3/4	3	32309	32374	32310	32349
1/4	7°	1/8	1/2	3	32311	32375	32312	32350
1/4	10°	3/32	1/2	3	32313	32376	32314	32351
3/8	1°	3/16	1-3/4	3-1/2	32315	32377	32316	32352
3/8	1°30'	3/16	1-3/4	3-1/2	32317	32378	32318	32353
3/8	2°	3/16	1-3/4	3-1/2	32319	32379	32320	32354
3/8	3°	5/32	1-3/4	3-1/2	32321	32380	32322	32355
3/8	5°	1/8	1-1/2	3-1/2	32323	32381	32324	32356
3/8	7°	1/8	1	3-1/2	32325	32382	32326	32357
3/8	10°	1/8	3/4	3-1/2	32327	32383	32328	32358
1/2	1°	1/4	2	4	32329	32384	32330	32359
1/2	2°	1/4	2	4	32333	32385	32334	32360
1/2	3°	1/4	2	4	32335	32386	32336	32361
1/2	5°	1/4	1-1/4	4	32337	32387	32338	32362
1/2	7°	3/16	1-1/4	4	32339	32388	32340	32363
1/2	10°	1/8	1	4	32341	32389	32342	32364

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

Tapered Ball End

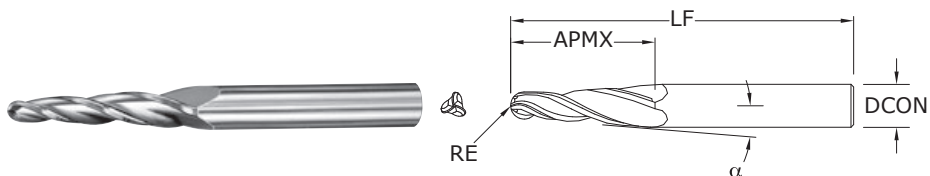

DCON = h_6
RE = $+0.0000/-0.0010$
 α = $+10' / -10'$


FRACTIONAL SERIES

inch					EDP NO.			
SHANK DIAMETER DCON	CENTER LINE ANGLE α	RADIUS RE	LENGTH OF CUT APMX	OVERALL LENGTH LF	UNCOATED	TI-NAMITE® (TiN)	TI-NAMITE®-C (TiCN)	TI-NAMITE®-A (AlTiN)
1/4	1°	.062	1-1/2	3	32402	32403	32445	32470
1/4	1°30'	.062	1-1/2	3	32404	32405	32446	32471
1/4	2°	.062	1-1/4	3	32406	32407	32447	32472
1/4	3°	.062	1	3	32408	32409	32448	32473
1/4	5°	.062	3/4	3	32410	32411	32449	32474
1/4	7°	.062	1/2	3	32412	32413	32450	32475
1/4	10°	.047	1/2	3	32414	32415	32451	32476
3/8	1°	.093	1-3/4	3-1/2	32416	32417	32452	32477
3/8	1°30'	.093	1-3/4	3-1/2	32418	32419	32453	32478
3/8	2°	.093	1-3/4	3-1/2	32420	32421	32454	32479
3/8	3°	.078	1-3/4	3-1/2	32422	32423	32455	32480
3/8	5°	.062	1-1/2	3-1/2	32424	32425	32456	32481
3/8	7°	.062	1	3-1/2	32426	32427	32457	32482
3/8	10°	.062	3/4	3-1/2	32428	32429	32458	32483
1/2	1°	.125	2	4	32430	32431	32459	32484
1/2	2°	.125	2	4	32434	32435	32460	32485
1/2	3°	.125	2	4	32436	32437	32461	32486
1/2	5°	.125	1-1/4	4	32438	32439	32462	32487
1/2	7°	.093	1-1/4	4	32440	32441	32463	32488
1/2	10°	.062	1	4	32442	32443	32464	32489

HIGH TEMP ALLOYS

www.kyocera-sgstool.com

4 Flute Square End • 4 Flute Corner Radius



TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6


≥1/8 DIAMETER

DC = +0.000 / -0.002

1CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

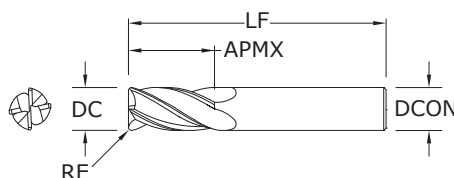

**1 • 1L • 1EL •
1CR • 16**
FRACTIONAL SERIES

inch						EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	WELDON FLAT	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/64	1/32	1-1/2	1/8	—		30101	39101	39001	30191	1
1/32	5/64	1-1/2	1/8	—		30103	39103	39003	30192	1
3/64	7/64	1-1/2	1/8	—		30105	39105	39005	30193	1
1/16	1/8	1-1/2	1/8	—		31601	31650	31238	31251	16
† 1/16	3/16	1-1/2	1/8	—		30107	39107	39007	30194	1
5/64	3/16	1-1/2	1/8	—		30109	39109	39009	30195	1
3/32	3/16	1-1/2	1/8	—		31603	31651	31239	31252	16
3/32	9/32	1-1/2	1/8	—		30111	39111	39011	30196	1
7/64	3/8	1-1/2	1/8	—		30113	39113	39013	30197	1
1/8	1/4	1-1/2	1/8	—		31605	31652	31240	31253	16
1/8	3/8	1-1/2	1/8	—		30177	39177	39077	30029	1
*† 1/8	1/2	1-1/2	1/8	—		30115	39115	39015	30198	1
1/8	1/2	1-1/2	1/8	.015		38001	38002	38115	38157	1CR
1/8	1/2	1-1/2	1/8	.020		38003	38004	38116	38158	1CR
1/8	3/4	2-1/4	1/8	—		33141	31727	31737	31747	1L
1/8	1	3	1/8	—		33143	31860	31870	31880	1EL
9/64	1/2	2	3/16	—		30117	39117	39017	30199	1
5/32	5/16	2	3/16	—		31607	31653	31241	31254	16
5/32	1/2	2	3/16	—		30119	39119	39019	30000	1
11/64	5/8	2	3/16	—		30121	39121	39021	30001	1
3/16	3/8	2	3/16	—		31609	31654	31242	31255	16
*† 3/16	5/8	2	3/16	—		30123	39123	39023	30002	1
3/16	5/8	2	3/16	.015		38009	38010	38117	38159	1CR
3/16	5/8	2	3/16	.020		38011	38012	38118	38160	1CR
3/16	5/8	2	3/16	.030		38013	38014	38119	38161	1CR
3/16	3/4	2-1/2	3/16	—		33101	31728	31738	31748	1L
3/16	1-1/8	3	3/16	—		33121	31861	31871	31881	1EL
13/64	5/8	2-1/2	1/4	—		30125	39125	39025	30003	1
7/32	7/16	2	1/4	—		31611	31655	31243	31256	16
7/32	5/8	2-1/2	1/4	—		30127	39127	39027	30004	1
15/64	3/4	2-1/2	1/4	—		30129	39129	39029	30005	1
1/4	1/2	2	1/4	—		31613	31656	31244	31257	16
*† 1/4	3/4	2-1/2	1/4	—		30131	39131	39031	30006	1
1/4	3/4	2-1/2	1/4	—	•	30300	—	—	—	1

STEELS

STAINLESS STEELS

CAST IRON


NON-FERROUS

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com


continued on next page

4 Flute Square End • 4 Flute Corner Radius



**1•1L•1EL •
1CR • 16**

FRACTIONAL SERIES

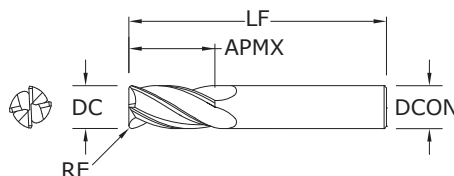

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000 / -0.002

1CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

CONTINUED

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	WELDON FLAT	EDP NO.				SERIES
						UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/4	3/4	2-1/2	1/4	.015		38019	38020	38120	38162	1CR
1/4	3/4	2-1/2	1/4	.020		38021	38022	38121	38163	1CR
1/4	3/4	2-1/2	1/4	.030		38023	38024	38122	38164	1CR
1/4	3/4	2-1/2	1/4	.045		38025	38026	38123	38165	1CR
1/4	1-1/8	3	1/4	—		33103	31729	31739	31749	1L
1/4	1-1/2	4	1/4	—		33123	31862	31872	31882	1EL
17/64	3/4	2-1/2	5/16	—		30133	39133	39033	30007	1
9/32	3/4	2-1/2	5/16	—		30135	39135	39035	30008	1
19/64	13/16	2-1/2	5/16	—		30137	39137	39037	30009	1
5/16	1/2	2	5/16	—		31615	31657	31245	31258	16
*1/5	13/16	2-1/2	5/16	—		30139	39139	39039	30010	1
5/16	13/16	2-1/2	5/16	.015		38031	38032	38124	38166	1CR
5/16	13/16	2-1/2	5/16	.020		38033	38034	38125	38167	1CR
5/16	13/16	2-1/2	5/16	.030		38035	38036	38126	38168	1CR
5/16	13/16	2-1/2	5/16	.045		38037	38038	38127	38169	1CR
5/16	1-1/8	3	5/16	—		33105	31730	31740	31763	1L
5/16	1-5/8	4	5/16	—		33125	31863	31873	31883	1EL
21/64	1	2-1/2	3/8	—		30141	39141	39041	30011	1
11/32	1	2-1/2	3/8	—		30143	39143	39043	30012	1
23/64	1	2-1/2	3/8	—		30145	39145	39045	30013	1
3/8	5/8	2	3/8	—		31617	31658	31246	31259	16
*1/3	1	2-1/2	3/8	—		30147	39147	39047	30014	1
3/8	1	2-1/2	3/8	—	•	30179	—	—	30379	1
3/8	1	2-1/2	3/8	.015	•	38045	38046	38128	38170	1CR
3/8	1	2-1/2	3/8	.020	•	38047	38048	38129	38171	1CR
3/8	1	2-1/2	3/8	.030	•	38049	38050	38130	38172	1CR
3/8	1	2-1/2	3/8	.045	•	38051	38052	38131	38173	1CR
3/8	1-1/8	3	3/8	—		33107	31731	31741	31764	1L
3/8	1-3/4	4	3/8	—		33127	31864	31874	31884	1EL
25/64	1	2-3/4	7/16	—		30149	39149	39049	30015	1
13/32	1	2-3/4	7/16	—		30151	39151	39051	30016	1
27/64	1	2-3/4	7/16	—		30153	39153	39053	30017	1

continued on next page

4 Flute Square End • 4 Flute Corner Radius



TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6


≥1/8 DIAMETER

DC = +0.000 / -0.002

1CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

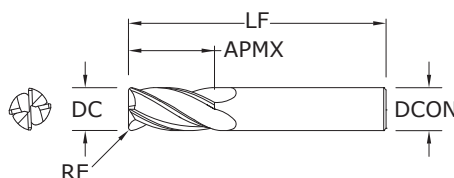


**1•1L• 1EL•
1CR• 16**
FRACTIONAL SERIES

inch						EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	WELDON FLAT	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
7/16	5/8	2-1/2	7/16	—		31619	31659	31247	31260	16
7/16	1	2-3/4	7/16	—		30155	39155	39055	30018	1
7/16	2	4-1/2	7/16	—		33109	31732	31742	31765	1L
7/16	3	6	7/16	—		33129	31865	31875	31885	1EL
29/64	1	3	1/2	—		30157	39157	39057	30019	1
15/32	1	3	1/2	—		30159	39159	39059	30020	1
31/64	1	3	1/2	—		30161	39161	39061	30021	1
1/2	5/8	2-1/2	1/2	—		31621	31660	31248	31261	16
*1/2	1	3	1/2	—		30163	39163	39063	30022	1
1/2	1	3	1/2	—	•	30180	—	—	30380	1
1/2	1	3	1/2	.015	•	38059	38060	38132	38174	1CR
1/2	1	3	1/2	.020	•	38061	38062	38133	38175	1CR
1/2	1	3	1/2	.030	•	38063	38064	38134	38176	1CR
1/2	1	3	1/2	.045	•	38065	38066	38135	38177	1CR
1/2	1	3	1/2	.060	•	38067	38068	38136	38178	1CR
1/2	2	4-1/2	1/2	—		33111	31733	31743	31766	1L
1/2	3	6	1/2	—		33131	31866	31876	31886	1EL
9/16	1-1/8	3-1/2	9/16	—		30165	39165	39065	30023	1
5/8	3/4	3	5/8	—		31623	31661	31249	31262	16
5/8	1-1/4	3-1/2	5/8	—		30167	39167	39067	30024	1
5/8	1-1/4	3-1/2	5/8	—	•	30181	—	—	30381	1
5/8	1-1/4	3-1/2	5/8	.015	•	38073	38074	38137	38179	1CR
5/8	1-1/4	3-1/2	5/8	.020	•	38075	38076	38138	38180	1CR
5/8	1-1/4	3-1/2	5/8	.030	•	38077	38078	38139	38181	1CR
5/8	1-1/4	3-1/2	5/8	.045	•	38079	38080	38140	38182	1CR
5/8	1-1/4	3-1/2	5/8	.060	•	38081	38082	38141	38183	1CR
5/8	1-1/4	3-1/2	5/8	.090	•	38083	38084	38142	38184	1CR
5/8	2-1/4	5	5/8	—		33113	31734	31744	31767	1L
5/8	3	6	5/8	—		33133	31867	31877	31887	1EL
11/16	1-3/8	4	3/4	—		30169	39169	39069	30025	1
3/4	1	3	3/4	—		31625	31662	31250	31263	16
3/4	1-1/2	4	3/4	—		30171	39171	39071	30026	1


continued on next page

CONTINUED




For patent information visit
www.ksptpatents.com

4 Flute Square End • 4 Flute Corner Radius



**1•1L•1EL •
1CR • 16**

FRACTIONAL SERIES

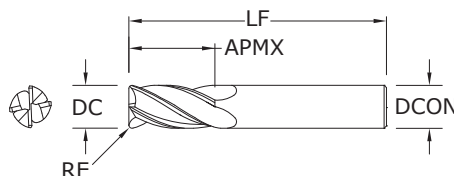

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

≥1/8 DIAMETER


DC = +0.000 / -0.002

1CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

CONTINUED




For patent
information visit
www.ksptpatents.com

inch						EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	WELDON FLAT	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
3/4	1-1/2	4	3/4	—	•	30182	—	—	30382	1
3/4	1-1/2	4	3/4	.015	•	38087	38088	38143	38185	1CR
3/4	1-1/2	4	3/4	.020	•	38089	38090	38144	38186	1CR
3/4	1-1/2	4	3/4	.030	•	38091	38092	38145	38187	1CR
3/4	1-1/2	4	3/4	.045	•	38093	38094	38146	38188	1CR
3/4	1-1/2	4	3/4	.060	•	38095	38096	38147	38189	1CR
3/4	1-1/2	4	3/4	.090	•	38097	38098	38148	38190	1CR
3/4	1-1/2	4	3/4	.125	•	38099	38100	38149	38191	1CR
3/4	2-1/4	5	3/4	—		33115	31735	31745	31768	1L
3/4	3	6	3/4	—		33135	31868	31878	31888	1EL
7/8	1-1/2	4	7/8	—		30173	39173	39073	30027	1
1	1-1/2	4	1	—		30175	39175	39075	30028	1
1	1-1/2	4	1	—		30183	—	—	30383	1
1	1-1/2	4	1	.015	•	38101	38102	38150	38192	1CR
1	1-1/2	4	1	.020	•	38103	38104	38151	38193	1CR
1	1-1/2	4	1	.030	•	38105	38106	38152	38194	1CR
1	1-1/2	4	1	.045	•	38107	38108	38153	38195	1CR
1	1-1/2	4	1	.060	•	38109	38110	38154	38196	1CR
1	1-1/2	4	1	.090	•	38111	38112	38155	38197	1CR
1	1-1/2	4	1	.125	•	38113	38114	38156	38198	1CR
1	2-1/4	5	1	—		33117	31736	31746	31769	1L
1	3	6	1	—		33137	31869	31879	31889	1EL
*Series 1 Set						30189	39189	39089	30030	1

† Di-NAMITE® coating offered standard for this configuration. Please contact your KSPT Representative for more information.

FRACTIONAL 4 Flute Ball End



TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6


RE = +0.000/-0.0005

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6

RE = +0.000/-0.001

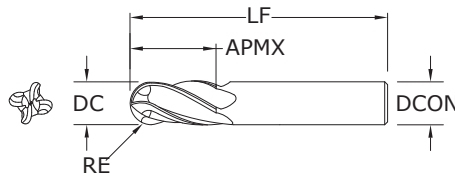


**1B • 1LB •
1ELB**
FRACTIONAL SERIES

inch					EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	WELDON FLAT	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/64	1/32	1-1/2	1/8		30102	39102	39002	30031	1B
1/32	5/64	1-1/2	1/8		30104	39104	39004	30032	1B
3/64	7/64	1-1/2	1/8		30106	39106	39006	30033	1B
*1/16	3/16	1-1/2	1/8		30108	39108	39008	30034	1B
5/64	3/16	1-1/2	1/8		30110	39110	39010	30035	1B
3/32	9/32	1-1/2	1/8		30112	39112	39012	30036	1B
7/64	3/8	1-1/2	1/8		30114	39114	39014	30037	1B
*1/8	3/8	1-1/2	1/8		30178	39178	39078	30069	1B
*1/8	1/2	1-1/2	1/8		30116	39116	39016	30038	1B
1/8	3/4	2-1/4	1/8		33142	31770	31780	31790	1LB
1/8	1	3	1/8		33144	31900	31918	31928	1ELB
9/64	1/2	2	3/16		30118	39118	39018	30039	1B
5/32	1/2	2	3/16		30120	39120	39020	30040	1B
11/64	5/8	2	3/16		30122	39122	39022	30041	1B
*1/32	5/8	2	3/16		30124	39124	39024	30042	1B
3/16	3/4	2-1/2	3/16		33102	31771	31781	31791	1LB
3/16	1-1/8	3	3/16		33122	31902	31919	31929	1ELB
13/64	5/8	2-1/2	1/4		30126	39126	39026	30043	1B
7/32	5/8	2-1/2	1/4		30128	39128	39028	30044	1B
15/64	3/4	2-1/2	1/4		30130	39130	39030	30045	1B
*1/4	3/4	2-1/2	1/4		30132	39132	39032	30046	1B
1/4	1-1/8	3	1/4		33104	31772	31782	31792	1LB
1/4	1-1/2	4	1/4		33124	31904	31920	31930	1ELB
17/64	3/4	2-1/2	5/16		30134	39134	39034	30047	1B
9/32	3/4	2-1/2	5/16		30136	39136	39036	30048	1B
19/64	13/16	2-1/2	5/16		30138	39138	39038	30049	1B
*1/5	13/16	2-1/2	5/16		30140	39140	39040	30050	1B
5/16	1-1/8	3	5/16		33106	31773	31783	31793	1LB
5/16	1-5/8	4	5/16		33126	31906	31921	31931	1ELB
21/64	1	2-1/2	3/8		30142	39142	39042	30051	1B
11/32	1	2-1/2	3/8		30144	39144	39044	30052	1B
23/64	1	2-1/2	3/8		30146	39146	39046	30053	1B



RE = 1/2 Cutting Diameter (DC)

continued on next page



For patent information visit
www.ksptpatents.com

4 Flute Ball End

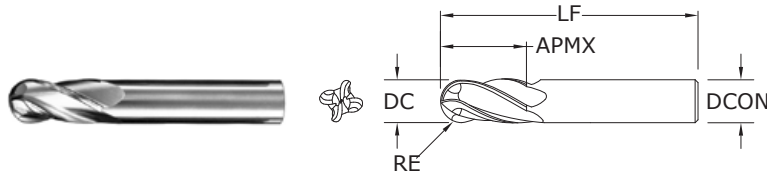
**1B•1LB•
1ELB**
FRACTIONAL SERIES


TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6

RE = +0.000/-0.0005


≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6

RE = +0.000/-0.001

CONTINUED




For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			WELDON FLAT	EDP NO.				SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON			UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
*1/8	1	2-1/2	3/8			30148	39148	39048	30054	1B
3/8	1	2-1/2	3/8	•		30184	—	—	30384	1B
3/8	1-1/8	3	3/8			33108	31774	31784	31794	1LB
3/8	1-3/4	4	3/8			33128	31908	31922	31932	1ELB
25/64	1	2-3/4	7/16			30150	39150	39050	30055	1B
13/32	1	2-3/4	7/16			30152	39152	39052	30056	1B
27/64	1	2-3/4	7/16			30154	39154	39054	30057	1B
7/16	1	2-3/4	7/16			30156	39156	39056	30058	1B
7/16	2	4-1/2	7/16			33110	31775	31785	31795	1LB
7/16	3	6	7/16			33130	31910	31923	31933	1ELB
29/64	1	3	1/2			30158	39158	39058	30059	1B
15/32	1	3	1/2			30160	39160	39060	30060	1B
31/64	1	3	1/2			30162	39162	39062	30061	1B
*1/2	1	3	1/2			30164	39164	39064	30062	1B
1/2	1	3	1/2	•		30185	—	—	30385	1B
1/2	2	4-1/2	1/2			33112	31776	31786	31796	1LB
1/2	3	6	1/2			33132	31912	31924	31934	1ELB
9/16	1-1/8	3-1/2	9/16			30166	39166	39066	30063	1B
5/8	1-1/4	3-1/2	5/8			30168	39168	39068	30064	1B
5/8	1-1/4	3-1/2	5/8	•		30186	—	—	30386	1B
5/8	2-1/4	5	5/8			33114	31777	31787	31797	1LB
5/8	3	6	5/8			33134	31914	31925	31935	1ELB
11/16	1-3/8	4	3/4			30170	39170	39070	30065	1B
3/4	1-1/2	4	3/4			30172	39172	39072	30066	1B
3/4	1-1/2	4	3/4	•		30187	—	—	30387	1B
3/4	2-1/4	5	3/4			33116	31778	31788	31798	1LB
3/4	3	6	3/4			33136	31916	31926	31936	1ELB
7/8	1-1/2	4	7/8			30174	39174	39074	30067	1B
1	1-1/2	4	1			30176	39176	39076	30068	1B
1	1-1/2	4	1	•		30188	—	—	30388	1B
1	2-1/4	5	1			33118	31779	31789	31799	1LB
1	3	6	1			33138	31917	31927	31937	1ELB
*Series 1B Set						30190	39190	39090	30070	1B

RE = 1/2 Cutting Diameter (DC)

† Di-NAMITE® coating offered standard for this configuration. Please contact your KSPT Representative for more information.

4 Flute Square End • 4 Flute Corner Radius



TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0,0254


DCON = h_6

≥3 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6


RE = +0,0000 / -0,0508

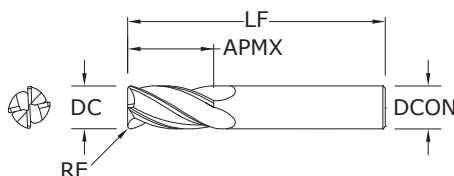

**1M • 1XLM •
1MCR • 16M**
METRIC SERIES


mm					EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	CORNER RADIUS RE	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	2,0	38,0	—	3,0	41605	49136	49157	49178	16M
1,0	4,0	38,0	—	3,0	40105	48500	48522	48543	1M
1,5	3,0	38,0	—	3,0	41609	49137	49158	49179	16M
1,5	4,5	38,0	—	3,0	40109	48501	48523	48544	1M
2,0	4,0	38,0	—	3,0	41613	49138	49159	49180	16M
2,0	6,3	38,0	—	3,0	40113	48502	48524	48545	1M
2,5	5,0	38,0	—	3,0	41617	49139	49160	49181	16M
2,5	9,5	38,0	—	3,0	40117	48503	48525	48546	1M
3,0	6,0	38,0	—	3,0	41621	49140	49161	49182	16M
3,0	12,0	38,0	—	3,0	40121	48504	48526	48547	1M
3,0	25,0	75,0	—	3,0	43101	49388	49401	49414	1XLM
3,5	7,0	50,0	—	4,0	41625	49141	49162	49183	16M
3,5	12,0	50,0	—	4,0	40125	48505	48527	48548	1M
4,0	8,0	50,0	—	4,0	41629	49142	49163	49184	16M
4,0	14,0	50,0	—	4,0	40129	48506	48528	48549	1M
4,0	14,0	50,0	0,25	4,0	—	—	—	40000	1MCR
4,0	14,0	50,0	0,50	4,0	—	—	—	40001	1MCR
4,0	14,0	50,0	1,00	4,0	—	—	—	40003	1MCR
4,0	25,0	75,0	—	4,0	43103	49389	49402	49415	1XLM
4,5	9,5	50,0	—	4,5	41633	49143	49164	49185	16M
4,5	16,0	50,0	—	6,0	40133	48507	48529	48550	1M
5,0	10,0	50,0	—	5,0	41637	49144	49165	49186	16M
5,0	16,0	50,0	—	6,0	40137	48508	48530	48551	1M
5,0	16,0	50,0	0,25	6,0	—	—	—	40004	1MCR
5,0	16,0	50,0	0,50	6,0	—	—	—	40005	1MCR
5,0	16,0	50,0	1,00	6,0	—	—	—	40007	1MCR
5,0	25,0	75,0	—	5,0	43107	49391	49404	49417	1XLM
6,0	12,0	50,0	—	6,0	41641	49145	49166	49187	16M
6,0	19,0	50,0	—	6,0	40141	48509	48531	48552	1M
6,0	19,0	50,0	0,25	6,0	—	—	—	40009	1MCR
6,0	19,0	50,0	0,50	6,0	—	—	—	40010	1MCR
6,0	19,0	50,0	0,75	6,0	—	—	—	40011	1MCR

continued on next page




For patent information visit
www.ksptpatents.com

4 Flute Square End • 4 Flute Corner Radius



**1M • 1XLM •
1MCR • 16M**

METRIC SERIES

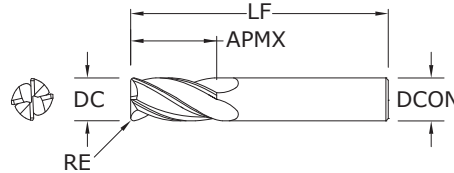

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000/-0,0254

DCON = h_6


≥3 DIAMETER

DC = +0,0000/-0,0508

DCON = h_6

RE = +0,0000/-0,0508

CONTINUED




For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			SHANK DIAMETER DCON	EDP NO.				SERIES
		OVERALL LENGTH LF	CORNER RADIUS RE			UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
6,0	19,0	50,0	1,00		6,0	—	—	—	40012	1MCR
6,0	25,0	75,0	—		6,0	43105	49390	49403	49416	1XLM
7,0	12,0	50,0			8,0	41645	49146	49167	49188	16M
7,0	19,0	63,0	—		8,0	40145	48510	48532	48553	1M
8,0	12,0	50,0			8,0	41649	49147	49168	49189	16M
8,0	20,0	63,0	—		8,0	40149	48511	48533	48554	1M
8,0	20,0	63,0	0,50		8,0	—	—	—	40015	1MCR
8,0	20,0	63,0	0,75		8,0	—	—	—	40016	1MCR
8,0	20,0	63,0	1,00		8,0	—	—	—	40017	1MCR
8,0	20,0	63,0	1,50		8,0	—	—	—	40019	1MCR
8,0	20,0	63,0	2,00		8,0	—	—	—	40020	1MCR
8,0	25,0	75,0	—		8,0	43115	49392	49405	49418	1XLM
9,0	14,0	50,0			9,0	41653	49148	49169	49190	16M
9,0	22,0	75,0	—		10,0	40153	48512	48534	48555	1M
10,0	16,0	50,0			10,0	41657	49149	49170	49191	16M
10,0	22,0	75,0	—		10,0	40157	48513	48535	48556	1M
10,0	22,0	75,0	0,50		10,0	—	—	—	40021	1MCR
10,0	22,0	75,0	1,00		10,0	—	—	—	40023	1MCR
10,0	22,0	75,0	1,50		10,0	—	—	—	40024	1MCR
10,0	22,0	75,0	2,00		10,0	—	—	—	40025	1MCR
10,0	38,0	100,0	—		10,0	43125	49393	49406	49419	1XLM
11,0	19,0	63,0			12,0	41661	49150	49171	49192	16M
11,0	25,0	75,0	—		12,0	40161	48514	48536	48557	1M
12,0	19,0	63,0			12,0	40165	49151	49172	49193	16M
12,0	25,0	75,0	—		12,0	41665	48515	48537	48558	1M
12,0	25,0	75,0	0,50		12,0	—	—	—	40028	1MCR
12,0	25,0	75,0	1,00		12,0	—	—	—	40030	1MCR
12,0	25,0	75,0	1,50		12,0	—	—	—	40031	1MCR
12,0	25,0	75,0	2,00		12,0	—	—	—	40032	1MCR
12,0	50,0	100,0	—		12,0	43135	49394	49407	49420	1XLM
12,0	75,0	150,0	—		12,0	43145	49395	49408	49421	1XLM
14,0	32,0	89,0	—		14,0	40169	48516	48538	48559	1M
14,0	75,0	150,0	—		14,0	43155	49396	49409	49422	1XLM
16,0	32,0	89,0	—		16,0	40173	48517	48539	48560	1M
16,0	32,0	89,0	0,50		16,0	—	—	—	40035	1MCR
16,0	32,0	89,0	1,00		16,0	—	—	—	40037	1MCR

continued on next page

4 Flute Square End • 4 Flute Corner Radius



TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0,0254


DCON = h_6

≥3 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

RE = +0,0000 / -0,0508

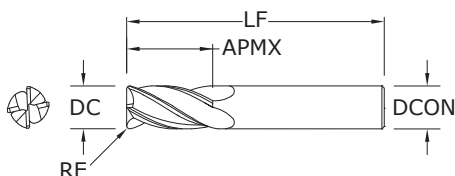


**1M • 1XLM •
1MCR • 16M**

METRIC SERIES


mm					EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	CORNER RADIUS RE	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
16,0	32,0	89,0	1,50	16,0	—	—	—	40038	1MCR
16,0	32,0	89,0	2,00	16,0	—	—	—	40039	1MCR
16,0	75,0	150,0	—	16,0	43165	49397	49410	49423	1XLM
18,0	38,0	100,0	—	18,0	40177	48518	48540	48561	1M
18,0	75,0	150,0	—	18,0	43175	49398	49411	49424	1XLM
20,0	38,0	100,0	—	20,0	40181	48519	48541	48562	1M
20,0	75,0	150,0	—	20,0	43185	49399	49412	49425	1XLM
25,0	38,0	100,0	—	25,0	40185	48520	48542	48563	1M
25,0	75,0	150,0	—	25,0	43195	49400	49413	49426	1XLM

CONTINUED




For patent
information visit
www.ksptpatents.com

4 Flute Ball End



**1MB•
1XLMB**
METRIC SERIES

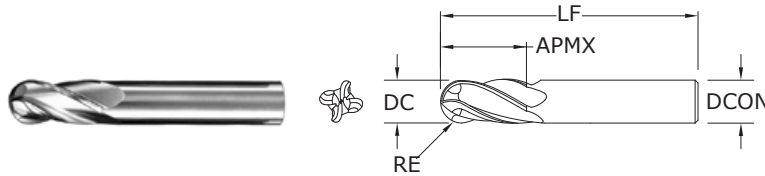

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0.0254

DCON = h_6


RE = +0,0000 / -0.0127

≥3 DIAMETER

DC = +0,0000 / -0.0508

DCON = h_6

RE = +0,0000 / -0.0254



For patent
information visit
www.ksptpatents.com

mm				EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	4,0	38,0	3,0	40106	48564	48586	48607	1MB
1,5	4,5	38,0	3,0	40110	48565	48587	48608	1MB
2,0	6,3	38,0	3,0	40114	48566	48588	48609	1MB
2,5	9,5	38,0	3,0	40118	48567	48589	48610	1MB
3,0	12,0	38,0	3,0	40122	48568	48590	48611	1MB
3,0	25,0	75,0	3,0	43102	49505	49518	49531	1XLMB
3,5	12,0	50,0	4,0	40126	48569	48591	48612	1MB
4,0	14,0	50,0	4,0	40130	48570	48592	48613	1MB
4,0	25,0	75,0	4,0	43104	49506	49519	49532	1XLMB
4,5	16,0	50,0	6,0	40134	48571	48593	48614	1MB
5,0	16,0	50,0	6,0	40138	48572	48594	48615	1MB
5,0	25,0	75,0	5,0	43108	49508	49521	49534	1XLMB
6,0	19,0	50,0	6,0	40142	48573	48595	48616	1MB
6,0	25,0	75,0	6,0	43106	49507	49520	49533	1XLMB
7,0	19,0	63,0	8,0	40146	48574	48596	48617	1MB
8,0	20,0	63,0	8,0	40150	48575	48597	48618	1MB
8,0	25,0	75,0	8,0	43116	49509	49522	49535	1XLMB
9,0	22,0	75,0	10,0	40154	48576	48598	48619	1MB
10,0	22,0	75,0	10,0	40158	48577	48599	48620	1MB
10,0	38,0	100,0	10,0	43126	49510	49523	49536	1XLMB
11,0	25,0	75,0	12,0	40162	48578	48600	48621	1MB
12,0	25,0	75,0	12,0	40166	48579	48601	48622	1MB
12,0	50,0	100,0	12,0	43136	49511	49524	49537	1XLMB
12,0	75,0	150,0	12,0	43146	49512	49525	49538	1XLMB
14,0	32,0	89,0	14,0	40170	48580	48602	48623	1MB
14,0	75,0	150,0	14,0	43156	49513	49526	49539	1XLMB
16,0	32,0	89,0	16,0	40174	48581	48603	48624	1MB
16,0	75,0	150,0	16,0	43166	49514	49527	49540	1XLMB
18,0	38,0	100,0	18,0	40178	48582	48604	48625	1MB
18,0	75,0	150,0	18,0	43176	49515	49528	49541	1XLMB
20,0	38,0	100,0	20,0	40182	48583	48605	48626	1MB
20,0	75,0	150,0	20,0	43186	49516	49529	49542	1XLMB
25,0	38,0	100,0	25,0	40186	48584	48606	48627	1MB
25,0	75,0	150,0	25,0	43196	49517	49530	49543	1XLMB

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL & METRIC 4 Flute Double End

TOLERANCES (inch)

<1/8 DIAMETER


DC = +0.000 / -0.001

DCON = h₆

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h₆

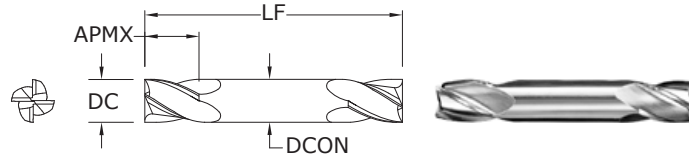

14
FRACTIONAL SERIES

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/32	1/16	1-1/2	1/8	31401	31441	39601	31170
3/64	3/32	1-1/2	1/8	31403	31443	39603	31171
1/16	1/8	1-1/2	1/8	31405	31445	39605	31172
5/64	1/8	1-1/2	1/8	31407	31447	39607	31173
3/32	3/16	1-1/2	1/8	31409	31449	39609	31174
7/64	3/16	1-1/2	1/8	31411	31451	39611	31175
*1/8	1/4	1-1/2	1/8	31413	31453	39613	31176
9/64	5/16	2	3/16	31415	31455	39615	31177
5/32	5/16	2	3/16	31417	31457	39617	31178
11/64	5/16	2	3/16	31419	31459	39619	31179
*3/16	3/8	2	3/16	31421	31461	39621	31180
13/64	1/2	2-1/2	1/4	31423	31463	39623	31181
7/32	1/2	2-1/2	1/4	31425	31465	39625	31182
15/64	1/2	2-1/2	1/4	31427	31467	39627	31183
*1/4	1/2	2-1/2	1/4	31429	31469	39629	31184
9/32	1/2	2-1/2	5/16	31431	31471	39631	31185
*5/16	1/2	2-1/2	5/16	31433	31473	39633	31186
*3/8	9/16	2-1/2	3/8	31435	31475	39635	31187
7/16	9/16	2-3/4	7/16	31437	31477	39637	31188
*1/2	5/8	3	1/2	31439	31479	39639	31189
*Series 14 Set				31489	31481	39641	31190

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

TOLERANCES (mm)

<3 DIAMETER


DC = +0.0000 / -0.0254

DCON = h₆

≥3 DIAMETER

DC = +0.0000 / -0.0508

DCON = h₆

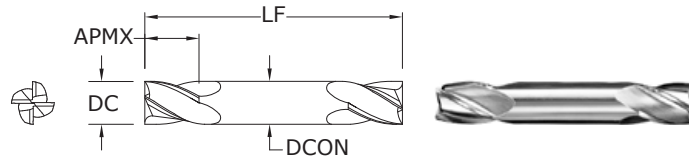

14M
METRIC SERIES

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1,0	2,0	38,0	3,0	41405	48884	48905	48926
1,5	3,0	38,0	3,0	41409	48885	48906	48927
2,0	4,0	38,0	3,0	41413	48886	48907	48928
2,5	5,0	38,0	3,0	41417	48887	48908	48929
3,0	6,0	38,0	3,0	41421	48888	48909	48930
3,5	7,0	50,0	4,0	41425	48889	48910	48931
4,0	8,0	50,0	4,0	41429	48890	48911	48932
4,5	9,5	63,0	4,5	41433	48891	48912	48933
5,0	10,0	63,0	5,0	41437	48892	48913	48934
6,0	12,0	63,0	6,0	41441	48893	48914	48935
7,0	12,0	63,0	8,0	41445	48894	48915	48936
8,0	12,0	63,0	8,0	41449	48895	48916	48937
9,0	14,0	75,0	9,0	41453	48896	48917	48938
10,0	14,0	75,0	10,0	41457	48897	48918	48939
11,0	14,0	75,0	12,0	41461	48898	48919	48940
12,0	16,0	75,0	12,0	41465	48899	48920	48941

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

4 Flute Double End Ball End



14B

FRACTIONAL SERIES

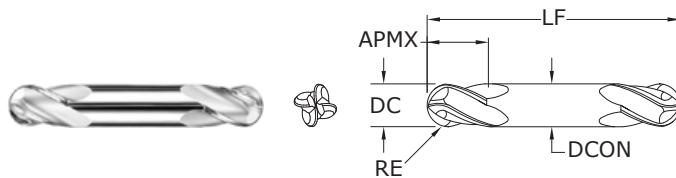

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

RE = +0.000 / -0.005

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h_6


RE = +0.000 / -0.001

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/32	1/16	1-1/2	1/8	31402	31442	39602	31218
3/64	3/32	1-1/2	1/8	31404	31444	39604	31219
1/16	1/8	1-1/2	1/8	31406	31446	39606	31220
5/64	1/8	1-1/2	1/8	31408	31448	39608	31221
3/32	3/16	1-1/2	1/8	31410	31450	39610	31222
7/64	3/16	1-1/2	1/8	31412	31452	39612	31223
*1/8	1/4	1-1/2	1/8	31414	31454	39614	31224
9/64	5/16	2	3/16	31416	31456	39616	31225
5/32	5/16	2	3/16	31418	31458	39618	31226
11/64	5/16	2	3/16	31420	31460	39620	31227
*3/16	3/8	2	3/16	31422	31462	39622	31228
13/64	1/2	2-1/2	1/4	31424	31464	39624	31229
7/32	1/2	2-1/2	1/4	31426	31466	39626	31230
15/64	1/2	2-1/2	1/4	31428	31468	39628	31231
*1/4	1/2	2-1/2	1/4	31430	31470	39630	31232
9/32	1/2	2-1/2	5/16	31432	31472	39632	31233
*5/16	1/2	2-1/2	5/16	31434	31474	39634	31234
*3/8	9/16	2-1/2	3/8	31436	31476	39636	31235
7/16	9/16	2-3/4	7/16	31438	31478	39638	31236
*1/2	5/8	3	1/2	31440	31480	39640	31237
*Series 14B Set				31490	31482	39642	31217

RE = 1/2 Cutting Diameter (DC)

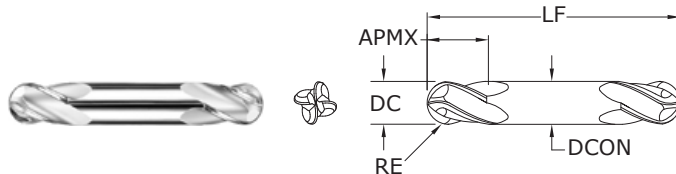

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0,0254

DCON = h_6

RE = +0,0000 / -0,0127

≥3 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

RE = +0,0000 / -0,0254

14MB

METRIC SERIES

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1,0	2,0	38,0	3,0	41406	48947	48968	48989
1,5	3,0	38,0	3,0	41410	48948	48969	48990
2,0	4,0	38,0	3,0	41414	48949	48970	48991
2,5	5,0	38,0	3,0	41418	48950	48971	48992
3,0	6,0	38,0	3,0	41422	48951	48972	48993
3,5	7,0	50,0	4,0	41426	48952	48973	48994
4,0	8,0	50,0	4,0	41430	48953	48974	48995
4,5	9,5	63,0	4,5	41434	48954	48975	48996
5,0	10,0	63,0	5,0	41438	48955	48976	48997
6,0	12,0	63,0	6,0	41442	48956	48977	48998
7,0	12,0	63,0	8,0	41446	48957	48978	48999
8,0	12,0	63,0	8,0	41450	48958	48979	49000
9,0	14,0	75,0	9,0	41454	48959	48980	49001
10,0	14,0	75,0	10,0	41458	48960	48981	49002
11,0	14,0	75,0	12,0	41462	48961	48982	49003
12,0	16,0	75,0	12,0	41466	48962	48983	49004

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL & METRIC 4 Flute High Shear



TOLERANCES (inch)

<1/8 DIAMETER


DC = +0.000/-0.001

DCON = h₆

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h₆

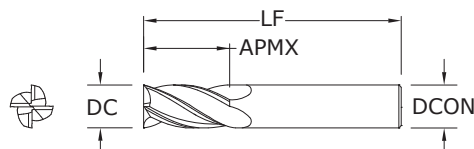

54
FRACTIONAL SERIES

inch				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-C (TiCN)
1/16	3/16	1-1/2	1/8	35473	35500
3/32	3/8	1-1/2	1/8	35475	35501
1/8	7/16	1-1/2	1/8	35477	35502
5/32	9/16	2	3/16	35478	35503
3/16	9/16	2	3/16	35479	35504
7/32	5/8	2-1/2	1/4	35480	35505
1/4	3/4	2-1/2	1/4	35481	35506
9/32	3/4	2-1/2	5/16	35482	35507
5/16	13/16	2-1/2	5/16	35483	35508
3/8	7/8	2-1/2	3/8	35485	35509
7/16	1	2-3/4	7/16	35487	35510
1/2	1	3	1/2	35489	35511
9/16	1-1/8	3-1/2	9/16	35491	35512
5/8	1-1/4	3-1/2	5/8	35493	35513
3/4	1-1/2	4	3/4	35495	35514
1	1-1/2	4	1	35497	35515

NON-FERROUS

For patent
information visit
www.ksptpatents.com

TOLERANCES (mm)

<3 DIAMETER


DC = +0,0000/-0,0254

DCON = h₆

≥3 DIAMETER

DC = +0,0000/-0,0508

DCON = h₆

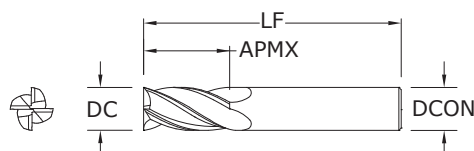


54M
METRIC SERIES

mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-C (TiCN)
3,0	8,0	38,0	3,0	45477	45478
3,5	10,0	57,0	6,0	45479	45480
4,0	11,0	57,0	6,0	45481	45482
4,5	11,0	57,0	6,0	45483	45484
5,0	13,0	57,0	6,0	45485	45486
6,0	13,0	57,0	6,0	45487	45488
8,0	19,0	63,0	8,0	45489	45490
10,0	22,0	72,0	10,0	45491	45492
12,0	26,0	83,0	12,0	45493	45494
14,0	26,0	83,0	14,0	45495	45496
16,0	32,0	92,0	16,0	45497	45498
20,0	38,0	104,0	20,0	45499	45500

NON-FERROUS


For patent
information visit
www.ksptpatents.com

Single End Roughers (Coarse Pitch)



61

FRACTIONAL SERIES

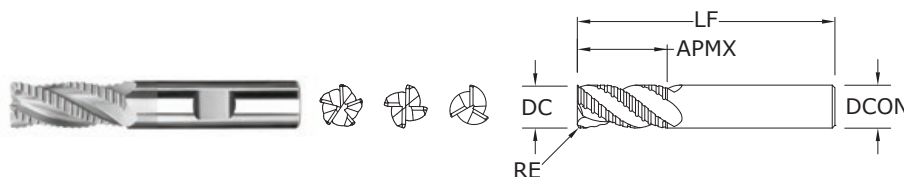

TOLERANCES (inch)

DC = +0.0000/-0.0040

DCON = h_6

RE = +0.0050/-0.0050


STEELS

CAST IRON

For patent
information visit
www.ksptpatents.com

inch						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
*1/4	3/4	2-1/2	1/4	.045	3	36107	36106	36110
*5/16	3/4	2-1/2	5/16	.045	3	36109	36108	36111
3/8	7/8	2-1/2	3/8	.060	3	36113	36112	36114
1/2	1	3	1/2	.060	4	36117	36116	36118
5/8	1-1/4	3-1/2	5/8	.060	4	36121	36120	36122
3/4	1-5/8	4	3/4	.060	4	36125	36124	36126
1	1-3/4	4	1	.060	5	36129	36128	36130

*Without Flat



61M

METRIC SERIES



TOLERANCES (mm)

DC = +0,000 / -0,100

DCON = h_6

RE = +0,127/-0,127

STEELS

CAST IRON

For patent
information visit
www.ksptpatents.com

mm						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
6,0	19,0	63,0	6,0	1,14	3	46107	46106	46110
8,0	19,0	63,0	8,0	1,14	3	46109	46108	46111
10,0	22,0	72,0	10,0	1,52	3	46113	46112	46114
12,0	26,0	83,0	12,0	1,52	4	46117	46116	46118
16,0	32,0	92,0	16,0	1,52	4	46121	46120	46122
20,0	38,0	104,0	20,0	1,52	4	46129	46128	46132
25,0	44,0	104,0	25,0	1,52	5	46131	46130	46133

Single End Roughers (Fine Pitch)




TOLERANCES (inch)

DC = +0.0000/-0.0040

DCON = h_6

RE = +0.0050/-0.0050

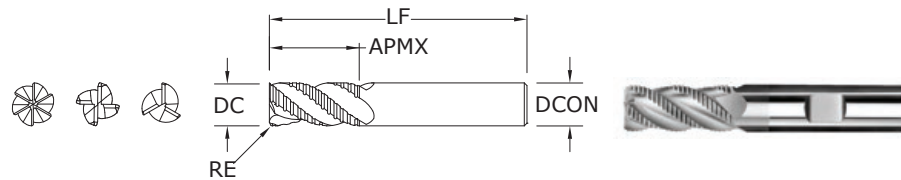
62
FRACTIONAL SERIES


inch						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
*1/4	3/4	2-1/2	1/4	.045	3	36207	36206	36210
*5/16	3/4	2-1/2	5/16	.045	3	36209	36208	36211
3/8	7/8	2-1/2	3/8	.060	3	36213	36212	36214
1/2	1	3	1/2	.060	4	36217	36216	36218
5/8	1-1/4	3-1/2	5/8	.060	4	36221	36220	36222
3/4	1-5/8	4	3/4	.060	4	36225	36224	36226
1	1-3/4	4	1	.060	6	36229	36228	36230

*Without Flat

STAINLESS STEELS

HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com




TOLERANCES (mm)

DC = +0,000 / -0,100

DCON = h_6

RE = +0,127/-0,127

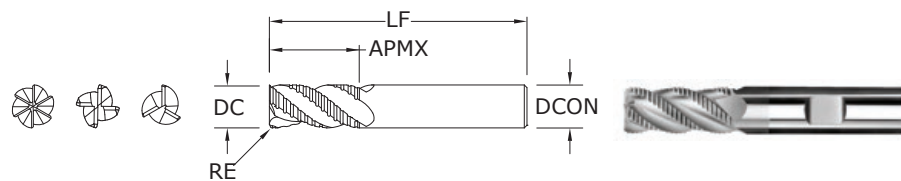
62M
METRIC SERIES

mm						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
6,0	19,0	63,0	6,0	1,14	3	46207	46206	46210
8,0	19,0	63,0	8,0	1,14	3	46209	46208	46211
10,0	22,0	72,0	10,0	1,52	3	46213	46212	46214
12,0	26,0	83,0	12,0	1,52	4	46217	46216	46218
16,0	32,0	92,0	16,0	1,52	4	46221	46220	46222
20,0	38,0	104,0	20,0	1,52	4	46229	46228	46232
25,0	44,0	104,0	25,0	1,52	5	46231	46230	46233


STAINLESS STEELS

HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

FRACTIONAL

End Mill Sets

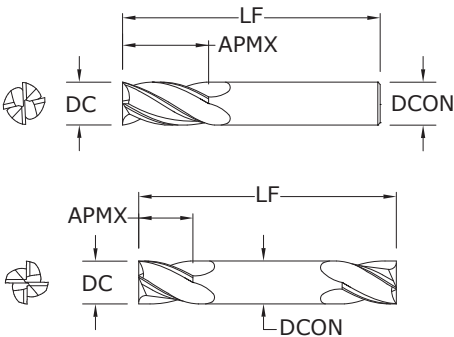

Pictured:
Series 1 4 Flute
Single End Square
Endmill Set

CUTTING DIAMETER DC	SINGLE END LENGTH OF CUT APMX	DOUBLE END LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON
1/8	1/2	1/4	1-1/2	1/8
3/16	5/8	3/8	2	3/16
1/4	3/4	1/2	2-1/2	1/4
5/16	13/16	1/2	2-1/2	5/16
3/8	1	9/16	2-1/2	3/8
1/2	1	5/8	3	1/2

Square End


FRACTIONAL SERIES



For patent
information visit
www.ksptpatents.com

DESCRIPTION	EDP NO.			
	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
Series 1 – 4 Flute, Single End	30189	39189	39089	30030
Series 3 – 2 Flute, Single End	30389	39389	39589	30470
Series 5 – 3 Flute, Single End	30589	39789	30810	30850
Series 14 – 4 Flute, Double End	31489	31481	39641	31190
Series 15 – 2 Flute, Double End	31589	31581	39691	31336

FRACTIONAL End Mill Sets

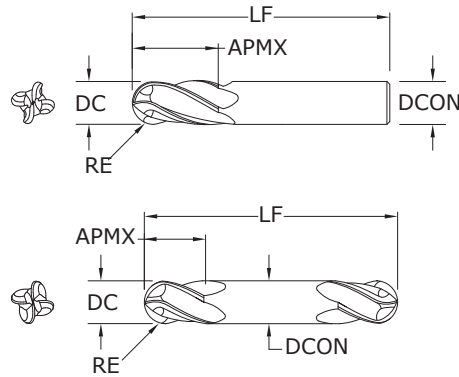

Pictured:
Series 1 4 Flute Single
End Ball Endmill Set

CUTTING DIAMETER DC	SINGLE END LENGTH OF CUT APMX	DOUBLE END LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON
1/8	1/2	1/4	1-1/2	1/8
3/16	5/8	3/8	2	3/16
1/4	3/4	1/2	2-1/2	1/4
5/16	13/16	1/2	2-1/2	5/16
3/8	1	9/16	2-1/2	3/8
1/2	1	5/8	3	1/2

RE = 1/2 Cutting Diameter (DC)

Ball End FRACTIONAL SERIES


DESCRIPTION	EDP NO.			
	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
Series 1B – 4 Flute, Single End	30190	39190	39090	30070
Series 3B – 2 Flute, Single End	30390	39390	39590	30600
Series 5B – 3 Flute, Single End	30590	30900	30944	31169
Series 14B – 4 Flute, Double End	31490	31482	39642	31217
Series 15B – 2 Flute, Double End	31590	31582	39692	31357



For patent
information visit
www.ksptpatents.com

2 Flute: Square & Ball End

4 Flute: Square & Ball End



Diamond 1, 1B, 3, 3B Fractional			Vc (sfm)	DC • in						
	Ae x DC	Ap x DC			1/8	1/4	5/16	3/8	1/2	
GRAPHITE Ultrafine, Superfine	 Profile	≤ 0.25	≤ 1.5	720	RPM	22003	11002	8801	7334	5501
				(576-864)	Fz	0.0009	0.0023	0.0036	0.0043	0.0058
					Feed 2 flutes (ipm)	38.3	50.6	63.4	63.1	63.8
					Feed 4 flutes (ipm)	76.6	101.2	126.7	126.2	127.6
	 Slot	≤ 1	≤ 1	580	RPM	17725	8862	7090	5908	4431
				(464-696)	Fz	0.0075	0.0020	0.0031	0.0038	0.0050
					Feed 2 flutes (ipm)	265.9	35.4	44.0	44.9	44.3
					Feed 4 flutes (ipm)	531.7	70.9	87.9	89.8	88.6
COMPOSITES FRP, CFRP, GRP	 Profile	≤ 0.25	≤ 1.5	385	RPM	11766	5883	4706	3922	2941
				(308-462)	Fz	0.0005	0.0014	0.0022	0.0026	0.0035
					Feed 2 flutes (ipm)	12.2	16.5	20.7	20.4	20.6
					Feed 4 flutes (ipm)	24.5	32.9	41.4	40.8	41.2
	 Slot	≤ 1	≤ 1	350	RPM	10696	5348	4278	3565	2674
				(280-420)	Fz	0.0005	0.0012	0.0019	0.0023	0.0030
					Feed 2 flutes (ipm)	9.6	12.8	16.3	16.4	16.0
					Feed 3 flutes (ipm)	19.3	25.7	32.5	32.8	32.1
PLASTICS Polycarbonate, PVC, Polypropylene	 Profile	≤ 0.25	≤ 1.5	1200	RPM	36672	18336	14669	12224	9168
				(960-1440)	Fz	0.0009	0.0023	0.0036	0.0043	0.0058
					Feed 2 flutes (ipm)	63.8	84.3	105.6	105.1	106.3
					Feed 4 flutes (ipm)	127.6	168.7	211.2	210.3	212.7
	 Slot	≤ 1	≤ 1	960	RPM	29338	14669	11735	9779	7334
				(768-1152)	Fz	0.0008	0.0020	0.0031	0.0038	0.0050
					Feed 2 flutes (ipm)	44.0	58.7	72.8	74.3	73.3
					Feed 3 flutes (ipm)	88.0	117.4	145.5	148.6	146.7

rpm = (Vc x 3.82) / DC


ipm = Fz x number of flutes x rpm

finish cuts typically require reduced feed and cut depths (.02 x D maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

FRACTIONAL

2 Flute: Square, Double, Stub, Long, Ball, Corner Radius
3 Flute: Square, Ball, Tapered
4 Flute: Square, Double, Stub, Ball, Corner Radius
Tapered: Square, Radius



Series 1, 3, 5, 14, 15, 16, 17, 23, 24, 59 Fractional		Hardness	Flutes	Ae x DC	Ap x DC	Vc (sfm)	DC • in																
							1/64	1/32	1/16	1/8	1/4	3/8	1/2	3/4	1								
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc		Profile	2 ≤ 0.50 ≤ 1.5	3 ≤ 0.25 ≤ 1.5	(368-552)	RPM	460	112461	56230	28115	14058	7029	4686	3514	2343	1757					
								Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028						
								Feed (ipm)	6.7	6.7	7.3	8.4	11.2	14.1	14.1	11.2	9.8						
				Slot	2 1 ≤ 1	3 1 ≤ 0.5	4 1 ≤ 0.4	(268-402)	RPM	335	81901	40950	20475	10238	5119	3413	2559	1706	1280				
									Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028					
									Feed (ipm)	4.9	4.9	5.3	6.1	8.2	10.2	10.2	8.2	7.2					
		ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc		Profile	2 ≤ 0.50 ≤ 1.5	3 ≤ 0.25 ≤ 1.5	(268-402)	Feed (ipm)	7.4	7.4	8.0	9.2	12.3	15.4	15.4	12.3	10.7					
									Fz	9.8	9.8	10.6	12.3	16.4	20.5	20.5	16.4	14.3					
									RPM	245	59898	29949	14974	7487	3744	2496	1872	1248	936				
					Slot	2 1 ≤ 1	3 1 ≤ 0.5	4 1 ≤ 0.4	(196-294)	Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021				
										Feed (ipm)	2.4	3.0	2.7	3.0	4.5	5.5	5.6	4.5	3.9				
										RPM	315	77011	38506	19253	9626	4813	3209	2407	1604	1203			
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc		Profile	2 ≤ 0.50 ≤ 1.5	3 ≤ 0.25 ≤ 1.5	(252-378)	Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021						
								Feed (ipm)	3.1	3.9	3.5	3.9	5.8	7.1	7.2	5.8	5.1						
								RPM	230	56230	28115	14058	7029	3514	2343	1757	1171	879					
									Slot	2 1 ≤ 1	3 1 ≤ 0.5	4 1 ≤ 0.4	(184-276)	Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021
														Feed (ipm)	2.2	2.8	2.5	2.8	4.2	5.2	5.3	4.2	3.7
														RPM	370	90458	45229	22614	11307	5654	3769	2827	1885
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F			≤ 275 Bhn or ≤ 28 HRc		Profile	2 ≤ 0.50 ≤ 1.5	3 ≤ 0.25 ≤ 1.5	(296-444)	Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021					
									Feed (ipm)	3.6	4.5	4.1	4.5	6.8	8.3	8.5	6.8	5.9					
									RPM	270	66010	33005	16502	8251	4126	2750	2063	1375	1031				
					Slot	2 1 ≤ 1	3 1 ≤ 0.5	4 1 ≤ 0.4	(216-324)	Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021				
										Feed (ipm)	2.6	3.3	3.0	3.3	5.0	6.1	6.2	5.0	4.3				
										RPM	255	62342	31171	15586	7793	3896	2598	1948	1299	974			
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4 PH, 15-5, 13-4, Custom 450	≤ 275 Bhn or ≤ 28 HRc		Profile	2 ≤ 0.50 ≤ 1.5	3 ≤ 0.25 ≤ 1.5	(204-306)	Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017						
								Feed (ipm)	2.5	2.5	2.5	2.6	3.9	4.7	4.7	3.6	3.3						
								RPM	185	45229	22614	11307	5654	2827	1885	1413	942	707					
				Slot	2 1 ≤ 1	3 1 ≤ 0.5	4 1 ≤ 0.4	(148-222)	Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017					
									Feed (ipm)	1.8	1.8	1.8	1.9	2.8	3.4	3.4	2.6	2.4					
									RPM	335	81901	40950	20475	10238	5119	3413	2559	1706	1280				
		K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc		Profile	2 ≤ 0.50 ≤ 1.5	3 ≤ 0.25 ≤ 1.5	(268-402)	Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028				
										Feed (ipm)	4.9	4.9	5.3	6.1	8.2	10.2	10.2	8.2	7.2				
										RPM	245	59898	29949	14974	7487	3744	2496	1872	1248	936			
						Slot	2 1 ≤ 1	3 1 ≤ 0.5	4 1 ≤ 0.4	(196-294)	Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028			
											Feed (ipm)	3.6	3.6	3.9	4.5	6.0	7.5	7.5	6.0	5.2			
											RPM	880	215142	107571	53786	26893	13446	8964	6723	4482	3362		
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150 Bhn or ≤ 88 HRb		Profile	2 ≤ 0.50 ≤ 1.5	3 ≤ 0.25 ≤ 1.5	(704-1056)	Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056						
								Feed (ipm)	25.8	28.0	26.9	32.3	43.0	53.8	53.8	43.0	37.6						
								RPM	640	156467	78234	39117	19558	9779	6519	4890	3260	2445					
				Slot	2 1 ≤ 1	3 1 ≤ 0.5	(512-768)	Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056						
								Feed (ipm)	18.8	20.3	19.6	23.5	31.3	39.1	39.1	31.3	27.4						
								RPM															

continued on next page


FRACTIONAL

2 Flute: Square, Double, Stub, Long, Ball, Corner Radius

3 Flute: Square, Ball, Tapered

4 Flute: Square, Double, Stub, Ball, Corner Radius

Tapered: Square, Radius



Series
1, 3, 5, 14, 15, 16,
17, 23, 24, 59
Fractional

Hardness

Flutes

Ae x DC

Ap x DC

Vc
(sfm)

DC • in

N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRC	Profile		2	≤ 0.50	≤ 1.5	(388-582)	RPM	485	118573	59286	29643	14822	7411	4941	3705	2470	1853	
										Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	
										Feed (ipm)	7.1	7.1	7.7	8.9	11.9	14.8	14.8	11.9	10.4	
										10.7	10.7	11.6	13.3	17.8	22.2	22.2	17.8	15.6		
			Slot		2	1	≤ 1	(280-420)	RPM	350	85568	42784	21392	10696	5348	3565	2674	1783	1337	
										Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	
										Feed (ipm)	5.1	5.1	5.6	6.4	8.6	10.7	10.7	8.6	7.5	
										7.7	7.7	8.3	9.6	12.8	16.0	16.0	12.8	11.2		
			Slot		2	1	≤ 0.5	(280-420)	RPM	485	85568	42784	21392	10696	5348	3565	2674	1783	1337	
										Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	
										Feed (ipm)	5.1	5.1	5.6	6.4	8.6	10.7	10.7	8.6	7.5	
										7.7	7.7	8.3	9.6	12.8	16.0	16.0	12.8	11.2		
PLASTICS Polycarbonate, PVC, Polypropylene	≤ 140 Bhn or ≤ 3 HRC	Profile		2	≤ 0.50	≤ 1.5	(704-1056)	RPM	880	215142	107571	53786	26893	13446	8964	6723	4482	3362		
									Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056		
									Feed (ipm)	25.8	28.0	26.9	32.3	43.0	53.8	53.8	43.0	37.6		
									38.7	42.0	40.3	48.4	64.5	80.7	80.7	64.5	56.5			
		Slot		2	1	≤ 1	(512-768)	RPM	640	156467	78234	39117	19558	9779	6519	4890	3260	2445		
									Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056		
									Feed (ipm)	18.8	20.3	19.6	23.5	31.3	39.1	39.1	31.3	27.4		
									28.2	30.5	29.3	35.2	46.9	58.7	58.7	46.9	41.1			
		GRAPHITE	≤ 140 Bhn or ≤ 3 HRC	Profile		2	≤ 0.50	≤ 1.5	(528-792)	RPM	660	161357	80678	40339	20170	10085	6723	5042	3362	2521
											Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056
											Feed (ipm)	19.4	21.0	20.2	24.2	32.3	40.3	40.3	32.3	28.2
											29.0	31.5	30.3	36.3	48.4	60.5	60.5	48.4	42.4	
Slot				2	1	≤ 1	(384-576)	RPM	480	117350	58675	29338	14669	7334	4890	3667	2445	1834		
									Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056		
									Feed (ipm)	14.1	15.3	14.7	17.6	23.5	29.3	29.3	23.5	20.5		
									21.1	22.9	22.0	26.4	35.2	44.0	44.0	35.2	30.8			
HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, 718, Incoloy 800, Monel 400,Rene, Waspalloy	≤ 300 Bhn or ≤ 32 HRC			Profile		2	≤ 0.50	≤ 1.5	(52-78)	RPM	65	15891	7946	3973	1986	993	662	497	331	248
											Fz	0.00002	0.00003	0.00006	0.0002	0.0004	0.0008	0.0010	0.0012	0.0014
											Feed (ipm)	0.6	0.5	0.5	0.7	0.7	1.1	1.0	0.8	0.7
											1.0	0.7	0.7	1.1	1.0	1.6	1.5	1.2	1.0	
		Slot		2	1	≤ 1	(36-54)	RPM	45	11002	5501	2750	1375	688	458	344	229	172		
									Fz	0.00002	0.00003	0.00006	0.0002	0.0004	0.0008	0.0010	0.0012	0.0014		
									Feed (ipm)	0.4	0.3	0.3	0.5	0.5	0.7	0.7	0.6	0.5		
									0.7	0.5	0.5	0.7	0.7	1.1	1.0	0.8	0.7			
		TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10V2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	≤ 350 Bhn or ≤ 38 HRC	Profile		2	≤ 0.50	≤ 1.5	(144-216)	RPM	180	44006	22003	11002	5501	2750	1834	1375	917	688
											Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017
											Feed (ipm)	1.8	1.8	1.8	2.2	2.8	3.3	3.3	2.6	2.3
											2.6	2.6	2.6	3.3	4.1	5.0	5.0	3.9	3.5	
Slot				2	1	≤ 1	(104-156)	RPM	130	31782	15891	7946	3973	1986	1324	993	662	497		
									Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017		
									Feed (ipm)	1.3	1.3	1.3	1.6	2.0	2.4	2.4	1.9	1.7		
									1.9	1.9	1.9	2.4	3.0	3.6	3.6	2.8	2.5			

Bhn (Brinell) HRC (Rockwell C) HRB (Rockwell B)

rpm = (Vc x 3.82) / DC

ipm = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed
for tapered end mills, base the speed on the largest diameter contacting
the workpiece and the feed on the smallest diameter

limit cut depths of long and extra long flute mills to .05 x DC when slotting
or profiling


reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)

2 Flute: High Shear

4 Flute: High Shear



Series 52, 54 Fractional		Hardness	Flutes	Ae x DC		Ap x DC	Vc (sfm)	DC • in									
								1/8	1/4	3/8	1/2	3/4	1				
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	≤ 150 Bhn or ≤ 88 HRb	Profile 					1360	RPM	41562	20781	13854	10390	6927	5195			
						(1088-1632)	Fz	0.00069	0.0018	0.0034	0.0046	0.0055	0.0064				
							Feed (ipm)	57.4	74.8	94.2	95.6	76.2	66.5				
			2 ≤ 0.3 ≤ 1.5				114.7	149.6	188.4	191.2	152.4	133.0					
		4 ≤ 0.3 ≤ 1.5				1090	RPM	33310	16655	11103	8328	5552	4164				
		Slot 					Fz	0.00063	0.0017	0.0032	0.0042	0.0050	0.0059				
			2 1 ≤ 1			(872-1308)	Feed (ipm)	42.0	56.6	71.1	70.0	55.5	49.1				
			4 1 ≤ 0.25				83.9	113.3	142.1	139.9	111.0	98.3					
			ALUMINUM DIE CAST ALLOYS (HIGH SILICON) A-390, A-392, B-390	≤ 125 Bhn or ≤ 77 HRb	Profile 					510	RPM	15586	7793	5195	3896	2598	1948
						(408-612)	Fz	0.00069	0.0018	0.0034	0.0046	0.0055	0.0064				
							Feed (ipm)	21.5	28.1	35.3	35.8	28.6	24.9				
		2 ≤ 0.3 ≤ 1.5					43.0	56.1	70.7	71.7	57.1	49.9					
	4 ≤ 0.3 ≤ 1.5					410	RPM	12530	6265	4177	3132	2088	1566				
	Slot 					Fz	0.00063	0.0017	0.0032	0.0042	0.0050	0.0059					
		2 1 ≤ 1			(328-492)	Feed (ipm)	15.8	21.3	26.7	26.3	20.9	18.5					
		4 1 ≤ 0.25				31.6	42.6	53.5	52.6	41.8	37.0						
		COPPER ALLOYS Aluminum Bronze, Muntz Brass, Naval, Brass, Red Brass			≤ 140 Bhn or ≤ 3 HRc	Profile 					590	RPM	18030	9015	6010	4508	3005
							(472-708)	Fz	0.00039	0.0010	0.0020	0.0026	0.0031	0.0037			
								Feed (ipm)	14.1	18.0	24.0	23.4	18.6	16.7			
	2 ≤ 0.3 ≤ 1.5							28.1	36.1	48.1	46.9	37.3	33.4				
	4 ≤ 0.3 ≤ 1.5					475	RPM	14516	7258	4839	3629	2419	1815				
	Slot 						Fz	0.00036	0.0010	0.0018	0.0024	0.0029	0.0034				
			2 1 ≤ 1			(380-570)	Feed (ipm)	10.5	14.5	17.4	17.4	14.0	12.3				
			4 1 ≤ 0.25				20.9	29.0	34.8	34.8	28.1	24.7					
COPPER ALLOYS Beryllium Copper, C110, Manganese Bronze, Tin Bronze			≤ 200 Bhn or ≤ 23 HRc	Profile 						235	RPM	7182	3591	2394	1795	1197	898
						(188-282)	Fz	0.00039	0.0010	0.0020	0.0026	0.0031	0.0037				
							Feed (ipm)	5.6	7.2	9.6	9.3	7.4	6.6				
	2 ≤ 0.3 ≤ 1.5						11.2	14.4	19.2	18.7	14.8	13.3					
	4 ≤ 0.3 ≤ 1.5				190	RPM	5806	2903	1935	1452	968	726					
	Slot 					Fz	0.00036	0.0010	0.0018	0.0024	0.0029	0.0034					
		2 1 ≤ 1			(152-228)	Feed (ipm)	4.2	5.8	7.0	7.0	5.6	4.9					
		4 1 ≤ 0.25				8.4	11.6	13.9	13.9	11.2	9.9						
		PLASTICS ABS, Polycarbonate, PVC, Polypropylene			Profile 					1600	RPM	48896	24448	16299	12224	8149	6112
						(1280-1920)	Fz	0.00110	0.0030	0.0056	0.0074	0.0089	0.0100				
							Feed (ipm)	107.6	146.7	182.5	180.9	145.1	122.2				
	2 ≤ 0.3 ≤ 1.5						215.1	293.4	365.1	361.8	290.1	244.5					
4 ≤ 0.3 ≤ 1.5					1280	RPM	39117	19558	13039	9779	6519	4890					
Slot 						Fz	0.00100	0.0027	0.0051	0.0068	0.0082	0.0095					
	2 1 ≤ 1				(1024-1536)	Feed (ipm)	78.2	105.6	133.0	133.0	106.9	92.9					
	4 1 ≤ 0.25					156.5	211.2	266.0	266.0	213.8	185.8						
	PLASTICS Fiberglass, Glass Filled				Profile 					720	RPM	22003	11002	7334	5501	3667	2750
						(576-864)	Fz	0.00082	0.0022	0.0041	0.0055	0.0065	0.0076				
							Feed (ipm)	36.1	48.4	60.1	60.5	47.7	41.8				
2 ≤ 0.3 ≤ 1.5							72.2	96.8	120.3	121.0	95.3	83.6					
4 ≤ 0.3 ≤ 1.5					575	RPM	17572	8786	5857	4393	2929	2197					
Slot 						Fz	0.00075	0.0020	0.0037	0.0050	0.0060	0.0070					
		2 1 ≤ 1			(460-690)	Feed (ipm)	26.4	35.1	43.3	43.9	35.1	30.8					
		4 1 ≤ 0.25				52.7	70.3	86.7	87.9	70.3	61.5						

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 3.82) / DC


ipm = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Single End Roughers (Coarse Pitch)



Series 61 Fractional	Hardness			Vc (sfm)	DC • in						
		Ae x DC	Ap x DC		1/4	3/8	1/2	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	 Profile ≤ 0.5 ≤ 1.5	≤ 175 Bhn or ≤ 7 HRc	(400-600)	500	RPM	7640	5093	3820	2547	1910
					Fz	0.0006	0.0011	0.0014	0.0017	0.0020	
					Feed (ipm)	13.8	16.8	21.4	17.3	19.1	
		 Slot 1 ≤ 1	400	RPM	6112	4075	3056	2037	1528		
				Fz	0.0006	0.0011	0.0014	0.0017	0.0020		
				Feed (ipm)	11.0	13.4	17.1	13.9	15.3		
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	 Profile ≤ 0.5 ≤ 1.5	≤ 275 Bhn or ≤ 28 HRc	(292-438)	365	RPM	5577	3718	2789	1859	1394
					Fz	0.0004	0.0008	0.0011	0.0013	0.0015	
					Feed (ipm)	6.7	8.9	12.3	9.7	10.5	
		 Slot 1 ≤ 1	295	RPM	4508	3005	2254	1503	1127		
				Fz	0.0004	0.0008	0.0011	0.0013	0.0015		
				Feed (ipm)	5.4	7.2	9.9	7.8	8.5		
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	 Profile ≤ 0.5 ≤ 1.5	≤ 250 Bhn or ≤ 24 HRc	(276-414)	345	RPM	5272	3514	2636	1757	1318
					Fz	0.0006	0.0009	0.0015	0.0018	0.0021	
					Feed (ipm)	9.5	9.5	15.8	12.7	13.8	
		 Slot 1 ≤ 1	275	RPM	4202	2801	2101	1401	1051		
				Fz	0.0006	0.0009	0.0015	0.0018	0.0021		
				Feed (ipm)	7.6	7.6	12.6	10.1	11.0		
K	CAST IRONS Gray, Malleable, Ductile	 Profile ≤ 0.5 ≤ 1.5	≤ 220 Bhn or ≤ 19 HRc	(292-438)	365	RPM	5577	3718	2789	1859	1394
					Fz	0.0008	0.0015	0.0020	0.0024	0.0028	
					Feed (ipm)	13.4	16.7	22.3	17.8	19.5	
		 Slot 1 ≤ 1	295	RPM	4508	3005	2254	1503	1127		
				Fz	0.0008	0.0015	0.0020	0.0024	0.0028		
				Feed (ipm)	10.8	13.5	18.0	14.4	15.8		

Bhn (Brinell) HRc (Rockwell C)


rpm = (Vc x 3.82) / DC

ipm = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Single End Roughers (Fine Pitch)



Series 62 Fractional	Hardness		Ae x DC	Ap x DC	Vc (sfm)		DC • in							
							1/4	3/8	1/2	3/4	1			
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc 	≤ 0.5	≤ 1.5	405	RPM	6188	4126	3094	2063	1547			
					(324-486)	Fz	0.0006	0.0011	0.0015	0.0019	0.0021			
						Feed (ipm)	11.1	13.6	18.6	15.7	19.5			
					Slot 	1	≤ 1	325	RPM	4966	3311	2483	1655	1242
								(260-390)	Fz	0.0006	0.0011	0.0015	0.0019	0.0021
					Feed (ipm)	8.9	10.9		14.9	12.6	15.6			
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4PH, 15-5PH, 13-4PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc 	≤ 0.5	≤ 1.5	280	RPM	4278	2852	2139	1426	1070			
					(224-336)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017			
						Feed (ipm)	6.4	7.7	10.3	8.6	10.9			
					Slot 	1	≤ 1	225	RPM	3438	2292	1719	1146	860
								(180-270)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017
					Feed (ipm)	5.2	6.2		8.3	6.9	8.8			
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspalloy	≤ 300 Bhn or ≤ 32 HRc 	≤ 0.5	≤ 1.5	70	RPM	1070	713	535	357	267			
					(56-84)	Fz	0.0004	0.0008	0.0010	0.0013	0.0014			
						Feed (ipm)	1.3	1.7	2.1	1.9	2.2			
					Slot 	1	≤ 1	56	RPM	856	570	428	285	214
								(45-67)	Fz	0.0004	0.0008	0.0010	0.0013	0.0014
					Feed (ipm)	1.0	1.4		1.7	1.5	1.8			
	TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10V2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	≤ 350 Bhn or ≤ 38 HRc 	≤ 0.5	≤ 1.5	155	RPM	2368	1579	1184	789	592			
					(124-186)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017			
						Feed (ipm)	3.6	4.3	5.7	4.7	6.0			
					Slot 	1	≤ 1	195	RPM	2980	1986	1490	993	745
								(156-234)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017
					Feed (ipm)	4.5	5.4		7.2	6.0	7.6			

Bhn (Brinell) HRc (Rockwell C)


rpm = (Vc x 3.82) / DC

ipm = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

2 Flute: Square, Double, Stub, Long Reach, Ball
3 Flute: Square, Long Reach, Ball
4 Flute: Square, Double, Stub, Long Reach, Ball, Corner Radius





continued on next page

2 Flute: Square, Double, Stub, Long Reach, Ball

3 Flute: Square, Long Reach, Ball


4 Flute: Square, Double, Stub, Long Reach, Ball, Corner Radius



Series 1M, 3M, 5M, 14M, 15M, 16M, 17M, 59M Metric								DC • mm									
	Hardness	Flutes	Ae x DC	Ap x DC	Vc (m/min)												
						0.4	0.75	1.5	3	6	10	12	20	25			
ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150 Bhn or ≤ 88 HRb	 Profile	2	≤ 0.50	≤ 1.5	268	RPM	213272	113745	56872	28436	14218	8531	7109	4265	3412	
						(215-322)	Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140	
							Feed (mm/min)	640	728	682	796	1081	1365	1365	1092	955	
		 Slot	3	≤ 0.25	≤ 1.5	195	RPM	155107	82724	41362	20681	10340	6204	5170	3102	2482	
						(156-234)	Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140	
							Feed (mm/min)	465	529	496	579	786	993	993	794	695	
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	 Profile	2	≤ 0.50	≤ 1.5	148	RPM	117542	62689	31344	15672	7836	4702	3918	2351	1881
							(118-177)	Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070
								Feed (mm/min)	188	188	194	219	298	376	376	301	263
			 Slot	3	≤ 0.25	≤ 1.5	195	RPM	84824	45239	22620	11310	5655	3393	2827	1696	1357
							(156-234)	Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070
								Feed (mm/min)	136	136	140	158	215	271	271	217	190
PLASTICS Polycarbonate, PVC, Polypropylene		 Profile	2	≤ 0.50	≤ 1.5	268	RPM	213272	113745	56872	28436	14218	8531	7109	4265	3412	
						(215-322)	Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140	
							Feed (mm/min)	640	728	682	796	1081	1365	1365	1092	955	
		 Slot	3	≤ 0.25	≤ 1.5	195	RPM	155107	82724	41362	20681	10340	6204	5170	3102	2482	
						(156-234)	Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140	
							Feed (mm/min)	465	529	496	579	786	993	993	794	695	
	GRAPHITE		 Profile	2	≤ 0.50	≤ 1.5	201	RPM	159954	85309	42654	21327	10664	6398	5332	3199	2559
							(161-241)	Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
								Feed (mm/min)	480	546	512	597	810	1024	1024	819	717
			 Slot	3	≤ 0.25	≤ 1.5	146	RPM	116330	62043	31021	15511	7755	4653	3878	2327	1861
							(117-176)	Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
								Feed (mm/min)	349	397	372	434	589	745	745	596	521
HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, 718, Incoloy 800, Monel 400, Rene, Waspalloy	≤ 300 Bhn or ≤ 32 HRc	 Profile	2	≤ 0.50	≤ 1.5	20	RPM	15753	8402	4201	2100	1050	630	525	315	252	
						(16-24)	Fz	0.0005	0.0007	0.0014	0.004	0.010	0.021	0.024	0.032	0.035	
							Feed (mm/min)	16	12	12	17	21	26	25	20	18	
		 Slot	3	≤ 0.25	≤ 1.5	14	RPM	10906	5816	2908	1454	727	436	364	218	174	
						(11-16)	Fz	0.0005	0.0007	0.0014	0.004	0.010	0.021	0.024	0.032	0.035	
							Feed (mm/min)	11	8	8	12	15	18	17	14	12	
	TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10V2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	≤ 350 Bhn or ≤ 38 HRc	 Profile	2	≤ 0.50	≤ 1.5	55	RPM	43624	23266	11633	5816	2908	1745	1454	872	698
							(44-66)	Fz	0.0005	0.0010	0.0019	0.004	0.012	0.024	0.029	0.037	0.042
								Feed (mm/min)	44	47	44	47	70	84	84	65	59
			 Slot	3	≤ 0.25	≤ 1.5	40	RPM	31506	16803	8402	4201	2100	1260	1050	630	504
							(32-48)	Fz	0.0005	0.0010	0.0019	0.004	0.012	0.024	0.029	0.037	0.042
								Feed (mm/min)	32	34	32	34	50	60	61	47	42

2 Flute: High Shear

4 Flute: High Shear




Series 52M, 54M Metric	Hardness	Flutes	Ae x DC		Ap x DC	Vc (m/min)	DC • mm							
							3	6	10	12	20	25		
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	≤ 150 Bhn or ≤ 88 HRb	Profile 				415	RPM	43947	21973	13184	10987	6592	5274	
							Fz	0.0166	0.043	0.091	0.110	0.147	0.160	
			2	≤ 0.3	≤ 1.5	(332-497)	Feed (mm/min)	1459	1890	2399	2417	1938	1688	
			4	≤ 0.3	≤ 1.5			2918	3779	4799	4834	3876	3375	
							Fz	0.0151	0.041	0.085	0.101	0.133	0.148	
			2	1	≤ 1	(266-399)	Feed (mm/min)	1064	1444	1796	1779	1405	1251	
							2127	2888	3593	3557	2811	2502		
		Slot 				332	RPM	35222	17611	10567	8806	5283	4227	
							Fz	0.0151	0.041	0.085	0.101	0.133	0.148	
			2	1	≤ 1	(266-399)	Feed (mm/min)	1064	1444	1796	1779	1405	1251	
			4	1	≤ 0.25			2127	2888	3593	3557	2811	2502	
							Fz	0.0151	0.041	0.085	0.101	0.133	0.148	
	2		1	≤ 1	(100-150)	Feed (mm/min)	400	543	676	669	529	471		
	ALUMINUM DIE CAST ALLOYS (HIGH SILICON) A-390, A-392, B-390	≤ 125 Bhn or ≤ 77 HRb	Profile 				155	RPM	16480	8240	4944	4120	2472	1978
								Fz	0.0166	0.043	0.091	0.110	0.147	0.160
				2	≤ 0.3	≤ 1.5	(124-187)	Feed (mm/min)	547	709	900	906	727	633
				4	≤ 0.3	≤ 1.5			1094	1417	1800	1813	1454	1266
								Fz	0.0151	0.041	0.085	0.101	0.133	0.148
				2	1	≤ 1	(100-150)	Feed (mm/min)	400	543	676	669	529	471
								800	1086	1351	1338	1057	941	
			Slot 				125	RPM	13249	6624	3975	3312	1987	1590
								Fz	0.0151	0.041	0.085	0.101	0.133	0.148
				2	1	≤ 1	(100-150)	Feed (mm/min)	400	543	676	669	529	471
				4	1	≤ 0.25			800	1086	1351	1338	1057	941
							Fz	0.0151	0.041	0.085	0.101	0.133	0.148	
2	1	≤ 1		(100-150)	Feed (mm/min)	400	543	676	669	529	471			
COPPER ALLOYS Aluminum Bronze, Muntz Brass, Naval, Brass, Red Brass	≤ 140 Bhn or ≤ 3 HRc	Profile 				180	RPM	19065	9533	5720	4766	2860	2288	
							Fz	0.0094	0.024	0.053	0.062	0.083	0.093	
			2	≤ 0.3	≤ 1.5	(144-216)	Feed (mm/min)	358	458	606	591	475	426	
			4	≤ 0.3	≤ 1.5			717	915	1213	1182	949	851	
							Fz	0.0086	0.024	0.048	0.058	0.077	0.085	
			2	1	≤ 1	(116-174)	Feed (mm/min)	264	368	442	445	355	313	
							528	737	884	890	709	626		
		Slot 				145	RPM	15349	7675	4605	3837	2302	1842	
							Fz	0.0086	0.024	0.048	0.058	0.077	0.085	
			2	1	≤ 1	(116-174)	Feed (mm/min)	264	368	442	445	355	313	
			4	1	≤ 0.25			528	737	884	890	709	626	
							Fz	0.0086	0.024	0.048	0.058	0.077	0.085	
2	1		≤ 1	(116-174)	Feed (mm/min)	264	368	442	445	355	313			
COPPER ALLOYS Beryllium Copper, C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc	Profile 				72	RPM	7594	3797	2278	1898	1139	911	
							Fz	0.0094	0.024	0.053	0.062	0.083	0.093	
			2	≤ 0.3	≤ 1.5	(57-86)	Feed (mm/min)	143	182	241	235	189	169	
			4	≤ 0.3	≤ 1.5			286	365	483	471	378	339	
							Fz	0.0086	0.024	0.048	0.058	0.077	0.085	
			2	1	≤ 1	(46-69)	Feed (mm/min)	106	147	177	178	142	125	
							211	295	354	356	284	250		

continued on next page

2 Flute: High Shear

4 Flute: High Shear



Series 52M, 54M Metric	Hardness	Flutes			Vc (m/min)	DC • mm							
			Ae x DC	Ap x DC		3	6	10	12	20	25		
N	PLASTICS ABS, Polycarbonate, PVC, Polypropylene				488	RPM	51702	25851	15511	12926	7755	6204	
					(390-585)	Fz	0.0264	0.072	0.149	0.178	0.237	0.250	
			2	≤ 0.3		≤ 1.5	Feed (mm/min)	2730	3723	4622	4601	3676	3102
			4	≤ 0.3		≤ 1.5		5460	7445	9244	9203	7352	6204
					390	RPM	41362	20681	12409	10340	6204	4963	
					(312-468)	Fz	0.0240	0.065	0.136	0.163	0.210	0.238	
			2	1		≤ 1	Feed (mm/min)	1985	2689	3375	3371	2606	2363
			4	1		≤ 0.25		3971	5377	6750	6742	5212	4725
	PLASTICS Fiberglass, Glass Filled				219	RPM	23266	11633	6980	5816	3490	2792	
					(176-263)	Fz	0.0197	0.053	0.109	0.132	0.173	0.190	
			2	≤ 0.3		≤ 1.5	Feed (mm/min)	917	1233	1522	1536	1208	1061
			4	≤ 0.3		≤ 1.5		1833	2466	3043	3071	2415	2122
					175	RPM	18580	9290	5574	4645	2787	2230	
					(140-210)	Fz	0.0180	0.048	0.101	0.120	0.160	0.175	
			2	1		≤ 1	Feed (mm/min)	669	892	1126	1115	892	780
			4	1		≤ 0.25		1338	1784	2252	2230	1784	1561

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)


mm/min = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

Single End Roughers (Coarse Pitch)



Series 61M	Metric	Hardness			Vc (m/min)	DC • mm						
			Ae x DC	Ap x DC		6	10	12	20	25		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	 Profile	≤ 0.5	≤ 1.5	152	RPM	8078	4847	4039	2424	1939
						(122-183)	Fz	0.014	0.029	0.034	0.045	0.050
						Feed (mm/min)	339	422	549	436	485	
			 Slot	1	≤ 1	122	RPM	6463	3878	3231	1939	1551
						(98-146)	Fz	0.014	0.029	0.034	0.045	0.050
						Feed (mm/min)	271	337	439	349	388	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	 Profile	≤ 0.5	≤ 1.5	111	RPM	5897	3538	2949	1769	1415
						(89-134)	Fz	0.010	0.021	0.026	0.035	0.038
						Feed (mm/min)	177	223	307	248	269	
			 Slot	1	≤ 1	90	RPM	4766	2860	2383	1430	1144
						(72-108)	Fz	0.010	0.021	0.026	0.035	0.038
						Feed (mm/min)	143	180	248	200	217	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc	 Profile	≤ 0.5	≤ 1.5	105	RPM	5574	3344	2787	1672	1338
						(84-126)	Fz	0.014	0.024	0.036	0.048	0.053
						Feed (mm/min)	234	241	401	321	355	
			 Slot	1	≤ 1	84	RPM	4443	2666	2222	1333	1066
						(67-101)	Fz	0.014	0.024	0.036	0.048	0.053
						Feed (mm/min)	187	192	320	256	283	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	 Profile	≤ 0.5	≤ 1.5	111	RPM	5897	3538	2949	1769	1415
						(89-134)	Fz	0.019	0.040	0.048	0.064	0.070
						Feed (mm/min)	336	425	566	453	495	
			 Slot	1	≤ 1	90	RPM	4766	2860	2383	1430	1144
						(72-108)	Fz	0.019	0.040	0.048	0.064	0.070
						Feed (mm/min)	272	343	458	366	400	

Bhn (Brinell) HRc (Rockwell C)


rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Single End Roughers (Fine Pitch)



Series 62M	Metric	Hardness			Vc (m/min)	DC • mm						
			Ae x DC	Ap x DC		6	10	12	20	25		
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRC		≤ 0.5	≤ 1.5	123	RPM	6544	3926	3272	1963	1570
						(99-148)	Fz	0.014	0.029	0.036	0.051	0.053
							Feed (mm/min)	283	345	471	398	495
				1	≤ 1	99	RPM	5251	3151	2626	1575	1260
						(79-119)	Fz	0.014	0.029	0.036	0.051	0.053
							Feed (mm/min)	227	277	378	319	397
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4PH, 15-5PH, 13-4PH, Custom 450	≤ 275 Bhn or ≤ 28 HRC		≤ 0.5	≤ 1.5	85	RPM	4524	2714	2262	1357	1086
						(68-102)	Fz	0.012	0.024	0.029	0.040	0.043
							Feed (mm/min)	163	195	261	217	277
				1	≤ 1	69	RPM	3635	2181	1818	1091	872
						(55-82)	Fz	0.012	0.024	0.029	0.040	0.043
							Feed (mm/min)	131	157	209	174	222
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspalloy	≤ 300 Bhn or ≤ 32 HRC		≤ 0.5	≤ 1.5	21	RPM	1131	679	565	339	271
						(17-26)	Fz	0.010	0.021	0.024	0.035	0.035
							Feed (mm/min)	33	43	54	47	57
				1	≤ 1	17	RPM	905	543	452	271	217
						(14-20)	Fz	0.010	0.021	0.024	0.035	0.035
							Feed (mm/min)	26	35	43	38	46
	TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10V2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	≤ 350 Bhn or ≤ 38 HRC		≤ 0.5	≤ 1.5	47	RPM	2504	1503	1252	751	601
						(38-57)	Fz	0.012	0.024	0.029	0.040	0.043
							Feed (mm/min)	90	108	144	120	153
				1	≤ 1	59	RPM	3151	1890	1575	945	756
						(48-71)	Fz	0.012	0.024	0.029	0.040	0.043
							Feed (mm/min)	113	136	181	151	193

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

General Application Drills



Hole Making

GENERAL APPLICATION DRILLS	SERIES	DESCRIPTION	PAGE	S&F PAGE
2 Flute	101	2 Flute Slow Spiral	336	344
Short Length Self Centering (DIN6539)	108M Plus	2 Flute Short Length DIN 6539	341	346
Straight Flute	106	Straight Flute 140 Point Geometry	348	351
3 Flute with 150 Point Geometry	103	3 Flute 150 Point Geometry	352	356
GENERAL APPLICATION COUNTERSINKS	SERIES	DESCRIPTION	PAGE	S&F PAGE
Combined Drill & Countersink	301	2 Flute Straight Flute Combined Drill and Countersink Fractional	358	361
	301M	2 Flute Straight Flute Combined Drill and Countersink Metric	358	362
Single Flute Countersink	601	Single Flute Fractional	364	365
3 Flute Countersink	603	3 Flute Fractional	367	368
6 Flute Countersink	606	6 Flute Fractional	370	371
GENERAL APPLICATION REAMERS	SERIES	DESCRIPTION	PAGE	S&F PAGE
Straight Flute Accu-Reamer	200	Accu-Reamer	374	376
Straight Flute Reamer	201M	Metric Reamer	378	379

Speed & Feed Recommendations listed after each series

Taladrado

BROCAS DE USO GENERAL	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
2 filos	101	2 filos, espiral de avance lento	336	344
Autocentrante de longitud corta (DIN6539)	108M Plus	2 filos, longitud corta, DIN 6539	341	346
Filo recto	106	Filo recto, geometría de 140 puntos	348	351
3 filos con geometría de 150 puntos	103	3 filos, geometría de 150 puntos	352	356

BROCAS DE USO AVELLANADORES	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
Broca y avellanador combinados	301	2 filos, filo recto, broca y avellanador combinados, fraccional	358	361
	301M	2 filos, filo recto, broca y avellanador combinados, métrico	358	362
Avellanador de filo único	601	Filo único, fraccional	364	365
Avellanador de 3 filos	603	3 filos, fraccional	367	368
Avellanador de 6 filos	606	6 filos, fraccional	370	371

BROCAS DE USO ESCARIADORES	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
Escariador Accu de filo recto	200	Escariador Accu	374	376
Escariador de filo recto	201M	Escariador métrico	378	379

Recomendaciones de velocidades y avances mostradas tras cada serie

Outils de perçage

FORETS UNIVERSELS	SÉRIES	DESCRIPTION	PAGE	S&F PAGE
2 dents	101	2 dents à spirale lente	336	344
Court autocentrant (DIN 6539)	108M Plus	2 dents court DIN 6539	341	346
Denture droite	106	Denture droite à angle de pointe 140°	348	351
3 dents à angle de pointe 150°	103	3 dents à angle de pointe 150°	352	356

FORETS À FRAISER	SÉRIES	DESCRIPTION	PAGE	S&F PAGE
Foret et foret à fraiser combinés	301	2 dents denture droite foret et foret à fraiser combinés (fractionnel)	358	361
	301M	2 dents denture droite foret et foret à fraiser combinés (métrique)	358	362
Foret à fraiser à dent simple	601	Foret à dent simple (fractionnel)	364	365
Foret à fraiser 3 dents	603	3 dents (fractionnel)	367	368
Foret à fraiser 6 dents	606	6 dents (fractionnel)	370	371

FORETS À ALÉSOIRS	SÉRIES	DESCRIPTION	PAGE	S&F PAGE
Alésoir denture droite Accu-Reamer	200	Alésoir Accu-Reamer	374	376
Alésoir denture droite	201M	Alésoir (métrique)	378	379

Recommandations de vitesse et avance indiquées après chaque série



STANDARD-BOHRER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
2 Schneiden	101	2 Schneiden mit kleinem Spanwinkel	336	344
Kurze Bauform Selbstzentrierung (DIN 6539)	108M Plus	2 Schneiden Kurze Bauform DIN 6539	341	346
Gerade Schneiden	106	Gerade Schneiden Spitzengeometrie 140	348	351
3 Schneiden mit Spitzengeometrie 150	103	3 Schneiden Spitzengeometrie 150	352	356

STANDARD-BOHRER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
Senkbohrer	301	Zölliger Senkbohrer mit 2 geraden Schneiden	358	361
	301M	Metrischer Senkbohrer mit 2 geraden Schneiden	358	362
Senker mit 1 Schneide	601	Zölliger Bohrer mit 1 Schneide	364	365
Senkbohrer mit 1 Schneide	603	Zölliger Bohrer mit 3 Schneiden	367	368
Senkbohrer mit 6 Schneiden	606	Zölliger Bohrer mit 6 Schneiden	370	371

STANDARD-BOHRER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
Reibahlen mit gerader Schneide	200	Accu-Reamer	374	376
Reibahle mit gerader Schneide	201M	Metrische Reibahle	378	379

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

2 Flute Drills • Metric: DIN 338

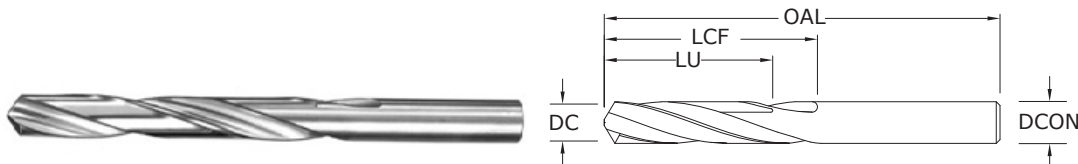

101

FRACTIONAL & METRIC SERIES

Pictured:
Series 101 Drill Set



DECIMAL DC/DCON	METRIC DC/DCON	inch & mm		FLUTE LENGTH LCF	USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL			UNCOATED	TI-NAMITE®-A (AITiN)
0.0135	0,340 mm	#80	3/4	3/16	—	51080	57076
0.0145	0,370 mm	#79	3/4	3/16	—	51079	57077
0.0156	0,400 mm	1/64	3/4	3/16	—	51101	57078
0.0160	0,410 mm	#78	3/4	3/16	—	51078	57079
0.0180	0,460 mm	#77	3/4	3/16	—	51077	57080
0.0200	0,510 mm	#76	7/8	1/4	—	51076	57081
0.0210	0,530 mm	#75	7/8	1/4	—	51075	57082
0.0225	0,570 mm	#74	7/8	1/4	—	51074	57083
0.0240	0,610 mm	#73	7/8	1/4	—	51073	57084
0.0250	0,640 mm	#72	1	5/16	—	51072	57085
0.0260	0,660 mm	#71	1	5/16	—	51071	57086
0.0276	0,700 mm		28,0	9,0	—	61001	68268
0.0280	0,710 mm	#70	1-1/4	1/2	—	51070	57087
0.0292	0,740 mm	#69	1-1/4	1/2	—	51069	57088
0.0310	0,790 mm	#68	1-1/4	1/2	—	51068	57089
0.0312	0,790 mm	1/32	1-1/4	1/2	—	51102	57090
0.0315	0,800 mm		30,0	10,0	—	61003	68269
0.0320	0,810 mm	#67	1-1/4	1/2	—	51067	57091
0.0330	0,840 mm	#66	1-1/4	1/2	—	51066	57092
0.0350	0,890 mm	#65	1-3/8	5/8	1/2	51065	57093
0.0354	0,900 mm		32,0	11,0	8,0	61005	68270
0.0360	0,910 mm	#64	1-3/8	5/8	1/2	51064	57094
0.0370	0,940 mm	#63	1-3/8	5/8	1/2	51063	57095
0.0380	0,970 mm	#62	1-3/8	5/8	1/2	51062	57096
0.0390	0,990 mm	#61	1-3/8	5/8	1/2	51061	57097
0.0394	1,000 mm		34,0	12,0	9,0	61007	68271
0.0400	1,020 mm	#60	1-1/2	3/4	39/64	51060	57098
0.0410	1,040 mm	#59	1-1/2	3/4	39/64	51059	57099
0.0420	1,070 mm	#58	1-1/2	3/4	39/64	51058	57100
0.0430	1,090 mm	#57	1-1/2	3/4	39/64	51057	57101
0.0433	1,000 mm		36,0	14,0	11,0	61052	68294
0.0465	1,180 mm	#56	1-1/2	3/4	39/64	51056	57102
0.0469	1,190 mm	3/64	1-1/2	3/4	39/64	51103	57103
0.0472	1,200 mm		38,0	16,0	12,0	61053	68295
0.0512	1,300 mm		38,0	16,0	12,0	61054	68296
0.0520	1,320 mm	#55	1-1/2	3/4	39/64	51055	57104
0.0550	1,400 mm	#54	1-1/2	3/4	39/64	51054	57105
0.0551	1,400 mm		40,0	18,0	14,0	61055	68297
0.0591	1,500 mm		40,0	18,0	14,0	61009	68272
0.0595	1,510 mm	#53	1-1/2	3/4	39/64	51053	57106
0.0625	1,590 mm	*1/16	1-1/2	3/4	39/64	51104	57107
0.0630	1,600 mm		43,0	20,0	16,0	61056	68298
0.0635	1,610 mm	#52	1-1/2	3/4	39/64	51052	57108
0.0669	1,700 mm		43,0	20,0	17,0	61057	68299

continued on next page

TOLERANCES (inch)

DC = +0.0000/-0.0005

TOLERANCES (mm)

DC = +0.0000/-0.0127

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

2 Flute Drills • Metric: DIN 338

101



FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm		FLUTE LENGTH LCF	USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL			UNCOATED	Ti-NAMITE®-A (AITiN)
0.0670	1,700 mm	#51	1-1/2	3/4	39/64	51051	57109
0.0700	1,780 mm	#50	1-3/4	7/8	45/64	51050	57110
0.0709	1,800 mm		46,0	22,0	17,0	61058	68300
0.0730	1,850 mm	#49	1-3/4	7/8	45/64	51049	57111
0.0748	1,900 mm		46,0	22,0	17,0	61059	68301
0.0760	1,930 mm	#48	1-3/4	7/8	45/64	51048	57112
0.0781	1,980 mm	5/64	1-3/4	7/8	45/64	51105	57113
0.0785	1,990 mm	#47	1-3/4	7/8	45/64	51047	57114
0.0787	2,000 mm		49,0	24,0	19,0	61011	68273
0.0810	2,060 mm	#46	1-3/4	7/8	45/64	51046	57115
0.0820	2,080 mm	#45	1-3/4	7/8	45/64	51045	57116
0.0827	2,100 mm		49,0	24,0	19,0	61060	68302
0.0860	2,180 mm	#44	2	1	51/64	51044	57117
0.0866	2,200 mm		53,0	27,0	21,0	61061	68303
0.0890	2,260 mm	#43	2	1	51/64	51043	57118
0.0906	2,300 mm		53,0	27,0	21,0	61062	68304
0.0935	2,370 mm	#42	2	1	51/64	51042	57119
0.0938	2,380 mm	3/32	2	1	51/64	51106	57120
0.0945	2,400 mm		57,0	30,0	24,0	61063	68305
0.0960	2,440 mm	#41	2	1	51/64	51041	57121
0.0980	2,490 mm	#40	2	1	51/64	51040	57122
0.0984	2,500 mm		57,0	30,0	24,0	61013	68274
0.0995	2,530 mm	#39	2-1/4	1-1/4	1	51039	57123
0.1015	2,580 mm	#38	2-1/4	1-1/4	1	51038	57124
0.1024	2,600 mm		57,0	30,0	24,0	61064	68306
0.1040	2,640 mm	#37	2-1/4	1-1/4	1	51037	57125
0.1063	2,700 mm		61,0	33,0	26,0	61065	68307
0.1065	2,710 mm	#36	2-1/4	1-1/4	1	51036	57126
0.1094	2,780 mm	7/64	2-1/4	1-1/4	1	51107	57127
0.1100	2,790 mm	#35	2-1/4	1-1/4	1	51035	57128
0.1102	2,800 mm		61,0	33,0	26,0	61066	68308
0.1110	2,820 mm	#34	2-1/4	1-1/4	1	51034	57129
0.1130	2,870 mm	#33	2-1/4	1-1/4	1	51033	57130
0.1142	2,900 mm		61,0	33,0	26,0	61067	68309
0.1160	2,950 mm	#32	2-1/4	1-1/4	1	51032	57131
0.1181	3,000 mm		61,0	33,0	26,0	61015	68275
0.1200	3,050 mm	#31	2-1/4	1-1/4	1	51031	57132
0.1220	3,100 mm		65,0	36,0	28,0	61068	68310
0.1250	3,180 mm	*1/8	2-1/4	1-1/4	1	51108	57133
0.1260	3,200 mm		65,0	36,0	28,0	61069	68311
0.1285	3,260 mm	#30	2-1/4	1-1/4	1	51030	57134
0.1299	3,300 mm		65,0	36,0	28,0	61070	68312
0.1339	3,400 mm		70,0	39,0	31,0	61071	68313
0.1360	3,450 mm	#29	2-1/2	1-3/8	1-7/64	51029	57135
0.1378	3,500 mm		70,0	39,0	31,0	61017	68276
0.1405	3,570 mm	#28	2-1/2	1-3/8	1-7/64	51028	57136
0.1406	3,570 mm	9/64	2-1/2	1-3/8	1-7/64	51109	57137
0.1417	3,600 mm		70,0	39,0	31,0	61072	68314
0.1440	3,660 mm	#27	2-1/2	1-3/8	1-7/64	51027	57138
0.1457	3,700 mm		70,0	39,0	31,0	61073	68315
0.1470	3,730 mm	#26	2-1/2	1-3/8	1-7/64	51026	57139
0.1495	3,800 mm	#25	2-1/2	1-3/8	1-7/64	51025	57140
0.1496	3,800 mm		75,0	43,0	34,0	61074	68316
0.1520	3,860 mm	#24	2-1/2	1-3/8	1-7/64	51024	57141

continued on next page


2 Flute Drills • Metric: DIN 338

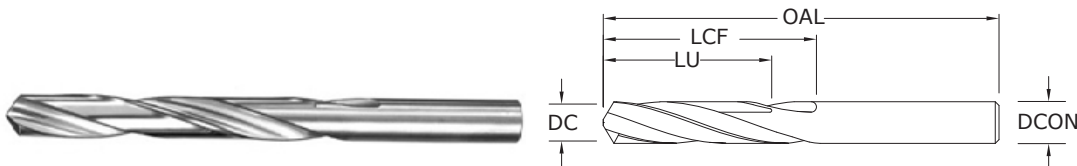

101

FRACTIONAL & METRIC SERIES

Pictured:
Series 101 Drill Set

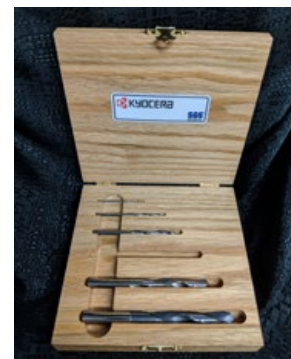

CONTINUED

DECIMAL DC/DCON	METRIC DC/DCON	FRACTIONAL/ LETTER/WIRE DC	inch & mm			EDP NO.	
			OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	TI-NAMITE®-A (AITiN)
0.1535	3,900 mm		75,0	43,0	34,0	61075	68317
0.1540	3,910 mm	#23	2-1/2	1-3/8	1-7/64	51023	57142
0.1562	3,970 mm	5/32	2-1/2	1-3/8	1-7/64	51110	57143
0.1570	3,990 mm	#22	2-1/2	1-3/8	1-7/64	51022	57144
0.1575	4,000 mm		75,0	43,0	34,0	61019	68277
0.1590	4,040 mm	#21	2-1/2	1-3/8	1-7/64	51021	57145
0.1610	4,090 mm	#20	2-1/2	1-3/8	1-7/64	51020	57146
0.1614	4,100 mm		75,0	43,0	34,0	61076	68318
0.1654	4,200 mm		75,0	43,0	34,0	61077	68319
0.1660	4,220 mm	#19	2-3/4	1-5/8	1-19/64	51019	57147
0.1693	4,300 mm		80,0	47,0	37,0	61078	68320
0.1695	4,310 mm	#18	2-3/4	1-5/8	1-19/64	51018	57148
0.1719	4,370 mm	11/64	2-3/4	1-5/8	1-19/64	51111	57149
0.1730	4,390 mm	#17	2-3/4	1-5/8	1-19/64	51017	57150
0.1732	4,400 mm		80,0	47,0	37,0	61079	68321
0.1770	4,500 mm	#16	2-3/4	1-5/8	1-19/64	51016	57151
0.1772	4,500 mm		80,0	47,0	37,0	61021	68278
0.1800	4,570 mm	#15	2-3/4	1-5/8	1-19/64	51015	57152
0.1811	4,600 mm		80,0	47,0	37,0	61080	68322
0.1820	4,620 mm	#14	2-3/4	1-5/8	1-19/64	51014	57153
0.1850	4,700 mm		80,0	47,0	37,0	61081	68323
0.1850	4,700 mm	#13	2-3/4	1-5/8	1-19/64	51013	57154
0.1875	4,760 mm	*3/16	2-3/4	1-5/8	1-19/64	51112	57155
0.1890	4,800 mm		86,0	52,0	41,0	61082	68324
0.1890	4,800 mm	#12	2-3/4	1-5/8	1-19/64	51012	57156
0.1910	4,850 mm	#11	2-3/4	1-5/8	1-19/64	51011	57157
0.1929	4,900 mm		86,0	52,0	41,0	61083	68325
0.1935	4,910 mm	#10	2-3/4	1-5/8	1-19/64	51010	57158
0.1960	4,980 mm	#9	3	1-3/4	1-13/32	51009	57159
0.1969	5,000 mm		86,0	52,0	41,0	61023	68279
0.1990	5,050 mm	#8	3	1-3/4	1-13/32	51008	57160
0.2008	5,010 mm		86,0	52,0	41,0	61084	68326
0.2010	5,110 mm	#7	3	1-3/4	1-13/32	51007	57161
0.2031	5,160 mm	13/64	3	1-3/4	1-13/32	51113	57162
0.2040	5,180 mm	#6	3	1-3/4	1-13/32	51006	57163
0.2047	5,200 mm		86,0	52,0	41,0	61085	68327
0.2055	5,220 mm	#5	3	1-3/4	1-13/32	51005	57164
0.2087	5,300 mm		86,0	52,0	41,0	61086	68328
0.2090	5,310 mm	#4	3	1-3/4	1-13/32	51004	57165
0.2126	5,400 mm		93,0	57,0	45,0	61087	68329
0.2130	5,410 mm	#3	3	1-3/4	1-13/32	51003	57166
0.2165	5,500 mm		93,0	57,0	1-13/32	61025	68280
0.2188	5,560 mm	7/32	3	1-3/4	1-13/32	51114	57167
0.2205	5,600 mm		93,0	57,0	45,0	61088	68330


continued on next page

TOLERANCES (inch)

DC = +0.0000/-0.0005

TOLERANCES (mm)

DC = +0.0000/-0.0127



For patent
information visit
www.ksptpatents.com

2 Flute Drills • Metric: DIN 338

101



FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm		FLUTE LENGTH LCF	USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL			UNCOATED	Ti-NAMITE®-A (AlTiN)
0.2210	5,610 mm	#2	3	1-3/4	1-13/32	51002	57168
0.2244	5,700 mm		93,0	57,0	45,0	61089	68331
0.2280	5,790 mm	#1	3	1-3/4	1-13/32	51001	57169
0.2283	5,800 mm		93,0	57,0	45,0	61090	68332
0.2323	5,900 mm		93,0	57,0	45,0	61091	68333
0.2340	5,940 mm	A	3-1/4	2	1-39/64	51201	57170
0.2344	5,950 mm	15/64	3-1/4	2	1-39/64	51115	57171
0.2362	6,000 mm		93,0	57,0	45,0	61027	68281
0.2380	6,050 mm	B	3-1/4	2	1-39/64	51202	57172
0.2402	6,100 mm		101,0	63,0	50,0	61092	68334
0.2420	6,150 mm	C	3-1/4	2	1-39/64	51203	57173
0.2441	6,200 mm		101,0	63,0	50,0	61093	68335
0.2460	6,250 mm	D	3-1/4	2	1-39/64	51204	57174
0.2480	6,300 mm		101,0	63,0	50,0	61094	68336
0.2500	6,350 mm	*1/4	3-1/4	2	1-39/64	51116	57176
0.2520	6,400 mm		101,0	63,0	50,0	61095	68337
0.2559	6,500 mm		101,0	63,0	50,0	61029	68282
0.2570	6,530 mm	F	3-1/4	2	1-39/64	51206	57177
0.2598	6,600 mm		101,0	63,0	50,0	61096	68338
0.2610	6,630 mm	G	3-1/2	2-1/8	1-45/64	51207	57178
0.2638	6,700 mm		101,0	63,0	50,0	61097	68339
0.2656	6,750 mm	17/64	3-1/2	2-1/8	1-45/64	51117	57179
0.2660	6,760 mm	H	3-1/2	2-1/8	1-45/64	51208	57180
0.2677	6,800 mm		109,0	69,0	55,0	61098	68340
0.2717	6,900 mm		109,0	69,0	55,0	61099	68341
0.2720	6,910 mm	I	3-1/2	2-1/8	1-45/64	51209	57181
0.2756	7,000 mm		109,0	69,0	55,0	61031	68283
0.2770	7,040 mm	J	3-1/2	2-1/8	1-45/64	51210	57182
0.2795	7,100 mm		109,0	69,0	55,0	61100	68342
0.2810	7,140 mm	K	3-1/2	2-1/8	1-45/64	51211	57183
0.2812	7,140 mm	9/32	3-1/2	2-1/8	1-45/64	51118	57184
0.2835	7,200 mm		109,0	69,0	55,0	61101	68343
0.2874	7,300 mm		109,0	69,0	55,0	61102	68344
0.2900	7,370 mm	L	3-1/2	2-1/8	1-45/64	51212	57185
0.2913	7,400 mm		109,0	69,0	55,0	61103	68345
0.2950	7,490 mm	M	3-3/4	2-3/8	1-29/32	51213	57186
0.2953	7,500 mm		109,0	69,0	55,0	61033	68284
0.2969	7,540 mm	19/64	3-3/4	2-3/8	1-29/32	51119	57187
0.2992	7,600 mm		117,0	75,0	60,0	61104	68346
0.3020	7,670 mm	N	3-3/4	2-3/8	1-29/32	51214	57188
0.3031	7,700 mm		117,0	75,0	60,0	61105	68347
0.3071	7,800 mm		117,0	75,0	60,0	61106	68348
0.3110	7,900 mm		117,0	75,0	60,0	61107	68349
0.3125	7,940 mm	*5/16	3-3/4	2-3/8	1-29/32	51120	57189
0.3150	8,000 mm		117,0	75,0	60,0	61035	68285
0.3160	8,030 mm	O	3-3/4	2-3/8	1-29/32	51215	57190
0.3189	8,100 mm		117,0	75,0	60,0	61108	68350
0.3228	8,200 mm		117,0	75,0	60,0	61109	68351
0.3230	8,200 mm	P	3-3/4	2-3/8	1-29/32	51216	57191
0.3268	8,300 mm		117,0	75,0	60,0	61110	68352
0.3281	8,330 mm	21/64	4	2-1/2	2	51121	57192
0.3307	8,400 mm		117,0	75,0	60,0	61111	68353
0.3320	8,430 mm	Q	4	2-1/2	2	51217	57193
0.3346	8,500 mm		117,0	75,0	60,0	61037	68286

continued on next page


2 Flute Drills • Metric: DIN 338

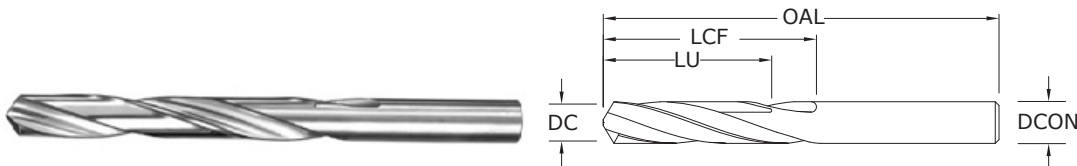

101

FRACTIONAL & METRIC SERIES

Pictured:
Series 101 Drill Set

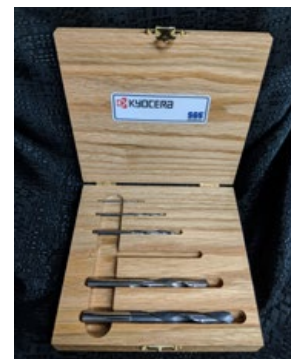

CONTINUED


DECIMAL DC/DCON	METRIC DC/DCON	FRACTIONAL/ LETTER/WIRE DC	inch & mm			EDP NO.	
			OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	TI-NAMITE®-A (AITiN)
0.3386	8,600 mm		125,0	81,0	64,0	61112	68354
0.3390	8,610 mm	R	4	2-1/2	2	51218	57194
0.3425	8,700 mm		125,0	81,0	64,0	61113	68355
0.3438	8,730 mm	11/32	4	2-1/2	2	51122	57195
0.3465	8,800 mm		125,0	81,0	64,0	61114	68356
0.3480	8,840 mm	S	4	2-1/2	2	51219	57196
0.3504	8,900 mm		125,0	81,0	64,0	61115	68357
0.3543	9,000 mm		125,0	81,0	64,0	61039	68287
0.3580	9,090 mm	T	4-1/4	2-3/4	2-13/64	51220	57197
0.3583	9,100 mm		125,0	81,0	64,0	61116	68358
0.3594	9,130 mm	23/64	4-1/4	2-3/4	2-13/64	51123	57198
0.3622	9,200 mm		125,0	81,0	64,0	61117	68359
0.3661	9,300 mm		125,0	81,0	64,0	61118	68360
0.3680	9,350 mm	U	4-1/4	2-3/4	2-13/64	51221	57199
0.3701	9,400 mm		125,0	81,0	64,0	61119	68361
0.3740	9,500 mm		125,0	81,0	64,0	61041	68288
0.3750	9,530 mm	*3/8	4-1/4	2-3/4	2-13/64	51124	57200
0.3770	9,580 mm	V	4-1/4	2-3/4	2-13/64	51222	57201
0.3780	9,600 mm		133,0	87,0	69,0	61120	68362
0.3819	9,700 mm		133,0	87,0	69,0	61121	68363
0.3858	9,800 mm		133,0	87,0	69,0	61122	68364
0.3860	9,800 mm	W	4-1/2	2-7/8	2-19/64	51223	57202
0.3898	9,900 mm		133,0	87,0	69,0	61123	68365
0.3906	9,920 mm	25/64	4-1/2	2-7/8	2-19/64	51125	57203
0.3937	10,000 mm		133,0	87,0	69,0	61043	68289
0.3970	10,080 mm	X	4-1/2	2-7/8	2-19/64	51224	57204
0.4016	10,010 mm		133,0	87,0	69,0	61124	68366
0.4040	10,260 mm	Y	4-1/2	2-7/8	2-19/64	51225	57205
0.4062	10,320 mm	13/32	4-1/2	2-7/8	2-19/64	51126	57206
0.4130	10,490 mm	Z	4-1/2	2-7/8	2-19/64	51226	57207
0.4134	10,500 mm		133,0	87,0	69,0	61045	68290
0.4219	10,720 mm	27/64	4-1/2	2-7/8	2-19/64	51127	57208
0.4331	11,000 mm		142,0	94,0	75,0	61047	68291
0.4375	11,110 mm	7/16	4-1/2	2-7/8	2-19/64	51128	57209
0.4528	11,500 mm		142,0	94,0	75,0	61049	68292
0.4531	11,510 mm	29/64	4-3/4	3	2-13/32	51129	57210
0.4688	11,910 mm	15/32	4-3/4	3	2-13/32	51130	57211
0.4724	12,000 mm		151,0	101,0	80,0	61051	68293
0.4844	12,300 mm	31/64	4-3/4	3	2-13/32	51131	57212
0.5000	12,700 mm	1/2	4-3/4	3	2-13/32	51132	57213
*Series 101 Set						61175	57351

TOLERANCES (inch)

DC = +0.0000/-0.0005



TOLERANCES (mm)

DC = +0.0000/-0.0127



For patent
information visit
www.ksptpatents.com

Short Length Self Centering Drills • DIN 6539

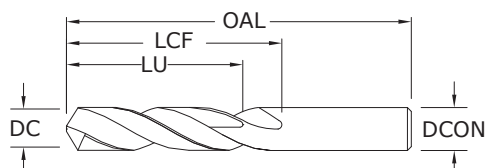

108M Plus
METRIC SERIES

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,000/-0,010

DCON = h_6

>3-6 DIAMETER

DC = +0,000/-0,012

DCON = h_6

>6-10 DIAMETER

DC = +0,000/-0,015

DCON = h_6

>10-16 DIAMETER

DC = +0,000/-0,018

DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

mm						EDP NO.	
DECIMAL DC/DCON	METRIC DC/DCON	LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AlTiN)
0.0197	0,500 mm		20,0	3,0	—	62001	68643
0.0217	0,550 mm		21,0	3,5	—	62003	68644
0.0236	0,600 mm		21,0	3,5	—	62005	68645
0.0256	0,650 mm		22,0	4,0	—	62007	68646
0.0276	0,700 mm		23,0	4,5	—	62009	68647
0.0295	0,750 mm		23,0	4,5	—	62011	68648
0.0315	0,800 mm		24,0	5,0	—	62013	68649
0.0335	0,850 mm		24,0	5,0	—	62015	68650
0.0354	0,900 mm		25,0	5,5	4,0	62017	68651
0.0374	0,950 mm		25,0	5,5	4,0	62019	68652
0.0394	1,000 mm		26,0	6,0	4,7	62021	68653
0.0413	1,050 mm		26,0	6,0	4,7	62023	68654
0.0433	1,100 mm		28,0	7,0	5,4	62025	68655
0.0453	1,150 mm		28,0	7,0	5,4	62027	68656
0.0472	1,200 mm		30,0	8,0	6,0	62029	68657
0.0492	1,250 mm		30,0	8,0	6,0	62031	68658
0.0512	1,300 mm		30,0	8,0	6,0	62033	68659
0.0531	1,350 mm		32,0	9,0	7,0	62035	68660
0.0551	1,400 mm		32,0	9,0	7,0	62037	68661
0.0571	1,450 mm		32,0	9,0	7,0	62039	68662
0.0591	1,500 mm		32,0	9,0	7,0	62041	68663
0.0630	1,600 mm		34,0	10,0	7,0	62043	68664
0.0669	1,700 mm		34,0	10,0	7,0	62045	68665
0.0709	1,800 mm		36,0	11,0	8,0	62047	68666
0.0748	1,900 mm		36,0	11,0	8,0	62049	68667
0.0748	2,000 mm		38,0	12,0	9,0	62051	68668
0.0827	2,100 mm		38,0	12,0	9,0	62053	68669
0.0866	2,200 mm		40,0	13,0	10,0	62055	68670
0.0906	2,300 mm		40,0	13,0	10,0	62057	68671
0.0945	2,400 mm		43,0	14,0	11,0	62059	68672
0.0984	2,500 mm		43,0	14,0	11,0	62061	68673
0.1024	2,600 mm		43,0	14,0	11,0	62063	68674
0.1063	2,700 mm		46,0	16,0	12,0	62065	68675
0.1102	2,800 mm		46,0	16,0	12,0	62067	68676

continued on next page

Short Length Self Centering Drills • DIN 6539




3xD



108M Plus

METRIC SERIES

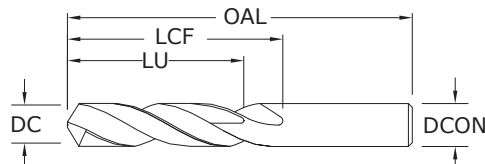

CONTINUED

mm						EDP NO.	
DECIMAL DC/DCON	METRIC DC/DCON	LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AlTiN)
0.1142	2,900 mm		46,0	16,0	12,0	62069	68677
0.1181	3,000 mm		46,0	16,0	12,0	62071	68678
0.1220	3,100 mm		49,0	18,0	14,0	62073	68679
0.1260	3,200 mm		49,0	18,0	14,0	62075	68680
0.1299	3,300 mm		49,0	18,0	14,0	62077	68681
0.1339	3,400 mm		52,0	20,0	15,0	62079	68682
0.1378	3,500 mm		52,0	20,0	15,0	62081	68683
0.1417	3,600 mm		52,0	20,0	15,0	62083	68684
0.1457	3,700 mm		52,0	20,0	15,0	62085	68685
0.1496	3,800 mm		55,0	22,0	17,0	62087	68686
0.1535	3,900 mm		55,0	22,0	17,0	62089	68687
0.1575	4,000 mm		55,0	22,0	17,0	62091	68688
0.1614	4,100 mm		55,0	22,0	17,0	62093	68689
0.1654	4,200 mm		55,0	22,0	17,0	62095	68690
0.1693	4,300 mm		58,0	24,0	18,0	62097	68691
0.1732	4,400 mm		58,0	24,0	18,0	62099	68692
0.1772	4,500 mm		58,0	24,0	18,0	62101	68693
0.1811	4,600 mm		58,0	24,0	18,0	62103	68694
0.1850	4,700 mm	#13	58,0	24,0	18,0	62105	68695
0.1890	4,800 mm	#12	62,0	26,0	20,0	62107	68696
0.1929	4,900 mm		62,0	26,0	20,0	62109	68697
0.1969	5,000 mm		62,0	26,0	20,0	62111	68698
0.2008	5,100 mm		62,0	26,0	20,0	62113	68699
0.2047	5,200 mm		62,0	26,0	20,0	62115	68700
0.2087	5,300 mm		62,0	26,0	20,0	62117	68701
0.2126	5,400 mm		66,0	28,0	21,0	62119	68702
0.2165	5,500 mm		66,0	28,0	21,0	62121	68703
0.2205	5,600 mm		66,0	28,0	21,0	62123	68704
0.2244	5,700 mm		66,0	28,0	21,0	62125	68705
0.2283	5,800 mm		66,0	28,0	21,0	62127	68706
0.2323	5,900 mm		66,0	28,0	21,0	62129	68707
0.2362	6,000 mm		66,0	28,0	21,0	62131	68708

continued on next page

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,000/-0,010

DCON = h₆

>3-6 DIAMETER

DC = +0,000/-0,012

DCON = h₆

>6-10 DIAMETER

DC = +0,000/-0,015

DCON = h₆

>10-16 DIAMETER



DC = +0,000/-0,018

DCON = h₆

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Short Length Self Centering Drills • DIN 6539

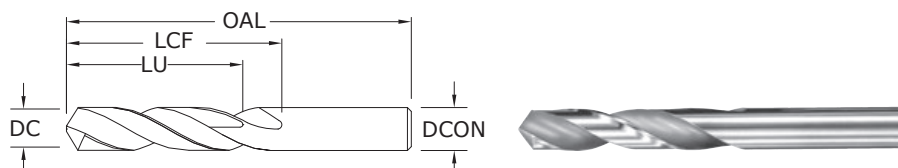

108M Plus

METRIC SERIES

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,000/-0,010

DCON = h_6

>3-6 DIAMETER

DC = +0,000/-0,012

DCON = h_6

>6-10 DIAMETER

DC = +0,000/-0,015

DCON = h_6

>10-16 DIAMETER

DC = +0,000/-0,018

DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

mm						EDP NO.	
DECIMAL DC/DCON	METRIC DC/DCON	LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AlTiN)
0.2402	6,100 mm		70,0	31,0	23,0	62133	68709
0.2441	6,200 mm		70,0	31,0	23,0	62135	68710
0.2480	6,300 mm		70,0	31,0	23,0	62137	68711
0.2520	6,400 mm		70,0	31,0	23,0	62139	68712
0.2559	6,500 mm		70,0	31,0	23,0	62141	68713
0.2598	6,800 mm		70,0	31,0	23,0	62142	68603
0.2756	7,000 mm		74,0	34,0	25,0	62143	68718
0.2953	7,500 mm		74,0	34,0	25,0	62145	68723
0.3071	7,800 mm		79,0	37,0	27,0	62146	68604
0.3150	8,000 mm		79,0	37,0	27,0	62147	68728
0.3346	8,500 mm		79,0	37,0	27,0	62149	68733
0.3543	9,000 mm		84,0	40,0	29,0	62151	68738
0.3740	9,500 mm		84,0	40,0	29,0	62153	68743
0.3858	9,800 mm		89,0	43,0	31,0	62154	68606
0.3937	10,000 mm		89,0	43,0	31,0	62155	68748
0.4016	10,200 mm		89,0	43,0	31,0	62156	68607
0.4134	10,500 mm		89,0	43,0	31,0	62066	68753
0.4331	11,000 mm		95,0	47,0	33,0	62157	68758
0.4528	11,500 mm		95,0	47,0	33,0	62084	68763
0.4646	11,800 mm		102,0	51,0	35,0	62158	68608
0.4724	12,000 mm		102,0	51,0	35,0	62159	68768
0.4921	12,500 mm		102,0	51,0	35,0	62102	68773
0.5118	13,000 mm		102,0	51,0	35,0	62112	68778
0.5433	13,800 mm		107,0	54,0	37,0	62164	68609
0.5512	14,000 mm		107,0	54,0	37,0	62116	68780
0.5709	14,500 mm		111,0	56,0	38,0	62166	68611
0.5827	14,800 mm		111,0	56,0	38,0	62167	68612
0.5906	15,000 mm		111,0	56,0	38,0	62168	68613
0.6221	15,800 mm		115,0	58,0	38,0	62170	68614
0.6299	16,000 mm		115,0	58,0	38,0	62171	68616

CONTINUED

2 Flute Drills

Series 101 Fractional	Hardness	Vc (sfm)		DC • in						
				1/64	1/32	1/16	1/8	1/4	3/8	1/2
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	265 (212-318)	RPM	64787	32394	16197	8098	4049	2699	2025
			Fr	0.00021	0.0004	0.0008	0.0017	0.0033	0.0050	0.0067
			Feed (ipm)	13.5	13.5	13.5	13.5	13.5	13.5	13.5
		125 (100-150)	RPM	30560	15280	7640	3820	1910	1273	955
			Fr	0.00020	0.0004	0.0008	0.0016	0.0031	0.0047	0.0063
			Feed (ipm)	6.0	6.0	6.0	6.0	6.0	6.0	6.0
		85 (68-102)	RPM	20781	10390	5195	2598	1299	866	649
			Fr	0.00011	0.0002	0.0004	0.0008	0.0017	0.0025	0.0034
			Feed (ipm)	2.2	2.2	2.2	2.2	2.2	2.2	2.2
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	230 (184-276)	RPM	56230	28115	14058	7029	3514	2343	1757
			Fr	0.00019	0.0004	0.0007	0.0015	0.0030	0.0045	0.0060
			Feed (ipm)	10.5	10.5	10.5	10.5	10.5	10.5	10.5
		145 (116-174)	RPM	35450	17725	8862	4431	2216	1477	1108
			Fr	0.00019	0.0004	0.0007	0.0015	0.0030	0.0045	0.0060
			Feed (ipm)	6.6	6.6	6.6	6.6	6.6	6.6	6.6
		60 (48-72)	RPM	14669	7334	3667	1834	917	611	458
			Fr	0.00008	0.0002	0.0003	0.0007	0.0013	0.0020	0.0026
			Feed (ipm)	1.2	1.2	1.2	1.2	1.2	1.2	1.2
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	85 (68-102)	RPM	20781	10390	5195	2598	1299	866	649
			Fr	0.00011	0.0002	0.0004	0.0009	0.0018	0.0027	0.0035
			Feed (ipm)	2.3	2.3	2.3	2.3	2.3	2.3	2.3
		55 (44-66)	RPM	13446	6723	3362	1681	840	560	420
			Fr	0.00005	0.0001	0.0002	0.0004	0.0008	0.0012	0.0017
			Feed (ipm)	0.7	0.7	0.7	0.7	0.7	0.7	0.7
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	210 (168-252)	RPM	51341	25670	12835	6418	3209	2139	1604
			Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0036	0.0048
			Feed (ipm)	7.7	7.7	7.7	7.7	7.7	7.7	7.7
		110 (88-132)	RPM	26893	13446	6723	3362	1681	1121	840
			Fr	0.00009	0.0002	0.0004	0.0007	0.0015	0.0022	0.0030
			Feed (ipm)	2.5	2.5	2.5	2.5	2.5	2.5	2.5
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	65 (52-78)	RPM	15891	7946	3973	1986	993	662	497
			Fr	0.00010	0.0002	0.0005	0.0009	0.0018	0.0025	0.0035
			Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7
		55 (44-66)	RPM	13446	6723	3362	1681	840	560	420
			Fr	0.00010	0.0002	0.0004	0.0008	0.0015	0.0023	0.0031
			Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3
K	CAST IRONS Gray, Malleable, Ductile	280 (224-336)	RPM	68454	34227	17114	8557	4278	2852	2139
			Fr	0.00026	0.0005	0.0010	0.0020	0.0041	0.0061	0.0082
			Feed (ipm)	17.5	17.5	17.5	17.5	17.5	17.5	17.5
		250 (200-300)	RPM	61120	30560	15280	7640	3820	2547	1910
			Fr	0.00025	0.0005	0.0010	0.0020	0.0041	0.0061	0.0081
			Feed (ipm)	15.5	15.5	15.5	15.5	15.5	15.5	15.5

continued on next page

FRACTIONAL 2 Flute Drills

Series 101 Fractional	Hardness	Vc (sfm)	DC • in							
			1/64	1/32	1/16	1/8	1/4	3/8	1/2	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	540 (432-648)	RPM	132019	66010	33005	16502	8251	5501	4126
			Fr	0.00030	0.0006	0.0012	0.0024	0.0048	0.0073	0.0097
			Feed (ipm)	40.0	40.0	40.0	40.0	40.0	40.0	40.0
		455 (364-546)	RPM	111238	55619	27810	13905	6952	4635	3476
			Fr	0.00031	0.0006	0.0013	0.0025	0.0050	0.0076	0.0101
			Feed (ipm)	35.0	35.0	35.0	35.0	35.0	35.0	35.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	190 (152-228)	RPM	46451	23226	11613	5806	2903	1935	1452
			Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0036	0.0048
			Feed (ipm)	7.0	7.0	7.0	7.0	7.0	7.0	7.0
		175 (140-210)	RPM	42784	21392	10696	5348	2674	1783	1337
			Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0036	0.0048
			Feed (ipm)	6.4	6.4	6.4	6.4	6.4	6.4	6.4
PLASTICS Polycarbonate, PVC	500 (400-600)	RPM	122240	61120	30560	15280	7640	5093	3820	
		Fr	0.00031	0.0006	0.0012	0.0025	0.0050	0.0075	0.0099	
		Feed (ipm)	38.0	38.0	38.0	38.0	38.0	38.0	38.0	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	40 (32-48)	RPM	9779	4890	2445	1222	611	407	306
			Fr	0.00010	0.0002	0.0004	0.0008	0.0016	0.0025	0.0033
			Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
		25 (20-30)	RPM	6112	3056	1528	764	382	255	191
			Fr	0.00010	0.0002	0.0004	0.0008	0.0016	0.0024	0.0031
			Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
	20 (16-24)	RPM	4890	2445	1222	611	306	204	153	
		Fr	0.00004	0.0001	0.0002	0.0003	0.0007	0.0010	0.0013	
		Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	85 (68-102)	RPM	20781	10390	5195	2598	1299	866	649
			Fr	0.00020	0.0004	0.0008	0.0016	0.0032	0.0049	0.0065
			Feed (ipm)	4.2	4.2	4.2	4.2	4.2	4.2	4.2
65 (52-78)		RPM	15891	7946	3973	1986	993	662	497	
		Fr	0.00011	0.0002	0.0004	0.0009	0.0017	0.0026	0.0034	
		Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7	
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	40 (32-48)	RPM	9779	4890	2445	1222	611	407	306	
		Fr	0.00005	0.0001	0.0002	0.0004	0.0008	0.0012	0.0016	
		Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

2 Flute Drills

Short Length Self Centering Drills • DIN 6539

Series 101M, 108M Metric	Hardness	Vc (m/min)	DC • mm							
			1	3	6	8	10	12	16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	81	RPM	25690	8563	4282	3211	2569	2141	1606
		(65-97)	Fr	0.014	0.041	0.082	0.109	0.136	0.163	0.218
			Feed (mm/min)	350	350	350	350	350	350	350
		38	RPM	12118	4039	2020	1515	1212	1010	757
		(30-46)	Fr	0.012	0.036	0.072	0.096	0.120	0.144	0.191
			Feed (mm/min)	145	145	145	145	145	145	145
		26	RPM	8240	2747	1373	1030	824	687	515
		(21-31)	Fr	0.007	0.020	0.040	0.053	0.067	0.080	0.107
			Feed (mm/min)	55	55	55	55	55	55	55
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	70	RPM	22297	7432	3716	2787	2230	1858	1394
		(56-84)	Fr	0.012	0.036	0.073	0.097	0.121	0.145	0.194
			Feed (mm/min)	270	270	270	270	270	270	270
		44	RPM	14057	4686	2343	1757	1406	1171	879
		(35-53)	Fr	0.012	0.036	0.073	0.097	0.121	0.145	0.194
			Feed (mm/min)	170	170	170	170	170	170	170
		18	RPM	5816	1939	969	727	582	485	364
		(15-22)	Fr	0.005	0.015	0.030	0.040	0.050	0.060	0.080
			Feed (mm/min)	29	29	29	29	29	29	29
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	26	RPM	8240	2747	1373	1030	824	687	515
		(21-31)	Fr	0.007	0.020	0.040	0.053	0.067	0.080	0.107
			Feed (mm/min)	55	55	55	55	55	55	55
		17	RPM	5332	1777	889	666	533	444	333
		(13-20)	Fr	0.003	0.010	0.020	0.027	0.034	0.041	0.054
			Feed (mm/min)	18	18	18	18	18	18	18
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	64	RPM	20358	6786	3393	2545	2036	1696	1272
		(51-77)	Fr	0.010	0.029	0.059	0.079	0.098	0.118	0.157
			Feed (mm/min)	200	200	200	200	200	200	200
		34	RPM	10664	3555	1777	1333	1066	889	666
		(27-40)	Fr	0.006	0.017	0.034	0.045	0.056	0.068	0.090
			Feed (mm/min)	60	60	60	60	60	60	60
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	20	RPM	6301	2100	1050	788	630	525	394
		(16-24)	Fr	0.007	0.021	0.043	0.057	0.071	0.086	0.114
			Feed (mm/min)	45	45	45	45	45	45	45
		17	RPM	5332	1777	889	666	533	444	333
		(13-20)	Fr	0.007	0.020	0.039	0.053	0.066	0.079	0.105
			Feed (mm/min)	35	35	35	35	35	35	35
K	CAST IRONS Gray, Malleable, Ductile	85	RPM	27144	9048	4524	3393	2714	2262	1696
		(68-102)	Fr	0.016	0.049	0.097	0.130	0.162	0.195	0.259
			Feed (mm/min)	440	440	440	440	440	440	440
		76	RPM	24235	8078	4039	3029	2424	2020	1515
		(61-91)	Fr	0.017	0.050	0.099	0.132	0.165	0.198	0.264
			Feed (mm/min)	400	400	400	400	400	400	400

continued on next page

2 Flute Drills

Short Length Self Centering Drills • DIN 6539

Series 101M, 108M Metric	Hardness	Vc (m/min)	DC • mm								
			1	3	6	8	10	12	16		
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	165	RPM	52348	17449	8725	6544	5235	4362	3272
			(132-198)	Fr	0.020	0.060	0.120	0.160	0.200	0.240	0.319
			Feed (mm/min)	1045	1045	1045	1045	1045	1045	1045	
		≤ 150 Bhn or ≤ 88 HRb	139	RPM	44108	14703	7351	5514	4411	3676	2757
			(111-166)	Fr	0.020	0.060	0.120	0.160	0.200	0.239	0.319
			Feed (mm/min)	880	880	880	880	880	880	880	
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	58	RPM	18419	6140	3070	2302	1842	1535	1151
			(46-69)	Fr	0.010	0.030	0.060	0.080	0.100	0.121	0.161
			Feed (mm/min)	185	185	185	185	185	185	185	
		≤ 200 Bhn or ≤ 23 HRc	53	RPM	16965	5655	2827	2121	1696	1414	1060
			(43-64)	Fr	0.010	0.030	0.060	0.080	0.100	0.120	0.160
			Feed (mm/min)	170	170	170	170	170	170	170	
PLASTICS Polycarbonate, PVC	152 (122-183)	RPM	48471	16157	8078	6059	4847	4039	3029		
		Fr	0.020	0.060	0.120	0.160	0.200	0.240	0.320		
		Feed (mm/min)	970	970	970	970	970	970	970		
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 220 Bhn or ≤ 19 HRc	12	RPM	3878	1293	646	485	388	323	242
			(10-15)	Fr	0.006	0.019	0.039	0.052	0.064	0.077	0.103
			Feed (mm/min)	25	25	25	25	25	25	25	
		≤ 320 Bhn or ≤ 34 HRc	8	RPM	2424	808	404	303	242	202	151
			(6-9)	Fr	0.006	0.019	0.037	0.050	0.062	0.074	0.099
			Feed (mm/min)	15	15	15	15	15	15	15	
		≤ 425 Bhn or ≤ 45 HRc	6	RPM	1939	646	323	242	194	162	121
			(5-7)	Fr	0.005	0.015	0.031	0.041	0.052	0.062	0.083
			Feed (mm/min)	10	10	10	10	10	10	10	
	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	26	RPM	8240	2747	1373	1030	824	687	515
			(21-31)	Fr	0.013	0.040	0.080	0.107	0.133	0.160	0.214
			Feed (mm/min)	110	110	110	110	110	110	110	
		≤ 350 Bhn or ≤ 38 HRc	20	RPM	6301	2100	1050	788	630	525	394
			(16-24)	Fr	0.007	0.021	0.043	0.057	0.071	0.086	0.114
			Feed (mm/min)	45	45	45	45	45	45	45	
		≤ 440 Bhn or ≤ 47 HRc	17	RPM	5332	1777	889	666	533	444	333
			(13-20)	Fr	0.007	0.020	0.039	0.053	0.066	0.079	0.105
			Feed (mm/min)	35	35	35	35	35	35	35	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	12	RPM	3878	1293	646	485	388	323	242
			(10-15)	Fr	0.003	0.009	0.019	0.025	0.031	0.037	0.050
			Feed (mm/min)	12	12	12	12	12	12	12	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

Straight Flute Drills • Metric: DIN 6539




3xD



106

FRACTIONAL & METRIC SERIES

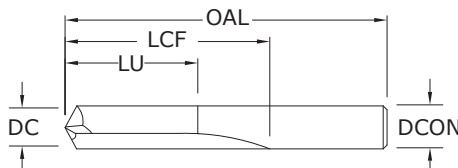

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm		FLUTE LENGTH LCF	USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL			UNCOATED	Ti-NAMITE®-A (AlTiN)
0.0394	1,000 mm		26,0	6,0	4,5	66001	66002
0.0400	1,020 mm	#60	1-1/2	1/2	13/32	56060	56269
0.0410	1,040 mm	#59	1-1/2	1/2	13/32	56059	56268
0.0420	1,070 mm	#58	1-1/2	1/2	13/32	56058	56267
0.0430	1,090 mm	#57	1-1/2	1/2	13/32	56057	56266
0.0465	1,180 mm	#56	1-1/2	1/2	13/32	56056	56265
0.0469	1,190 mm	3/64	1-1/2	1/2	13/32	56103	56135
0.0520	1,320 mm	#55	1-1/2	1/2	13/32	56055	56264
0.0550	1,400 mm	#54	1-1/2	1/2	13/32	56054	56263
0.0591	1,500 mm		32,0	9,0	7,0	66003	66004
0.0595	1,510 mm	#53	1-1/2	1/2	13/32	56053	56262
0.0625	1,590 mm	1/16	1-1/2	5/8	1/2	56104	56136
0.0635	1,610 mm	#52	1-11/16	11/16	35/64	56052	56261
0.0670	1,700 mm	#51	1-11/16	11/16	35/64	56051	56260
0.0700	1,780 mm	#50	1-11/16	11/16	35/64	56050	56259
0.0730	1,850 mm	#49	1-11/16	11/16	35/64	56049	56258
0.0760	1,930 mm	#48	1-11/16	11/16	35/64	56048	56257
0.0781	1,980 mm	5/64	1-11/16	11/16	35/64	56105	56137
0.0785	1,990 mm	#47	1-3/4	3/4	39/64	56047	56256
0.0787	2,000 mm		38,0	12,0	9,0	66005	66006
0.0810	2,060 mm	#46	1-3/4	3/4	39/64	56046	56255
0.0820	2,080 mm	#45	1-3/4	3/4	39/64	56045	56254
0.0860	2,180 mm	#44	1-3/4	3/4	39/64	56044	56253
0.0890	2,260 mm	#43	1-3/4	3/4	39/64	56043	56252
0.0935	2,370 mm	#42	1-3/4	3/4	39/64	56042	56251
0.0938	2,380 mm	3/32	1-3/4	3/4	39/64	56106	56138
0.0960	2,440 mm	#41	1-13/16	13/16	21/32	56041	56250
0.0980	2,490 mm	#40	1-13/16	13/16	21/32	56040	56249
0.0984	2,500 mm		43,0	14,0	11,0	66007	66008
0.0995	2,530 mm	#39	1-13/16	13/16	21/32	56039	56248
0.1015	2,580 mm	#38	1-13/16	13/16	21/32	56038	56247
0.1040	2,640 mm	#37	1-13/16	13/16	21/32	56037	56246
0.1065	2,710 mm	#36	1-13/16	13/16	21/32	56036	56245
0.1094	2,780 mm	7/64	1-13/16	13/16	21/32	56107	56139
0.1100	2,790 mm	#35	1-7/8	7/8	45/64	56035	56244
0.1110	2,820 mm	#34	1-7/8	7/8	45/64	56034	56243

continued on next page

TOLERANCES (inch)

DC = +0.0000/-0.0005

DCON = h₆

TOLERANCES (mm)

DC = +0.0000/-0.0127

DCON = h₆

STEELS

CAST IRON

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Straight Flute Drills • Metric: DIN 6539

106

FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC / DCON	METRIC DC / DCON	inch & mm				EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AITiN)
0.1130	2,870 mm	#33	1-7/8	7/8	45/64	56033	56242
0.1160	2,950 mm	#32	1-7/8	7/8	45/64	56032	56241
0.1181	3,000 mm		46,0	16,0	12,0	66009	66010
0.1200	3,050 mm	#31	1-7/8	7/8	45/64	56031	56240
0.1250	3,180 mm	1/8	1-7/8	7/8	45/64	56108	56140
0.1285	3,260 mm	#30	1-15/16	15/16	3/4	56030	56239
0.1360	3,450 mm	#29	1-15/16	15/16	3/4	56029	56238
0.1378	3,500 mm		52,0	20,0	15,0	66011	66012
0.1405	3,570 mm	#28	1-15/16	15/16	3/4	56028	56237
0.1406	3,570 mm	9/64	1-15/16	15/16	3/4	56109	56141
0.1440	3,660 mm	#27	2-1/16	1	51/64	56027	56236
0.1470	3,730 mm	#26	2-1/16	1	51/64	56026	56235
0.1495	3,800 mm	#25	2-1/16	1	51/64	56025	56234
0.1520	3,860 mm	#24	2-1/16	1	51/64	56024	56233
0.1540	3,910 mm	#23	2-1/16	1	51/64	56023	56232
0.1562	3,970 mm	5/32	2-1/16	1	51/64	56110	56142
0.1570	3,990 mm	#22	2-1/8	1-1/16	55/64	56022	56231
0.1575	4,000 mm		55,0	22,0	17,0	66013	66014
0.1590	4,040 mm	#21	2-1/8	1-1/16	55/64	56021	56230
0.1610	4,090 mm	#20	2-1/8	1-1/16	55/64	56020	56229
0.1660	4,220 mm	#19	2-1/8	1-1/16	55/64	56019	56228
0.1695	4,310 mm	#18	2-1/8	1-1/16	55/64	56018	56227
0.1719	4,370 mm	11/64	2-1/8	1-1/16	55/64	56111	56143
0.1730	4,390 mm	#17	2-3/16	1-1/8	29/32	56017	56226
0.1770	4,500 mm	#16	2-3/16	1-1/8	29/32	56016	56225
0.1772	4,500 mm		58,0	24,0	18,0	66015	66016
0.1800	4,570 mm	#15	2-3/16	1-1/8	29/32	56015	56224
0.1820	4,620 mm	#14	2-3/16	1-1/8	29/32	56014	56223
0.1850	4,700 mm	#13	2-3/16	1-1/8	29/32	56013	56222
0.1875	4,760 mm	3/16	2-3/16	1-1/8	29/32	56112	56144
0.1890	4,800 mm	#12	2-3/16	1-1/8	29/32	56012	56221
0.1910	4,850 mm	#11	2-3/16	1-1/8	29/32	56011	56220
0.1935	4,910 mm	#10	2-3/16	1-1/8	29/32	56010	56219
0.1960	4,980 mm	#9	2-1/4	1-3/16	61/64	56009	56218
0.1969	5,000 mm		62,0	26,0	20,0	66017	66018
0.1990	5,050 mm	#8	2-1/4	1-3/16	61/64	56008	56217
0.2010	5,110 mm	#7	2-1/4	1-3/16	61/64	56007	56216
0.2031	5,160 mm	13/64	2-1/4	1-3/16	61/64	56113	56145
0.2040	5,180 mm	#6	2-3/8	1-1/4	1	56006	56215
0.2055	5,220 mm	#5	2-3/8	1-1/4	1	56005	56214
0.2090	5,310 mm	#4	2-3/8	1-1/4	1	56004	56213
0.2130	5,410 mm	#3	2-3/8	1-1/4	1	56003	56212
0.2165	5,500 mm		66,0	28,0	21,0	66019	66020
0.2188	5,560 mm	7/32	2-3/8	1-1/4	1	56114	56146
0.2210	5,610 mm	#2	2-7/16	1-5/16	1-3/64	56002	56211
0.2280	5,790 mm	#1	2-7/16	1-5/16	1-3/64	56001	56210

continued on next page

Straight Flute Drills • Metric: DIN 6539




3xD



106

FRACTIONAL & METRIC SERIES

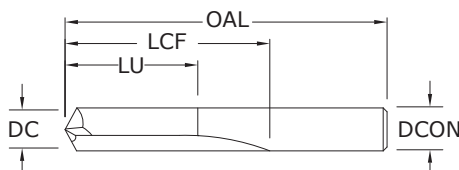

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm				EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AlTiN)
0.2344	5,950 mm	15/64	2-7/16	1-5/16	1-3/64	56115	56147
0.2362	6,000 mm		66,0	28,0	21,0	66021	66045
0.2500	6,350 mm	1/4	2-1/2	1-3/8	1-7/64	56116	56148
0.2559	6,500 mm		70,0	31,0	23,0	66022	66046
0.2656	6,750 mm	17/64	2-5/8	1-7/16	1-7/64	56117	56149
0.2756	7,000 mm		74,0	34,0	25,0	66023	66024
0.2812	7,140 mm	9/32	2-11/16	1-1/2	1-13/64	56118	56150
0.2953	7,500 mm		74,0	34,0	25,0	66025	66026
0.2969	7,540 mm	19/64	2-3/4	1-9/16	1-1/4	56119	56151
0.3125	7,940 mm	5/16	2-13/16	1-5/8	1-19/64	56120	56152
0.3150	8,000 mm		79,0	37,0	27,0	66027	66028
0.3281	8,330 mm	21/64	2-15/16	1-11/16	1-23/64	56121	56153
0.3346	8,500 mm		79,0	37,0	27,0	66029	66030
0.3438	8,730 mm	11/32	3	1-11/16	1-23/64	56122	56154
0.3543	9,000 mm		84,0	40,0	29,0	66031	66032
0.3594	9,130 mm	23/64	3-1/16	1-3/4	1-13/32	56123	56155
0.3740	9,500 mm		84,0	40,0	29,0	66033	66034
0.3750	9,530 mm	3/8	3-1/8	1-13/16	1-29/64	56124	56156
0.3906	9,920 mm	25/64	3-1/4	1-7/8	1-1/2	56125	56157
0.3937	10,000 mm		89,0	43,0	31,0	66035	66036
0.4062	10,320 mm	13/32	3-5/16	1-15/16	1-35/64	56126	56158
0.4134	10,500 mm		89,0	43,0	31,0	66037	66038
0.4219	10,720 mm	27/64	3-3/8	2	1-39/64	56127	56159
0.4331	11,000 mm		95,0	47,0	33,0	66039	66040
0.4375	11,110 mm	7/16	3-7/16	2-1/16	1-21/32	56128	56160
0.4528	11,500 mm		95,0	47,0	33,0	66041	66042
0.4531	11,510 mm	29/64	3-9/16	2-1/8	1-45/64	56129	56161
0.4688	11,910 mm	15/32	3-5/8	2-1/8	1-45/64	56130	56162
0.4724	12,000 mm		102,0	51,0	35,0	66043	66044
0.4844	12,300 mm	31/64	3-11/16	2-3/16	1-3/4	56131	56163
0.5000	12,700 mm	1/2	3-3/4	2-1/4	1-51/64	56132	56164

TOLERANCES (inch)

DC = +0.0000/-0.0005

DCON = h₆

TOLERANCES (mm)

DC = +0.0000/-0.0127

DCON = h₆

STEELS

CAST IRON

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

FRACTIONAL & METRIC

Straight Flute Drills

Series 106 Fractional		Hardness	Vc (sfm)	DC • in						
				1/16	1/8	3/16	1/4	3/8	1/2	
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 500 Bhn or ≤ 52 HRc	60	RPM	3667	1834	1222	917	611	458
			(48-72)	Fr	0.0004	0.0007	0.0011	0.0014	0.0021	0.0028
				Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3
		≤ 615 Bhn or ≤ 58 HRc	50	RPM	3056	1528	1019	764	509	382
			(40-60)	Fr	0.0004	0.0008	0.0012	0.0016	0.0024	0.0031
				Feed (ipm)	1.2	1.2	1.2	1.2	1.2	1.2
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	250	RPM	15280	7640	5093	3820	2547	1910
			(200-300)	Fr	0.0010	0.0020	0.0030	0.0041	0.0061	0.0081
				Feed (ipm)	15.5	15.5	15.5	15.5	15.5	15.5
		≤ 330 Bhn or ≤ 36 HRc	195	RPM	11918	5959	3973	2980	1986	1490
			(156-234)	Fr	0.0010	0.0020	0.0030	0.0040	0.0060	0.0081
				Feed (ipm)	12.0	12.0	12.0	12.0	12.0	12.0
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 500 Bhn or ≤ 52 HRc	60	RPM	3667	1834	1222	917	611	458
			(48-72)	Fr	0.0004	0.0007	0.0011	0.0014	0.0021	0.0028
				Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3
		≤ 615 Bhn or ≤ 58 HRc	50	RPM	3056	1528	1019	764	509	382
			(40-60)	Fr	0.0004	0.0008	0.0012	0.0016	0.0024	0.0031
				Feed (ipm)	1.2	1.2	1.2	1.2	1.2	1.2

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

Series 106M Metric	Hardness	Vc (m/min)	DC • mm							
			1	3	6	8	10	12		
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 500 Bhn or ≤ 52 HRc	18	RPM	5816	1939	969	727	582	485
		(15-22)	Fr	0.006	0.018	0.035	0.047	0.058	0.070	
			Feed (mm/min)	34	34	34	34	34	34	
		≤ 615 Bhn or ≤ 58 HRc	15	RPM	4847	1616	808	606	485	404
		(12-18)	Fr	0.006	0.017	0.033	0.045	0.056	0.067	
			Feed (mm/min)	27	27	27	27	27	27	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	76	RPM	24235	8078	4039	3029	2424	2020
		(61-91)	Fr	0.016	0.048	0.096	0.128	0.160	0.192	
			Feed (mm/min)	395	395	395	395	395	395	
		≤ 330 Bhn or ≤ 36 HRc	59	RPM	18904	6301	3151	2363	1890	1575
		(48-71)	Fr	0.016	0.048	0.096	0.128	0.160	0.192	
			Feed (mm/min)	305	305	305	305	305	305	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 500 Bhn or ≤ 52 HRc	18	RPM	5816	1939	969	727	582	485
		(15-22)	Fr	0.006	0.018	0.035	0.047	0.058	0.070	
			Feed (mm/min)	34	34	34	34	34	34	
		≤ 615 Bhn or ≤ 58 HRc	15	RPM	4847	1616	808	606	485	404
		(12-18)	Fr	0.006	0.017	0.033	0.045	0.056	0.067	
			Feed (mm/min)	27	27	27	27	27	27	

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

3 Flute Drills • Metric: DIN 6539

3xD
(mm)5xD
(inch)

103

FRACTIONAL & METRIC SERIES

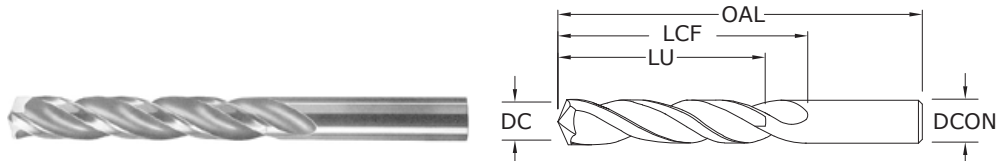

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm				EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AlTiN)
0.1065	2,710 mm	#36	2-1/4	1-1/4	1	53036	58011
0.1094	2,780 mm	7/64	2-1/4	1-1/4	1	53107	58012
0.1100	2,790 mm	#35	2-1/4	1-1/4	1	53035	58013
0.1110	2,820 mm	#34	2-1/4	1-1/4	1	53034	58014
0.1130	2,870 mm	#33	2-1/4	1-1/4	1	53033	58015
0.1160	2,950 mm	#32	2-1/4	1-1/4	1	53032	58016
0.1181	3,000 mm		46,0	16,0	12,0	63000	68965
0.1200	3,050 mm	#31	2-1/4	1-1/4	1	53031	58017
0.1220	3,100 mm		49,0	18,0	14,0	63044	68966
0.1250	3,180 mm	1/8	2-1/4	1-1/4	1	53108	58018
0.1260	3,200 mm		49,0	18,0	14,0	63045	68967
0.1285	3,260 mm	#30	2-1/4	1-1/4	1	53030	58019
0.1299	3,300 mm		49,0	18,0	14,0	63001	68968
0.1339	3,400 mm		52,0	20,0	15,0	63046	68969
0.1360	3,450 mm	#29	2-1/2	1-3/8	1-7/64	53029	58020
0.1378	3,500 mm		52,0	20,0	15,0	63002	68970
0.1405	3,570 mm	#28	2-1/2	1-3/8	1-7/64	53028	58021
0.1406	3,570 mm	9/64	2-1/2	1-3/8	1-7/64	53109	58022
0.1417	3,600 mm		52,0	20,0	15,0	63047	68971
0.1440	3,660 mm	#27	2-1/2	1-3/8	1-7/64	53027	58023
0.1457	3,700 mm		52,0	20,0	15,0	63003	68972
0.1470	3,730 mm	#26	2-1/2	1-3/8	1-7/64	53026	58024
0.1495	3,800 mm	#25	2-1/2	1-3/8	1-7/64	53025	58025
0.1496	3,800 mm		55,0	22,0	17,0	63048	68973
0.1520	3,860 mm	#24	2-1/2	1-3/8	1-7/64	53024	58026
0.1535	3,900 mm		55,0	22,0	17,0	63049	68974
0.1540	3,910 mm	#23	2-1/2	1-3/8	1-7/64	53023	58027
0.1562	3,970 mm	5/32	2-1/2	1-3/8	1-7/64	53110	58028
0.1570	3,990 mm	#22	2-1/2	1-3/8	1-7/64	53022	58029
0.1575	4,000 mm		55,0	22,0	17,0	63004	68975
0.1590	4,040 mm	#21	2-1/2	1-3/8	1-7/64	53021	58030
0.1610	4,090 mm	#20	2-1/2	1-3/8	1-7/64	53020	58031
0.1614	4,100 mm		55,0	22,0	17,0	63050	68976
0.1654	4,200 mm		55,0	22,0	17,0	63005	68977
0.1660	4,220 mm	#19	2-3/4	1-5/8	1-19/64	53019	58032
0.1693	4,300 mm		58,0	24,0	18,0	63051	68978
0.1695	4,310 mm	#18	2-3/4	1-5/8	1-19/64	53018	58033
0.1719	4,370 mm	11/64	2-3/4	1-5/8	1-19/64	53111	58034
0.1730	4,390 mm	#17	2-3/4	1-5/8	1-19/64	53017	58035
0.1732	4,400 mm		58,0	24,0	18,0	63052	68979

TOLERANCES (inch)

DC = +0.0000/-0.0005

DCON = h₆

TOLERANCES (mm)

DC = +0.0000/-0.0127

DCON = h₆

STEELS

CAST IRON

NON-FERROUS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

continued on next page

3 Flute Drills • Metric: DIN 6539

103

FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC / DCON	METRIC DC / DCON	inch & mm				EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AITiN)
0.1770	4,500 mm	#16	2-3/4	1-5/8	1-19/64	53016	58036
0.1772	4,500 mm		58,0	24,0	18,0	63006	68980
0.1800	4,570 mm	#15	2-3/4	1-5/18	1-19/64	53015	58037
0.1811	4,600 mm		58,0	24,0	18,0	63053	68981
0.1820	4,620 mm	#14	2-3/4	1-5/8	1-19/64	53014	58038
0.1850	4,700 mm	#13	2-3/4	1-5/8	1-19/64	53013	58039
0.1850	4,700 mm		58,0	24,0	18,0	63054	68982
0.1875	4,760 mm	3/16	2-3/4	1-5/8	1-19/64	53112	58040
0.1890	4,800 mm	#12	2-3/4	1-5/8	1-19/64	53012	58041
0.1890	4,800 mm		62,0	26,0	20,0	63055	68983
0.1910	4,850 mm	#11	2-3/4	1-5/8	1-19/64	53011	58042
0.1929	4,900 mm		62,0	26,0	20,0	63056	68984
0.1935	4,910 mm	#10	2-3/4	1-5/8	1-19/64	53010	58043
0.1960	4,980 mm	#9	3	1-3/4	1-13/32	53009	58044
0.1969	5,000 mm		62,0	26,0	20,0	63007	68985
0.1990	5,050 mm	#8	3	1-3/4	1-13/32	53008	58045
0.2008	5,100 mm		62,0	26,0	20,0	63057	68986
0.2010	5,110 mm	#7	3	1-3/4	1-13/32	53007	58046
0.2031	5,160 mm	13/64	3	1-3/4	1-13/32	53113	58047
0.2040	5,180 mm	#6	3	1-3/4	1-13/32	53006	58048
0.2047	5,200 mm		62,0	26,0	20,0	63008	68987
0.2055	5,220 mm	#5	3	1-3/4	1-13/32	53005	58049
0.2087	5,300 mm		62,0	26,0	20,0	63058	68988
0.2090	5,310 mm	#4	3	1-3/4	1-13/32	53004	58050
0.2126	5,400 mm		66,0	28,0	21,0	63059	68989
0.2130	5,410 mm	#3	3	1-3/4	1-13/32	53003	58051
0.2165	5,500 mm		66,0	28,0	21,0	63009	68990
0.2188	5,560 mm	7/32	3	1-3/4	1-13/32	53114	58052
0.2205	5,600 mm		66,0	28,0	21,0	63060	68991
0.2210	5,610 mm	#2	3	1-3/4	1-13/32	53002	58053
0.2244	5,700 mm		66,0	28,0	21,0	63061	68992
0.2280	5,790 mm	#1	3	1-3/4	1-13/32	53001	58054
0.2283	5,800 mm		66,0	28,0	21,0	63062	68993
0.2323	5,900 mm		66,0	28,0	21,0	63063	68994
0.2340	5,940 mm	A	3-1/4	2	1-39/64	53201	58055
0.2344	5,950 mm	15/64	3-1/4	2	1-39/64	53115	58056
0.2362	6,000 mm		66,0	28,0	21,0	63010	68995
0.2380	6,050 mm	B	3-1/4	2	1-39/64	53202	58057
0.2402	6,100 mm		70,0	31,0	23,0	63064	68996
0.2420	6,150 mm	C	3-1/4	2	1-39/64	53203	58058
0.2441	6,200 mm		70,0	31,0	23,0	63011	68997
0.2460	6,250 mm	D	3-1/4	2	1-39/64	53204	58059
0.2480	6,300 mm		70,0	31,0	23,0	63065	68998
0.2500	6,350 mm	1/4	3-1/4	2	1-39/64	53116	58061
0.2520	6,400 mm		70,0	31,0	23,0	63066	68999
0.2559	6,500 mm		70,0	31,0	23,0	63012	69000
0.2570	6,530 mm	F	3-1/4	2	1-39/64	53206	58062
0.2598	6,600 mm		70,0	31,0	23,0	63067	69001
0.2610	6,630 mm	G	3-1/2	2-1/8	1-45/64	53207	58063
0.2638	6,700 mm		70,0	31,0	23,0	63068	69002


continued on next page

3 Flute Drills • Metric: DIN 6539

3xD
(mm)5xD
(inch)

103

FRACTIONAL & METRIC SERIES

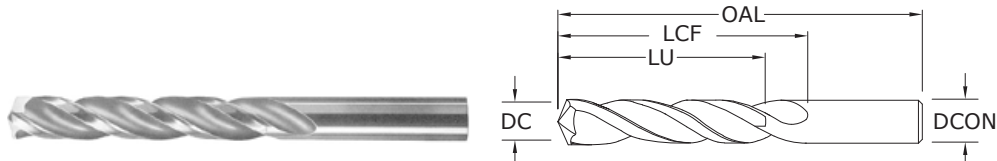

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm		FLUTE LENGTH LCF	USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL			UNCOATED	Ti-NAMITE®-A (AITiN)
0.2656	6,750 mm	17/64	3-1/2	2-1/8	1-45/64	53117	58064
0.2660	6,760 mm	H	3-1/2	2-1/8	1-45/64	53208	58065
0.2677	6,800 mm		74,0	34,0	25,0	63013	69003
0.2717	6,900 mm		74,0	34,0	25,0	63069	69004
0.2720	6,910 mm	I	3-1/2	2-1/8	1-45/64	53209	58066
0.2756	7,000 mm		74,0	34,0	25,0	63014	69005
0.2770	7,040 mm	J	3-1/2	2-1/8	1-45/64	53210	58067
0.2795	7,100 mm		74,0	34,0	25,0	63070	69006
0.2810	7,140 mm	K	3-1/2	2-1/8	1-45/64	53211	58068
0.2812	7,140 mm	9/32	3-1/2	2-1/8	1-45/64	53118	58069
0.2835	7,200 mm		74,0	34,0	25,0	63015	69007
0.2874	7,300 mm		74,0	34,0	25,0	63071	69008
0.2900	7,370 mm	L	3-1/2	2-1/8	1-45/64	53212	58070
0.2913	7,400 mm		74,0	34,0	25,0	63072	69009
0.2950	7,490 mm	M	3-3/4	2-3/8	1-29/32	53213	58071
0.2953	7,500 mm		74,0	34,0	25,0	63016	69010
0.2969	7,540 mm	19/64	3-3/4	2-3/8	1-29/32	53119	58072
0.2992	7,600 mm		79,0	37,0	27,0	63073	69011
0.3020	7,670 mm	N	2-3/8	2-3/8	1-29/32	53214	58073
0.3031	7,700 mm		79,0	37,0	27,0	63074	69012
0.3071	7,800 mm		79,0	37,0	27,0	63075	69013
0.3110	7,900 mm		79,0	37,0	27,0	63076	69014
0.3125	7,940 mm	5/16	3-3/4	2-3/8	1-29/32	53120	58074
0.3150	8,000 mm		79,0	37,0	27,0	63017	69015
0.3160	8,030 mm	O	3-3/4	2-3/8	1-29/32	53215	58075
0.3189	8,100 mm		79,0	37,0	27,0	63077	69016
0.3228	8,200 mm		79,0	37,0	27,0	63018	69017
0.3230	8,200 mm	P	3-3/4	2-3/8	1-29/32	53216	58076
0.3268	8,300 mm		79,0	37,0	27,0	63078	69018
0.3281	8,330 mm	21/64	4	2-1/2	2	53121	58077
0.3307	8,400 mm		79,0	37,0	27,0	63019	69019
0.3320	8,430 mm	Q	4	2-1/2	2	53217	58078
0.3346	8,500 mm		79,0	37,0	27,0	63020	69020
0.3386	8,600 mm		84,0	40,0	29,0	63021	69021
0.3390	8,610 mm	R	4	2-1/2	2	53218	58079
0.3425	8,700 mm		84,0	40,0	29,0	63079	69022
0.3438	8,730 mm	11/32	4	2-1/2	2	53122	58080
0.3465	8,800 mm		84,0	40,0	29,0	63022	69023
0.3480	8,840 mm	S	4	2-1/2	2	53219	58081
0.3504	8,900 mm		84,0	40,0	29,0	63080	69024
0.3543	9,000 mm		84,0	40,0	29,0	63023	69025
0.3580	9,090 mm	T	4-1/4	2-3/4	2-13/64	53220	58082

continued on next page

TOLERANCES (inch)

DC = +0.0000/-0.0005

DCON = h₆

TOLERANCES (mm)

DC = +0,0000/-0,0127

DCON = h₆

STEELS

CAST IRON

NON-FERROUS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

3 Flute Drills • Metric: DIN 6539

103

FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC / DCON	METRIC DC / DCON	inch & mm				EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AlTiN)
0.3583	9,100 mm		84,0	40,0	29,0	63081	69026
0.3594	9,130 mm	23/64	4-1/4	2-3/4	2-13/64	53123	58083
0.3622	9,200 mm		84,0	40,0	29,0	63024	69027
0.3661	9,300 mm		84,0	40,0	29,0	63082	69028
0.3680	9,350 mm	U	4-1/4	2-3/4	2-13/64	53221	58084
0.3701	9,400 mm		84,0	40,0	29,0	63083	69029
0.3740	9,500 mm		84,0	40,0	29,0	63025	69030
0.3750	9,530 mm	3/8	4-1/4	2-3/4	2-13/64	53124	58085
0.3770	9,580 mm	V	4-1/4	2-3/4	2-13/64	53222	58086
0.3780	9,600 mm		89,0	43,0	31,0	63084	69031
0.3819	9,700 mm		89,0	43,0	31,0	63085	69032
0.3858	9,800 mm		89,0	43,0	31,0	63086	69033
0.3860	9,800 mm	W	4-1/2	2-7/8	2-19/64	53223	58087
0.3898	9,900 mm		89,0	43,0	31,0	63087	69034
0.3906	9,920 mm	25/64	4-1/2	2-7/8	2-19/64	53125	58088
0.3937	10,000 mm		89,0	43,0	31,0	63026	69035
0.3970	10,080 mm	X	4-1/2	2-7/8	2-19/64	53224	58089
0.3976	10,100 mm		89,0	43,0	31,0	63088	69036
0.4016	10,200 mm		89,0	43,0	31,0	63027	69037
0.4040	10,260 mm	Y	4-1/2	2-7/8	2-19/64	53225	58090
0.4062	10,320 mm	13/32	4-1/2	2-7/8	2-19/64	53126	58091
0.4094	10,400 mm		89,0	43,0	31,0	63028	69038
0.4130	10,490 mm	Z	4-1/2	2-7/8	2-19/64	53226	58092
0.4134	10,500 mm		89,0	43,0	31,0	63029	69039
0.4213	10,700 mm		95,0	47,0	33,0	63030	69040
0.4219	10,720 mm	27/64	4-1/2	2-7/8	2-19/64	53127	58093
0.4252	10,800 mm		95,0	47,0	33,0	63031	69041
0.4331	11,000 mm		95,0	47,0	33,0	63032	69042
0.4375	11,110 mm	7/16	4-1/2	2-7/8	2-19/64	53128	58094
0.4528	11,500 mm		95,0	47,0	33,0	63033	69043
0.4531	11,510 mm	29/64	4-3/4	3	2-13/32	53129	58095
0.4688	11,910 mm	15/32	4-3/4	3	2-13/32	53130	58096
0.4724	12,000 mm		102,0	51,0	35,0	63034	69044
0.4844	12,300 mm	31/64	4-3/4	3	2-13/32	53131	58097
0.4921	12,500 mm		102,0	51,0	35,0	63035	69045
0.5000	12,700 mm	1/2	4-3/4	3	2-13/32	53132	58098
0.5039	12,800 mm		102,0	51,0	35,0	63036	69046
0.5118	13,000 mm		102,0	51,0	35,0	63089	69047
0.5156	13,100 mm	33/64	4-3/4	3	2-13/32	53135	58099
0.5157	13,100 mm		102,0	51,0	35,0	63037	69048
0.5315	13,500 mm		107,0	54,0	37,0	63090	69049
0.5512	14,000 mm		107,0	54,0	37,0	63038	69050
0.5625	14,290 mm	9/16	4-3/4	3	2-13/32	53136	58100
0.5630	14,300 mm		111,0	56,0	38,0	63039	69051
0.5709	14,500 mm		111,0	56,0	38,0	63040	69052
0.5906	15,000 mm		111,0	56,0	38,0	63091	69053
0.6250	15,880 mm	5/8	5-3/4	3-1/2	2-51/64	53133	58101
0.6875	17,460 mm	11/16	5-3/4	3-1/2	2-51/64	53137	58102
0.6890	17,500 mm		123,0	62,0	40,0	63041	69054
0.7500	19,050 mm	3/4	5-3/4	4-1/4	3 13/32	53134	58103
0.7677	19,500 mm		131,0	66,0	42,0	63042	69055
0.7874	20,000 mm		131,0	66,0	42,0	63043	69056

3 Flute Drills

Series 103 Fractional	Hardness	Vc (sfm)	DC • in						
				1/8	1/4	3/8	1/2	5/8	3/4
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	295	RPM	9015	4508	3005	2254	1803	1503
		≤ 175 Bhn or ≤ 7 HRc	Fr	0.0026	0.0051	0.0077	0.0102	0.0128	0.0153
		(236-354)	Feed (ipm)	23.0	23.0	23.0	23.0	23.0	23.0
		260	RPM	7946	3973	2649	1986	1589	1324
		≤ 300 Bhn or ≤ 32 HRc	Fr	0.0023	0.0045	0.0068	0.0091	0.0113	0.0136
		(208-312)	Feed (ipm)	18.0	18.0	18.0	18.0	18.0	18.0
		150	RPM	4584	2292	1528	1146	917	764
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.0013	0.0026	0.0039	0.0052	0.0065	0.0079
		(120-180)	Feed (ipm)	6.0	6.0	6.0	6.0	6.0	6.0
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	230	RPM	7029	3514	2343	1757	1406	1171
		≤ 275 Bhn or ≤ 28 HRc	Fr	0.0019	0.0038	0.0058	0.0077	0.0096	0.0115
		(184-276)	Feed (ipm)	13.5	13.5	13.5	13.5	13.5	13.5
		145	RPM	4431	2216	1477	1108	886	739
		≤ 375 Bhn or ≤ 40 HRc	Fr	0.0019	0.0038	0.0058	0.0077	0.0096	0.0115
		(116-174)	Feed (ipm)	8.5	8.5	8.5	8.5	8.5	8.5
		115	RPM	3514	1757	1171	879	703	586
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.0005	0.0010	0.0015	0.0020	0.0026	0.0031
		(92-138)	Feed (ipm)	1.8	1.8	1.8	1.8	1.8	1.8
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	85	RPM	2598	1299	866	649	520	433
		≤ 250 Bhn or ≤ 24 HRc	Fr	0.0013	0.0026	0.0039	0.0052	0.0065	0.0079
		(68-102)	Feed (ipm)	3.4	3.4	3.4	3.4	3.4	3.4
		65	RPM	1986	993	662	497	397	331
		≤ 375 Bhn or ≤ 40 HRc	Fr	0.0007	0.0013	0.0020	0.0026	0.0033	0.0039
		(52-78)	Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3
K	CAST IRONS Gray, Malleable, Ductile	250	RPM	7640	3820	2547	1910	1528	1273
		≤ 220 Bhn or ≤ 19 HRc	Fr	0.0026	0.0052	0.0079	0.0105	0.0131	0.0157
		(200-300)	Feed (ipm)	20.0	20.0	20.0	20.0	20.0	20.0
		195	RPM	5959	2980	1986	1490	1192	993
		≤ 330 Bhn or ≤ 36 HRc	Fr	0.0026	0.0052	0.0078	0.0104	0.0130	0.0156
		(156-234)	Feed (ipm)	15.5	15.5	15.5	15.5	15.5	15.5
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	540	RPM	16502	8251	5501	4126	3300	2750
		≤ 80 Bhn or ≤ 47 HRb	Fr	0.0032	0.0064	0.0096	0.0128	0.0161	0.0193
		(432-648)	Feed (ipm)	53.0	53.0	53.0	53.0	53.0	53.0
		455	RPM	13905	6952	4635	3476	2781	2317
		≤ 150 Bhn or ≤ 88 HRb	Fr	0.0032	0.0065	0.0097	0.0129	0.0162	0.0194
		(364-546)	Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	305	RPM	9321	4660	3107	2330	1864	1553
		≤ 140 Bhn or ≤ 3 HRc	Fr	0.0019	0.0039	0.0058	0.0077	0.0097	0.0116
		(244-366)	Feed (ipm)	18.0	18.0	18.0	18.0	18.0	18.0
		160	RPM	4890	2445	1630	1222	978	815
		≤ 200 Bhn or ≤ 23 HRc	Fr	0.0016	0.0033	0.0049	0.0065	0.0082	0.0098
		(128-192)	Feed (ipm)	8.0	8.0	8.0	8.0	8.0	8.0
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3
		50	RPM	1528	764	509	382	306	255
		≤ 475 Bhn or ≤ 50 HRc	Fr	0.0007	0.0013	0.0020	0.0026	0.0033	0.0039
		(40-60)	Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 103M Metric	Hardness	Vc (m/min)	DC • mm						
			3	6	10	12	16	20	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	90	RPM	9533	4766	2860	2383	1787	1430
		≤ 175 Bhn or ≤ 7 HRc	Fr	0.062	0.124	0.206	0.248	0.330	0.413
		(72-108)	Feed (mm/min)	590	590	590	590	590	590
		79	RPM	8402	4201	2520	2100	1575	1260
		≤ 300 Bhn or ≤ 32 HRc	Fr	0.055	0.110	0.183	0.219	0.292	0.365
		(63-95)	Feed (mm/min)	460	460	460	460	460	460
		46	RPM	4847	2424	1454	1212	909	727
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.032	0.064	0.107	0.128	0.171	0.213
		(37-55)	Feed (mm/min)	155	155	155	155	155	155
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	70	RPM	7432	3716	2230	1858	1394	1115
		≤ 275 Bhn or ≤ 28 HRc	Fr	0.046	0.093	0.155	0.186	0.248	0.309
		(56-84)	Feed (mm/min)	345	345	345	345	345	345
		44	RPM	4686	2343	1406	1171	879	703
		≤ 375 Bhn or ≤ 40 HRc	Fr	0.046	0.092	0.153	0.184	0.245	0.306
		(35-53)	Feed (mm/min)	215	215	215	215	215	215
		35	RPM	3716	1858	1115	929	697	557
		≤ 450 Bhn or ≤ 48 HRc	Fr	0.012	0.024	0.040	0.048	0.065	0.081
		(28-42)	Feed (mm/min)	45	45	45	45	45	45
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	26	RPM	2747	1373	824	687	515	412
		≤ 250 Bhn or ≤ 24 HRc	Fr	0.031	0.062	0.103	0.124	0.165	0.206
		(21-31)	Feed (mm/min)	85	85	85	85	85	85
		20	RPM	2100	1050	630	525	394	315
		≤ 375 Bhn or ≤ 40 HRc	Fr	0.017	0.033	0.056	0.067	0.089	0.111
		(16-24)	Feed (mm/min)	35	35	35	35	35	35
K	CAST IRONS Gray, Malleable, Ductile	76	RPM	8078	4039	2424	2020	1515	1212
		≤ 220 Bhn or ≤ 19 HRc	Fr	0.063	0.126	0.210	0.253	0.337	0.421
		(61-91)	Feed (mm/min)	510	510	510	510	510	510
		59	RPM	6301	3151	1890	1575	1181	945
		≤ 330 Bhn or ≤ 36 HRc	Fr	0.052	0.105	0.175	0.209	0.279	0.349
		(48-71)	Feed (mm/min)	330	330	330	330	330	330
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	165	RPM	17449	8725	5235	4362	3272	2617
		≤ 80 Bhn or ≤ 47 HRb	Fr	0.078	0.156	0.260	0.312	0.416	0.520
		(132-198)	Feed (mm/min)	1360	1360	1360	1360	1360	1360
		139	RPM	14703	7351	4411	3676	2757	2205
		≤ 150 Bhn or ≤ 7 HRc	Fr	0.078	0.156	0.261	0.313	0.417	0.521
		(111-166)	Feed (mm/min)	1150	1150	1150	1150	1150	1150
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	93	RPM	9856	4928	2957	2464	1848	1478
		≤ 140 Bhn or ≤ 3 HRc	Fr	0.047	0.094	0.157	0.189	0.252	0.315
		(74-112)	Feed (mm/min)	465	465	465	465	465	465
		49	RPM	5170	2585	1551	1293	969	776
		≤ 200 Bhn or ≤ 23 HRc	Fr	0.039	0.077	0.129	0.155	0.206	0.258
		(39-59)	Feed (mm/min)	200	200	200	200	200	200
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	15	RPM	1616	808	485	404	303	242
		≤ 475 Bhn or ≤ 50 HRc	Fr	0.015	0.031	0.052	0.062	0.083	0.103
		(12-18)	Feed (mm/min)	25	25	25	25	25	25


Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $rpm = (Vc \times 1000) / (DC \times 3.14)$
 $mm/min = Fr \times rpm$
 reduce speed and feed 30 percent when using uncoated drills
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

FRACTIONAL

Combined Drill & Countersink



301
FRACTIONAL SERIES

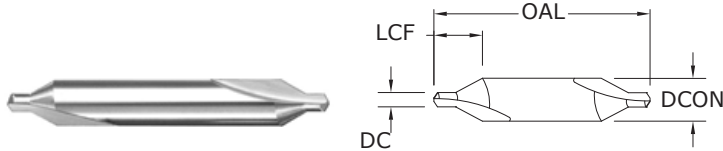

Pictured:
Series 301 Set



SIZE	inch				EDP NO.	
	DRILL DIAMETER DC	BODY DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	UNCOATED	Ti-NAMITE®-A (AlTiN)
*00	.025	1/8	1-1/2	.312	57005	57015
*0	1/32	1/8	1-1/2	.312	57006	57016
*1	3/64	1/8	1-1/2	.375	57007	57017
*2	5/64	3/16	1-7/8	.562	57008	57018
*3	7/64	1/4	2	.625	57009	57019
*4	1/8	5/16	2-1/8	.750	57010	57020
*5	3/16	7/16	2-3/4	.875	57011	57021
*6	7/32	1/2	3	.938	57012	57022
*Series 301 Set	—	—	—	—	57075	—



TOLERANCES (inch)

DC = +0.003/–0.000
DCON = –0.0001/–0.0005

- STEELS
- STAINLESS STEELS
- CAST IRON
- NON-FERROUS
- HIGH TEMP ALLOYS
- HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Combined Drill & Countersink

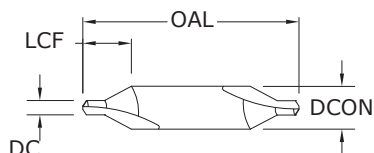

301M
METRIC SERIES

TOLERANCES (mm)

DC = +0,076/-0,000
DCON = -0,0025/-0,0127

	STEELS
	STAINLESS STEELS
	CAST IRON
	NON-FERROUS
	HIGH TEMP ALLOYS
	HARDENED STEELS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.	
DRILL DIAMETER DC	BODY DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	UNCOATED	Ti-NAMITE®-A (AlTiN)
0,5	3,15	20,0	7,1	67005	67035
0,8	3,15	20,0	7,1	67007	67037
1	3,15	31,5	8,3	67009	67039
1,25	3,15	31,5	9,9	67011	67041
1,6	4,0	35,5	12,7	67013	67043
2	5,0	40,0	14,7	67015	67045
2,5	6,3	45,0	15,9	67017	67047
3,15	8,0	50,0	19,4	67019	67049
4	10,0	56,0	21,4	67021	67051
5	12,5	63,0	23,0	67023	67053

Combined Drill & Countersink

Series 301 Fractional	Hardness	Vc (sfm)	DC • in					
			1/32	5/64	1/8	3/16	7/32	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	265	RPM	8098	5399	3239	2314	2025
		(212-318)	Fr	0.00068	0.0010	0.0017	0.0024	0.0027
			Feed (ipm)	5.5	5.5	5.5	5.5	5.5
		125	RPM	3820	2547	1528	1091	955
		(100-150)	Fr	0.00065	0.0010	0.0016	0.0023	0.0026
			Feed (ipm)	2.5	2.5	2.5	2.5	2.5
		85	RPM	2598	1732	1039	742	649
		(68-102)	Fr	0.00038	0.0006	0.0010	0.0013	0.0015
			Feed (ipm)	1.0	1.0	1.0	1.0	1.0
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	230	RPM	7029	4686	2812	2008	1757
		(184-276)	Fr	0.00064	0.0010	0.0016	0.0022	0.0026
			Feed (ipm)	4.5	4.5	4.5	4.5	4.5
		145	RPM	4431	2954	1772	1266	1108
		(116-174)	Fr	0.00059	0.0009	0.0015	0.0021	0.0023
			Feed (ipm)	2.6	2.6	2.6	2.6	2.6
		60	RPM	1834	1222	733	524	458
		(48-72)	Fr	0.00027	0.0004	0.0007	0.0010	0.0011
			Feed (ipm)	0.5	0.5	0.5	0.5	0.5
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	85	RPM	2598	1732	1039	742	649
		(68-102)	Fr	0.00035	0.0005	0.0009	0.0012	0.0014
			Feed (ipm)	0.9	0.9	0.9	0.9	0.9
		55	RPM	1681	1121	672	480	420
		(44-66)	Fr	0.00016	0.0002	0.0004	0.0006	0.0006
			Feed (ipm)	0.3	0.3	0.3	0.3	0.3
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	210	RPM	6418	4278	2567	1834	1604
		(168-252)	Fr	0.00048	0.0007	0.0012	0.0017	0.0019
			Feed (ipm)	3.1	3.1	3.1	3.1	3.1
		110	RPM	3362	2241	1345	960	840
		(88-132)	Fr	0.00028	0.0004	0.0007	0.0010	0.0011
			Feed (ipm)	0.9	0.9	0.9	0.9	0.9
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	65	RPM	1986	1324	795	568	497
		(52-78)	Fr	0.00036	0.0005	0.0009	0.0013	0.0014
			Feed (ipm)	0.7	0.7	0.7	0.7	0.7
		55	RPM	1681	1121	672	480	420
		(44-66)	Fr	0.00032	0.0005	0.0008	0.0011	0.0013
			Feed (ipm)	0.5	0.5	0.5	0.5	0.5
K	CAST IRONS Gray, Malleable, Ductile	280	RPM	8557	5705	3423	2445	2139
		(224-336)	Fr	0.00084	0.0013	0.0021	0.0029	0.0034
			Feed (ipm)	7.2	7.2	7.2	7.2	7.2
		250	RPM	7640	5093	3056	2183	1910
		(200-300)	Fr	0.00084	0.0013	0.0021	0.0029	0.0034
			Feed (ipm)	6.4	6.4	6.4	6.4	6.4

continued on next page

Combined Drill & Countersink

Series 301 Fractional	Hardness	Vc (sfm)		DC • in				
				1/32	5/64	1/8	3/16	7/32
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	540 (432-648)	RPM	16502	11002	6601	4715	4126
			Fr	0.00100	0.0015	0.0025	0.0035	0.0040
			Feed (ipm)	16.5	16.5	16.5	16.5	16.5
		455 (364-546)	RPM	13905	9270	5562	3973	3476
			Fr	0.00100	0.0015	0.0025	0.0035	0.0040
			Feed (ipm)	13.9	13.9	13.9	13.9	13.9
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	190 (152-228)	RPM	5806	3871	2323	1659	1452
			Fr	0.00048	0.0007	0.0012	0.0017	0.0019
			Feed (ipm)	2.8	2.8	2.8	2.8	2.8
		175 (140-210)	RPM	5348	3565	2139	1528	1337
			Fr	0.00048	0.0007	0.0012	0.0017	0.0019
			Feed (ipm)	2.6	2.6	2.6	2.6	2.6
S	PLASTICS Polycarbonate, PVC	500 (400-600)	RPM	15280	10187	6112	4366	3820
			Fr	0.00100	0.0015	0.0025	0.0035	0.0040
			Feed (ipm)	15.3	15.3	15.3	15.3	15.3
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	40 (32-48)	RPM	1222	815	489	349	306
			Fr	0.00036	0.0005	0.0009	0.0013	0.0014
			Feed (ipm)	0.4	0.4	0.4	0.4	0.4
		25 (20-30)	RPM	764	509	306	218	191
			Fr	0.00033	0.0005	0.0008	0.0011	0.0013
			Feed (ipm)	0.3	0.3	0.3	0.3	0.3
		20 (16-24)	RPM	611	407	244	175	153
			Fr	0.00016	0.0002	0.0004	0.0006	0.0007
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	85 (68-102)	RPM	2598	1732	1039	742	649
			Fr	0.00064	0.0010	0.0016	0.0022	0.0026
			Feed (ipm)	1.7	1.7	1.7	1.7	1.7
		65 (52-78)	RPM	1986	1324	795	568	497
			Fr	0.00036	0.0005	0.0009	0.0013	0.0014
			Feed (ipm)	0.7	0.7	0.7	0.7	0.7
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	40 (32-48)	RPM	1222	815	489	349	306
			Fr	0.00016	0.0002	0.0004	0.0006	0.0007
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DCON

ipm = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Combined Drill & Countersink

Series 301M Metric	Hardness	Vc (m/min)	DC • mm					
			1	1.6	2.5	4	5	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	81	RPM	8155	6422	4078	2569	2055
		(65-97)	Fr	0.017	0.022	0.034	0.054	0.068
			Feed (mm/min)	139	139	139	139	139
		38	RPM	3847	3029	1923	1212	969
		(30-46)	Fr	0.016	0.020	0.032	0.051	0.064
			Feed (mm/min)	62	62	62	62	62
		26	RPM	2616	2060	1308	824	659
		(21-31)	Fr	0.010	0.013	0.020	0.032	0.039
			Feed (mm/min)	26	26	26	26	26
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	70	RPM	7078	5574	3539	2230	1784
		(56-84)	Fr	0.016	0.020	0.032	0.051	0.063
			Feed (mm/min)	113	113	113	113	113
		44	RPM	4462	3514	2231	1406	1125
		(35-53)	Fr	0.015	0.019	0.030	0.048	0.060
			Feed (mm/min)	67	67	67	67	67
		18	RPM	1847	1454	923	582	465
		(15-22)	Fr	0.007	0.009	0.014	0.022	0.028
			Feed (mm/min)	13	13	13	13	13
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	26	RPM	2616	2060	1308	824	659
		(21-31)	Fr	0.009	0.012	0.018	0.029	0.036
			Feed (mm/min)	24	24	24	24	24
		17	RPM	1693	1333	846	533	427
		(13-20)	Fr	0.004	0.005	0.008	0.013	0.016
			Feed (mm/min)	7	7	7	7	7
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	64	RPM	6463	5089	3231	2036	1629
		(51-77)	Fr	0.012	0.015	0.024	0.038	0.048
			Feed (mm/min)	78	78	78	78	78
		34	RPM	3385	2666	1693	1066	853
		(27-40)	Fr	0.007	0.009	0.014	0.023	0.028
			Feed (mm/min)	24	24	24	24	24
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	20	RPM	2000	1575	1000	630	504
		(16-24)	Fr	0.009	0.011	0.018	0.029	0.036
			Feed (mm/min)	18	18	18	18	18
		17	RPM	1693	1333	846	533	427
		(13-20)	Fr	0.008	0.011	0.017	0.026	0.033
			Feed (mm/min)	14	14	14	14	14
K	CAST IRONS Gray, Malleable, Ductile	85	RPM	8617	6786	4309	2714	2171
		(68-102)	Fr	0.021	0.027	0.042	0.067	0.083
			Feed (mm/min)	181	181	181	181	181
		76	RPM	7694	6059	3847	2424	1939
		(61-91)	Fr	0.021	0.027	0.042	0.067	0.084
			Feed (mm/min)	162	162	162	162	162

continued on next page

Combined Drill & Countersink

Series 301M Metric	Hardness	Vc (m/min)		DC • mm				
				1	1.6	2.5	4	5
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	165	RPM	16619	13087	8309	5235	4188
		≤ 80 Bhn or ≤ 47 HRb	Fr	0.025	0.032	0.050	0.079	0.099
		(132-198)	Feed (mm/min)	415	415	415	415	415
		139	RPM	14003	11027	7001	4411	3529
		≤ 150 Bhn or ≤ 88 HRc	Fr	0.025	0.032	0.050	0.079	0.099
		(111-166)	Feed (mm/min)	350	350	350	350	350
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	58	RPM	5847	4605	2924	1842	1474
		≤ 140 Bhn or ≤ 3 HRc	Fr	0.012	0.015	0.024	0.038	0.048
		(46-69)	Feed (mm/min)	70	70	70	70	70
		53	RPM	5386	4241	2693	1696	1357
		≤ 200 Bhn or ≤ 23 HRc	Fr	0.012	0.015	0.024	0.038	0.048
		(43-64)	Feed (mm/min)	65	65	65	65	65
	PLASTICS Polycarbonate, PVC	152	RPM	15388	12118	7694	4847	3878
		(122-183)	Fr	0.025	0.032	0.050	0.079	0.099
			Feed (mm/min)	385	385	385	385	385
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	12	RPM	1231	969	616	388	310
		≤ 220 Bhn or ≤ 19 HRc	Fr	0.009	0.011	0.018	0.028	0.035
		(10-15)	Feed (mm/min)	11	11	11	11	11
		8	RPM	769	606	385	242	194
		≤ 320 Bhn or ≤ 34 HRc	Fr	0.008	0.010	0.016	0.025	0.031
		(6-9)	Feed (mm/min)	6	6	6	6	6
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	6	RPM	616	485	308	194	155
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.003	0.004	0.006	0.010	0.013
		(5-7)	Feed (mm/min)	2	2	2	2	2
		26	RPM	2616	2060	1308	824	659
		≤ 275 Bhn or ≤ 28 HRc	Fr	0.016	0.020	0.032	0.051	0.064
		(21-31)	Feed (mm/min)	42	42	42	42	42
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	20	RPM	2000	1575	1000	630	504
		≤ 350 Bhn or ≤ 38 HRc	Fr	0.009	0.011	0.018	0.029	0.036
		(16-24)	Feed (mm/min)	18	18	18	18	18
		17	RPM	1693	1333	846	533	427
		≤ 440 Bhn or ≤ 47 HRc	Fr	0.008	0.011	0.017	0.026	0.033
		(13-20)	Feed (mm/min)	14	14	14	14	14
		12	RPM	1231	969	616	388	310
		≤ 475 Bhn or ≤ 50 HRc	Fr	0.004	0.005	0.008	0.013	0.016
		(10-15)	Feed (mm/min)	5	5	5	5	5

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DCON x 3.14)


mm/min = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills


reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Single Flute Countersink

**601**

FRACTIONAL SERIES

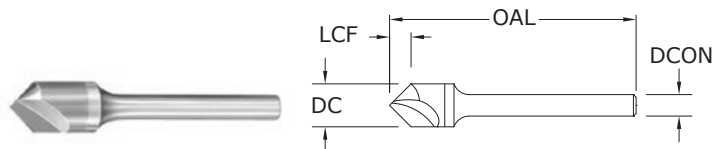

inch				EDP NO.		
CUTTING DIAMETER DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	UNCOATED 60°	UNCOATED 82°	UNCOATED 90°
1/8	1/8	1-1/2	.062	—	—	74201
1/8	1/8	1-1/2	.072	—	74101	—
1/8	1/8	1-1/2	.108	74001	—	—
3/16	3/16	2	.094	—	—	74204
3/16	3/16	2	.108	—	74104	—
3/16	3/16	2	.163	74004	—	—
1/4	1/4	2	.125	—	—	74207
1/4	1/4	2	.144	—	74107	—
1/4	1/4	2	.217	74007	—	—
*3/8	1/4	2-13/16	.188	—	—	74210
*3/8	1/4	2-13/16	.216	—	74110	—
*3/8	1/4	2-13/16	.325	74010	—	—
*1/2	1/4	2-7/8	.250	—	—	74213
*1/2	1/4	2-7/8	.288	—	74113	—
*1/2	1/4	2-7/8	.433	74013	—	—
*5/8	3/8	3	.313	—	—	74216
*5/8	3/8	3	.360	—	74116	—
*5/8	3/8	3	.541	74016	—	—
*3/4	1/2	3	.375	—	—	74219
*3/4	1/2	3	.431	—	74119	—
*3/4	1/2	3	.650	74019	—	—
*1	1/2	3-1/4	.500	—	—	74222
*1	1/2	3-1/4	.575	—	74122	—
*1	1/2	3-1/4	.866	74022	—	—

*Steel Shank / Con mango de acero / Avec queue en acier / Mit Stahlschaft

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0005

3/8–1 DIAMETER

DC = +0.003/–0.000

Included Angle +1°/–1°

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Single Flute Countersink

Series 601 Fractional	Hardness	Vc (sfm)	DC • in								
			1/8	3/16	1/4	3/8	1/2	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	125	RPM	3820	2547	1910	1273	955	637	478
			(100-150)	Fr	0.0005	0.0008	0.0010	0.0016	0.0021	0.0031	0.0042
				Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0
		≤ 300 Bhn or ≤ 32 HRc	60	RPM	1834	1222	917	611	458	306	229
			(48-72)	Fr	0.0005	0.0007	0.0010	0.0015	0.0020	0.0029	0.0039
				Feed (ipm)	0.9	0.9	0.9	0.9	0.9	0.9	0.9
		≤ 425 Bhn or ≤ 45 HRc	45	RPM	1375	917	688	458	344	229	172
			(36-54)	Fr	0.0003	0.0004	0.0006	0.0009	0.0012	0.0017	0.0023
				Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	95	RPM	2903	1935	1452	968	726	484	363
			(76-114)	Fr	0.0004	0.0007	0.0009	0.0013	0.0018	0.0027	0.0036
				Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3
		≤ 375 Bhn or ≤ 40 HRc	60	RPM	1834	1222	917	611	458	306	229
			(48-72)	Fr	0.0004	0.0007	0.0009	0.0013	0.0017	0.0026	0.0035
				Feed (ipm)	0.8	0.8	0.8	0.8	0.8	0.8	0.8
		≤ 425 Bhn or ≤ 45 HRc	35	RPM	1070	713	535	357	267	178	134
			(28-42)	Fr	0.0003	0.0004	0.0006	0.0008	0.0011	0.0017	0.0022
				Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc	35	RPM	1070	713	535	357	267	178	134
			(28-42)	Fr	0.0003	0.0004	0.0006	0.0008	0.0011	0.0017	0.0022
				Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
		≤ 375 Bhn or ≤ 40 HRc	25	RPM	764	509	382	255	191	127	96
			(20-30)	Fr	0.0001	0.0002	0.0003	0.0004	0.0005	0.0008	0.0010
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 250 Bhn or ≤ 24 HRc	53	RPM	1620	1080	810	540	405	270	202
			(42-64)	Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0019	0.0025
				Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
		≤ 330 Bhn or ≤ 36 HRc	46	RPM	1406	937	703	469	351	234	176
			(37-55)	Fr	0.0002	0.0003	0.0004	0.0006	0.0009	0.0013	0.0017
				Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	28	RPM	856	570	428	285	214	143	107
			(22-34)	Fr	0.0004	0.0005	0.0007	0.0011	0.0014	0.0021	0.0028
				Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
		≤ 375 Bhn or ≤ 40 HRc	21	RPM	642	428	321	214	160	107	80
			(17-25)	Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	105	RPM	3209	2139	1604	1070	802	535	401
			(84-126)	Fr	0.0006	0.0009	0.0012	0.0018	0.0024	0.0036	0.0047
				Feed (ipm)	1.9	1.9	1.9	1.9	1.9	1.9	1.9
		≤ 330 Bhn or ≤ 36 HRc	75	RPM	2292	1528	1146	764	573	382	287
			(60-90)	Fr	0.0006	0.0009	0.0012	0.0018	0.0024	0.0037	0.0049
				Feed (ipm)	1.4	1.4	1.4	1.4	1.4	1.4	1.4

continued on next page

Single Flute Countersink

	Series 601 Fractional	Hardness	Vc (sfm)	DC • in							
				1/8	3/16	1/4	3/8	1/2	3/4	1	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	225 (180-270)	RPM	6876	4584	3438	2292	1719	1146	860
				Fr	0.0008	0.0011	0.0015	0.0023	0.0030	0.0045	0.0061
				Feed (ipm)	5.2	5.2	5.2	5.2	5.2	5.2	5.2
		≤ 150 Bhn or ≤ 88 HRb	190 (152-228)	RPM	5806	3871	2903	1935	1452	968	726
				Fr	0.0008	0.0011	0.0015	0.0023	0.0030	0.0045	0.0061
				Feed (ipm)	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	95 (76-114)	RPM	2903	1935	1452	968	726	484	363
				Fr	0.0004	0.0006	0.0008	0.0011	0.0015	0.0023	0.0030
				Feed (ipm)	1.1	1.1	1.1	1.1	1.1	1.1	1.1
		≤ 200 Bhn or ≤ 23 HRc	80 (64-96)	RPM	2445	1630	1222	815	611	407	306
				Fr	0.0004	0.0006	0.0008	0.0012	0.0016	0.0025	0.0033
				Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 220 Bhn or ≤ 19 HRc	18 (14-22)	RPM	550	367	275	183	138	92	69
				Fr	0.0002	0.0003	0.0004	0.0005	0.0007	0.0011	0.0015
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
		≤ 320 Bhn or ≤ 34 HRc	14 (11-17)	RPM	428	285	214	143	107	71	53
				Fr	0.0002	0.0004	0.0005	0.0007	0.0009	0.0014	0.0019
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 425 Bhn or ≤ 45 HRc	12 (10-14)	RPM	367	244	183	122	92	61	46
				Fr	0.0003	0.0004	0.0005	0.0008	0.0011	0.0016	0.0022
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
		≤ 275 Bhn or ≤ 28 HRc	36 (29-43)	RPM	1100	733	550	367	275	183	138
				Fr	0.0005	0.0007	0.0009	0.0014	0.0018	0.0027	0.0036
				Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 350 Bhn or ≤ 38 HRc	28 (22-34)	RPM	856	570	428	285	214	143	107
				Fr	0.0004	0.0005	0.0007	0.0011	0.0014	0.0021	0.0028
				Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
		≤ 440 Bhn or ≤ 47 HRc	21 (17-25)	RPM	642	428	321	214	160	107	80
				Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
		≤ 475 Bhn or ≤ 50 HRc	20 (16-24)	RPM	611	407	306	204	153	102	76
				Fr	0.0002	0.0002	0.0003	0.0005	0.0007	0.0010	0.0013
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)


rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

3 Flute Countersink

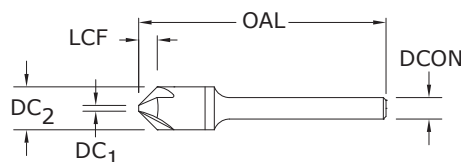

603
FRACTIONAL SERIES

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0005

3/8–1 DIAMETER

DC = +0.003/–0.000

Included Angle +1°/–1°

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC ₂	SHANK DIAMETER DCON	inch			EDP NO.		
		OVERALL LENGTH OAL	FLUTE LENGTH LCF	TIP DIAMETER DC ₁	UNCOATED 60°	UNCOATED 82°	UNCOATED 90°
1/8	1/8	1-1/2	.045	.040	—	—	74225
1/8	1/8	1-1/2	.049	.040	—	74125	—
1/8	1/8	1-1/2	.078	.035	74025	—	—
3/16	3/16	2	.071	.060	—	—	74228
3/16	3/16	2	.073	.060	—	74128	—
3/16	3/16	2	.123	.045	74028	—	—
1/4	1/4	2	.090	.100	—	—	74231
1/4	1/4	2	.086	.100	—	74131	—
1/4	1/4	2	.156	.070	74031	—	—
*3/8	1/4	2-13/16	.138	.108	—	—	74234
*3/8	1/4	2-13/16	.154	.108	—	74134	—
*3/8	1/4	2-13/16	.238	.100	74034	—	—
*1/2	1/4	2-7/8	.194	.122	—	—	74237
*1/2	1/4	2-7/8	.217	.122	—	74137	—
*1/2	1/4	2-7/8	.335	.113	74037	—	—
*5/8	3/8	3	.249	.138	—	—	74240
*5/8	3/8	3	.280	.138	—	74140	—
*5/8	3/8	3	.430	.128	74040	—	—
*3/4	1/2	3	.304	.153	—	—	74243
*3/4	1/2	3	.343	.153	—	74143	—
*3/4	1/2	3	.526	.143	74043	—	—
*1	1/2	3-1/4	.421	.168	—	—	74246
*1	1/2	3-1/4	.479	.168	—	74146	—
*1	1/2	3-1/4	.729	.158	74046	—	—

*Steel Shank / Con mango de acero / Avec queue en acier / Mit Stahlschaft

NOTE: DC₁ dimension varies based on angle. Contact your KSPT representative or consult SGS Tool Wizard® for dimension information.

3 Flute Countersink

Series 603 Fractional	Hardness	Vc (sfm)	DC • in								
			1/8	3/16	1/4	3/8	1/2	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	125	RPM	3820	2547	1910	1273	955	637	478
			(100-150)	Fr	0.0008	0.0012	0.0016	0.0024	0.0031	0.0047	0.0063
				Feed (ipm)	3.0	3.0	3.0	3.0	3.0	3.0	3.0
		≤ 300 Bhn or ≤ 32 HRc	60	RPM	1834	1222	917	611	458	306	229
			(48-72)	Fr	0.0007	0.0011	0.0014	0.0021	0.0028	0.0043	0.0057
				Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3
		≤ 425 Bhn or ≤ 45 HRc	45	RPM	1375	917	688	458	344	229	172
			(36-54)	Fr	0.0004	0.0007	0.0009	0.0013	0.0017	0.0026	0.0035
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	95	RPM	2903	1935	1452	968	726	484	363
			(76-114)	Fr	0.0007	0.0010	0.0014	0.0021	0.0028	0.0041	0.0055
				Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0
		≤ 375 Bhn or ≤ 40 HRc	60	RPM	1834	1222	917	611	458	306	229
			(48-72)	Fr	0.0007	0.0010	0.0013	0.0020	0.0026	0.0039	0.0052
				Feed (ipm)	1.2	1.2	1.2	1.2	1.2	1.2	1.2
		≤ 425 Bhn or ≤ 45 HRc	35	RPM	1070	713	535	357	267	178	134
			(28-42)	Fr	0.0004	0.0006	0.0007	0.0011	0.0015	0.0022	0.0030
				Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc	35	RPM	1070	713	535	357	267	178	134
			(28-42)	Fr	0.0004	0.0006	0.0007	0.0011	0.0015	0.0022	0.0030
				Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4
		≤ 375 Bhn or ≤ 40 HRc	25	RPM	764	509	382	255	191	127	96
			(20-30)	Fr	0.0003	0.0004	0.0005	0.0008	0.0010	0.0016	0.0021
				Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 250 Bhn or ≤ 24 HRc	53	RPM	1620	1080	810	540	405	270	202
			(42-64)	Fr	0.0004	0.0006	0.0009	0.0013	0.0017	0.0026	0.0035
				Feed (ipm)	0.7	0.7	0.7	0.7	0.7	0.7	0.7
		≤ 330 Bhn or ≤ 36 HRc	46	RPM	1406	937	703	469	351	234	176
			(37-55)	Fr	0.0004	0.0005	0.0007	0.0011	0.0014	0.0021	0.0028
				Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	28	RPM	856	570	428	285	214	143	107
			(22-34)	Fr	0.0005	0.0007	0.0009	0.0014	0.0019	0.0028	0.0037
				Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4
		≤ 375 Bhn or ≤ 40 HRc	21	RPM	642	428	321	214	160	107	80
			(17-25)	Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	105	RPM	3209	2139	1604	1070	802	535	401
			(84-126)	Fr	0.0009	0.0014	0.0018	0.0027	0.0036	0.0054	0.0072
				Feed (ipm)	2.9	2.9	2.9	2.9	2.9	2.9	2.9
		≤ 330 Bhn or ≤ 36 HRc	75	RPM	2292	1528	1146	764	573	382	287
			(60-90)	Fr	0.0009	0.0014	0.0018	0.0027	0.0037	0.0055	0.0073
				Feed (ipm)	2.1	2.1	2.1	2.1	2.1	2.1	2.1

continued on next page

3 Flute Countersink

Series 603 Fractional	Hardness	Vc (sfm)		DC • in						
				1/8	3/16	1/4	3/8	1/2	3/4	1
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	225	RPM	6876	4584	3438	2292	1719	1146	860
		≤ 80 Bhn or ≤ 47 HRb	Fr	0.0011	0.0017	0.0023	0.0034	0.0045	0.0068	0.0091
		(180-270)	Feed (ipm)	7.8	7.8	7.8	7.8	7.8	7.8	7.8
		190	RPM	5806	3871	2903	1935	1452	968	726
		≤ 150 Bhn or ≤ 88 HRb	Fr	0.0011	0.0017	0.0022	0.0034	0.0045	0.0067	0.0090
		(152-228)	Feed (ipm)	6.5	6.5	6.5	6.5	6.5	6.5	6.5
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	95	RPM	2903	1935	1452	968	726	484	363
		≤ 140 Bhn or ≤ 3 HRc	Fr	0.0006	0.0009	0.0012	0.0018	0.0023	0.0035	0.0047
		(76-114)	Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7
		80	RPM	2445	1630	1222	815	611	407	306
		≤ 200 Bhn or ≤ 23 HRc	Fr	0.0006	0.0009	0.0011	0.0017	0.0023	0.0034	0.0046
		(64-96)	Feed (ipm)	1.4	1.4	1.4	1.4	1.4	1.4	1.4
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	18	RPM	550	367	275	183	138	92	69
		≤ 220 Bhn or ≤ 19 HRc	Fr	0.0004	0.0005	0.0007	0.0011	0.0015	0.0022	0.0029
		(14-22)	Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		14	RPM	428	285	214	143	107	71	53
		≤ 320 Bhn or ≤ 34 HRc	Fr	0.0002	0.0004	0.0005	0.0007	0.0009	0.0014	0.0019
		(11-17)	Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
		12	RPM	367	244	183	122	92	61	46
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.0003	0.0004	0.0005	0.0008	0.0011	0.0016	0.0022
		(10-14)	Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	36	RPM	1100	733	550	367	275	183	138
		≤ 275 Bhn or ≤ 28 HRc	Fr	0.0007	0.0011	0.0015	0.0022	0.0029	0.0044	0.0058
		(29-43)	Feed (ipm)	0.8	0.8	0.8	0.8	0.8	0.8	0.8
		28	RPM	856	570	428	285	214	143	107
		≤ 350 Bhn or ≤ 38 HRc	Fr	0.0006	0.0009	0.0012	0.0018	0.0023	0.0035	0.0047
		(22-34)	Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	20	RPM	611	407	306	204	153	102	76
		≤ 475 Bhn or ≤ 50 HRc	Fr	0.0002	0.0002	0.0003	0.0005	0.0007	0.0010	0.0013
		(16-24)	Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

6 Flute Countersink



606

FRACTIONAL SERIES

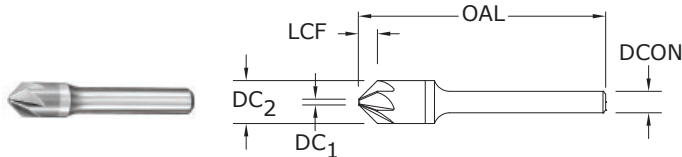

CUTTING DIAMETER DC ₂	SHANK DIAMETER DCON	inch			EDP NO.		
		OVERALL LENGTH OAL	FLUTE LENGTH LCF	TIP DIAMETER DC ₁	UNCOATED 60°	UNCOATED 82°	UNCOATED 90°
1/8	1/8	1-1/2	.045	.035	—	—	74249
1/8	1/8	1-1/2	.052	.035	—	74149	—
1/8	1/8	1-1/2	.078	.035	74049	—	—
3/16	3/16	2	.071	.045	—	—	74252
3/16	3/16	2	.082	.045	—	74152	—
3/16	3/16	2	.123	.045	74052	—	—
1/4	1/4	2	.090	.070	—	—	74255
1/4	1/4	2	.104	.070	—	74155	—
1/4	1/4	2	.156	.070	74055	—	—
*3/8	1/4	2-13/16	.138	.100	—	—	74258
*3/8	1/4	2-13/16	.158	.100	—	74158	—
*3/8	1/4	2-13/16	.238	.100	74058	—	—
*1/2	1/4	2-7/8	.170	.160	—	—	74261
*1/2	1/4	2-7/8	.196	.160	—	74161	—
*1/2	1/4	2-7/8	.294	.160	74061	—	—
*5/8	3/8	3	.218	.190	—	—	74264
*5/8	3/8	3	.250	.190	—	74164	—
*5/8	3/8	3	.377	.190	74064	—	—
*3/4	1/2	3	.265	.220	—	—	74267
*3/4	1/2	3	.305	.220	—	74167	—
*3/4	1/2	3	.459	.220	74067	—	—
*1	1/2	3-1/4	.370	.260	—	—	74270
*1	1/2	3-1/4	.426	.260	—	74170	—
*1	1/2	3-1/4	.641	.260	74070	—	—

*Steel Shank / Con mango de acero / Avec queue en acier / Mit Stahlschaft

NOTE: DC₁ dimension varies based on angle. Contact your KSPT representative or consult SGS Tool Wizard® for dimension information.

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0005

3/8–1 DIAMETER

DC = +0.003/–0.000

Included Angle +1°/–1°

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

FRACTIONAL 6 Flute Countersink

Series 606 Fractional	Hardness	Vc (sfm)	DC • in								
			1/8	3/16	1/4	3/8	1/2	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	125	RPM	3820	2547	1910	1273	955	637	478
			(100-150)	Fr	0.0010	0.0016	0.0021	0.0031	0.0042	0.0063	0.0084
				Feed (ipm)	4.0	4.0	4.0	4.0	4.0	4.0	4.0
		≤ 300 Bhn or ≤ 32 HRc	60	RPM	1834	1222	917	611	458	306	229
			(48-72)	Fr	0.0010	0.0015	0.0020	0.0029	0.0039	0.0059	0.0079
				Feed (ipm)	1.8	1.8	1.8	1.8	1.8	1.8	1.8
		≤ 425 Bhn or ≤ 45 HRc	45	RPM	1375	917	688	458	344	229	172
			(36-54)	Fr	0.0006	0.0009	0.0012	0.0017	0.0023	0.0035	0.0047
				Feed (ipm)	0.8	0.8	0.8	0.8	0.8	0.8	0.8
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	95	RPM	2903	1935	1452	968	726	484	363
			(76-114)	Fr	0.0009	0.0013	0.0018	0.0027	0.0036	0.0054	0.0072
				Feed (ipm)	2.6	2.6	2.6	2.6	2.6	2.6	2.6
		≤ 375 Bhn or ≤ 40 HRc	60	RPM	1834	1222	917	611	458	306	229
			(48-72)	Fr	0.0009	0.0014	0.0019	0.0028	0.0037	0.0056	0.0074
				Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7
		≤ 425 Bhn or ≤ 45 HRc	35	RPM	1070	713	535	357	267	178	134
			(28-42)	Fr	0.0006	0.0008	0.0011	0.0017	0.0022	0.0034	0.0045
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc	35	RPM	1070	713	535	357	267	178	134
			(28-42)	Fr	0.0006	0.0008	0.0011	0.0017	0.0022	0.0034	0.0045
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		≤ 375 Bhn or ≤ 40 HRc	25	RPM	764	509	382	255	191	127	96
			(20-30)	Fr	0.0003	0.0004	0.0005	0.0008	0.0010	0.0016	0.0021
				Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 250 Bhn or ≤ 24 HRc	53	RPM	1620	1080	810	540	405	270	202
			(42-64)	Fr	0.0006	0.0009	0.0012	0.0019	0.0025	0.0037	0.0049
				Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
		≤ 330 Bhn or ≤ 36 HRc	46	RPM	1406	937	703	469	351	234	176
			(37-55)	Fr	0.0005	0.0007	0.0010	0.0015	0.0020	0.0030	0.0040
				Feed (ipm)	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	28	RPM	856	570	428	285	214	143	107
			(22-34)	Fr	0.0007	0.0011	0.0014	0.0021	0.0028	0.0042	0.0056
				Feed (IPM)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		≤ 375 Bhn or ≤ 40 HRc	21	RPM	642	428	321	214	160	107	80
			(17-25)	Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0019	0.0025
				Feed (IPM)	0.2	0.2	0.2	0.2	0.2	0.2	0.2

continued on next page

6 Flute Countersink

Series 606 Fractional	Hardness	Vc (sfm)	DC • in								
			1/8	3/16	1/4	3/8	1/2	3/4	1		
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	105	RPM	3209	2139	1604	1070	802	535	401
			(84-126)	Fr	0.0012	0.0018	0.0024	0.0036	0.0049	0.0073	0.0097
				Feed (ipm)	3.9	3.9	3.9	3.9	3.9	3.9	3.9
		≤ 330 Bhn or ≤ 36 HRc	75	RPM	2292	1528	1146	764	573	382	287
			(60-90)	Fr	0.0012	0.0018	0.0024	0.0037	0.0049	0.0073	0.0098
				Feed (ipm)	2.8	2.8	2.8	2.8	2.8	2.8	2.8
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	225	RPM	6876	4584	3438	2292	1719	1146	860
			(180-270)	Fr	0.0015	0.0022	0.0030	0.0045	0.0060	0.0090	0.0120
				Feed (ipm)	10.3	10.3	10.3	10.3	10.3	10.3	10.3
		≤ 150 Bhn or ≤ 88 HRb	190	RPM	5806	3871	2903	1935	1452	968	726
			(152-228)	Fr	0.0015	0.0022	0.0030	0.0045	0.0060	0.0090	0.0120
				Feed (ipm)	8.7	8.7	8.7	8.7	8.7	8.7	8.7
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	95	RPM	2903	1935	1452	968	726	484	363
			(76-114)	Fr	0.0008	0.0011	0.0015	0.0023	0.0030	0.0045	0.0061
				Feed (ipm)	2.2	2.2	2.2	2.2	2.2	2.2	2.2
		≤ 200 Bhn or ≤ 23 HRc	80	RPM	2445	1630	1222	815	611	407	306
			(64-96)	Fr	0.0008	0.0012	0.0016	0.0023	0.0031	0.0047	0.0062
				Feed (ipm)	1.9	1.9	1.9	1.9	1.9	1.9	1.9

continued on next page

6 Flute Countersink

Series 606 Fractional	Hardness	Vc (sfm)		DC • in						
				1/8	3/16	1/4	3/8	1/2	3/4	1
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	18 (14-22)	RPM	550	367	275	183	138	92	69
			Fr	0.0005	0.0008	0.0011	0.0016	0.0022	0.0033	0.0044
			Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
		14 (11-17)	RPM	428	285	214	143	107	71	53
			Fr	0.0005	0.0007	0.0009	0.0014	0.0019	0.0028	0.0037
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		12 (10-14)	RPM	367	244	183	122	92	61	46
			Fr	0.0003	0.0004	0.0005	0.0008	0.0011	0.0016	0.0022
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	36 (29-43)	RPM	1100	733	550	367	275	183	138
			Fr	0.0009	0.0014	0.0018	0.0027	0.0036	0.0055	0.0073
			Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
		28 (22-34)	RPM	856	570	428	285	214	143	107
			Fr	0.0007	0.0011	0.0014	0.0021	0.0028	0.0042	0.0056
			Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		21 (17-25)	RPM	642	428	321	214	160	107	80
			Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0019	0.0025
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	20 (16-24)	RPM	611	407	306	204	153	102	76
			Fr	0.0003	0.0005	0.0007	0.0010	0.0013	0.0020	0.0026
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)


rpm = Vc x 3.82 / DC

ipm = Fr x rpm


reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Straight Flute Accu-Reamer

**200**

FRACTIONAL SERIES

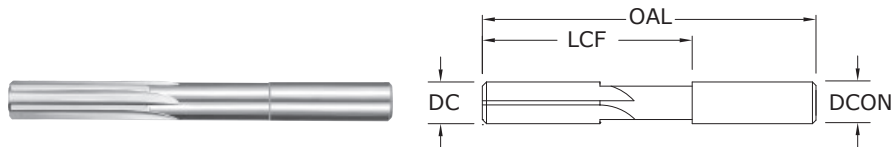

inch					EDP NO.
CUTTING DIAMETER DC	SHANK DIAMETER DCON	MAXIMUM REAM LENGTH LCF	OVERALL LENGTH OAL	NO. OF FLUTES	UNCOATED
3/64	3/64	3/4	1-1/2	4	70003
1/16	1/16	3/4	1-1/2	4	70004
5/64	5/64	1	2	4	70005
3/32	3/32	1-1/4	2-1/4	4	70006
7/64	7/64	1-1/4	2-1/4	4	70007
1/8	1/8	1-1/4	2-1/4	4	70008
9/64	9/64	1-1/2	2-1/2	4	70009
5/32	5/32	1-1/2	2-1/2	4	70010
11/64	11/64	1-3/4	2-3/4	4	70011
3/16	3/16	1-3/4	2-3/4	4	70012
13/64	13/64	2	3	4	70013
7/32	7/32	2	3	4	70014
15/64	15/64	2	3	4	70015
1/4	1/4	2	3	4	70016
17/64	17/64	2-1/4	3-1/4	6	70017
9/32	9/32	2-1/4	3-1/4	6	70018
19/64	19/64	2-1/4	3-1/4	6	70019
5/16	5/16	2-1/4	3-1/4	6	70020
21/64	21/64	2-3/8	3-1/2	6	70021
11/32	11/32	2-3/8	3-1/2	6	70022
23/64	23/64	2-3/8	3-1/2	6	70023
3/8	3/8	2-3/8	3-1/2	6	70024
25/64	25/64	2-7/8	4	6	70025
13/32	13/32	2-7/8	4	6	70026
27/64	27/64	2-7/8	4	6	70027
7/16	7/16	2-7/8	4	6	70028
29/64	29/64	2-7/8	4	6	70029
15/32	15/32	2-7/8	4	6	70030
31/64	31/64	2-7/8	4	6	70031
1/2	1/2	2-7/8	4	6	70032

continued on next page

TOLERANCES (inch)

DC = +0.0002/-0.0000

DCON = +0.0002/-0.0000

STEELS

STAINLESS STEELS

CAST IRON


NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Straight Flute Accu-Reamer



200
FRACTIONAL SERIES

CONTINUED

inch				NO. OF FLUTES
CUTTING DIAMETER DC	SHANK DIAMETER DCON	MAXIMUM REAM LENGTH LCF	OVERALL LENGTH OAL	
.0470 – .0625	1/16	3/4	1-1/2	4
.0626 – .0781	5/64	1	2	4
.0782 – .0938	3/32	1-1/4	2-1/4	4
.0939 – .1094	7/64	1-1/4	2-1/4	4
.1095 – .1250	1/8	1-1/4	2-1/4	4
.1251 – .1406	9/64	1-1/2	2-1/2	4
.1407 – .1562	5/32	1-1/2	2-1/2	4
.1563 – .1719	11/64	1-3/4	2-3/4	4
.1720 – .1875	3/16	1-3/4	2-3/4	4
.1876 – .2031	13/64	2	3	4
.2032 – .2188	7/32	2	3	4
.2189 – .2344	15/64	2	3	4
.2345 – .2500	1/4	2	3	4
.2501 – .2656	17/64	2-1/4	3-1/4	6
.2657 – .2812	9/32	2-1/4	3-1/4	6
.2813 – .2969	19/64	2-1/4	3-1/4	6
.2970 – .3125	5/16	2-1/4	3-1/4	6
.3126 – .3281	21/64	2-3/8	3-1/2	6
.3282 – .3438	11/32	2-3/8	3-1/2	6
.3439 – .3594	23/64	2-3/8	3-1/2	6
.3595 – .3750	3/8	2-3/8	3-1/2	6
.3751 – .3906	25/64	2-7/8	4	6
.3907 – .4062	13/32	2-7/8	4	6
.4063 – .4219	27/64	2-7/8	4	6
.4220 – .4375	7/16	2-7/8	4	6
.4376 – .4531	29/64	2-7/8	4	6
.4532 – .4688	15/32	2-7/8	4	6
.4689 – .4844	31/64	2-7/8	4	6
.4845 – .5000	1/2	2-7/8	4	6

SER 200 Fractional reamers can be ordered to specific diameters according to the size range of Cutting Diameter DC. Please order as:

- 200. Then the size of the cut diameter in fractional format.
- i.e. 200.0492
- Description: Series 200 size 0.0492
- For Metric sizes convert to fractional inches (i.e. $\div 25.4$)
- The above sample would be a 1.25mm size ($1.25 \div 25.4 = 0.0492$)

All other dimensions are fractional as per table including the Shank

Straight Flute Accu-Reamer

Series 200 Fractional	Hardness	Vc (sfm)		DC • in						
				1/16	1/8	3/16	1/4	5/16	3/8	1/2
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	150 (120-180)	RPM	9168	4584	3056	2292	1834	1528	1146
			Fr	0.0018	0.0035	0.0053	0.0071	0.0088	0.0106	0.0141
			Feed (ipm)	16.5	16.0	16.2	16.3	16.1	16.2	16.2
		75 (60-90)	RPM	4584	2292	1528	1146	917	764	573
			Fr	0.0016	0.0031	0.0047	0.0062	0.0078	0.0093	0.0124
			Feed (ipm)	7.3	7.1	7.2	7.1	7.2	7.1	7.1
		55 (44-66)	RPM	3362	1681	1121	840	672	560	420
			Fr	0.0009	0.0019	0.0028	0.0037	0.0046	0.0056	0.0074
			Feed (ipm)	3.0	3.2	3.1	3.1	3.1	3.1	3.1
		115 (92-138)	RPM	7029	3514	2343	1757	1406	1171	879
			Fr	0.0015	0.0030	0.0045	0.0060	0.0075	0.0090	0.0120
			Feed (ipm)	10.5	10.5	10.5	10.5	10.5	10.5	10.5
M	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	70 (56-84)	RPM	4278	2139	1426	1070	856	713	535
			Fr	0.0015	0.0030	0.0045	0.0060	0.0075	0.0090	0.0120
			Feed (ipm)	6.4	6.4	6.4	6.4	6.4	6.4	6.4
		45 (36-54)	RPM	2750	1375	917	688	550	458	344
			Fr	0.0009	0.0019	0.0028	0.0037	0.0046	0.0056	0.0074
			Feed (ipm)	2.5	2.6	2.6	2.5	2.5	2.6	2.5
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	40 (32-48)	RPM	2445	1222	815	611	489	407	306
			Fr	0.0010	0.0020	0.0029	0.0039	0.0049	0.0059	0.0078
			Feed (ipm)	2.4	2.4	2.4	2.4	2.4	2.4	2.4
		25 (20-30)	RPM	1528	764	509	382	306	255	191
			Fr	0.0006	0.0013	0.0019	0.0025	0.0031	0.0038	0.0050
			Feed (ipm)	0.9	1.0	1.0	1.0	0.9	1.0	1.0
K	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	75 (60-90)	RPM	4584	2292	1528	1146	917	764	573
			Fr	0.0010	0.0020	0.0029	0.0039	0.0049	0.0059	0.0078
			Feed (ipm)	4.6	4.6	4.4	4.5	4.5	4.5	4.5
		55 (44-66)	RPM	3362	1681	1121	840	672	560	420
			Fr	0.0008	0.0015	0.0023	0.0030	0.0038	0.0045	0.0060
			Feed (ipm)	2.7	2.5	2.6	2.5	2.6	2.5	2.5
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	35 (28-42)	RPM	2139	1070	713	535	428	357	267
			Fr	0.0010	0.0020	0.0029	0.0039	0.0049	0.0059	0.0078
			Feed (ipm)	2.1	2.1	2.1	2.1	2.1	2.1	2.1
		25 (20-30)	RPM	1528	764	509	382	306	255	191
			Fr	0.0006	0.0013	0.0019	0.0025	0.0031	0.0038	0.0050
			Feed (ipm)	0.9	1.0	1.0	1.0	0.9	1.0	1.0
K	CAST IRONS Gray, Malleable, Ductile	125 (100-150)	RPM	7640	3820	2547	1910	1528	1273	955
			Fr	0.0020	0.0040	0.0060	0.0081	0.0101	0.0121	0.0161
			Feed (ipm)	15.3	15.3	15.3	15.5	15.4	15.4	15.4
		95 (76-114)	RPM	5806	2903	1935	1452	1161	968	726
			Fr	0.0020	0.0040	0.0060	0.0081	0.0101	0.0121	0.0161
			Feed (ipm)	11.6	11.6	11.6	11.8	11.7	11.7	11.7

continued on next page

Straight Flute Accu-Reamer

	Series 200 Fractional	Hardness	Vc (sfm)	DC • in							
	1/16			1/8	3/16	1/4	5/16	3/8	1/2		
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	270	RPM	16502	8251	5501	4126	3300	2750	2063
			(216-324)	Fr	0.0025	0.0050	0.0075	0.0100	0.0125	0.0150	0.0200
				Feed (ipm)	41.3	41.3	41.3	41.3	41.3	41.3	41.3
		≤ 150 Bhn or ≤ 88 HRb	230	RPM	14058	7029	4686	3514	2812	2343	1757
			(184-276)	Fr	0.0025	0.0050	0.0075	0.0100	0.0125	0.0150	0.0200
				Feed (ipm)	35.1	35.1	35.1	35.1	35.1	35.1	35.1
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	115	RPM	7029	3514	2343	1757	1406	1171	879
			(92-138)	Fr	0.0013	0.0026	0.0038	0.0051	0.0064	0.0077	0.0102
				Feed (ipm)	9.1	9.1	8.9	9.0	9.0	9.0	9.0
		≤ 200 Bhn or ≤ 23 HRc	95	RPM	5806	2903	1935	1452	1161	968	726
			(76-114)	Fr	0.0013	0.0026	0.0038	0.0051	0.0064	0.0077	0.0102
				Feed (ipm)	7.5	7.5	7.4	7.4	7.4	7.5	7.4
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 220 Bhn or ≤ 19 HRc	20	RPM	1222	611	407	306	244	204	153
			(16-24)	Fr	0.0008	0.0015	0.0023	0.0030	0.0038	0.0045	0.0060
				Feed (ipm)	1.0	0.9	0.9	0.9	0.9	0.9	0.9
		≤ 320 Bhn or ≤ 34 HRc	15	RPM	917	458	306	229	183	153	115
			(12-18)	Fr	0.0006	0.0013	0.0019	0.0025	0.0031	0.0038	0.0050
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		≤ 425 Bhn or ≤ 45 HRc	10	RPM	611	306	204	153	122	102	76
			(8-12)	Fr	0.0004	0.0007	0.0011	0.0015	0.0018	0.0022	0.0029
				Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	45	RPM	2750	1375	917	688	550	458	344
			(36-54)	Fr	0.0015	0.0030	0.0045	0.0060	0.0075	0.0090	0.0120
				Feed (ipm)	4.1	4.1	4.1	4.1	4.1	4.1	4.1
		≤ 350 Bhn or ≤ 38 HRc	35	RPM	2139	1070	713	535	428	357	267
			(28-42)	Fr	0.0010	0.0020	0.0029	0.0039	0.0049	0.0059	0.0078
				Feed (ipm)	2.1	2.1	2.1	2.1	2.1	2.1	2.1
		≤ 440 Bhn or ≤ 47 HRc	25	RPM	1528	764	509	382	306	255	191
			(20-30)	Fr	0.0006	0.0013	0.0019	0.0025	0.0031	0.0038	0.0050
				Feed (ipm)	0.9	1.0	1.0	1.0	0.9	1.0	1.0
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	20	RPM	1222	611	407	306	244	204	153
			(16-24)	Fr	0.0004	0.0008	0.0012	0.0016	0.0019	0.0023	0.0031
				Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
		≤ 655 Bhn or ≤ 60 HRc	14	RPM	856	428	285	214	171	143	107
			(11-17)	Fr	0.0003	0.0007	0.0011	0.0014	0.0018	0.0021	0.0028
				Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm



increase speed and feed 30 percent when using coated reamers

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

METRIC

Straight Flute Reamer

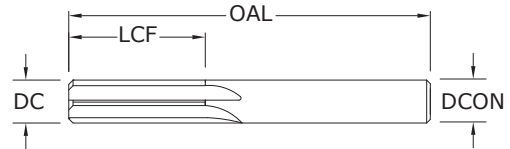
201M
 METRIC SERIES


CUTTING DIAMETER DC	SHANK DIAMETER DCON	mm		NO. OF FLUTES	EDP NO.
		MAXIMUM REAM LENGTH LCF	OVERALL LENGTH OAL		UNCOATED
1,0	1,0	6,0	32,0	4	81001
1,5	1,5	9,5	38,0	4	81003
2,0	2,0	12,7	44,0	4	81005
2,5	2,5	12,7	50,0	4	81007
3,0	3,0	16,0	57,0	4	81009
3,5	3,5	19,0	63,0	4	81011
4,0	4,0	19,0	63,0	4	81013
4,5	4,5	22,0	70,0	4	81015
5,0	5,0	25,0	75,0	4	81017
5,5	5,5	25,0	75,0	4	81019
6,0	6,0	25,0	75,0	4	81021
7,0	7,0	28,0	82,0	6	81023
8,0	8,0	28,0	82,0	6	81025
9,0	9,0	31,0	89,0	6	81027
10,0	10,0	31,0	89,0	6	81029

TOLERANCES (mm)
1–6 DIAMETER

DC = +0,008/–0,000

>6–10 DIAMETER

DC = +0,010/–0,000

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

 For patent
 information visit
www.ksptpatents.com

Straight Flute Reamer

Series 201M Metric	Hardness	Vc (m/min)	DC • mm							
			1	2	3	4	6	8	10	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	46 or ≤ 7 HRc (37-55)	RPM	14541	7271	4847	3635	2424	1818	1454
			Fr	0.028	0.056	0.085	0.113	0.169	0.226	0.282
			Feed (mm/min)	410	410	410	410	410	410	410
		23 or ≤ 32 HRc (18-27)	RPM	7271	3635	2424	1818	1212	909	727
			Fr	0.025	0.050	0.074	0.099	0.149	0.198	0.248
			Feed (mm/min)	180	180	180	180	180	180	180
		17 or ≤ 45 HRc (13-20)	RPM	5332	2666	1777	1333	889	666	533
			Fr	0.015	0.030	0.044	0.059	0.089	0.119	0.148
			Feed (mm/min)	79	79	79	79	79	79	79
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	35 or ≤ 28 HRc (28-42)	RPM	11148	5574	3716	2787	1858	1394	1115
			Fr	0.024	0.048	0.072	0.096	0.144	0.192	0.240
			Feed (mm/min)	268	268	268	268	268	268	268
		21 or ≤ 40 HRc (17-26)	RPM	6786	3393	2262	1696	1131	848	679
			Fr	0.024	0.048	0.072	0.096	0.144	0.192	0.240
			Feed (mm/min)	163	163	163	163	163	163	163
		14 or ≤ 45 HRc (11-16)	RPM	4362	2181	1454	1091	727	545	436
			Fr	0.015	0.030	0.045	0.060	0.089	0.119	0.149
			Feed (mm/min)	65	65	65	65	65	65	65
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	12 or ≤ 24 HRc (10-15)	RPM	3878	1939	1293	969	646	485	388
			Fr	0.015	0.031	0.046	0.062	0.093	0.124	0.155
			Feed (mm/min)	60	60	60	60	60	60	60
		8 or ≤ 40 HRc (6-9)	RPM	2424	1212	808	606	404	303	242
			Fr	0.010	0.020	0.030	0.040	0.059	0.079	0.099
			Feed (mm/min)	24	24	24	24	24	24	24
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	23 or ≤ 24 HRc (18-27)	RPM	7271	3635	2424	1818	1212	909	727
			Fr	0.015	0.030	0.045	0.059	0.089	0.119	0.149
			Feed (mm/min)	108	108	108	108	108	108	108
		17 or ≤ 36 HRc (13-20)	RPM	5332	2666	1777	1333	889	666	533
			Fr	0.012	0.024	0.036	0.048	0.072	0.096	0.120
			Feed (mm/min)	64	64	64	64	64	64	64
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	11 or ≤ 28 HRc (9-13)	RPM	3393	1696	1131	848	565	424	339
			Fr	0.015	0.029	0.044	0.059	0.088	0.118	0.147
			Feed (mm/min)	50	50	50	50	50	50	50
		8 or ≤ 40 HRc (6-9)	RPM	2424	1212	808	606	404	303	242
			Fr	0.010	0.020	0.030	0.040	0.059	0.079	0.099
			Feed (mm/min)	24	24	24	24	24	24	24

continued on next page

Straight Flute Reamer

Series 201M Metric	Hardness	Vc (m/min)	DC • mm								
			1	2	3	4	6	8	10		
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	38	RPM	12118	6059	4039	3029	2020	1515	1212
		(30-46)	Fr	0.032	0.064	0.097	0.129	0.193	0.257	0.322	
			Feed (mm/min)	390	390	390	390	390	390	390	
		≤ 330 Bhn or ≤ 36 HRc	29	RPM	9209	4605	3070	2302	1535	1151	921
		(23-35)	Fr	0.032	0.064	0.096	0.128	0.192	0.256	0.320	
			Feed (mm/min)	295	295	295	295	295	295	295	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	82	RPM	26174	13087	8725	6544	4362	3272	2617
		(66-99)	Fr	0.040	0.080	0.120	0.160	0.240	0.320	0.400	
			Feed (mm/min)	1047	1047	1047	1047	1047	1047	1047	
		≤ 150 Bhn or ≤ 88 HRb	70	RPM	22297	11148	7432	5574	3716	2787	2230
		(56-84)	Fr	0.040	0.080	0.120	0.160	0.240	0.320	0.400	
			Feed (mm/min)	892	892	892	892	892	892	892	
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	35	RPM	11148	5574	3716	2787	1858	1394	1115
		(28-42)	Fr	0.020	0.041	0.061	0.081	0.122	0.163	0.204	
			Feed (mm/min)	227	227	227	227	227	227	227	
		≤ 200 Bhn or ≤ 23 HRc	29	RPM	9209	4605	3070	2302	1535	1151	921
		(23-35)	Fr	0.020	0.041	0.061	0.082	0.122	0.163	0.204	
			Feed (mm/min)	188	188	188	188	188	188	188	

continued on next page

Straight Flute Reamer

Series 201M Metric	Hardness	Vc (m/min)	DC • mm							
			1	2	3	4	6	8	10	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	6	RPM	1939	969	646	485	323	242	194
		(5-7)	Fr	0.012	0.024	0.036	0.047	0.071	0.095	0.119
			Feed (mm/min)	23	23	23	23	23	23	23
		5	RPM	1454	727	485	364	242	182	145
		(4-5)	Fr	0.010	0.021	0.031	0.041	0.062	0.083	0.103
			Feed (mm/min)	15	15	15	15	15	15	15
		3	RPM	969	485	323	242	162	121	97
		(2-4)	Fr	0.006	0.012	0.019	0.025	0.037	0.050	0.062
			Feed (mm/min)	6	6	6	6	6	6	6
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	14	RPM	4362	2181	1454	1091	727	545	436
		(11-16)	Fr	0.024	0.048	0.072	0.096	0.144	0.193	0.241
			Feed (mm/min)	105	105	105	105	105	105	105
		11	RPM	3393	1696	1131	848	565	424	339
		(9-13)	Fr	0.015	0.029	0.044	0.059	0.088	0.118	0.147
			Feed (mm/min)	50	50	50	50	50	50	50
		8	RPM	2424	1212	808	606	404	303	242
		(6-9)	Fr	0.010	0.020	0.030	0.040	0.059	0.079	0.099
			Feed (mm/min)	24	24	24	24	24	24	24
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	6	RPM	1939	969	646	485	323	242	194
		(5-7)	Fr	0.006	0.012	0.019	0.025	0.037	0.050	0.062
			Feed (mm/min)	12	12	12	12	12	12	12
		4	RPM	1272	636	424	318	212	159	127
		(3-5)	Fr	0.006	0.013	0.019	0.025	0.038	0.050	0.063
			Feed (mm/min)	8	8	8	8	8	8	8

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

increase speed and feed 30 percent when using coated reamers

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Routers



Routing

HIGH PERFORMANCE ROUTERS	SERIES	DESCRIPTION	PAGE	S&F PAGE
Carbon Composite	20-CCR	Multi-Flute Carbon Composite Fractional	386	388
	20M-CCR	Multi-Flute Carbon Composite Metric	386	389
	20-CCR-LHC	Multi-Flute Carbon Composite Left Hand Cut Fractional	387	388
	20M-CCR-LHC	Multi-Flute Carbon Composite Left Hand Cut Metric	387	389
Coarse Cut Carbon Composite	31-CCR	Multi-Flute Coarse Composite Fractional	390	391
	31M-CCR	Multi-Flute Coarse Composite Metric	390	392
Compression	25	Multi-Flute Compression Fractional	393	394
	25M	Multi-Flute Compression Metric	393	395
GENERAL APPLICATION ROUTERS	SERIES	DESCRIPTION	PAGE	S&F PAGE
Up Cut	21	2 Flute Up Cut Fractional	396	398
	21M	2 Flute Up Cut Metric	396	399
Down Cut	22	2 Flute Down Cut Fractional	397	398
	22M	2 Flute Down Cut Metric	397	399

Speed & Feed Recommendations listed after each series

Ranurado

RANURADORES DE ALTO RENDIMIENTO	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
Compuesto de carbono	20-CCR	Filo múltiple, compuesto de carbono, fraccional	386	388
	20M-CCR	Filo múltiple, compuesto de carbono, métrico	386	389
	20-CCR-LHC	Filo múltiple, carbon composite corte hélice izquierda fraccional	387	388
	20M-CCR-LHC	Filo múltiple, carbo composite corte hélice izquierda métrico	387	389
Compuesto de carbono de corte grueso	31-CCR	Filo múltiple, compuesto grueso, fraccional	390	391
	31M-CCR	Filo múltiple, compuesto grueso, métrico	390	392
Compresión	25	Filo múltiple, compresión, fraccional	393	394
	25M	Filo múltiple, compresión, métrico	393	395

RANURADORES DE USO GENERAL	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
Corte ascendente	21	2 filos, corte ascendente, fraccional	396	398
	21M	2 filos, corte ascendente, métrico	396	399
Corte descendente	22	2 filos, corte descendente, fraccional	397	398
	22M	2 filos, corte descendente, métrico	397	399

Recomendaciones de velocidades y avances mostradas tras cada serie

Détourage

FRAISES A DETOURER HAUTE PERFORMANCE	SÈRIES	DESCRIPTION	PAGE	S&F PAGE
Composites carbone	20-CCR	Multi-dents pour composites carbone (fractionnel)	386	388
	20M-CCR	Multi-dents pour composites carbone (métrique)	386	389
	20-CCR-LHC	Multi-dents carbon composite coupe à gauche (fractionnel)	387	388
	20M-CCR-LHC	Multi-dents carbon composite coupe à gauche (métrique)	387	389
Pour composites carbone coupe grossière	31-CCR	Multi-dents pour composites grossiers (fractionnel)	390	391
	31M-CCR	Multi-dents pour composites grossiers (métrique)	390	392
Compression	25	Multi-dents de compression (fractionnel)	393	394
	25M	Multi-dents de compression (métrique)	393	395

FRAISES À DÉTOURER UNIVERSELLES	SÈRIES	DESCRIPTION	PAGE	S&F PAGE
Coupe ascendante	21	2 dents coupe ascendante (fractionnel)	396	398
	21M	2 dents coupe ascendante (métrique)	396	399
Coupe descendante	22	2 dents coupe descendante (fractionnel)	397	398
	22M	2 dents coupe descendante (métrique)	397	399


Recommandations de vitesse et avance indiquées après chaque série

HOCHLEISTUNGS-KONTURENFRÄSER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
Kohlefaserverbundwerkstoff	20-CCR	Zölliger Konturenfräser für Kohlefaserverbundwerkstoff	386	388
	20M-CCR	Konturenfräser für Kohlefaserverbundwerkstoff	386	389
	20-CCR-LHC	Mehrschneider Carbon Composite Links geschnittene zöllig	387	388
	20M-CCR-LHC	Mehrschneider Carbon Composite Links geschnittene metrisch	387	389
Grobschnitt Kohlefaserverbundwerkstoff	31-CCR	Zölliger Konturenfräser für Verbundkunststoff	390	391
	31M-CCR	Konturenfräser für Verbundkunststoff	390	392
Gegenläufiger Drall	25	Zölliger Gegenläufiger Konturenfräser	393	394
	25M	Gegenläufiger Konturenfräser	393	395

STANDARD-KONTURENFRÄSER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
Rechtsspirale	21	Zölliger VHM-Fräser mit 2 Schneiden (ziehend)	396	398
	21M	VHM-Fräser mit 2 Schneiden (ziehend)	396	399
Linksspirale	22	Zölliger VHM-Fräser mit 2 Schneiden (drückend)	397	398
	22M	VHM-Fräser mit 2 Schneiden (drückend)	397	399

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie


Carbon Composite



20-CCR

FRACTIONAL SERIES

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

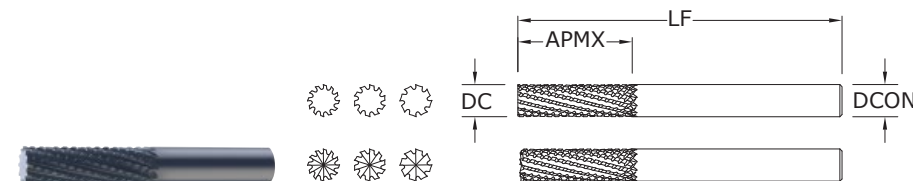

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	8	No End Cutting	72930	73013
1/4	1	2-1/2	1/4	8	End Cutting	72947	73012
5/16	1	2-1/2	5/16	10	No End Cutting	72948	73026
5/16	1	2-1/2	5/16	10	End Cutting	72949	73014
3/8	1-1/8	2-1/2	3/8	12	No End Cutting	72950	73028
3/8	1-1/8	2-1/2	3/8	12	End Cutting	72951	73027
1/2	1-1/2	3-1/2	1/2	12	No End Cutting	72952	73041
1/2	1-1/2	3-1/2	1/2	12	End Cutting	72953	73029

TOLERANCES (inch)

DC = +.000/- .005

DCON = h₆


NON-FERROUS

For patent
information visit
www.ksptpatents.com

20M-CCR

METRIC SERIES

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

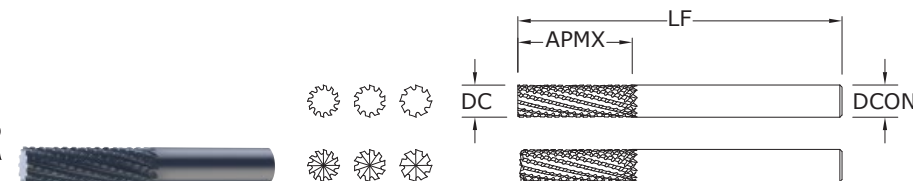

mm						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Ti-NAMITE-B (TiB ₂)	Di-NAMITE® (Diamond)
2,0	6,0	38,0	3,0	5	End Cutting	82930	83100	83070
3,0	10,0	38,0	3,0	6	End Cutting	82931	83101	83071
4,0	12,0	50,0	4,0	7	End Cutting	82932	83102	83072
5,0	15,0	50,0	6,0	8	End Cutting	82933	83103	83073
6,0	25,0	63,0	6,0	8	No End Cutting	82966	83104	83027
6,0	25,0	63,0	6,0	8	End Cutting	82967	83105	83026
8,0	25,0	63,0	8,0	10	No End Cutting	82968	83106	83029
8,0	25,0	63,0	8,0	10	End Cutting	82969	83107	83028
10,0	28,0	63,0	10,0	12	No End Cutting	82970	83108	83042
10,0	28,0	63,0	10,0	12	End Cutting	82971	83109	83041
12,0	38,0	89,0	12,0	12	No End Cutting	82972	83110	83044
12,0	38,0	89,0	12,0	12	End Cutting	82973	83111	83043

TOLERANCES (mm)

DC = +0,000/-0,130


DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com



FRACTIONAL & METRIC Carbon Composite

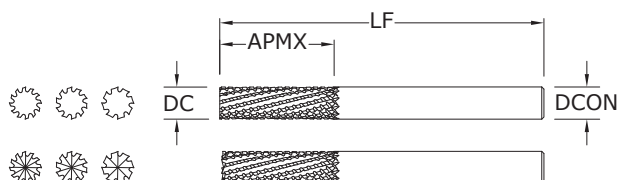

20-CCR-LHC FRACTIONAL SERIES

TOLERANCES (inch)

DC = +.000/- .005


DCON = h_6

NON-FERROUS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	EDP NO.	
						UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	8	No End Cutting	73070	73078
1/4	1	2-1/2	1/4	8	End Cutting	73071	73079
5/16	1	2-1/2	5/16	10	No End Cutting	73072	73080
5/16	1	2-1/2	5/16	10	End Cutting	73073	73081
3/8	1-1/8	2-1/2	3/8	12	No End Cutting	73074	73082
3/8	1-1/8	2-1/2	3/8	12	End Cutting	73075	73083

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

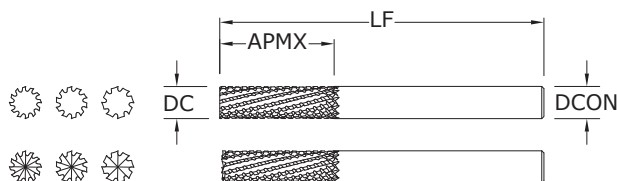

20M-CCR-LHC METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,130

DCON = h_6


NON-FERROUS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	EDP NO.	
						UNCOATED	Di-NAMITE® (Diamond)
6,0	25,0	63,0	6,0	8	No End Cutting	83220	83230
6,0	25,0	63,0	6,0	8	End Cutting	83221	83231
8,0	25,0	63,0	8,0	10	No End Cutting	83222	83232
8,0	25,0	63,0	8,0	10	End Cutting	83223	83233
10,0	28,0	63,0	10,0	12	No End Cutting	83224	83234
10,0	28,0	63,0	10,0	12	End Cutting	83225	83235

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

Carbon Composite



Series 20 Fractional			Vc (sfm)	DC • in						
	Ae x DC	Ap x DC			1/4	5/16	3/8	1/2		
N	CFRP, AFRP (CARBON FIBER, ARAMID FIBER)		1	≤ 1	400 (320-480)	RPM	6112	4890	4075	3056
						Fr	0.0049	0.0094	0.0135	0.0180
						Feed (ipm)	30	46	55	55
			≤ 0.5	≤ 1.5	500 (400-600)	RPM	7640	6112	5093	3820
						Fr	0.0049	0.0094	0.0135	0.0180
						Feed (ipm)	38	58	69	69
			≤ 0.05	≤ 2	825 (660-990)	RPM	12606	10085	8404	6303
						Fr	0.0111	0.0215	0.0309	0.0413
						Feed (ipm)	140	217	260	260
	GFRP (FIBERGLASS)		1	≤ 1	320 (256-384)	RPM	4890	3912	3260	2445
						Fr	0.0049	0.0095	0.0135	0.0180
						Feed (ipm)	24	37	44	44
			≤ 0.5	≤ 1.5	400 (320-480)	RPM	6112	4890	4075	3056
						Fr	0.0049	0.0095	0.0135	0.0180
						Feed (ipm)	30	46	55	55
			≤ 0.05	≤ 2	660 (528-792)	RPM	10085	8068	6723	5042
						Fr	0.0110	0.0214	0.0311	0.0414
						Feed (ipm)	111	173	209	209
	CARBON, GRAPHITE		1	≤ 1	480 (384-576)	RPM	7334	5868	4890	3667
						Fr	0.0064	0.0124	0.0180	0.0240
						Feed (ipm)	47	73	88	88
			≤ 0.5	≤ 1.5	600 (480-720)	RPM	9168	7334	6112	4584
						Fr	0.0064	0.0124	0.0180	0.0240
						Feed (ipm)	59	91	110	110
		≤ 0.05	≤ 2	990 (792-1188)	RPM	15127	12102	10085	7564	
					Fr	0.0147	0.0287	0.0412	0.0549	
					Feed (ipm)	223	347	415	415	
PLASTICS		1	≤ 1	665 (640-690)	RPM	10161	8129	6774	5081	
					Fr	0.0077	0.0150	0.0217	0.0241	
					Feed (ipm)	78	122	147	147	
		≤ 0.5	≤ 1.5	1000 (800-1200)	RPM	15280	12224	10187	7640	
					Fr	0.0077	0.0150	0.0217	0.0241	
					Feed (ipm)	118	183	221	184	
		≤ 0.05	≤ 2	1650 (1320-1980)	RPM	25212	20170	16808	12606	
					Fr	0.0147	0.0287	0.0413	0.0551	
					Feed (ipm)	370	579	694	694	

HSM (high speed machining)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant


dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials

refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)

Carbon Composite

Series 20M Metric				Vc (m/min)	DC • mm						
	Ae x DC	Ap x DC	3		6	8	10	12			
N	CFRP, AFRP (CARBON FIBER, ARAMID FIBER)		1	≤ 1	120 (96-164)	RPM	12722	6361	4771	3817	3181
						Fr	0.055	0.113	0.243	0.366	0.439
						Feed (mm/min)	700	720	1160	1395	1395
			≤ 0.5	≤ 1.5	150 (120-180)	RPM	15903	7951	5963	4771	3976
						Fr	0.055	0.113	0.243	0.366	0.439
						Feed (mm/min)	875	900	1450	1744	1744
			≤ 0.05	≤ 2	250 (200-300)	RPM	26504	13252	9939	7951	6626
						Fr	0.126	0.260	0.556	0.833	1.000
						Feed (mm/min)	3350	3450	5527	6625	6625
	GFRP (FIBERGLASS)		1	≤ 1	100 (80-120)	RPM	10602	5301	3976	3181	2650
						Fr	0.054	0.111	0.236	0.357	0.428
						Feed (mm/min)	570	587	940	1135	1135
			≤ 0.5	≤ 1.5	120 (96-164)	RPM	12722	6361	4771	3817	3181
						Fr	0.054	0.111	0.236	0.357	0.428
						Feed (mm/min)	684	704	1128	1362	1362
			≤ 0.05	≤ 2	200 (160-240)	RPM	21203	10602	7951	6361	5301
						Fr	0.124	0.261	0.557	1.011	1.213
						Feed (mm/min)	2629	2765	4430	6430	6430
	CARBON, GRAPHITE		1	≤ 1	145 (116-174)	RPM	15372	7686	5765	4612	3843
						Fr	0.069	0.152	0.323	0.482	0.579
						Feed (mm/min)	1061	1165	1860	2224	2224
			≤ 0.5	≤ 1.5	185 (148-222)	RPM	19613	9807	7355	5884	4903
						Fr	0.069	0.152	0.323	0.482	0.579
						Feed (mm/min)	1353	1486	2373	2838	2838
			≤ 0.05	≤ 2	300 (240-360)	RPM	31805	15903	11927	9542	7951
						Fr	0.159	0.348	0.740	1.109	1.331
						Feed (mm/min)	5057	5535	8820	10580	10580
	PLASTICS		1	≤ 1	245 (196-294)	RPM	25974	12987	9740	7792	6494
						Fr	0.069	0.150	0.319	0.477	0.572
						Feed (mm/min)	1792	1945	3107	3717	3717
			≤ 0.5	≤ 1.5	305 (244-366)	RPM	32335	16168	12126	9701	8084
						Fr	0.069	0.150	0.319	0.477	0.572
						Feed (mm/min)	2231	2421	3868	4627	4627
			≤ 0.05	≤ 2	505 (404-606)	RPM	53538	26769	20077	16062	13385
						Fr	0.159	0.344	0.732	1.097	1.316
						Feed (mm/min)	8513	9220	14690	17617	17617

HSM (high speed machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{rpm}$
 adjust parameters based on resin type and fiber structure
 reduce speed when overheating causes melting or damage to resin
 reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths
 rates shown are for use without coolant; rates may be increased with coolant
 dust collection is vital when machining dry
 diamond coating will increase tool life in graphite and composite materials
 refer to the SGS Tool Wizard® for complete technical information
 (www.kyocera-sgstool.com)


Coarse Cut Carbon Composite



31-CCR

FRACTIONAL SERIES

- Fewer, deeper flutes to prevent clogging in heavy routing
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

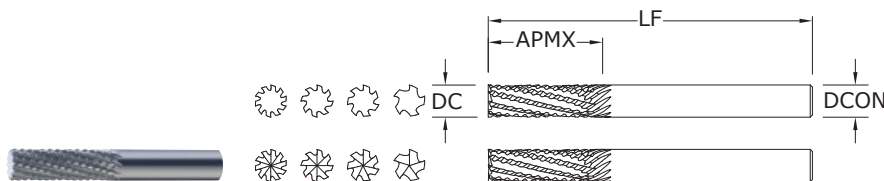

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	5	End Cutting	72954	72955
1/4	1	2-1/2	1/4	5	No End Cutting	72956	72957
5/16	1	2-1/2	5/16	7	End Cutting	72958	72959
5/16	1	2-1/2	5/16	7	No End Cutting	72960	72961
3/8	1-1/8	2-1/2	3/8	8	End Cutting	72962	72963
3/8	1-1/8	2-1/2	3/8	8	No End Cutting	72964	72965
1/2	1-1/2	3-1/2	1/2	10	End Cutting	72966	72967
1/2	1-1/2	3-1/2	1/2	10	No End Cutting	72968	72969

TOLERANCES (inch)

DC = +.000/- .005

DCON = h₆


NON-FERROUS

For patent
information visit
www.ksptpatents.com

31M-CCR

METRIC SERIES

- Fewer, deeper flutes to prevent clogging in heavy routing
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

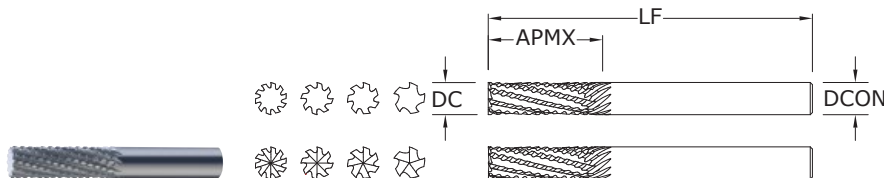

mm						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Ti-NAMITE-B (TiB ₂)	Di-NAMITE® (Diamond)
6,0	25,0	63,0	6,0	5	End Cutting	82974	83200	82982
6,0	25,0	63,0	6,0	5	No End Cutting	82975	83201	82983
8,0	25,0	63,0	8,0	7	End Cutting	82976	83202	82984
8,0	25,0	63,0	8,0	7	No End Cutting	82977	83203	82985
10,0	28,0	63,0	10,0	8	End Cutting	82978	83204	82986
10,0	28,0	63,0	10,0	8	No End Cutting	82979	83205	82987
12,0	38,0	89,0	12,0	10	End Cutting	82980	83206	82988
12,0	38,0	89,0	12,0	10	No End Cutting	82981	83207	82989

TOLERANCES (mm)


DC = +0,000/-0,130

DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com



Coarse Cut Carbon Composite



Series 31M Metric			Vc (m/min)	DC • mm						
	Ae x DC	Ap x DC		6	8	10	12			
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)		1	≤ 1	120	RPM	6361	4771	3817	3181	
				(96-164)	Fr	0.071	0.170	0.244	0.366	
					Feed (mm/min)	450	810	930	1165	
		≤ 0.5	≤ 1.5	150	RPM	7951	5963	4771	3976	
				(120-180)	Fr	0.071	0.170	0.244	0.366	
					Feed (mm/min)	563	1013	1163	1456	
		≤ 0.05	≤ 2	250	RPM	13252	9939	7951	6626	
				(200-300)	Fr	0.162	0.388	0.555	0.832	
					Feed (mm/min)	2150	3860	4415	5515	
	GFRP (FIBERGLASS)		1	≤ 1	100	RPM	5301	3976	3181	2650
					(80-120)	Fr	0.069	0.165	0.237	0.357
						Feed (mm/min)	365	655	755	945
		≤ 0.5	≤ 1.5	120	RPM	6361	4771	3817	3181	
				(96-164)	Fr	0.069	0.165	0.237	0.357	
					Feed (mm/min)	438	786	906	1134	
		≤ 0.05	≤ 2	200	RPM	10602	7951	6361	5301	
				(160-240)	Fr	0.163	0.390	0.557	0.834	
					Feed (mm/min)	1725	3100	3540	4420	
CARBON, GRAPHITE			1	≤ 1	145	RPM	7686	5765	4612	3843
					(116-174)	Fr	0.095	0.226	0.321	0.483
						Feed (mm/min)	728	1300	1480	1855
		≤ 0.5	≤ 1.5	185	RPM	9807	7355	5884	4903	
				(148-222)	Fr	0.095	0.226	0.321	0.483	
					Feed (mm/min)	929	1659	1888	2367	
		≤ 0.05	≤ 2	300	RPM	15903	11927	9542	7951	
				(240-360)	Fr	0.217	0.517	0.739	1.111	
					Feed (mm/min)	3450	6170	7050	8830	
	PLASTICS		1	≤ 1	245	RPM	12987	9740	7792	6494
					(196-294)	Fr	0.094	0.223	0.318	0.477
						Feed (mm/min)	1215	2175	2475	3100
		≤ 0.5	≤ 1.5	305	RPM	16168	12126	9701	8084	
				(244-366)	Fr	0.094	0.223	0.318	0.477	
					Feed (mm/min)	1513	2708	3081	3859	
		≤ 0.05	≤ 2	505	RPM	26769	20077	16062	13385	
				(404-606)	Fr	0.215	0.512	0.731	1.098	
					Feed (mm/min)	5760	10280	11745	14700	

HSM (high speed machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{rpm}$
 adjust parameters based on resin type and fiber structure
 reduce speed when overheating causes melting or damage to resin
 reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths
 rates shown are for use without coolant; rates may be increased with coolant
 dust collection is vital when machining dry
 diamond coating will increase tool life in graphite and composite materials
 refer to the SGS Tool Wizard® for complete technical information
 (www.kyocera-sgstool.com)

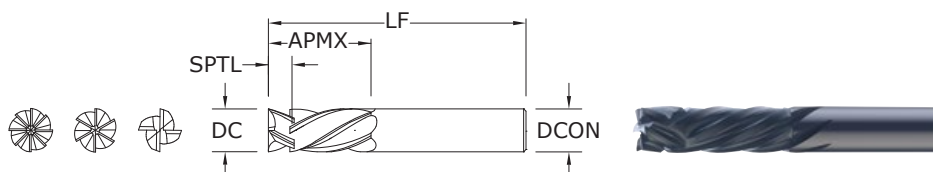

TOLERANCES (inch)

DC = +.000/- .003

DCON = h_6


NON-FERROUS

For patent
information visit
www.ksptpatents.com

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	SPLIT LENGTH SPTL	NO. OF FLUTES	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	11/64	4	72970	72971
5/16	1	2-1/2	5/16	7/32	4	72972	72973
3/8	1-1/8	2-1/2	3/8	17/64	6	72974	72975
1/2	1-1/2	3-1/2	1/2	23/64	8	72976	72977

25
FRACTIONAL SERIES

- Compression-style helixes direct cutting forces inward, eliminating fiber breakout and delamination
- Primary/secondary relief grind for reduced friction and pressure
- Rigid, heavy core

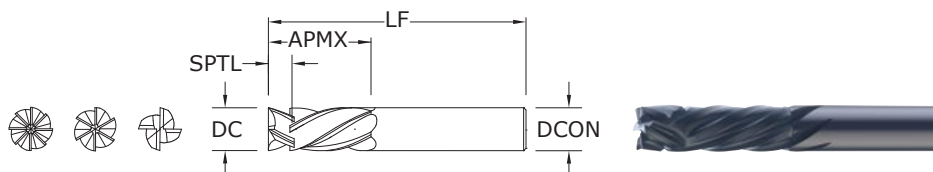

TOLERANCES (mm)

DC = +0,000/-0,080

DCON = h_6

NON-FERROUS


For patent
information visit
www.ksptpatents.com


mm						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	SPLIT LENGTH SPTL	NO. OF FLUTES	UNCOATED	Di-NAMITE® (Diamond)
6,0	25,0	63,0	6,0	4,10	4	82990	82991
8,0	25,0	63,0	8,0	5,58	4	82992	82993
10,0	28,0	63,0	10,0	7,05	6	82994	82995
12,0	38,0	89,0	12,0	8,60	8	82996	82997

25M
METRIC SERIES

- Compression-style helixes direct cutting forces inward, eliminating fiber breakout and delamination
- Primary/secondary relief grind for reduced friction and pressure
- Rigid, heavy core

Compression



Series 25 Fractional				Vc (sfm)		DC • in				
		1/45/163/81/2								
N	CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	 Profile	≤ 0.5	≤ 1.5	500	RPM	7640	6112	5093	3820
					(400-600)	Fz	0.0016	0.0030	0.0040	0.0048
						Feed (ipm)	49	73	122	147
		 HSM	≤ 0.05	≤ 2	825	RPM	12606	10085	8404	6303
					(660-990)	Fz	0.0037	0.0069	0.0092	0.0110
						Feed (ipm)	187	278	464	555
	GFRP (FIBERGLASS)	 Profile	≤ 0.5	≤ 1.5	400	RPM	6112	4890	4075	3056
					(320-480)	Fz	0.0016	0.0030	0.0040	0.0048
						Feed (ipm)	39	59	98	117
		 HSM	≤ 0.05	≤ 2	660	RPM	10085	8068	6723	5042
					(528-792)	Fz	0.0037	0.0069	0.0092	0.0110
						Feed (ipm)	149	223	371	444
	CARBON, GRAPHITE	 Profile	≤ 0.5	≤ 1.5	600	RPM	9168	7334	6112	4584
					(480-720)	Fz	0.0020	0.0038	0.0050	0.0060
						Feed (ipm)	73	111	183	220
		 HSM	≤ 0.05	≤ 2	990	RPM	15127	12102	10085	7564
					(792-1188)	Fz	0.0046	0.0086	0.0115	0.0138
						Feed (ipm)	278	416	696	835
PLASTICS	 Profile	≤ 0.5	≤ 1.5	1000	RPM	15280	12224	10187	7640	
				(800-1200)	Fz	0.0020	0.0038	0.0050	0.0060	
					Feed (ipm)	122	186	306	367	
	 HSM	≤ 0.05	≤ 2	1650	RPM	25212	20170	16808	12606	
				(1320-1980)	Fz	0.0046	0.0086	0.0115	0.0138	
					Feed (ipm)	464	694	1160	1392	
MACHINABLE CERAMICS MACHINABLE GLASS	 Profile	≤ 0.5	≤ 1.5	50	RPM	764	611	509	382	
				(40-60)	Fz	0.0008	0.0015	0.0020	0.0024	
					Feed (ipm)	2.4	3.7	6.1	7.3	
	 HSM	≤ 0.05	≤ 2	85	RPM	1299	1039	866	649	
				(68-102)	Fz	0.0018	0.0034	0.0046	0.0055	
					Feed (ipm)	9.4	14.1	23.9	28.6	

HSM (high speed machining)

$\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$

$\text{ipm} = \text{Fz} \times \text{number of flutes} \times \text{rpm}$

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant


dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials

refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)

Compression



Series 25M Metric		Ae x DC	Ap x DC	Vc (m/min)	DC • mm				
					6	8	10	12	
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	Profile 	≤ 0.5	≤ 1.5	150	RPM	7951	5963	4771	3976
				(96-164)	Fz	0.040	0.065	0.075	0.100
					Feed (mm/min)	1272	1550	2147	3181
	HSM 	≤ 0.05	≤ 2	250	RPM	13252	9939	7951	6626
				(200-300)	Fz	0.095	0.145	0.175	0.235
					Feed (mm/min)	5036	5765	8349	12457
GFRP (FIBERGLASS)	Profile 	≤ 0.5	≤ 1.5	120	RPM	6361	4771	3817	3181
				(96-164)	Fz	0.040	0.065	0.075	0.100
					Feed (mm/min)	1018	1240	1717	2544
	HSM 	≤ 0.05	≤ 2	200	RPM	10602	7951	6361	5301
				(160-240)	Fz	0.095	0.145	0.175	0.235
					Feed (mm/min)	4029	4612	6679	9966
N CARBON, GRAPHITE	Profile 	≤ 0.5	≤ 1.5	185	RPM	9807	7355	5884	4903
				(148-222)	Fz	0.050	0.080	0.095	0.125
					Feed (mm/min)	1961	2354	3354	4903
	HSM 	≤ 0.05	≤ 2	300	RPM	15903	11927	9542	7951
				(240-360)	Fz	0.115	0.185	0.220	0.290
					Feed (mm/min)	7315	8826	12595	18447
PLASTICS	Profile 	≤ 0.5	≤ 1.5	305	RPM	16168	12126	9701	8084
				(244-366)	Fz	0.050	0.080	0.095	0.125
					Feed (mm/min)	3234	3880	5529	8084
	HSM 	≤ 0.05	≤ 2	505	RPM	26769	20077	16062	13385
				(404-606)	Fz	0.115	0.185	0.220	0.290
					Feed (mm/min)	12314	14857	21201	31052
MACHINABLE CERAMICS MACHINABLE GLASS	Profile 	≤ 0.5	≤ 1.5	15	RPM	795	596	477	398
				(12-18)	Fz	0.020	0.035	0.045	0.050
					Feed (mm/min)	64	83	129	159
	HSM 	≤ 0.05	≤ 2	25	RPM	1325	994	795	663
				(20-30)	Fz	0.045	0.075	0.085	0.115
					Feed (mm/min)	239	298	406	610

HSM (high speed machining)

$\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$

$\text{mm/min} = \text{Fz} \times \text{number of flutes} \times \text{rpm}$

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant


dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials


refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)

Up Cut

**21**

FRACTIONAL SERIES

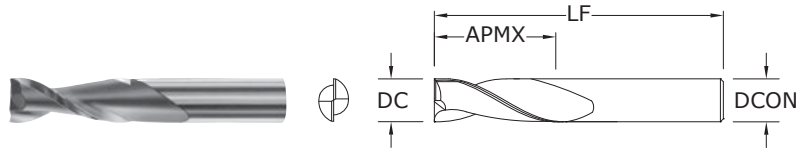

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED
1/8	1/2	2	1/4	90001
5/32	5/8	2-1/2	1/4	90005
3/16	3/4	2-1/2	1/4	90009
1/4	3/4	2-1/2	1/4	90013
1/4	1	2-1/2	1/4	90017
5/16	1	2-1/2	5/16	90021
5/16	1	3	1/2	90025
3/8	1	2-1/2	3/8	90029
3/8	1-1/4	3	1/2	90033
1/2	1-1/4	3	1/2	90037
1/2	1-1/2	3-1/2	1/2	90041
1/2	2	4	1/2	90045
5/8	2	4-1/2	5/8	90049
3/4	2	4-1/2	3/4	90053

TOLERANCES (inch)

DC = +.000/- .003


DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

21M

METRIC SERIES

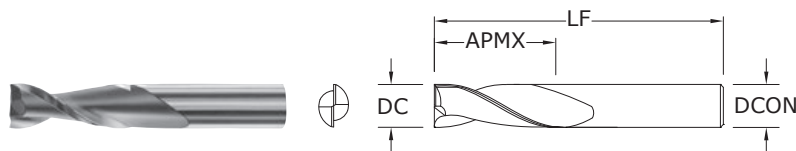

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED
3,0	13,0	50,0	6,0	90101
4,0	16,0	63,0	6,0	90107
5,0	19,0	63,0	6,0	90109
6,0	25,0	63,0	6,0	90113
8,0	25,0	63,0	8,0	90121
10,0	31,0	75,0	10,0	90129
12,0	31,0	75,0	12,0	90137

TOLERANCES (mm)



DC = +0,000/-0,080

DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

Down Cut

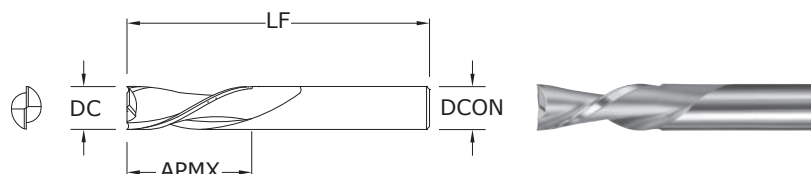

22

FRACTIONAL SERIES

TOLERANCES (inch)


DC = +.000/-0.003

DCON = h_6

NON-FERROUS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED
1/8	1/2	2	1/4	91001
5/32	5/8	2-1/2	1/4	91005
3/16	3/4	2-1/2	1/4	91009
1/4	3/4	2-1/2	1/4	91013
1/4	1	2-1/2	1/4	91017
5/16	1	2-1/2	5/16	91021
5/16	1	3	1/2	91025
3/8	1	2-1/2	3/8	91029
3/8	1-1/4	3	1/2	91033
1/2	1-1/4	3	1/2	91037
1/2	1-1/2	3-1/2	1/2	91041
1/2	2	4	1/2	91045
5/8	2	4-1/2	5/8	91049
3/4	2	4-1/2	3/4	91053

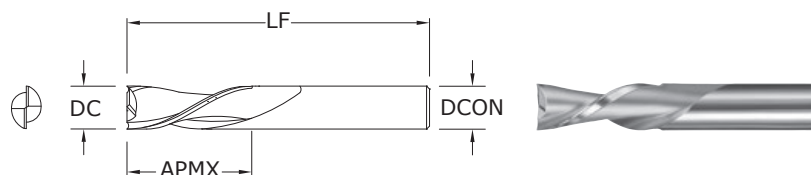

22M

METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,080


DCON = h_6

NON-FERROUS

For patent
information visit
www.ksptpatents.com


mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED
3,0	13,0	50,0	6,0	91101
4,0	16,0	63,0	6,0	91107
5,0	19,0	63,0	6,0	91109
6,0	25,0	63,0	6,0	91113
8,0	25,0	63,0	8,0	91121
10,0	31,0	75,0	10,0	91129
12,0	31,0	75,0	12,0	91137

Up Cut Down Cut



Series 21, 22 Fractional						Vc (sfm)	DC • in				
		Ae x DC	Ap x DC	1/8	1/4		3/8	1/2	3/4		
HARDWOODS		1	≤ 1	1550	RPM	47368	23684	15789	11842	7895	
				(1240-1860)	Fz	0.0008	0.0015	0.0025	0.0030	0.0045	
				Feed (ipm)	76	71	79	71	71		
		≤ 0.5	≤ 1.5	1550	RPM	47368	23684	15789	11842	7895	
				(1240-1860)	Fz	0.0008	0.0015	0.0025	0.0030	0.0045	
				Feed (ipm)	76	71	79	71	71		
	SOFTWOODS		1	≤ 1	1950	RPM	59592	29796	19864	14898	9932
					(1560-2340)	Fz	0.0010	0.0020	0.0030	0.0035	0.0055
					Feed (ipm)	119	119	119	104	109	
			≤ 0.5	≤ 1.5	1950	RPM	59592	29796	19864	14898	9932
					(1560-2340)	Fz	0.0010	0.0020	0.0030	0.0035	0.0055
					Feed (ipm)	119	119	119	104	109	
PLYWOODS		1	≤ 1	1950	RPM	59592	29796	19864	14898	9932	
				(1560-2340)	Fz	0.0013	0.0025	0.0040	0.0050	0.0075	
				Feed (ipm)	155	149	159	149	149		
		≤ 0.5	≤ 1.5	1950	RPM	59592	29796	19864	14898	9932	
				(1560-2340)	Fz	0.0013	0.0025	0.0040	0.0050	0.0075	
				Feed (ipm)	155	149	159	149	149		
N PLASTICS		1	≤ 1	1950	RPM	59592	29796	19864	14898	9932	
				(1560-2340)	Fz	0.0008	0.0017	0.0025	0.0035	0.0050	
				Feed (ipm)	95	101	99	104	99		
		≤ 0.5	≤ 1.5	1950	RPM	59592	29796	19864	14898	9932	
				(1560-2340)	Fz	0.0008	0.0017	0.0025	0.0035	0.0050	
				Feed (ipm)	95	101	99	104	99		

rpm = Vc x 3.82 / DC
ipm = Fz x 2 x rpm

Series 21M, 22M Metric				Vc (m/min)	DC • mm						
		Ae x DC	Ap x DC		3	6	10	12	20		
HARDWOODS	 Slot	1	≤ 1	470	RPM	49828	24914	14948	12457	7474	
				(376-564)	Fz	0.020	0.040	0.065	0.075	0.115	
					Feed (mm/min)	1993	1993	1943	1869	1719	
	 Profile	≤ 0.5	≤ 1.5	470	RPM	49828	24914	8155	4241	1509	
				(376-564)	Fz	0.020	0.040	0.065	0.075	0.115	
					Feed (mm/min)	1993	1993	1060	636	347	
	SOFTWOODS	 Slot	1	≤ 1	600	RPM	63610	31805	19083	15903	9542
					(480-720)	Fz	0.025	0.050	0.075	0.090	0.140
						Feed (mm/min)	3181	3181	2862	2862	2672
		 Profile	≤ 0.5	≤ 1.5	600	RPM	63610	31805	19083	15903	303467
					(480-720)	Fz	0.025	0.050	0.075	0.090	0.140
						Feed (mm/min)	3181	3181	2862	2862	84971
PLYWOODS	 Slot	1	≤ 1	600	RPM	63610	31805	19083	15903	9542	
				(480-720)	Fz	0.030	0.065	0.100	0.125	0.190	
					Feed (mm/min)	3817	4135	3817	3976	3626	
	 Profile	≤ 0.5	≤ 1.5	600	RPM	63610	31805	19083	15903	303467	
				(480-720)	Fz	0.030	0.065	0.100	0.125	0.190	
					Feed (mm/min)	3817	4135	3817	3976	115318	
N PLASTICS	 Slot	1	≤ 1	600	RPM	63610	31805	19083	15903	9542	
				(480-720)	Fz	0.020	0.040	0.065	0.090	0.125	
					Feed (mm/min)	2544	2544	2481	2862	2385	
	 Profile	≤ 0.5	≤ 1.5	600	RPM	63610	31805	19083	15903	9542	
				(480-720)	Fz	0.020	0.040	0.065	0.090	0.125	
					Feed (mm/min)	2544	2544	2481	2862	2385	

rpm = (Vc x 1000) / (DC x 3.14)
mm/min = Fz x 2 x rpm

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
30000.....	303	30108.....	307	30188.....	308	30366.....	284	30483.....	283	30563.....	297
30001.....	303	30109.....	303	30189.....	306	30367.....	282	30484.....	283	30564.....	298
30002.....	303	30110.....	307	30189.....	318	30368.....	284	30485.....	283	30565.....	297
30003.....	303	30111.....	303	30190.....	308	30369.....	282	30486.....	283	30566.....	298
30004.....	303	30112.....	307	30190.....	319	30370.....	284	30487.....	283	30567.....	297
30005.....	303	30113.....	303	30191.....	303	30371.....	282	30488.....	283	30568.....	298
30006.....	303	30114.....	307	30192.....	303	30372.....	284	30489.....	283	30569.....	297
30007.....	304	30115.....	303	30193.....	303	30373.....	282	30490.....	283	30570.....	298
30008.....	304	30116.....	307	30194.....	303	30374.....	284	30491.....	283	30571.....	297
30009.....	304	30117.....	303	30195.....	303	30375.....	282	30492.....	283	30572.....	298
30010.....	304	30118.....	307	30196.....	303	30376.....	284	30493.....	283	30573.....	297
30011.....	304	30119.....	303	30197.....	303	30377.....	280	30494.....	284	30574.....	298
30012.....	304	30120.....	307	30198.....	303	30378.....	283	30495.....	284	30575.....	297
30013.....	304	30121.....	303	30199.....	303	30379.....	304	30496.....	284	30576.....	298
30014.....	304	30122.....	307	30300.....	303	30380.....	305	30497.....	284	30577.....	297
30015.....	304	30123.....	303	30301.....	280	30381.....	305	30498.....	284	30578.....	298
30016.....	304	30124.....	307	30302.....	283	30382.....	306	30499.....	284	30589.....	297
30017.....	304	30125.....	303	30303.....	280	30383.....	306	30500.....	284	30589.....	318
30018.....	305	30126.....	307	30304.....	283	30384.....	308	30501.....	297	30590.....	298
30019.....	305	30127.....	303	30305.....	280	30385.....	308	30502.....	298	30590.....	319
30020.....	305	30128.....	307	30306.....	283	30386.....	308	30503.....	297	30591.....	284
30021.....	305	30129.....	303	30307.....	280	30387.....	308	30504.....	298	30592.....	284
30022.....	305	30130.....	307	30308.....	283	30388.....	308	30505.....	297	30593.....	284
30023.....	305	30131.....	303	30309.....	280	30389.....	282	30506.....	298	30594.....	284
30024.....	305	30132.....	307	30310.....	283	30389.....	318	30507.....	297	30595.....	284
30025.....	305	30133.....	304	30311.....	280	30390.....	284	30508.....	298	30596.....	284
30026.....	305	30134.....	307	30312.....	283	30390.....	319	30509.....	297	30597.....	284
30027.....	306	30135.....	304	30313.....	280	30397.....	280	30510.....	298	30598.....	284
30028.....	306	30136.....	307	30314.....	283	30398.....	280	30511.....	297	30599.....	283
30029.....	303	30137.....	304	30315.....	280	30399.....	280	30512.....	298	30600.....	284
30030.....	306	30138.....	307	30316.....	283	30400.....	280	30513.....	297	30600.....	319
30030.....	318	30139.....	304	30317.....	280	30435.....	280	30514.....	298	30602.....	298
30031.....	307	30140.....	307	30318.....	283	30436.....	280	30515.....	297	30604.....	298
30032.....	307	30141.....	304	30319.....	280	30437.....	280	30516.....	298	30606.....	29

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
30902.....	298	31175.....	313	31319.....	287	31428.....	314	31521.....	287	31650.....	303
30904.....	298	31176.....	313	31320.....	287	31429.....	313	31522.....	288	31651.....	303
30906.....	298	31177.....	313	31321.....	287	31430.....	314	31523.....	287	31652.....	303
30908.....	298	31178.....	313	31322.....	287	31431.....	313	31524.....	288	31653.....	303
30910.....	298	31179.....	313	31323.....	287	31432.....	314	31525.....	287	31654.....	303
30912.....	298	31180.....	313	31324.....	287	31433.....	313	31526.....	288	31655.....	303
30914.....	298	31181.....	313	31325.....	287	31434.....	314	31527.....	287	31656.....	303
30916.....	298	31182.....	313	31326.....	287	31435.....	313	31528.....	288	31657.....	304
30918.....	298	31183.....	313	31327.....	287	31436.....	314	31529.....	287	31658.....	304
30920.....	298	31184.....	313	31328.....	287	31437.....	313	31530.....	288	31659.....	305
30921.....	298	31185.....	313	31329.....	287	31438.....	314	31531.....	287	31660.....	305
30922.....	298	31186.....	313	31330.....	287	31439.....	313	31532.....	288	31661.....	305
30923.....	298	31187.....	313	31331.....	287	31440.....	314	31533.....	287	31662.....	305
30924.....	298	31188.....	313	31332.....	287	31441.....	313	31534.....	288	31701.....	291
30925.....	298	31189.....	313	31333.....	287	31442.....	314	31535.....	287	31703.....	291
30926.....	298	31190.....	313	31334.....	287	31443.....	313	31536.....	288	31705.....	291
30927.....	298	31190.....	318	31335.....	287	31444.....	314	31537.....	287	31707.....	291
30928.....	298	31217.....	314	31336.....	287	31445.....	313	31538.....	288	31709.....	291
30929.....	298	31217.....	319	31336.....	318	31446.....	314	31539.....	287	31711.....	291
30930.....	298	31218.....	314	31337.....	288	31447.....	313	31540.....	288	31713.....	291
30931.....	298	31219.....	314	31338.....	288	31448.....	314	31541.....	287	31715.....	291
30932.....	298	31220.....	314	31339.....	288	31449.....	313	31542.....	288	31717.....	291
30933.....	298	31221.....	314	31340.....	288	31450.....	314	31543.....	287	31719.....	291
30934.....	298	31222.....	314	31341.....	288	31451.....	313	31544.....	288	31721.....	291
30935.....	298	31223.....	314	31342.....	288	31452.....	314	31545.....	287	31723.....	291
30936.....	298	31224.....	314	31343.....	288	31453.....	313	31546.....	288	31725.....	291
30937.....	298	31225.....	314	31344.....	288	31454.....	314	31547.....	287	31727.....	303
30938.....	298	31226.....	314	31345.....	288	31455.....	313	31548.....	288	31728.....	303
30939.....	298	31227.....	314	31346.....	288	31456.....	314	31549.....	287	31729.....	304
30940.....	298	31228.....	314	31347.....	288	31457.....	313	31550.....	288	31730.....	304
30941.....	298	31229.....	314	31348.....	288	31458.....	314	31551.....	287	31731.....	304
30942.....	298	31230.....	314	31349.....	288	31459.....	313	31552.....	288	31732.....	305
30943.....	298	31231.....	314	31350.....	288	31460.....	314	31553.....	287	31733.....	305
30944.....	298	31232.....	314	31351.....	288	31461.....	313	31554.....	288	31734.....	30

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
31873.....	304	31961.....	281	32211.....	294	32346.....	301	32446.....	302	32603.....	66	32718.....	150
31874.....	304	31962.....	281	32212.....	294	32347.....	301	32447.....	302	32604.....	66	32719.....	150
31875.....	305	31963.....	281	32213.....	294	32348.....	301	32448.....	302	32605.....	66	32720.....	150
31876.....	305	31964.....	282	32214.....	294	32349.....	301	32449.....	302	32606.....	65	32725.....	148
31877.....	305	31965.....	282	32215.....	294	32350.....	301	32450.....	302	32607.....	65	32726.....	148
31878.....	306	31966.....	282	32216.....	294	32351.....	301	32451.....	302	32608.....	65	32727.....	148
31879.....	306	31967.....	282	32217.....	294	32352.....	301	32452.....	302	32609.....	65	32728.....	148
31880.....	303	31968.....	283	32260.....	293	32353.....	301	32453.....	302	32610.....	65	32729.....	148
31881.....	303	31969.....	283	32261.....	293	32354.....	301	32454.....	302	32611.....	65	32730.....	148
31882.....	304	31970.....	283	32262.....	293	32355.....	301	32455.....	302	32612.....	65	32731.....	148
31883.....	304	31971.....	283	32263.....	293	32356.....	301	32456.....	302	32613.....	65	32732.....	148
31884.....	304	31972.....	284	32264.....	293	32357.....	301	32457.....	302	32614.....	65	32733.....	148
31885.....	305	31973.....	284	32265.....	293	32358.....	301	32458.....	302	32615.....	65	32734.....	148
31886.....	305	31974.....	284	32266.....	293	32359.....	301	32459.....	302	32616.....	65	32735.....	149
31887.....	305	31975.....	284	32267.....	293	32360.....	301	32460.....	302	32619.....	65	32736.....	149
31888.....	306	31976.....	284	32270.....	293	32361.....	301	32461.....	302	32620.....	65	32737.....	149
31889.....	306	31977.....	284	32271.....	293	32362.....	301	32462.....	302	32621.....	65	32738.....	149
31890.....	283	31978.....	283	32272.....	293	32363.....	301	32463.....	302	32625.....	65	32739.....	149
31891.....	283	31979.....	283	32273.....	293	32364.....	301	32464.....	302	32626.....	65	32740.....	149
31892.....	283	31980.....	283	32274.....	293	32370.....	301	32470.....	302	32627.....	65	32741.....	149
31893.....	283	31981.....	283	32275.....	293	32371.....	301	32471.....	302	32628.....	65	32742.....	150
31894.....	284	31982.....	284	32276.....	293	32372.....	301	32472.....	302	32632.....	66	32743.....	150
31895.....	284	31983.....	284	32277.....	293	32373.....	301	32473.....	302	32633.....	66	32744.....	150
31896.....	284	31984.....	284	32280.....	293	32374.....	301	32474.....	302	32655.....	65	32745.....	150
31897.....	284	31985.....	284	32281.....	293	32375.....	301	32475.....	302	32656.....	65	32751.....	148
31898.....	284	31986.....	284	32282.....	293	32376.....	301	32476.....	302	32657.....	65	32752.....	148
31899.....	284	31987.....	284	32283.....	293	32377.....	301	32477.....	302	32658.....	65	32753.....	148
31900.....	307	31988.....	283	32284.....	293	32378.....	301	32478.....	302	32659.....	65	32754.....	148
31902.....	307	31989.....	283	32285.....	293	32379.....	301	32479.....	302	32660.....	65	32755.....	148
31904.....	307	31990.....	283	32286.....	293	32380.....	301	32480.....	302	32661.....	65	32756.....	148
31906.....	307	31991.....	283	32287.....	293	32381.....	301	32481.....	302	32662.....	65	32757.....	148
31908.....	308	31992.....	284	32290.....	294	32382.....	301	32482.....	302	32663.....	66	32758.....	148
31910.....	308	31993.....	284	32291.....	294	32383.....	301	32483.....	302	32664.....	66	32759.....	148
31912.....	308	31994.....	284	32292.....	294	32384.....	301	32484.....	302	32665.....	66	32760.....	148
31914.....	308	31995.....	284	32293.....	294	32385.....	301	32485.....	302	32666.....	66	32761.....	145
31916.....	308	31996.....	284	32294.....	294	32386.....	301	32486.....	302	32667.....	66	32762.....	148
31917.....	308	31997.....	284	32295.....	294	32387.....	301	32487.....	302	32668.....	66	32763.....	148
31918.....	307	32033.....	173	32296.....	294	32388.....	301	32488.....	302	32669.....	66	32764.....	148
31919.....	307	32034.....	173	32297.....	294	32389.....	301	32489.....	302	32670.....	66	32765.....	148
31920.....	307	32035.....	173	32301.....	301	32402.....	302	32500.....	67	32671.....	66	32766.....	145
31921.....	307	32036.....	173	32302.....	301	32403.....	302	32501.....	67	32672.....	65	32767.....	148
31922.....	308	32037.....	173	32303.....	301	32404.....	302	32502.....	67	32673.....	65	32768.....	148
31923.....	308	32038.....	173	32304.....	301	32405.....	302	32503.....	67	32674.....	65	32769.....	148
31924.....	308	32039.....	173	32305.....	301	32406.....	302	32504.....	67	32675.....	65	32770.....	148
31925.....	308	32040.....	173	32306.....	301	32407.....	302	32505.....	67	32676.....	65	32771.....	149
31926.....	308	32041.....	173	32307.....	301	32408.....	302	32506.....	67	32677.....	65	32772.....	149
31927.....	308	32042.....	173	32308.....	301	32409.....	302	32569.....	65	32678.....	66	32773.....	149
31928.....	307	32043.....	173	32309.....	301	32410.....	302	32570.....	66	32679.....	66	32774.....	149
31929.....	307	32044.....	173	32310.....	301	32411.....	302	32571.....	66	32680.....	66	32775.....	149
31930.....	307	32045.....	173	32311.....	301	32412.....	302	32572.....	66	32681.....	66	32776.....	149
31931.....	307	32046.....	173	32312.....	301	32413.....	302	32573.....	65	32682.....	66	32777.....	149
31932.....	308	32047.....	173	32313.....	301	32414.....	302	32574.....	65	32683.....	66	32778.....	149
31933.....	308	32048.....	173	32314.....	301	32415.....	302	32575.....	66	32685.....	66	32779.....	149
31934.....	308	32049.....	173	32315.....	301	32416.....	302	32576.....	66	32686.....	66	32780.....	149
31935.....	308	32053.....	173	32316.....	301	32417.....	302	32577.....	66	32687.....	66	32781.....	149
31936.....	308	32054.....	173	32317.....	301	32418.....	302	32578.....	66	32688.....	66	32782.....	149
31937.....	308	32055.....	173	32318.....	301	32419.....	302	32579.....	66	32689.....	66	32783.....	149
31938.....	280	32056.....	173	32319.....	301	32420.....	302	32580.....	66	32691.....	148	32784.....	149
31939.....	280	32057.....	173	32320.....	301	32421.....	302	32581.....	66	32692.....	148	32785.....	149
31940.....	280	32058.....	173	32321.....	301	32422.....	302	32582.....	66	32697.....	149	32786.....	149
31941.....	281	32059.....	173	32322.....	301	32423.....	302	32583.....	66	32698.....	149	32787.....	149
31942.....	281	32060.....	173	32323.....	301	32424.....	302	32584.....	66	32699.....	150	32788.....	149
31943.....	281	32061.....	173	32324.....	301	32425.....	302	32585.....	66	32700.....	148	32789.....	149
31944.....	282	32062.....	173	32325.....	301	32426.....	302	32586.....	66	32701.....	148	32790.....	149
31945.....	282	32063.....	173	32326.....	301	32427.....	302	32587.....	66	32702.....	148	32791.....	149
31946.....	282	32064.....	173	32327.....	301	32428.....	302	32588.....	66	32703.....	148	32792.....	149
31947.....	282	32065.....	173	32328.....	301	32429.....	302	32589.....	66	32704.....	148	32793.....	149
31948.....	280	32066.....	173	32329.....	301	32430.....	302	32590.....	66	32705.....	148	32794.....	149
31949.....	280	32067.....	173	32330.....	301	32431.....	302	32591.....	65	32706.....	148	32795.....	149
31950.....	280	32068.....	173	32333.....	301	32434.....	302	32592.....	65	32707.....	148	32796.....	150
31951.....	281	32069.....	173	32334.....	301	32435.....	302	32593.....	65	32708.....	148	32797.....	150
31952.....	281	32200.....	294	32335.....	301	32436.....	302	32594.....	66	32709.....	148	32798.....	150
31953.....	281	32201.....	294	32336.....	301	32437.....	302	32595.....	66	32710.....	149	32799.....	150
31954.....	282	32202.....	294	32337.....	301	32438.....	302	32596.....	66	32711.....	149	32800.....	150
31955.....	282	32203.....	294	32338.....	301	32439.....	302	32597.....	66	32712.....	149	32801.....	150
31956.....	282	32204.....	294	32339.....	301	32440.....	302	32598.....	66	32713.....	149	32802.....	150
31957.....	282	32205.....	294	32340.....	301	32441.....	302	32599.....	66	32714.....	149	32803.....	150
31958.....	280	32206.....	294	32341.....	301	32442.....	302	32600.....	66	32715.....	149	32804.....	150
31959.....	280	32207.....	294	32342.....	301	32443.....	302	32601.....	66	32716.....	149	32805.....	150
31960.....	280	32210.....	294	32345.....	301	32445.....	302	32602.....	66	32717.....	150	32806.....	150

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
32807.....	150	33118.....	308	33396.....	154	33542.....	155	34309.....	154	34672.....	168
32808.....	150	33121.....	303	33397.....	154	33543.....	155	34501.....	173	34673.....	168
32809.....	150	33122.....	307	33398.....	154	33544.....	155	34502.....	173	34674.....	168
32810.....	150	33123.....	304	33400.....	154	33547.....	155	34503.....	173	34675.....	168
32815.....	148	33124.....	307	33401.....	154	33548.....	155	34504.....	173	34676.....	168
32816.....	148	33125.....	304	33402.....	154	33551.....	155	34505.....	173	34677.....	168
32817.....	148	33126.....	307	33403.....	154	33552.....	155	34506.....	173	34678.....	167
32818.....	148	33127.....	304	33404.....	154	33553.....	155	34507.....	173	34679.....	167
32819.....	148	33128.....	308	33406.....	154	33554.....	155	34508.....	173	34680.....	167
32820.....	148	33129.....	305	33407.....	154	33555.....	155	34509.....	173	34681.....	167
32821.....	148	33130.....	308	33408.....	154	33556.....	155	34510.....	173	34682.....	167
32822.....	148	33131.....	305	33409.....	154	33557.....	155	34511.....	173	34683.....	167
32823.....	148	33132.....	308	33410.....	154	33558.....	155	34512.....	173	34684.....	167
32824.....	148	33133.....	305	33411.....	154	33559.....	155	34513.....	173	34685.....	167
32825.....	145	33134.....	308	33412.....	154	33560.....	155	34514.....	173	34686.....	168
32826.....	148	33135.....	306	33413.....	154	33561.....	155	34515.....	173	34687.....	168
32827.....	148	33136.....	308	33415.....	154	33562.....	155	34516.....	173	34688.....	168
32828.....	148	33137.....	306	33416.....	154	33563.....	155	34517.....	173	34689.....	168
32829.....	148	33138.....	308	33417.....	154	33564.....	155	34518.....	173	34690.....	168
32830.....	145	33141.....	303	33418.....	154	33565.....	155	34519.....	173	34691.....	168
32831.....	148	33142.....	307	33419.....	154	34016.....	138	34520.....	173	34692.....	168
32832.....	148	33143.....	303	33420.....	154	34017.....	138	34521.....	173	34693.....	168
32833.....	148	33144.....	307	33421.....	154	34018.....	138	34522.....	173	34701.....	144
32834.....	148	33301.....	280	33422.....	154	34019.....	138	34523.....	173	34702.....	144
32835.....	149	33302.....	283	33423.....	154	34020.....	138	34524.....	173	34703.....	144
32836.....	149	33303.....	280	33424.....	154	34021.....	138	34525.....	173	34704.....	144
32837.....	149	33304.....	283	33450.....	154	34022.....	138	34526.....	173	34705.....	144
32838.....	149	33305.....	281	33451.....	154	34023.....	138	34527.....	173	34706.....	144
32839.....	149	33306.....	283	33452.....	154	34024.....	138	34528.....	173	34707.....	144
32840.....	149	33307.....	281	33453.....	154	34025.....	138	34529.....	173	34708.....	144
32841.....	149	33308.....	284	33454.....	154	34026.....	138	34530.....	173	34709.....	144
32842.....	149	33309.....	281	33455.....	154	34027.....	138	34531.....	173	34710.....	144
32843.....	149	33310.....	284	33456.....	154	34028.....	138	34532.....	173	34711.....	145
32844.....	149	33311.....	281	33457.....	154	34029.....	138	34533.....	173	34712.....	14

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
34921.....	152	35117.....	76	35303.....	292	35610.....	145	35700.....	145	36111.....	316
34922.....	152	35118.....	76	35304.....	292	35611.....	145	35701.....	145	36112.....	316
34923.....	152	35119.....	76	35305.....	292	35612.....	146	35702.....	146	36113.....	316
34924.....	152	35120.....	76	35306.....	292	35613.....	146	35703.....	146	36114.....	316
34925.....	152	35121.....	76	35307.....	292	35614.....	146	35704.....	146	36116.....	316
34926.....	152	35122.....	76	35308.....	292	35615.....	146	35705.....	146	36117.....	316
34927.....	152	35123.....	76	35309.....	292	35616.....	146	35706.....	146	36118.....	316
34928.....	152	35124.....	76	35310.....	292	35617.....	146	35707.....	146	36120.....	316
34929.....	152	35125.....	76	35311.....	292	35618.....	146	35708.....	146	36121.....	316
34930.....	152	35126.....	76	35312.....	292	35619.....	146	35709.....	146	36122.....	316
34931.....	152	35127.....	77	35313.....	292	35620.....	146	35710.....	146	36124.....	316
34932.....	152	35128.....	77	35314.....	292	35621.....	146	35711.....	146	36125.....	316
34933.....	152	35129.....	77	35315.....	292	35622.....	146	35712.....	146	36126.....	316
34934.....	152	35130.....	77	35473.....	315	35623.....	146	35713.....	146	36128.....	316
34941.....	153	35131.....	77	35475.....	315	35624.....	146	35714.....	146	36129.....	316
34942.....	153	35132.....	77	35477.....	315	35625.....	146	35715.....	146	36130.....	316
34943.....	153	35133.....	77	35478.....	315	35626.....	146	35716.....	146	36140.....	116
34944.....	153	35134.....	77	35479.....	315	35627.....	146	35717.....	146	36141.....	116
34945.....	153	35135.....	77	35480.....	315	35628.....	146	35718.....	146	36142.....	116
34946.....	153	35136.....	77	35481.....	315	35629.....	146	35719.....	146	36143.....	116
34947.....	153	35137.....	77	35482.....	315	35630.....	146	35720.....	146	36206.....	317
34948.....	153	35138.....	77	35483.....	315	35631.....	146	35721.....	146	36207.....	317
34949.....	153	35139.....	77	35485.....	315	35632.....	146	35722.....	146	36208.....	317
34950.....	153	35140.....	77	35487.....	315	35633.....	147	35723.....	147	36209.....	317
34951.....	153	35141.....	77	35489.....	315	35634.....	147	35724.....	147	36210.....	317
34952.....	153	35150.....	76	35491.....	315	35635.....	147	35725.....	147	36211.....	317
34954.....	153	35151.....	76	35493.....	315	35636.....	147	35726.....	147	36212.....	317
34955.....	153	35152.....	76	35495.....	315	35637.....	147	35727.....	147	36213.....	317
34956.....	153	35153.....	76	35497.....	315	35638.....	147	35728.....	147	36214.....	317
34972.....	152	35154.....	76	35500.....	315	35639.....	147	35729.....	147	36216.....	317
34973.....	152	35155.....	76	35501.....	315	35640.....	147	35730.....	147	36217.....	317
34974.....	152	35156.....	76	35502.....	315	35641.....	147	35731.....	147	36218.....	317
34975.....	152	35157.....	76	35503.....	315	35642.....	147	35732.....	147	36220.....	317
34976.....	152	35158.....	76	35504.....	315	35643.....	147	35733.....	147	36221.....	317
34977.....	152	35159.....	76	35505.....	315	35644.....	147	35734.....	147	36222.....	317
34978.....	152	35160.....	76	35506.....	315	35645.....	147	35735.....	147	36224.....	317
34979.....	152	35161.....	76	35507.....	315	35646.....	147	35736.....	147	36225.....	317
34980.....	152	35180.....	77	35508.....	315	35647.....	147	35737.....	147	36226.....	317
34981.....	152	35181.....	77	35509.....	315	35648.....	147	35738.....	147	36228.....	317
34982.....	152	35182.....	77	35510.....	315	35649.....	147	35739.....	147	36229.....	317
34983.....	152	35183.....	77	35511.....	315	35650.....	147	35740.....	147	36230.....	317
34984.....	152	35184.....	77	35512.....	315	35651.....	147	35741.....	147	36235.....	148
34985.....	152	35185.....	77	35513.....	315	35652.....	147	35742.....	147	36236.....	148
34986.....	152	35186.....	77	35514.....	315	35653.....	147	35743.....	147	36237.....	151
34987.....	152	35187.....	77	35515.....	315	35654.....	147	35744.....	147	36238.....	151
34988.....	152	35188.....	77	35575.....	144	35665.....	144	35787.....	148	36239.....	148
34989.....	152	35189.....	77	35576.....	144	35666.....	144	35788.....	148	36240.....	148
34990.....	152	35190.....	77	35577.....	144	35667.....	144	35789.....	151	36241.....	151
35005.....	153	35191.....	77	35578.....	144	35668.....	144	35790.....	151	36242.....	151
35006.....	153	35220.....	78	35579.....	144	35669.....	144	35791.....	148	36243.....	148
35007.....	153	35221.....	78	35580.....	144	35670.....	144	35792.....	148	36244.....	148
35008.....	153	35222.....	78	35581.....	144	35671.....	144	35793.....	151	36245.....	151
35009.....	153	35223.....	78	35582.....	144	35672.....	144	35794.....	151	36246.....	151
35010.....	153	35224.....	78	35583.....	144	35673.....	144	35795.....	148	36247.....	151
35011.....	153	35225.....	78	35584.....	144	35674.....	144	35796.....	148	36248.....	151
35012.....	153	35226.....	78	35585.....	144	35675.....	144	35797.....	151	36249.....	151
35013.....	153	35227.....	78	35586.....	144	35676.....	144	35798.....	151	36250.....	151
35014.....	153	35228.....	78	35587.....	144	35677.....	144	35799.....	151	36251.....	149
35015.....	153	35229.....	78	35588.....	144	35678.....	144	35800.....	151	36252.....	149
35016.....	153	35230.....	78	35589.....	144	35679.....	144	35801.....	151	36253.....	151
35018.....	153	35231.....	78	35590.....	145	35680.....	145	35802.....	151	36254.....	151
35019.....	153	35273.....	292	35591.....	145	35681.....	145	35803.....	149	36257.....	150
35020.....	153	35275.....	292	35592.....	145	35682.....	145	35804.....	149	36258.....	150
35100.....	76	35277.....	292	35593.....	145	35683.....	145	35805.....	151	36259.....	150
35101.....	76	35278.....	292	35594.....	145	35684.....	145	35806.....	151	36260.....	150
35102.....	76	35279.....	292	35595.....	145	35685.....	145	35809.....	150	36261.....	151
35103.....	76	35280.....	292	35596.....	145	35686.....	145	35810.....	150	36262.....	151
35104.....	76	35281.....	292	35597.....	145	35687.....	145	35811.....	150	36263.....	151
35105.....	76	35282.....	292	35598.....	145	35688.....	145	35812.....	150	36264.....	151
35106.....	77	35283.....	292	35599.....	145	35689.....	145	35813.....	151	36265.....	151
35107.....	77	35285.....	292	35600.....	145	35690.....	145	35814.....	151	36266.....	151
35108.....	77	35287.....	292	35601.....	145	35691.....	145	35815.....	151	36344.....	53
35109.....	77	35289.....	292	35602.....	145	35692.....	145	35816.....	151	36345.....	53
35110.....	77	35291.....	292	35603.....	145	35693.....	145	35817.....	151	36346.....	53
35111.....	77	35293.....	292	35604.....	145	35694.....	145	35818.....	151	36347.....	53
35112.....	76	35295.....	292	35605.....	145	35695.....	145	36106.....	316	36348.....	53
35113.....	76	35297.....	292	35606.....	145	35696.....	145	36107.....	316	36349.....	53
35114.....	76	35300.....	292	35607.....	145	35697.....	145	36108.....	316	36350.....	53
35115.....	76	35301.....	292	35608.....	145	35698.....	145	36109.....	316	36351.....	53
35116.....	76	35302.....	292	35609.....	145	35699.....	145	36110.....	316	36352.....	53

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
36515.....	42	36641.....	94	36856.....	42	37058.....	32	37139.....	34	37233.....	33	37353.....	32
36517.....	42	36701.....	42	36857.....	42	37059.....	32	37140.....	34	37234.....	33	37354.....	32
36519.....	43	36702.....	42	36858.....	42	37060.....	32	37141.....	34	37235.....	33	37355.....	32
36520.....	43	36704.....	42	36859.....	42	37061.....	32	37142.....	34	37236.....	34	37356.....	32
36530.....	42	36706.....	42	36860.....	43	37062.....	32	37143.....	34	37237.....	34	37357.....	32
36531.....	42	36707.....	42	36861.....	43	37063.....	32	37144.....	34	37260.....	32	37359.....	32
36532.....	42	36709.....	43	36862.....	43	37064.....	32	37145.....	34	37261.....	32	37360.....	32
36533.....	42	36710.....	43	36863.....	43	37065.....	32	37146.....	34	37262.....	32	37361.....	32
36534.....	42	36711.....	43	36864.....	42	37066.....	32	37147.....	34	37263.....	32	37362.....	32
36535.....	42	36712.....	43	36865.....	42	37067.....	32	37148.....	34	37264.....	32	37390.....	125
36536.....	43	36713.....	43	36866.....	42	37068.....	32	37149.....	34	37265.....	32	37391.....	125
36537.....	43	36714.....	43	36867.....	42	37069.....	32	37150.....	34	37266.....	32	38001.....	303
36538.....	43	36715.....	43	36868.....	43	37070.....	32	37151.....	34	37267.....	32	38002.....	303
36539.....	53	36716.....	43	36869.....	43	37071.....	32	37152.....	34	37268.....	33	38003.....	303
36540.....	53	36717.....	43	36870.....	43	37072.....	32	37153.....	34	37269.....	33	38004.....	303
36541.....	53	36718.....	43	36871.....	43	37073.....	32	37154.....	34	37270.....	33	38009.....	303
36542.....	53	36719.....	43	36872.....	41	37074.....	32	37155.....	34	37271.....	33	38010.....	303
36543.....	53	36722.....	41	36873.....	41	37075.....	33	37156.....	34	37272.....	33	38011.....	303
36544.....	53	36723.....	41	36874.....	41	37076.....	33	37157.....	34	37273.....	33	38012.....	303
36545.....	53	36724.....	42	36875.....	41	37077.....	33	37160.....	31	37274.....	33	38013.....	303
36546.....	53	36725.....	42	36876.....	41	37078.....	33	37161.....	31	37275.....	33	38014.....	303
36547.....	53	36727.....	42	36877.....	41	37079.....	33	37162.....	31	37276.....	33	38019.....	304
36555.....	59	36729.....	42	36878.....	41	37080.....	33	37163.....	31	37277.....	33	38020.....	304
36556.....	59	36731.....	42	37000.....	30	37081.....	32	37164.....	31	37278.....	33	38021.....	304
36557.....	59	36733.....	43	37001.....	30	37082.....	33	37165.....	31	37279.....	33	38022.....	304
36558.....	59	36736.....	42	37002.....	30	37083.....	33	37166.....	31	37280.....	33	38023.....	304
36559.....	59	36738.....	42	37003.....	30	37084.....	33	37167.....	31	37281.....	33	38024.....	304
36560.....	59	36740.....	42	37004.....	30	37085.....	33	37174.....	31	37282.....	33	38025.....	304
36561.....	59	36742.....	42	37005.....	30	37086.....	33	37180.....	30	37283.....	33	38026.....	304
36570.....	59	36744.....	43	37006.....	30	37087.....	33	37181.....	30	37284.....	33	38031.....	304
36571.....	59	36780.....	63	37007.....	30	37088.....	33	37182.....	30	37285.....	33	38032.....	304
36572.....	59	36781.....	63	37008.....	30	37089.....	33	37183.....	30	37286.....	33	38033.....	304
36573.....	59	36782.....	63	37009.....	30	37090.....	33	37184.....	30	37287.....	33	38034.....	304
36574.....	59	36783.....	63	37010.....	30	37091.....	33	37185.....	30	37288.....	34	38035.....	304
36575.....	59	36784.....	63	37011.....	30	37092.....	33	37186.....	30	37289.....	34	38036.....	304
36576.....	59	36785.....	63	37012.....	30	37093.....	33	37187.....	31	37290.....	34	38037.....	304
36577.....	59	36786.....	63	37013.....	30	37094.....	33	37188.....	31	37291.....	34	38038.....	304
36578.....	59	36787.....	63	37014.....	31	37095.....	33	37189.....	31	37292.....	34	38045.....	304
36590.....	53	36788.....	63	37015.....	31	37096.....	33	37190.....	32	37293.....	34	38046.....	304
36591.....	53	36789.....	63	37016.....	31	37097.....	33	37191.....	32	37294.....	34	38047.....	304
36592.....	53	36790.....	63	37017.....	31	37098.....	33	37192.....	32	37295.....	34	38048.....	304
36596.....	41	36791.....	63	37018.....	31	37099.....	33	37193.....	32	37296.....	34	38049.....	304
36597.....	42	36792.....	63	37019.....	31	37100.....	33	37194.....	32	37297.....	34	38050.....	304
36598.....	42	36793.....	63	37020.....	31	37101.....	33	37195.....	32	37298.....	34	38051.....	304
36599.....	41	36804.....	42	37021.....	31	37102.....	33	37196.....	32	37299.....	34	38052.....	304
36600.....	41	36805.....	42	37022.....	31	37103.....	33	37197.....	32	37300.....	34	38059.....	305
36601.....	41	36806.....	43	37023.....	31	37104.....	33	37198.....	32	37301.....	34	38060.....	305
36602.....	42	36807.....	43	37024.....	32	37105.....	33	37199.....	33	37302.....	34	38061.....	305
36603.....	42	36808.....	43	37025.....	32	37106.....	33	37200.....	33	37303.....	34	38062.....	305
36604.....	42	36809.....	43	37026.....	32	37107.....	33	37201.....	33	37304.....	34	38063.....	305
36605.....	42	36810.....	42	37027.....	32	37108.....	33	37202.....	32	37305.....	34	38064.....	305
36610.....	42	36811.....	42	37028.....	32	37109.....	33	37203.....	33	37306.....	34	38065.....	305
36611.....	42	36812.....	42	37029.....	32	37110.....	33	37204.....	33	37307.....	34	38066.....	305
36612.....	42	36813.....	42	37030.....	32	37111.....	33	37205.....	33	37308.....	34	38067.....	305
36613.....	42	36814.....	43	37031.....	32	37112.....	33	37206.....	33	37320.....	32	38068.....	305
36614.....	42	36815.....	43	37032.....	32	37113.....	33	37207.....	33	37321.....	32	38073.....	305
36615.....	42	36816.....	43	37033.....	32	37114.....	33	37208.....	33	37322.....	32	38074.....	305
36616.....	59	36817.....	43	37034.....	32	37115.....	33	37209.....	33	37323.....	32	38075.....	305
36617.....	59	36818.....	43	37035.....	32	37116.....	34	37210.....	33	37324.....	32	38076.....	305
36618.....	59	36819.....	43	37036.....	32	37117.....	34	37211.....	33	37325.....	32	38077.....	305
36620.....	94	36820.....	43	37037.....	32	37118.....	34	37212.....	33	37330.....	32	38078.....	305
36621.....	94	36821.....	43	37038.....	32	37119.....	34	37213.....	33	37331.....	32	38079.....	305
36622.....	94	36822.....	43	37039.....	32	37120.....	34	37214.....	34	37332.....	32	38080.....	305
36623.....	94	36823.....	43	37040.....	32	37121.....	34	37215.....	34	37333.....	32	38081.....	305
36624.....	94	36824.....	43	37041.....	32	37122.....	34	37216.....	34	37334.....	32	38082.....	305
36625.....	94	36825.....	43	37042.....	32	37123.....	34	37217.....	34	37335.....	32	38083.....	305
36626.....	94	36826.....	42	37043.....	32	37124.....	34	37218.....	34	37337.....	32	38084.....	305
36627.....	94	36827.....	42	37044.....	32	37125.....	34	37219.....	34	37338.....	32	38087.....	306
36628.....	94	36828.....	43	37045.....	32	37126.....	34	37220.....	34	37339.....	32	38088.....	306
36629.....	94	36829.....	43	37046.....	32	37127.....	34	37221.....	34	37340.....	32	38089.....	306
36630.....	94	36830.....	43	37047.....	32	37128.....	34	37222.....	33	37341.....	32	38090.....	306
36631.....	94	36846.....	53	37048.....	32	37129.....	34	37223.....	33	37342.....	32	38091.....	306
36632.....	94	36847.....	53	37049.....	32	37130.....	34	37224.....	33	37343.....	32	38092.....	306
36633.....	94	36848.....	53	37050.....	32	37131.....	34	37225.....	33	37344.....	32	38093.....	306
36634.....	94	36849.....	53	37051.....	32	37132.....	34	37226.....	33	37345.....	32	38094.....	306
36635.....	94	36850.....	53	37052.....	32	37133.....	34	37227.....	33	37346.....	32	38095.....	306
36636.....	94	36851.....	41	37053.....	32	37134.....	34	37228.....	33	37348.....	32	38096.....	306
36637.....	94	36852.....	41	37054.....	32	37135.....	34	37229.....	33	37349.....	32	38097.....	306
36638.....	94	36853.....	41	37055.....	32	37136.....	34	37230.....	33	37350.....	32	38098.....	306
36639.....	94	36854.....	41	37056.....	32	37137.....	34	37231.....	33	37351.....	32	38099.....	306
36640.....	94	36855.....	42	37057.....	32	37138.....	34	37232.....	33	37352.....	32	38100.....	306

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
38101.....	306	38182.....	305	38295.....	282	38376.....	281	38555.....	33	38636.....	33
38102.....	306	38183.....	305	38296.....	282	38377.....	281	38556.....	33	38637.....	33
38103.....	306	38184.....	305	38297.....	282	38378.....	281	38557.....	33	38638.....	33
38104.....	306	38185.....	306	38298.....	282	38379.....	282	38558.....	33	38639.....	33
38105.....	306	38186.....	306	38299.....	282	38380.....	282	38559.....	33	38640.....	33
38106.....	306	38187.....	306	38300.....	282	38381.....	282	38560.....	33	38641.....	33
38107.....	306	38188.....	306	38301.....	282	38382.....	282	38561.....	33	38642.....	33
38108.....	306	38189.....	306	38302.....	282	38383.....	282	38562.....	33	38643.....	33
38109.....	306	38190.....	306	38303.....	282	38384.....	282	38563.....	34	38644.....	33
38110.....	306	38191.....	306	38304.....	282	38385.....	282	38564.....	34	38645.....	33
38111.....	306	38192.....	306	38305.....	282	38386.....	282	38565.....	34	38646.....	33
38112.....	306	38193.....	306	38306.....	282	38387.....	282	38566.....	34	38647.....	34
38113.....	306	38194.....	306	38307.....	282	38388.....	282	38567.....	34	38648.....	34
38114.....	306	38195.....	306	38308.....	282	38389.....	282	38568.....	34	38649.....	34
38115.....	303	38196.....	306	38309.....	282	38390.....	282	38569.....	34	38650.....	34
38116.....	303	38197.....	306	38310.....	282	38391.....	282	38570.....	34	38651.....	34
38117.....	303	38198.....	306	38311.....	282	38392.....	282	38571.....	34	38652.....	34
38118.....	303	38201.....	280	38312.....	282	38393.....	282	38572.....	34	38653.....	34
38119.....	303	38202.....	280	38313.....	282	38394.....	282	38573.....	34	38654.....	34
38120.....	304	38203.....	280	38314.....	282	38395.....	282	38574.....	34	38655.....	34
38121.....	304	38204.....	280	38315.....	280	38396.....	282	38575.....	34	38656.....	34
38122.....	304	38209.....	280	38316.....	280	38397.....	282	38576.....	34	38657.....	34
38123.....	304	38210.....	280	38317.....	280	38398.....	282	38577.....	34	38658.....	34
38124.....	304	38211.....	280	38318.....	280	38490.....	45	38578.....	32	38659.....	34
38125.....	304	38212.....	280	38319.....	280	38492.....	45	38579.....	32	38660.....	34
38126.....	304	38213.....	280	38320.....	280	38496.....	45	38580.....	32	38661.....	34
38127.....	304	38214.....	280	38321.....	280	38500.....	30	38581.....	32	38662.....	34
38128.....	304	38219.....	280	38322.....	280	38501.....	30	38582.....	32	38663.....	34
38129.....	304	38220.....	280	38323.....	280	38502.....	30	38583.....	32	38664.....	34
38130.....	304	38221.....	280	38324.....	281	38503.....	31	38584.....	32	38770.....	30
38131.....	304	38222.....	280	38325.....	281	38504.....	31	38585.....	32	38771.....	30
38132.....	305	38223.....	280	38326.....	281	38505.....	31	38586.....	32	38772.....	30
38133.....	305	38224.....	280	38327.....	281	38506.....	32	38587.....	32	38773.....	30
38134.....	305	38225.....	280	38328.....	281	38507.....	32	38588.....	32	38774.....	30
38135.....	305	38226.....	280	38329.....	281	38508.....	32	38589.....	32	38775.....	30
38136.....	305	38231.....	281	38330.....	281	38509.....	33	38590.....	32	38776.....	30
38137.....	305	38232.....	281	38331.....	281	38510.....	34	38591.....	32	38777.....	30
38138.....	305	38233.....	281	38332.....	281	38511.....	34	38592.....	32	38778.....	30
38139.....	305	38234.....	281	38333.....	281	38512.....	32	38593.....	32	38779.....	30
38140.....	305	38235.....	281	38334.....	281	38513.....	32	38594.....	32	38780.....	30
38141.....	305	38236.....	281	38335.....	281	38514.....	32	38595.....	32	38781.....	30
38142.....	305	38237.....	281	38336.....	281	38515.....	33	38596.....	33	38782.....	30
38143.....	306	38238.....	281	38337.....	282	38516.....	34	38597.....	33	38783.....	30
38144.....	306	38245.....	281	38338.....	282	38517.....	34	38598.....	33	38784.....	30
38145.....	306	38246.....	281	38339.....	282	38518.....	32	38599.....	33	38785.....	30
38146.....	306	38247.....	281	38340.....	282	38519.....	32	38600.....	33	38786.....	30
38147.....	306	38248.....	281	38341.....	282	38520.....	33	38601.....	33	38787.....	30
38148.....	306	38249.....	281	38342.....	282	38521.....	33	38602.....	33	38788.....	30
38149.....	306	38250.....	281	38343.....	282	38522.....	34	38603.....	33	38789.....	30
38150.....	306	38251.....	281	38344.....	282	38523.....	34	38604.....	33	38792.....	30
38151.....	306	38252.....	281	38345.....	282	38524.....	34	38605.....	33	38793.....	30
38152.....	306	38259.....	281	38346.....	282	38525.....	30	38606.....	33	38794.....	30
38153.....	306	38260.....	281	38347.....	282	38526.....	30	38607.....	33	38795.....	30
38154.....	306	38261.....	281	38348.....	282	38527.....	30	38608.....	34	38798.....	31
38155.....	306	38262.....	281	38349.....	282	38528.....	30	38609.....	34	38799.....	31
38156.....	306	38263.....	281	38350.....	282	38529.....	31	38610.....	34	38800.....	31
38157.....	303	38264.....	281	38351.....	282	38530.....	31	38611.....	34	38801.....	31
38158.....	303	38265.....	281	38352.....	282	38531.....	31	38612.....	34	38802.....	31
38159.....	303	38266.....	281	38353.....	282	38532.....	31	38613.....	34	38803.....	31
38160.....	303	38267.....	281	38354.....	282	38533.....	32	38614.....	34	38804.....	31
38161.....	303	38268.....	281	38355.....	282	38534.....	32	38615.....	34	38805.....	31
38162.....	304	38273.....	282	38356.....	282	38535.....	32	38616.....	34	38806.....	31
38163.....	304	38274.....	282	38357.....	280	38536.....	32	38617.....	34	38807.....	31
38164.....	304	38275.....	282	38358.....	280	38537.....	32	38618.....	34	38808.....	31
38165.....	304	38276.....	282	38359.....	280	38538.....	32	38619.....	34	38809.....	31
38166.....	304	38277.....	282	38360.....	280	38539.....	32	38620.....	34	38810.....	31
38167.....	304	38278.....	282	38361.....	280	38540.....	32	38621.....	34	38811.....	31
38168.....	304	38279.....	282	38362.....	280	38541.....	32	38622.....	34	38812.....	31
38169.....	304	38280.....	282	38363.....	280	38542.....	32	38623.....	32	38813.....	31
38170.....	304	38281.....	282	38364.....	280	38543.....	32	38624.....	32	38814.....	31
38171.....	304	38282.....	282	38365.....	280	38544.....	32	38625.....	32	38815.....	31
38172.....	304	38283.....	282	38366.....	281	38545.....	32	38626.....	32	38816.....	31
38173.....	304	38284.....	282	38367.....	281	38546.....	32	38627.....	32	38817.....	31
38174.....	305	38287.....	282	38368.....	281	38547.....	32	38628.....	32	38818.....	31
38175.....	305	38288.....	282	38369.....	281	38548.....	32	38629.....	33	38819.....	31
38176.....	305	38289.....	282	38370.....	281	38549.....	32	38630.....	33	38820.....	31
38177.....	305	38290.....	282	38371.....	281	38550.....	32	38631.....	33	38821.....	31
38178.....	305	38291.....	282	38372.....	281	38551.....	33	38632.....	33	38822.....	31
38179.....	305	38292.....	282	38373.....	281	38552.....	33	38633.....	33	38823.....	31
38180.....	305	38293.....	282	38374.....	281	38553.....	33	38634.....	33	38824.....	31
38181.....	305	38294.....	282	38375.....	281	38554.....	33	38635.....	33	38825.....	31

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
39022.....	307	39121.....	303	39320.....	283	39519.....	280	39618.....	314	39721.....	297
39023.....	303	39122.....	307	39321.....	280	39520.....	283	39619.....	313	39723.....	297
39024.....	307	39123.....	303	39322.....	283	39521.....	280	39620.....	314	39725.....	297
39025.....	303	39124.....	307	39323.....	280	39522.....	283	39621.....	313	39727.....	297
39026.....	307	39125.....	303	39324.....	283	39523.....	280	39622.....	314	39729.....	297
39027.....	303	39126.....	307	39325.....	280	39524.....	283	39623.....	313	39731.....	297
39028.....	307	39127.....	303	39326.....	283	39525.....	280	39624.....	314	39733.....	297
39029.....	303	39128.....	307	39327.....	280	39526.....	283	39625.....	313	39735.....	297
39030.....	307	39129.....	303	39328.....	283	39527.....	280	39626.....	314	39737.....	297
39031.....	303	39130.....	307	39329.....	280	39528.....	283	39627.....	313	39739.....	297
39032.....	307	39131.....	303	39330.....	283	39529.....	280	39628.....	314	39741.....	297
39033.....	304	39132.....	307	39331.....	280	39530.....	283	39629.....	313	39743.....	297
39034.....	307	39133.....	304	39332.....	283	39531.....	280	39630.....	314	39745.....	297
39035.....	304	39134.....	307	39333.....	280	39532.....	283	39631.....	313	39747.....	297
39036.....	307	39135.....	304	39334.....	283	39533.....	280	39632.....	314	39749.....	297
39037.....	304	39136.....	307	39335.....	280	39534.....	283	39633.....	313	39751.....	297
39038.....	307	39137.....	304	39336.....	283	39535.....	280	39634.....	314	39753.....	297
39039.....	304	39138.....	307	39337.....	281	39536.....	283	39635.....	313	39755.....	297
39040.....	307	39139.....	304	39338.....	283	39537.....	281	39636.....	314	39757.....	297
39041.....	304	39140.....	307	39339.....	281	39538.....	283	39637.....	313	39759.....	297
39042.....	307	39141.....	304	39340.....	283	39539.....	281	39638.....	314	39761.....	297
39043.....	304	39142.....	307	39341.....	281	39540.....	283	39639.....	313	39763.....	297
39044.....	307	39143.....	304	39342.....	283	39541.....	281	39640.....	314	39765.....	297
39045.....	304	39144.....	307	39343.....	281	39542.....	283	39641.....	313	39767.....	297
39046.....	307	39145.....	304	39344.....	283	39543.....	281	39641.....	318	39769.....	297
39047.....	304	39146.....	307	39345.....	281	39544.....	283	39642.....	314	39771.....	297
39048.....	308	39147.....	304	39346.....	283	39545.....	281	39642.....	319	39773.....	297
39049.....	304	39148.....	308	39347.....	281	39546.....	283	39651.....	287	39775.....	297
39050.....	308	39149.....	304	39348.....	284	39547.....	281	39652.....	288	39777.....	297
39051.....	304	39150.....	308	39349.....	281	39548.....	284	39653.....	287	39789.....	297
39052.....	308	39151.....	304	39350.....	284	39549.....	281	39654.....	288	39789.....	318
39053.....	304	39152.....	308	39351.....	281	39550.....	284	39655.....	287	40000.....	309
39054.....	308	39153.....	304	39352.....	284	39551.....	281	39656.....	288	40001.....	309
39055.....	305	39154.....	308	39353.....	281	39552.....	284	39657.....	287	40003.....	30

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
40545.....	299	41558.....	290	42665.....	70	43115.....	310	43501.....	299	44303.....	164	44605.....	171
40546.....	300	41561.....	289	42666.....	70	43116.....	312	43502.....	300	44304.....	164	44606.....	171
40549.....	299	41562.....	290	42667.....	70	43125.....	310	43503.....	299	44305.....	164	44607.....	171
40550.....	300	41565.....	289	42668.....	70	43126.....	312	43504.....	300	44306.....	164	44608.....	171
40553.....	299	41566.....	290	42669.....	70	43135.....	310	43505.....	299	44307.....	164	44609.....	170
40554.....	300	41605.....	309	42670.....	70	43136.....	312	43506.....	300	44308.....	164	44610.....	170
40557.....	299	41609.....	309	42671.....	70	43145.....	310	43507.....	299	44309.....	164	44611.....	170
40558.....	300	41613.....	309	42672.....	70	43146.....	312	43508.....	300	44505.....	173	44612.....	170
40561.....	299	41617.....	309	42673.....	70	43155.....	310	43515.....	299	44506.....	173	44613.....	170
40562.....	300	41621.....	309	42674.....	70	43156.....	312	43516.....	300	44509.....	173	44614.....	170
40565.....	299	41625.....	309	42675.....	70	43165.....	311	43525.....	299	44510.....	173	44615.....	171
40566.....	300	41629.....	309	42676.....	70	43166.....	312	43526.....	300	44513.....	173	44616.....	171
40569.....	299	41633.....	309	42677.....	70	43175.....	311	43535.....	299	44514.....	173	44617.....	171
40570.....	300	41637.....	309	42678.....	70	43176.....	312	43536.....	300	44517.....	173	44618.....	171
40573.....	299	41641.....	309	42679.....	70	43185.....	311	43545.....	299	44518.....	173	44619.....	171
40574.....	300	41645.....	310	42680.....	70	43186.....	312	43546.....	300	44521.....	173	44620.....	171
40577.....	299	41649.....	310	42681.....	70	43195.....	311	43555.....	299	44522.....	173	44627.....	140
40578.....	300	41653.....	310	42682.....	70	43196.....	312	43556.....	300	44525.....	173	44628.....	140
40581.....	299	41657.....	310	42683.....	70	43301.....	285	43565.....	299	44526.....	173	44629.....	140
40582.....	300	41661.....	310	42684.....	70	43302.....	286	43566.....	300	44529.....	173	44630.....	140
40585.....	299	41665.....	310	42685.....	71	43303.....	285	43575.....	299	44530.....	173	44631.....	140
40586.....	300	41705.....	291	42686.....	71	43304.....	286	43576.....	300	44533.....	173	44634.....	140
41405.....	313	41709.....	291	42687.....	71	43305.....	285	43585.....	299	44534.....	173	44635.....	140
41406.....	314	41713.....	291	42688.....	71	43306.....	286	43586.....	300	44537.....	173	44636.....	140
41409.....	313	41717.....	291	42689.....	71	43307.....	285	43595.....	299	44538.....	173	44637.....	140
41410.....	314	41721.....	291	42690.....	71	43308.....	286	43596.....	300	44541.....	173	44638.....	140
41413.....	313	41725.....	291	42691.....	71	43315.....	285	43900.....	296	44542.....	173	44639.....	140
41414.....	314	41729.....	291	42692.....	71	43316.....	286	43901.....	296	44545.....	173	44641.....	140
41417.....	313	41733.....	291	42693.....	71	43325.....	285	43902.....	296	44546.....	173	44642.....	140
41418.....	314	41737.....	291	42694.....	71	43326.....	286	43903.....	296	44550.....	170	44643.....	140
41421.....	313	41741.....	291	42695.....	71	43335.....	285	43904.....	296	44551.....	170	44701.....	157
41422.....	314	41745.....	291	42696.....	71	43336.....	286	43905.....	296	44552.....	170	44702.....	157
41425.....	313	41749.....	291	42697.....	71	43345.....	285	43906.....	296	44553.....	170	44703.....	157
41426.....	314	41753.....	291	42698.....	71	43346.....	286	43907.....	296	44554.....	170	44705.....	157
41429.....	313	41757.....	291	42699.....	71	43355.....	285	43908.....	296	44555.....	170	44708.....	158
41430.....	314	41761.....	291	42700.....	71	43356.....	286	43909.....	296	44556.....	170	44711.....	158
41433.....	313	41765.....	291	42701.....	72	43365.....	285	43910.....	295	44557.....	170	44714.....	159
41434.....	314	42606.....	70	42702.....	72	43366.....	286	43911.....	295	44558.....	170	44715.....	157
41437.....	313	42607.....	70	42703.....	72	43375.....	285	43912.....	295	44559.....	170	44716.....	157
41438.....	314	42608.....	70	42704.....	72	43376.....	286	43913.....	295	44560.....	170	44717.....	157
41441.....	313	42609.....	70	42705.....	72	43385.....	285	43914.....	295	44561.....	170	44719.....	157
41442.....	314	42610.....	70	42706.....	160	43386.....	286	43915.....	295	44562.....	170	44722.....	158
41445.....	313	42611.....	70	42707.....	160	43395.....	285	43916.....	295	44563.....	170	44725.....	158
41446.....	314	42612.....	70	42708.....	160	43396.....	286	43917.....	295	44564.....	170	44728.....	159
41449.....	313	42613.....	70	42709.....	160	43445.....	106	43918.....	295	44565.....	170	44731.....	159
41450.....	314	42614.....	70	42710.....	161	43446.....	106	43919.....	295	44566.....	170	44732.....	157
41453.....	313	42615.....	70	42711.....	161	43447.....	106	43920.....	295	44570.....	171	44733.....	158
41454.....	314	42616.....	70	42712.....	61	43448.....	106	43921.....	295	44571.....	171	44734.....	158
41457.....	313	42617.....	71	42713.....	61	43449.....	106	43922.....	295	44572.....	171	44735.....	158
41458.....	314	42618.....	71	42714.....	61	43450.....	106	43923.....	295	44573.....	171	44736.....	158
41461.....	313	42619.....	71	42715.....	61	43451.....	106	43924.....	295	44574.....	171	44737.....	159
41462.....	314	42620.....	71	42716.....	61	43452.....	106	43925.....	295	44575.....	171	44738.....	160
41465.....	313	42621.....	72	42717.....	61	43453.....	106	43926.....	295	44576.....	171	44739.....	161
41466.....	314	42622.....	70	42718.....	49	43470.....	106	43927.....	295	44577.....	171	44740.....	161
41505.....	289	42623.....	70	42719.....	49	43471.....	106	43928.....	295	44578.....	171	44741.....	160
41506.....	290	42624.....	71	42721.....	49	43472.....	106	43929.....	295	44579.....	171	44745.....	140
41509.....	289	42625.....	71	42722.....	49	43473.....	106	43930.....	295	44580.....	171	44746.....	140
41510.....	290	42626.....	71	42723.....	49	43474.....	106	43931.....	295	44581.....	171	44747.....	140
41513.....	289	42627.....	71	42731.....	50	43475.....	106	43932.....	295	44582.....	171	44748.....	140
41514.....	290	42628.....	71	42732.....	50	43476.....	106	43933.....	295	44583.....	171	44749.....	140
41517.....	289	42630.....	71	42733.....	50	43477.....	106	43934.....	295	44584.....	171	44750.....	140
41518.....	290	42631.....	71	42734.....	50	43478.....	106	43935.....	295	44585.....	171	44751.....	140
41521.....	289	42632.....	71	42735.....	50	43479.....	106	43936.....	295	44586.....	171	44752.....	140
41522.....	290	42633.....	71	42736.....	50	43480.....	106	43937.....	295	44587.....	170	44753.....	140
41525.....	289	42648.....	71	42737.....	50	43481.....	106	43938.....	295	44588.....	170	44754.....	140
41526.....	290	42649.....	71	42738.....	50	43482.....	106	43939.....	295	44589.....	170	44755.....	140
41529.....	289	42650.....	71	42739.....	50	43483.....	106	43950.....	295	44590.....	170	44756.....	140
41530.....	290	42651.....	71	42750.....	73	43484.....	106	43951.....	295	44591.....	170	44757.....	140
41533.....	289	42652.....	71	42751.....	73	43485.....	106	43952.....	295	44592.....	170	44758.....	140
41534.....	290	42653.....	72	42752.....	73	43486.....	106	43953.....	295	44593.....	170	44759.....	140
41537.....	289	42654.....	72	42753.....	73	43487.....	106	43954.....	295	44594.....	170	44760.....	140
41538.....	290	42655.....	72	42754.....	73	43488.....	106	43955.....	295	44595.....	170	44761.....	140
41541.....	289	42656.....	71	42755.....	73	43489.....	106	43956.....	295	44596.....	170	44762.....	140
41542.....	290	42657.....	71	43101.....	309	43490.....	106	43957.....	295	44597.....	170	44763.....	140
41545.....	289	42658.....	71	43102.....	312	43491.....	106	43958.....	295	44598.....	171	44764.....	140
41546.....	290	42659.....	71	43103.....	309	43492.....	106	43959.....	295	44599.....	171	44765.....	140
41549.....	289	42660.....	70	43104.....	312	43493.....	106	44298.....	164	44600.....	171	44766.....	140
41550.....	290	42661.....	70	43105.....	310	43494.....	106	44299.....	164	44601.....	171	44767.....	140
41553.....	289	42662.....	70	43106.....	312	43495.....	106	44300.....	164	44602.....	171	44768.....	140
41554.....	290	42663.....	70	43107.....	309	43496.....	106	44301.....	164	44603.....	171	44769.....	160
41557.....	289	42664.....	70	43108.....	312	43497.....	106	44302.....	164	44604.....	171	44770.....	160

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
44771.....	160	44858.....	157	44959.....	160	45116.....	81	45293.....	292	46130.....	316
44772.....	160	44859.....	158	44960.....	160	45117.....	81	45295.....	292	46131.....	316
44773.....	160	44860.....	158	44961.....	161	45118.....	81	45297.....	292	46132.....	316
44774.....	160	44861.....	158	44962.....	161	45119.....	81	45299.....	292	46133.....	316
44775.....	160	44862.....	158	44963.....	161	45120.....	81	45477.....	315	46140.....	116
44776.....	160	44863.....	158	44964.....	161	45121.....	81	45478.....	315	46141.....	116
44777.....	160	44864.....	158	44965.....	161	45122.....	81	45479.....	315	46142.....	116
44778.....	160	44865.....	158	44966.....	161	45123.....	81	45480.....	315	46143.....	116
44779.....	160	44866.....	158	44967.....	161	45124.....	81	45481.....	315	46145.....	116
44780.....	160	44867.....	158	44968.....	161	45125.....	81	45482.....	315	46147.....	116
44781.....	160	44868.....	158	44969.....	161	45126.....	81	45483.....	315	46206.....	317
44782.....	160	44869.....	158	44970.....	161	45127.....	82	45484.....	315	46207.....	317
44783.....	160	44870.....	158	44971.....	161	45128.....	82	45485.....	315	46208.....	317
44784.....	160	44871.....	158	44972.....	161	45129.....	82	45486.....	315	46209.....	317
44785.....	161	44872.....	158	44973.....	161	45130.....	82	45487.....	315	46210.....	317
44786.....	161	44873.....	158	44974.....	161	45131.....	82	45488.....	315	46211.....	317
44787.....	161	44874.....	158	44975.....	135	45132.....	82	45489.....	315	46212.....	317
44788.....	161	44875.....	158	44976.....	135	45133.....	82	45490.....	315	46213.....	317
44789.....	160	44876.....	158	44977.....	135	45134.....	82	45491.....	315	46214.....	317
44790.....	160	44877.....	158	44978.....	135	45135.....	82	45492.....	315	46216.....	317
44791.....	160	44878.....	159	44979.....	135	45136.....	82	45493.....	315	46217.....	317
44792.....	160	44879.....	159	44980.....	135	45137.....	82	45494.....	315	46218.....	317
44793.....	160	44880.....	159	44981.....	135	45138.....	82	45495.....	315	46220.....	317
44794.....	160	44881.....	159	44982.....	135	45139.....	82	45496.....	315	46221.....	317
44795.....	160	44882.....	159	44983.....	135	45140.....	82	45497.....	315	46222.....	317
44796.....	160	44883.....	159	44984.....	135	45141.....	82	45498.....	315	46228.....	317
44797.....	160	44884.....	159	44985.....	135	45150.....	81	45499.....	315	46229.....	317
44798.....	160	44885.....	159	44986.....	135	45170.....	81	45500.....	315	46230.....	317
44799.....	160	44886.....	159	44987.....	135	45171.....	81	45700.....	101	46231.....	317
44800.....	160	44890.....	157	44990.....	135	45172.....	81	45701.....	101	46232.....	317
44801.....	160	44891.....	157	44991.....	135	45173.....	81	45702.....	101	46233.....	317
44802.....	160	44892.....	157	44992.....	135	45174.....	81	45703.....	101	46343.....	56
44803.....	160	44893.....	157	44993.....	135	45175.....	81	45704.....	101	46344.....	56
44804.....	160	44894.....	157	44994.....	135	45176.....	81	45705.....	101	46345.....	56
44805.....	161	44895.....	157	44995.....	135	45177.....	81	45706.....	101	46346.....	56
44806.....	161	44896.....	157	44996.....	135	45178.....	81	45707.....	101	46347.....	56
44807.....	161	44897.....	158	44997.....	135	45179.....	81	45708.....	101	46348.....	56
44808.....	161	44898.....	158	44998.....	135	45180.....	81	45709.....	101	46349.....	56
44814.....	158	44899.....	161	44999.....	135	45181.....	81	45710.....	101	46350.....	56
44815.....	158	44900.....	158	45000.....	135	45182.....	81	45711.....	101	46351.....	56
44816.....	158	44901.....	159	45001.....	135	45183.....	81	45712.....	101	46354.....	56
44817.....	158	44902.....	157	45002.....	135	45184.....	81	45713.....	101	46355.....	56
44818.....	158	44916.....	162	45003.....	135	45185.....	81	45714.....	101	46356.....	56
44819.....	158	44917.....	163	45004.....	135	45186.....	81	45715.....	101	46357.....	48
44820.....	158	44918.....	163	45005.....	136	45187.....	82	45716.....	101	46358.....	48
44821.....	158	44919.....	162	45006.....	136	45188.....	82	45717.....	101	46359.....	48
44822.....	159	44920.....	163	45007.....	136	45189.....	82	45718.....	142	46360.....	48
44823.....	159	44921.....	163	45008.....	136	45190.....	82	45719.....	142	46362.....	48
44824.....	159	44922.....	162	45009.....	136	45191.....	82	45720.....	142	46364.....	48
44826.....	158	44923.....	163	45010.....	136	45192.....	82	45721.....	142	46366.....	48
44827.....	158	44924.....	163	45011.....	136	45193.....	82	45722.....	142	46368.....	49
44828.....	158	44925.....	162	45012.....	136	45194.....	82	45723.....	142	46370.....	49
44829.....	158	44926.....	163	45013.....	136	45195.....	82	45724.....	142	46372.....	49
44830.....	159	44927.....	163	45014.....	136	45196.....	82	45725.....	142	46374.....	49
44831.....	159	44928.....	162	45015.....	136	45197.....	82	45726.....	142	46376.....	49
44832.....	160	44929.....	163	45016.....	136	45198.....	82	45727.....	142	46450.....	61
44833.....	160	44930.....	163	45017.....	136	45199.....	82	45728.....	142	46451.....	61
44834.....	160	44931.....	162	45018.....	136	45200.....	82	45729.....	142	46452.....	61
44835.....	161	44932.....	163	45019.....	136	45201.....	82	45730.....	142	46453.....	61
44836.....	161	44933.....	163	45020.....	135	45202.....	82	45731.....	142	46454.....	61
44837.....	161	44934.....	162	45021.....	135	45203.....	82	45732.....	142	46455.....	61
44838.....	161	44935.....	163	45022.....	135	45204.....	83	45733.....	142	46456.....	61
44839.....	160	44936.....	163	45023.....	135	45205.....	83	45734.....	142	46457.....	61
44840.....	161	44937.....	162	45024.....	135	45206.....	83	45735.....	142	46458.....	61
44841.....	161	44938.....	163	45025.....	135	45207.....	83	46106.....	316	46459.....	61
44842.....	157	44939.....	163	45100.....	81	45208.....	83	46107.....	316	46460.....	61
44843.....	157	44940.....	162	45101.....	81	45209.....	83	46108.....	316	46461.....	61
44844.....	157	44941.....	163	45102.....	81	45210.....	83	46109.....	316	46462.....	61
44845.....	157	44942.....	163	45103.....	81	45211.....	83	46110.....	316	46463.....	61
44846.....	157	44943.....	162	45104.....	81	45212.....	83	46111.....	316	46464.....	61
44847.....	157	44944.....	163	45105.....	81	45213.....	83	46112.....	316	46465.....	61
44848.....	157	44945.....	163	45106.....	82	45214.....	83	46113.....	316	46466.....	61
44849.....	157	44950.....	160	45107.....	82	45215.....	83	46114.....	316	46467.....	61
44850.....	157	44951.....	160	45108.....	82	45277.....	292	46116.....	316	46468.....	61
44851.....	157	44952.....	160	45109.....	82	45279.....	292	46117.....	316	46469.....	61
44852.....	157	44953.....	160	45110.....	82	45281.....	292	46118.....	316	46470.....	61
44853.....	157	44954.....	160	45111.....	82	45283.....	292	46120.....	316	46471.....	61
44854.....	157	44955.....	160	45112.....	81	45285.....	292	46121.....	316	46472.....	61
44855.....	157	44956.....	160	45113.....	81	45287.....	292	46122.....	316	46473.....	61
44856.....	157	44957.....	160	45114.....	81	45289.....	292	46128.....	316	46474.....	61
44857.....	157	44958.....	160	45115.....	81	45291.....	292	46129.....	316	46475.....	61

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
46829.....	50	46935.....	50	47069.....	38	48009.....	37	48519.....	311	48602.....	312
46830.....	50	46936.....	50	47070.....	38	48010.....	37	48520.....	311	48603.....	312
46831.....	50	46937.....	50	47071.....	38	48011.....	37	48522.....	309	48604.....	312
46832.....	50	46938.....	50	47072.....	38	48012.....	37	48523.....	309	48605.....	312
46833.....	50	46939.....	50	47073.....	38	48013.....	37	48524.....	309	48606.....	312
46834.....	50	46940.....	50	47074.....	38	48014.....	37	48525.....	309	48607.....	312
46835.....	50	46941.....	50	47075.....	38	48015.....	37	48526.....	309	48608.....	312
46836.....	50	46942.....	50	47076.....	38	48016.....	37	48527.....	309	48609.....	312
46837.....	50	46943.....	50	47077.....	38	48017.....	37	48528.....	309	48610.....	312
46838.....	50	46944.....	49	47078.....	38	48018.....	38	48529.....	309	48611.....	312
46839.....	50	46945.....	49	47079.....	38	48019.....	38	48530.....	309	48612.....	312
46840.....	50	46946.....	49	47080.....	38	48020.....	38	48531.....	309	48613.....	312
46841.....	50	47000.....	37	47081.....	38	48021.....	38	48532.....	310	48614.....	312
46849.....	48	47001.....	37	47082.....	38	48022.....	38	48533.....	310	48615.....	312
46850.....	48	47002.....	37	47083.....	38	48023.....	38	48534.....	310	48616.....	312
46851.....	48	47003.....	37	47084.....	38	48024.....	38	48535.....	310	48617.....	312
46852.....	48	47004.....	37	47085.....	38	48025.....	38	48536.....	310	48618.....	312
46853.....	48	47005.....	37	47086.....	38	48026.....	38	48537.....	310	48619.....	312
46854.....	48	47006.....	37	47087.....	38	48027.....	38	48538.....	310	48620.....	312
46855.....	48	47007.....	37	47088.....	38	48028.....	38	48539.....	310	48621.....	312
46856.....	48	47008.....	37	47089.....	38	48029.....	37	48540.....	311	48622.....	312
46857.....	48	47009.....	37	47090.....	38	48030.....	37	48541.....	311	48623.....	312
46858.....	48	47010.....	37	47091.....	38	48031.....	37	48542.....	311	48624.....	312
46859.....	48	47011.....	37	47092.....	38	48032.....	37	48543.....	309	48625.....	312
46860.....	48	47012.....	37	47093.....	38	48033.....	37	48544.....	309	48626.....	312
46861.....	48	47013.....	37	47094.....	38	48034.....	37	48545.....	309	48627.....	312
46862.....	49	47014.....	37	47095.....	38	48035.....	37	48546.....	309	48628.....	285
46863.....	49	47015.....	37	47096.....	38	48036.....	37	48547.....	309	48629.....	285
46864.....	49	47016.....	37	47097.....	38	48037.....	38	48548.....	309	48630.....	285
46865.....	49	47017.....	37	47120.....	37	48038.....	38	48549.....	309	48631.....	285
46866.....	49	47018.....	37	47121.....	37	48039.....	38	48550.....	309	48632.....	285
46867.....	49	47019.....	37	47122.....	37	48040.....	38	48551.....	309	48633.....	285
46868.....	49	47020.....	37	47123.....	37	48041.....	38	48552.....	309	48634.....	285
46869.....	49	47021.....	37	47124.....	37	48042.....	38	48553.....	310	48635.....	285
46873.....	48	47022.....	37	47125.....	37	48043.....	38	48554.....	310	48636.....	285
46874.....	48	47023.....	37	47126.....	37	48044.....	38	48555.....	310	48637.....	285
46880.....	48	47024.....	37	47127.....	37	48045.....	38	48556.....	310	48638.....	285
46881.....	48	47025.....	37	47128.....	37	48046.....	38	48557.....	310	48639.....	285
46882.....	48	47026.....	37	47129.....	37	48047.....	38	48558.....	310	48640.....	285
46884.....	48	47027.....	37	47130.....	37	48048.....	38	48559.....	310	48641.....	285
46886.....	48	47028.....	37	47131.....	37	48049.....	38	48560.....	310	48642.....	285
46887.....	48	47029.....	37	47132.....	38	48050.....	38	48561.....	311	48643.....	285
46889.....	48	47030.....	37	47133.....	38	48051.....	38	48562.....	311	48644.....	285
46890.....	48	47031.....	37	47134.....	37	48052.....	38	48563.....	311	48645.....	285
46891.....	48	47032.....	37	47135.....	38	48053.....	38	48564.....	312	48646.....	285
46893.....	48	47033.....	37	47136.....	38	48054.....	38	48565.....	312	48647.....	285
46894.....	49	47034.....	37	47137.....	38	48055.....	38	48566.....	312	48648.....	285
46895.....	49	47035.....	38	47138.....	38	48056.....	37	48567.....	312	48650.....	285
46896.....	49	47036.....	38	47139.....	38	48057.....	37	48568.....	312	48651.....	285
46898.....	49	47037.....	38	47140.....	38	48058.....	38	48569.....	312	48652.....	285
46899.....	49	47038.....	38	47141.....	38	48059.....	38	48570.....	312	48653.....	285
46900.....	49	47039.....	37	47142.....	38	48060.....	38	48571.....	312	48654.....	285
46903.....	49	47040.....	37	47143.....	38	48061.....	38	48572.....	312	48655.....	285
46904.....	49	47041.....	37	47144.....	38	48062.....	38	48573.....	312	48656.....	285
46905.....	49	47042.....	38	47145.....	38	48063.....	38	48574.....	312	48657.....	285
46909.....	48	47043.....	38	47146.....	38	48064.....	38	48575.....	312	48658.....	285
46910.....	48	47044.....	38	47147.....	38	48065.....	38	48576.....	312	48659.....	285
46911.....	48	47045.....	38	47148.....	38	48066.....	38	48577.....	312	48660.....	285
46912.....	49	47046.....	37	47160.....	37	48067.....	38	48578.....	312	48661.....	285
46913.....	49	47047.....	37	47161.....	37	48068.....	38	48579.....	312	48662.....	285
46914.....	49	47048.....	37	47162.....	37	48070.....	37	48580.....	312	48663.....	285
46915.....	49	47049.....	38	47163.....	37	48071.....	37	48581.....	312	48664.....	285
46916.....	49	47050.....	38	47164.....	37	48500.....	309	48582.....	312	48665.....	285
46917.....	49	47051.....	38	47165.....	37	48501.....	309	48583.....	312	48666.....	285
46918.....	49	47052.....	38	47166.....	37	48502.....	309	48584.....	312	48667.....	285
46919.....	49	47053.....	38	47167.....	37	48503.....	309	48586.....	312	48668.....	285
46920.....	49	47054.....	38	47168.....	37	48504.....	309	48587.....	312	48669.....	285
46921.....	49	47055.....	38	47169.....	37	48505.....	309	48588.....	312	48670.....	285
46922.....	49	47056.....	38	47170.....	37	48506.....	309	48589.....	312	48671.....	285
46923.....	49	47057.....	38	47171.....	37	48507.....	309	48590.....	312	48672.....	285
46924.....	49	47058.....	38	47172.....	37	48508.....	309	48591.....	312	48673.....	285
46925.....	49	47059.....	38	47173.....	37	48509.....	309	48592.....	312	48674.....	285
46926.....	49	47060.....	38	48000.....	37	48510.....	310	48593.....	312	48675.....	285
46927.....	49	47061.....	38	48001.....	37	48511.....	310	48594.....	312	48676.....	285
46928.....	50	47062.....	38	48002.....	37	48512.....	310	48595.....	312	48677.....	285
46929.....	50	47063.....	38	48003.....	37	48513.....	310	48596.....	312	48678.....	285
46930.....	50	47064.....	38	48004.....	37	48514.....	310	48597.....	312	48679.....	285
46931.....	50	47065.....	38	48005.....	37	48515.....	310	48598.....	312	48680.....	285
46932.....	50	47066.....	38	48006.....	37	48516.....	310	48599.....	312	48681.....	285
46933.....	50	47067.....	38	48007.....	37	48517.....	310	48600.....	312	48682.....	285
46934.....	50	47068.....	38	48008.....	37	48518.....	311	48601.....	312	48683.....	285

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
48766.....	299	48849.....	300	48940.....	313	49046.....	289	49157.....	309	49389.....	309
48767.....	299	48850.....	300	48941.....	313	49052.....	289	49158.....	309	49390.....	310
48768.....	299	48851.....	300	48947.....	314	49053.....	289	49159.....	309	49391.....	309
48769.....	299	48852.....	300	48948.....	314	49054.....	289	49160.....	309	49392.....	310
48770.....	299	48853.....	300	48949.....	314	49055.....	289	49161.....	309	49393.....	310
48771.....	299	48854.....	300	48950.....	314	49056.....	289	49162.....	309	49394.....	310
48772.....	299	48855.....	300	48951.....	314	49057.....	289	49163.....	309	49395.....	310
48773.....	299	48856.....	300	48952.....	314	49058.....	289	49164.....	309	49396.....	310
48774.....	299	48857.....	300	48953.....	314	49059.....	289	49165.....	309	49397.....	311
48775.....	299	48858.....	300	48954.....	314	49060.....	289	49166.....	309	49398.....	311
48776.....	299	48859.....	300	48955.....	314	49061.....	289	49167.....	310	49399.....	311
48778.....	299	48860.....	300	48956.....	314	49062.....	289	49168.....	310	49400.....	311
48779.....	299	48861.....	300	48957.....	314	49063.....	289	49169.....	310	49401.....	309
48780.....	299	48862.....	300	48958.....	314	49064.....	289	49170.....	310	49402.....	309
48781.....	299	48863.....	300	48959.....	314	49065.....	289	49171.....	310	49403.....	310
48782.....	299	48864.....	300	48960.....	314	49066.....	289	49172.....	310	49404.....	309
48783.....	299	48865.....	300	48961.....	314	49067.....	289	49178.....	309	49405.....	310
48784.....	299	48866.....	300	48962.....	314	49073.....	290	49179.....	309	49406.....	310
48785.....	299	48867.....	300	48968.....	314	49074.....	290	49180.....	309	49407.....	310
48786.....	299	48868.....	300	48969.....	314	49075.....	290	49181.....	309	49408.....	310
48787.....	299	48869.....	300	48970.....	314	49076.....	290	49182.....	309	49409.....	310
48788.....	299	48870.....	300	48971.....	314	49077.....	290	49183.....	309	49410.....	311
48789.....	299	48871.....	300	48972.....	314	49078.....	290	49184.....	309	49411.....	311
48790.....	299	48872.....	300	48973.....	314	49079.....	290	49185.....	309	49412.....	311
48791.....	299	48873.....	300	48974.....	314	49080.....	290	49186.....	309	49413.....	311
48792.....	299	48874.....	300	48975.....	314	49081.....	290	49187.....	309	49414.....	309
48793.....	299	48875.....	300	48976.....	314	49082.....	290	49188.....	310	49415.....	309
48794.....	299	48876.....	300	48977.....	314	49083.....	290	49189.....	310	49416.....	310
48795.....	299	48877.....	300	48978.....	314	49084.....	290	49190.....	310	49417.....	309
48796.....	299	48878.....	300	48979.....	314	49085.....	290	49191.....	310	49418.....	310
48797.....	299	48879.....	300	48980.....	314	49086.....	290	49192.....	310	49419.....	310
48798.....	299	48880.....	300	48981.....	314	49087.....	290	49193.....	310	49420.....	310
48799.....	299	48881.....	300	48982.....	314	49088.....	290	49262.....	291	49421.....	310
48800.....	299	48882.....	300	48983.....	314	49094.....	290	49263.....	291	49422.....	31

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
49551.....	286	49631.....	296	50025.....	232	51074.....	336	51335.....	235	51545.....	249	52300.....	244
49552.....	286	49632.....	296	50026.....	232	51075.....	336	51336.....	235	51580.....	244	52301.....	244
49553.....	286	49633.....	296	50027.....	232	51076.....	336	51337.....	235	51581.....	244	52302.....	244
49554.....	286	49634.....	296	50028.....	232	51077.....	336	51338.....	235	51582.....	245	52303.....	244
49555.....	286	49635.....	296	50029.....	232	51078.....	336	51339.....	235	51583.....	245	52304.....	244
49556.....	286	49636.....	296	50030.....	232	51079.....	336	51340.....	236	51584.....	245	52305.....	244
49557.....	286	49637.....	296	50031.....	232	51080.....	336	51341.....	236	51585.....	245	52306.....	244
49558.....	286	49638.....	296	51001.....	339	51101.....	336	51342.....	236	51586.....	245	52307.....	244
49559.....	286	49639.....	296	51002.....	339	51102.....	336	51343.....	236	51587.....	245	52308.....	244
49560.....	286	49640.....	296	51003.....	338	51103.....	336	51344.....	236	51588.....	245	52309.....	244
49561.....	286	49641.....	296	51004.....	338	51104.....	336	51345.....	236	51589.....	245	52310.....	244
49562.....	286	49642.....	296	51005.....	338	51105.....	337	51346.....	236	51590.....	246	52311.....	244
49563.....	286	49643.....	296	51006.....	338	51106.....	337	51347.....	237	51591.....	246	52312.....	244
49564.....	286	49644.....	296	51007.....	338	51107.....	337	51348.....	237	51592.....	249	52313.....	244
49565.....	286	49645.....	296	51008.....	338	51108.....	337	51349.....	237	51593.....	249	52314.....	244
49566.....	286	49646.....	296	51009.....	338	51109.....	337	51350.....	237	51594.....	249	52315.....	244
49567.....	286	49647.....	296	51010.....	338	51110.....	338	51351.....	237	51595.....	249	52316.....	244
49568.....	286	49648.....	296	51011.....	338	51111.....	338	51352.....	237	51596.....	249	52317.....	245
49569.....	286	49649.....	296	51012.....	338	51112.....	338	51353.....	237	51601.....	236	52318.....	245
49570.....	286	49650.....	296	51013.....	338	51113.....	338	51354.....	237	51602.....	236	52319.....	245
49571.....	286	49651.....	296	51014.....	338	51114.....	338	51355.....	238	51603.....	236	52321.....	245
49572.....	286	49663.....	173	51015.....	338	51115.....	339	51356.....	238	51604.....	236	52322.....	245
49573.....	286	49664.....	173	51016.....	338	51116.....	339	51357.....	238	51606.....	236	52323.....	245
49574.....	286	49665.....	173	51017.....	338	51117.....	339	51358.....	238	51607.....	236	52324.....	245
49575.....	286	49666.....	173	51018.....	338	51118.....	339	51359.....	238	51608.....	237	52325.....	245
49576.....	286	49667.....	173	51019.....	338	51119.....	339	51360.....	238	51609.....	237	52326.....	245
49577.....	286	49668.....	173	51020.....	338	51120.....	339	51361.....	239	51610.....	237	52327.....	245
49578.....	286	49669.....	173	51021.....	338	51121.....	339	51362.....	239	51611.....	237	52328.....	245
49579.....	286	49670.....	173	51022.....	338	51122.....	340	51363.....	239	51612.....	237	52329.....	245
49580.....	286	49671.....	173	51023.....	338	51123.....	340	51364.....	239	51613.....	237	52330.....	245
49581.....	286	49672.....	173	51024.....	337	51124.....	340	51365.....	239	51614.....	237	52331.....	245
49582.....	286	49673.....	173	51025.....	337	51125.....	340	51366.....	239	51615.....	237	52332.....	245
49583.....	300	49674.....	173	51026.....	337	51126.....	340	51367.....	239	51616.....	237	52333.....	245
49584.....	300	49675.....	173	51027.....	337	51127.....	340	51368.....	239	51617.....	237	52334.....	245
49585.....	300	49676.....	173	51028.....	337	51128.....	340	51369.....	239	51618.....	238	52335.....	246
49586.....	300	49677.....	173	51029.....	337	51129.....	340	51370.....	239	51619.....	238	52336.....	246
49587.....	300	49678.....	173	51030.....	337	51130.....	340	51371.....	239	51620.....	238	52337.....	246
49588.....	300	49679.....	173	51031.....	337	51131.....	340	51372.....	239	51621.....	238	52338.....	246
49589.....	300	49680.....	173	51032.....	337	51132.....	340	51373.....	239	51622.....	238	52339.....	246
49590.....	300	49681.....	173	51033.....	337	51201.....	339	51374.....	239	51752.....	234	52340.....	246
49591.....	300	49682.....	173	51034.....	337	51202.....	339	51375.....	239	51753.....	234	52341.....	246
49592.....	300	49683.....	173	51035.....	337	51203.....	339	51506.....	245	51754.....	234	52342.....	246
49593.....	300	49684.....	173	51036.....	337	51204.....	339	51507.....	245	51755.....	234	52343.....	247
49594.....	300	49829.....	292	51037.....	337	51206.....	339	51508.....	246	51756.....	234	52344.....	247
49595.....	300	49830.....	292	51038.....	337	51207.....	339	51509.....	246	51757.....	234	52345.....	247
49596.....	300	49831.....	292	51039.....	337	51208.....	339	51510.....	246	51758.....	234	52346.....	247
49597.....	300	49832.....	292	51040.....	337	51209.....	339	51511.....	246	51759.....	234	52347.....	247
49598.....	300	49833.....	292	51041.....	337	51210.....	339	51512.....	246	51760.....	235	52348.....	247
49599.....	300	49834.....	292	51042.....	337	51211.....	339	51513.....	246	51761.....	235	52349.....	247
49600.....	300	49835.....	292	51043.....	337	51212.....	339	51514.....	246	51762.....	235	52350.....	247
49601.....	300	49836.....	292	51044.....	337	51213.....	339	51515.....	247	51763.....	235	52351.....	248
49602.....	300	49837.....	292	51045.....	337	51214.....	339	51516.....	247	51764.....	235	52352.....	248
49603.....	300	49838.....	292	51046.....	337	51215.....	339	51517.....	247	51765.....	235	52353.....	248
49604.....	300	49839.....	292	51047.....	337	51216.....	339	51518.....	247	51766.....	235	52354.....	248
49605.....	300	49840.....	292	51048.....	337	51217.....	339	51519.....	247	51767.....	235	52355.....	249
49606.....	300	50000.....	232	51049.....	337	51218.....	340	51520.....	247	51768.....	235	52356.....	249
49607.....	300	50001.....	232	51050.....	337	51219.....	340	51521.....	247	51769.....	235	52357.....	249
49608.....	300	50002.....	232	51051.....	337	51220.....	340	51522.....	247	51770.....	235	52358.....	249
49609.....	300	50003.....	232	51052.....	336	51221.....	340	51523.....	247	51771.....	235	52359.....	249
49610.....	300	50004.....	232	51053.....	336	51222.....	340	51524.....	247	51772.....	235	52360.....	249
49611.....	300	50005.....	232	51054.....	336	51223.....	340	51525.....	248	51773.....	235	53001.....	353
49612.....	300	50006.....	232	51055.....	336	51224.....	340	51526.....	248	51774.....	235	53002.....	353
49613.....	300	50007.....	232	51056.....	336	51225.....	340	51527.....	248	51775.....	235	53003.....	353
49614.....	300	50008.....	232	51057.....	336	51226.....	340	51528.....	248	51776.....	235	53004.....	353
49615.....	300	50009.....	232	51058.....	336	51269.....	234	51529.....	248	51777.....	235	53005.....	353
49616.....	300	50010.....	232	51059.....	336	51270.....	234	51530.....	248	51778.....	236	53006.....	353
49617.....	300	50011.....	232	51060.....	336	51271.....	234	51531.....	248	51779.....	236	53007.....	353
49618.....	300	50012.....	232	51061.....	336	51272.....	234	51532.....	249	51780.....	236	53008.....	353
49619.....	300	50013.....	232	51062.....	336	51273.....	234	51533.....	249	51781.....	236	53009.....	353
49620.....	300	50014.....	232	51063.....	336	51274.....	234	51534.....	249	51782.....	236	53010.....	353
49621.....	300	50015.....	232	51064.....	336	51275.....	234	51535.....	249	51783.....	239	53011.....	353
49622.....	296	50016.....	232	51065.....	336	51276.....	234	51536.....	249	51784.....	239	53012.....	353
49623.....	296	50017.....	232	51066.....	336	51277.....	234	51537.....	249	51785.....	239	53013.....	353
49624.....	296	50018.....	232	51067.....	336	51278.....	234	51538.....	249	51786.....	239	53014.....	353
49625.....	296	50019.....	232	51068.....	336	51279.....	235	51539.....	249	51787.....	239	53015.....	353
49626.....	296	50020.....	232	51069.....	336	51330.....	234	51540.....	249	51788.....	239	53016.....	353
49627.....	296	50021.....	232	51070.....	336	51331.....	235	51541.....	249	51789.....	239	53017.....	352
49628.....	296	50022.....	232	51071.....	336	51332.....	235	51542.....	249	51790.....	239	53018.....	352
49629.....	296	50023.....	232	51072.....	336	51333.....	235	51543.....	249	51791.....	239	53019.....	352
49630.....	296	50024.....	232	51073.....	336	51334.....	235	51544.....	249	51792.....	239	53020.....	352

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
53021.....	352	54609.....	224	54818.....	229	55187.....	221	56115.....	350	56243.....	348
53022.....	352	54610.....	224	54819.....	229	55188.....	221	56116.....	350	56244.....	348
53023.....	352	54611.....	224	54820.....	229	55189.....	221	56117.....	350	56245.....	348
53024.....	352	54612.....	224	54821.....	229	55190.....	221	56118.....	350	56246.....	348
53025.....	352	54613.....	224	54822.....	229	55191.....	221	56119.....	350	56247.....	348
53026.....	352	54614.....	224	54823.....	229	55192.....	221	56120.....	350	56248.....	348
53027.....	352	54615.....	224	54824.....	229	55193.....	221	56121.....	350	56249.....	348
53028.....	352	54616.....	224	54825.....	229	55194.....	221	56122.....	350	56250.....	348
53029.....	352	54617.....	225	54826.....	229	55195.....	221	56123.....	350	56251.....	348
53030.....	352	54618.....	225	54827.....	230	56001.....	349	56124.....	350	56252.....	348
53031.....	352	54619.....	225	54828.....	230	56002.....	349	56125.....	350	56253.....	348
53032.....	352	54620.....	225	54829.....	230	56003.....	349	56126.....	350	56254.....	348
53033.....	352	54621.....	225	54830.....	230	56004.....	349	56127.....	350	56255.....	348
53034.....	352	54622.....	225	54831.....	230	56005.....	349	56128.....	350	56256.....	348
53035.....	352	54623.....	225	54832.....	230	56006.....	349	56129.....	350	56257.....	348
53036.....	352	54624.....	225	54833.....	230	56007.....	349	56130.....	350	56258.....	348
53107.....	352	54625.....	225	54834.....	230	56008.....	349	56131.....	350	56259.....	348
53108.....	352	54626.....	226	54835.....	230	56009.....	349	56132.....	350	56260.....	348
53109.....	352	54627.....	226	55000.....	227	56010.....	349	56135.....	348	56261.....	348
53110.....	352	54628.....	226	55001.....	227	56011.....	349	56136.....	348	56262.....	348
53111.....	352	54629.....	226	55002.....	227	56012.....	349	56137.....	348	56263.....	348
53112.....	353	54630.....	226	55003.....	227	56013.....	349	56138.....	348	56264.....	348
53113.....	353	54631.....	226	55004.....	227	56014.....	349	56139.....	348	56265.....	348
53114.....	353	54632.....	226	55005.....	227	56015.....	349	56140.....	349	56266.....	348
53115.....	353	54633.....	226	55006.....	227	56016.....	349	56141.....	349	56267.....	348
53116.....	353	54634.....	226	55007.....	227	56017.....	349	56142.....	349	56268.....	348
53117.....	354	54635.....	226	55008.....	227	56018.....	349	56143.....	349	56269.....	348
53118.....	354	54700.....	223	55009.....	228	56019.....	349	56144.....	349	56400.....	188
53119.....	354	54701.....	223	55010.....	228	56020.....	349	56145.....	349	56401.....	188
53120.....	354	54702.....	223	55011.....	228	56021.....	349	56146.....	349	56402.....	188
53121.....	354	54703.....	223	55012.....	228	56022.....	349	56147.....	350	56403.....	188
53122.....	354	54704.....	223	55013.....	228	56023.....	349	56148.....	350	56404.....	188
53123.....	355	54705.....	223	55014.....	228	56024.....	349	56149.....	350	56405.....	188
53124.....	355	54706.....	223	55015.....	228	56025.....	349	56150.....	350	56406.....	18

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
56535.....	201	57005.....	358	57140.....	337	58018.....	352	58100.....	355	58803.....	254
56536.....	201	57006.....	358	57141.....	337	58019.....	352	58101.....	355	58804.....	254
56537.....	201	57007.....	358	57142.....	338	58020.....	352	58102.....	355	58805.....	254
56538.....	201	57008.....	358	57143.....	338	58021.....	352	58103.....	355	58806.....	254
56539.....	201	57009.....	358	57144.....	338	58022.....	352	58480.....	263	58807.....	254
56540.....	201	57010.....	358	57145.....	338	58023.....	352	58481.....	263	58808.....	254
56541.....	201	57011.....	358	57146.....	338	58024.....	352	58482.....	263	58809.....	254
56542.....	201	57012.....	358	57147.....	338	58025.....	352	58483.....	263	58810.....	254
56543.....	201	57015.....	358	57148.....	338	58026.....	352	58484.....	263	58811.....	254
56800.....	206	57016.....	358	57149.....	338	58027.....	352	58485.....	263	58812.....	254
56801.....	206	57017.....	358	57150.....	338	58028.....	352	58486.....	263	58813.....	254
56802.....	206	57018.....	358	57151.....	338	58029.....	352	58487.....	263	58814.....	254
56803.....	206	57019.....	358	57152.....	338	58030.....	352	58488.....	263	58815.....	254
56804.....	206	57020.....	358	57153.....	338	58031.....	352	58489.....	263	58816.....	254
56805.....	206	57021.....	358	57154.....	338	58032.....	352	58490.....	263	58817.....	255
56806.....	206	57022.....	358	57155.....	338	58033.....	352	58491.....	263	58818.....	255
56807.....	206	57075.....	358	57156.....	338	58034.....	352	58492.....	263	58819.....	255
56808.....	206	57076.....	336	57157.....	338	58035.....	352	58493.....	263	58820.....	255
56809.....	207	57077.....	336	57158.....	338	58036.....	353	58494.....	264	58821.....	255
56810.....	207	57078.....	336	57159.....	338	58037.....	353	58495.....	264	58822.....	255
56811.....	207	57079.....	336	57160.....	338	58038.....	353	58496.....	264	58823.....	255
56812.....	207	57080.....	336	57161.....	338	58039.....	353	58497.....	264	58824.....	255
56813.....	207	57081.....	336	57162.....	338	58040.....	353	58498.....	264	58825.....	255
56814.....	207	57082.....	336	57163.....	338	58041.....	353	58499.....	264	58826.....	255
56815.....	207	57083.....	336	57164.....	338	58042.....	353	58500.....	264	58827.....	255
56816.....	207	57084.....	336	57165.....	338	58043.....	353	58501.....	264	58828.....	255
56817.....	207	57085.....	336	57166.....	338	58044.....	353	58502.....	264	58829.....	255
56818.....	207	57086.....	336	57167.....	338	58045.....	353	58503.....	264	58830.....	256
56819.....	208	57087.....	336	57168.....	339	58046.....	353	58504.....	264	58831.....	256
56820.....	208	57088.....	336	57169.....	339	58047.....	353	58505.....	264	58832.....	256
56821.....	208	57089.....	336	57170.....	339	58048.....	353	58506.....	264	58833.....	256
56822.....	208	57090.....	336	57171.....	339	58049.....	353	58507.....	264	58834.....	256
56823.....	208	57091.....	336	57172.....	339	58050.....	353	58508.....	264	58835.....	256
56824.....	208	57092.....	336	57173.....	339	58051.....	353	58509.....	264	58836.....	25

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
61059.....	337	62029.....	341	62171.....	343	63080.....	354	63751.....	236	64137.....	246
61060.....	337	62031.....	341	63000.....	352	63081.....	355	63752.....	236	64138.....	246
61061.....	337	62033.....	341	63001.....	352	63082.....	355	63753.....	236	64139.....	246
61062.....	337	62035.....	341	63002.....	352	63083.....	355	63754.....	236	64140.....	246
61063.....	337	62037.....	341	63003.....	352	63084.....	355	63755.....	236	64141.....	246
61064.....	337	62039.....	341	63004.....	352	63085.....	355	63756.....	236	64142.....	247
61065.....	337	62041.....	341	63005.....	352	63086.....	355	63757.....	236	64143.....	247
61066.....	337	62043.....	341	63006.....	353	63087.....	355	63758.....	236	64144.....	247
61067.....	337	62045.....	341	63007.....	353	63088.....	355	63759.....	236	64145.....	247
61068.....	337	62047.....	341	63008.....	353	63089.....	355	63760.....	237	64146.....	247
61069.....	337	62049.....	341	63009.....	353	63090.....	355	63761.....	237	64147.....	247
61070.....	337	62051.....	341	63010.....	353	63091.....	355	63762.....	237	64148.....	247
61071.....	337	62053.....	341	63011.....	353	63155.....	234	63763.....	237	64149.....	247
61072.....	337	62055.....	341	63012.....	353	63156.....	234	63764.....	237	64150.....	247
61073.....	337	62057.....	341	63013.....	354	63157.....	234	63765.....	237	64151.....	247
61074.....	337	62059.....	341	63014.....	354	63158.....	235	63766.....	237	64152.....	247
61075.....	338	62061.....	341	63015.....	354	63159.....	235	63767.....	237	64153.....	247
61076.....	338	62063.....	341	63016.....	354	63160.....	235	63768.....	237	64154.....	247
61077.....	338	62065.....	341	63017.....	354	63161.....	235	63769.....	237	64155.....	247
61078.....	338	62066.....	343	63018.....	354	63162.....	235	63770.....	237	64156.....	247
61079.....	338	62067.....	341	63019.....	354	63163.....	235	63771.....	237	64157.....	247
61080.....	338	62069.....	342	63020.....	354	63164.....	235	63772.....	237	64158.....	247
61081.....	338	62071.....	342	63021.....	354	63165.....	235	63773.....	237	64159.....	247
61082.....	338	62073.....	342	63022.....	354	63166.....	235	63774.....	237	64160.....	247
61083.....	338	62075.....	342	63023.....	354	63167.....	235	63775.....	237	64161.....	247
61084.....	338	62077.....	342	63024.....	355	63168.....	235	63776.....	237	64162.....	247
61085.....	338	62079.....	342	63025.....	355	63169.....	236	63777.....	238	64163.....	247
61086.....	338	62081.....	342	63026.....	355	63170.....	236	63778.....	238	64164.....	247
61087.....	338	62083.....	342	63027.....	355	63171.....	236	63779.....	238	64165.....	247
61088.....	338	62084.....	343	63028.....	355	63172.....	236	63780.....	238	64166.....	247
61089.....	339	62085.....	342	63029.....	355	63173.....	236	63781.....	238	64167.....	247
61090.....	339	62087.....	342	63030.....	355	63174.....	236	63782.....	238	64168.....	247
61091.....	339	62089.....	342	63031.....	355	63175.....	236	63783.....	238	64169.....	247
61092.....	339	62091.....	342	63032.....	355	63176.....	236	63784.....	238	64170.....	24

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
64654.....	224	64832.....	228	65010.....	227	65091.....	230	65229.....	220	66401.....	188
64655.....	225	64833.....	228	65011.....	227	65092.....	230	65230.....	220	66402.....	188
64656.....	225	64834.....	228	65012.....	227	65093.....	230	65231.....	220	66403.....	188
64657.....	225	64835.....	228	65013.....	227	65094.....	230	65232.....	220	66404.....	188
64658.....	225	64836.....	228	65014.....	227	65095.....	230	65233.....	220	66405.....	188
64659.....	225	64837.....	228	65015.....	227	65096.....	230	65234.....	220	66406.....	188
64660.....	225	64838.....	228	65016.....	227	65097.....	230	65235.....	220	66407.....	188
64661.....	225	64839.....	228	65017.....	227	65098.....	230	65236.....	220	66408.....	188
64662.....	225	64840.....	228	65018.....	227	65099.....	230	65237.....	220	66409.....	188
64663.....	225	64841.....	228	65019.....	227	65100.....	230	65238.....	220	66410.....	188
64664.....	225	64842.....	228	65020.....	227	65101.....	230	65239.....	220	66411.....	188
64665.....	225	64843.....	228	65021.....	227	65102.....	230	65240.....	220	66412.....	188
64666.....	225	64844.....	228	65022.....	227	65103.....	218	65241.....	220	66413.....	188
64667.....	225	64845.....	228	65023.....	227	65104.....	218	65242.....	220	66414.....	188
64668.....	225	64846.....	228	65024.....	227	65105.....	218	65243.....	220	66415.....	188
64669.....	225	64847.....	228	65025.....	227	65106.....	218	65244.....	220	66416.....	188
64670.....	225	64848.....	228	65026.....	227	65107.....	218	65245.....	220	66417.....	188
64671.....	225	64849.....	228	65027.....	228	65108.....	218	65246.....	220	66418.....	188
64672.....	225	64850.....	228	65028.....	228	65109.....	218	65247.....	220	66419.....	188
64673.....	225	64851.....	228	65029.....	228	65110.....	218	65248.....	220	66420.....	188
64674.....	225	64852.....	228	65030.....	228	65111.....	218	65249.....	220	66421.....	188
64675.....	225	64853.....	228	65031.....	228	65112.....	218	65250.....	220	66422.....	188
64676.....	225	64854.....	228	65032.....	228	65113.....	218	65251.....	221	66423.....	188
64677.....	225	64855.....	229	65033.....	228	65114.....	218	65252.....	221	66424.....	188
64678.....	225	64856.....	229	65034.....	228	65115.....	218	65253.....	221	66425.....	188
64679.....	225	64857.....	229	65035.....	228	65116.....	218	65254.....	221	66426.....	188
64680.....	225	64858.....	229	65036.....	228	65117.....	218	65255.....	221	66427.....	188
64681.....	225	64859.....	229	65037.....	228	65118.....	218	65256.....	221	66428.....	188
64682.....	225	64860.....	229	65038.....	228	65119.....	218	65257.....	221	66429.....	188
64683.....	225	64861.....	229	65039.....	228	65120.....	218	65258.....	221	66430.....	188
64684.....	225	64862.....	229	65040.....	228	65121.....	218	65259.....	221	66431.....	188
64685.....	225	64863.....	229	65041.....	228	65122.....	218	65260.....	221	66432.....	188
64686.....	225	64864.....	229	65042.....	228	65123.....	218	65261.....	221	66433.....	188
64687.....	225	64865.....	229	65043.....	228	65124.....	218	65262.....	221	66434.....	18

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
66563.....	192	66644.....	195	66725.....	198	66806.....	201	67117.....	265	67612.....	223
66564.....	192	66645.....	195	66726.....	198	66807.....	201	67118.....	265	67613.....	223
66565.....	192	66646.....	195	66727.....	198	66808.....	201	67119.....	265	67614.....	223
66566.....	192	66647.....	195	66728.....	198	66809.....	201	67120.....	265	67615.....	223
66567.....	192	66648.....	195	66729.....	198	66810.....	201	67121.....	265	67616.....	223
66568.....	193	66649.....	195	66730.....	198	66811.....	201	67122.....	265	67617.....	223
66569.....	193	66650.....	195	66731.....	198	67005.....	359	67123.....	265	67618.....	223
66570.....	193	66651.....	195	66732.....	198	67007.....	359	67124.....	265	67619.....	223
66571.....	193	66652.....	195	66733.....	198	67009.....	359	67125.....	265	67620.....	223
66572.....	193	66653.....	195	66734.....	198	67011.....	359	67126.....	265	67621.....	223
66573.....	193	66654.....	195	66735.....	199	67013.....	359	67127.....	265	67622.....	223
66574.....	193	66655.....	195	66736.....	199	67015.....	359	67128.....	265	67623.....	223
66575.....	193	66656.....	195	66737.....	199	67017.....	359	67129.....	265	67624.....	223
66576.....	193	66657.....	195	66738.....	199	67019.....	359	67130.....	265	67625.....	223
66577.....	193	66658.....	195	66739.....	199	67021.....	359	67131.....	265	67626.....	223
66578.....	193	66659.....	195	66740.....	199	67023.....	359	67132.....	265	67627.....	224
66579.....	193	66660.....	195	66741.....	199	67035.....	359	67133.....	265	67628.....	224
66580.....	193	66661.....	195	66742.....	199	67037.....	359	67134.....	265	67629.....	224
66581.....	193	66662.....	195	66743.....	199	67039.....	359	67135.....	265	67630.....	224
66582.....	193	66663.....	195	66744.....	199	67041.....	359	67136.....	265	67631.....	224
66583.....	193	66664.....	195	66745.....	199	67043.....	359	67137.....	265	67632.....	224
66584.....	193	66665.....	195	66746.....	199	67045.....	359	67138.....	265	67633.....	224
66585.....	193	66666.....	195	66747.....	199	67047.....	359	67139.....	265	67634.....	224
66586.....	193	66667.....	196	66748.....	199	67049.....	359	67140.....	265	67635.....	224
66587.....	193	66668.....	196	66749.....	199	67051.....	359	67141.....	266	67636.....	224
66588.....	193	66669.....	196	66750.....	199	67053.....	359	67142.....	266	67637.....	224
66589.....	193	66670.....	196	66751.....	199	67060.....	263	67143.....	266	67638.....	224
66590.....	193	66671.....	196	66752.....	199	67061.....	263	67144.....	266	67639.....	224
66591.....	193	66672.....	196	66753.....	199	67062.....	263	67145.....	266	67640.....	224
66592.....	193	66673.....	196	66754.....	199	67063.....	263	67146.....	266	67641.....	224
66593.....	193	66674.....	196	66755.....	199	67064.....	263	67147.....	266	67642.....	224
66594.....	193	66675.....	196	66756.....	199	67065.....	263	67148.....	266	67643.....	224
66595.....	193	66676.....	196	66757.....	199	67066.....	263	67149.....	266	67644.....	224
66596.....	193	66677.....	196	66758.....	199	67067.....	263	67150.....	266	67645.....	22

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
67778	256	67862	260	68285	339	68603	343	68718	343	69033	355	69178	207
67779	256	67863	260	68286	339	68604	343	68723	343	69034	355	69179	207
67780	256	67864	260	68287	340	68606	343	68728	343	69035	355	69180	207
67781	256	67865	260	68288	340	68607	343	68733	343	69036	355	69181	208
67782	256	67866	260	68289	340	68608	343	68738	343	69037	355	69182	208
67783	256	67867	260	68290	340	68609	343	68743	343	69038	355	69183	208
67784	256	67868	260	68291	340	68611	343	68748	343	69039	355	69184	208
67785	257	67869	260	68292	340	68612	343	68753	343	69040	355	69185	208
67786	257	67870	260	68293	340	68613	343	68758	343	69041	355	69186	208
67787	257	67871	260	68294	336	68614	343	68763	343	69042	355	69187	208
67788	257	67872	261	68295	336	68616	343	68768	343	69043	355	69188	208
67789	257	67873	261	68296	336	68643	341	68773	343	69044	355	69189	208
67790	257	67874	261	68297	336	68644	341	68778	343	69045	355	69190	208
67791	257	67875	261	68298	336	68645	341	68780	343	69046	355	69191	208
67792	257	67876	261	68299	336	68646	341	68965	352	69047	355	69192	208
67793	257	67877	261	68300	337	68647	341	68966	352	69048	355	69193	208
67794	257	67878	261	68301	337	68648	341	68967	352	69049	355	69194	208
67795	257	67879	261	68302	337	68649	341	68968	352	69050	355	69195	208
67796	257	67880	261	68303	337	68650	341	68969	352	69051	355	69196	208
67797	257	67881	261	68304	337	68651	341	68970	352	69052	355	69197	208
67798	257	67882	261	68305	337	68652	341	68971	352	69053	355	69198	208
67799	257	67883	261	68306	337	68653	341	68972	352	69054	355	69199	208
67800	257	67884	261	68307	337	68654	341	68973	352	69055	355	69200	208
67801	257	67885	261	68308	337	68655	341	68974	352	69056	355	69201	208
67802	257	67886	261	68309	337	68656	341	68975	352	69120	206	69202	208
67803	257	67887	261	68310	337	68657	341	68976	352	69121	206	69203	208
67804	257	67888	261	68311	337	68658	341	68977	352	69122	206	69204	208
67805	257	67889	261	68312	337	68659	341	68978	352	69123	206	69205	208
67806	257	67890	261	68313	337	68660	341	68979	352	69124	206	69206	208
67807	257	67891	261	68314	337	68661	341	68980	353	69125	206	69207	208
67808	257	67892	261	68315	337	68662	341	68981	353	69126	206	69208	208
67809	257	67893	261	68316	337	68663	341	68982	353	69127	206	69209	208
67810	258	67894	261	68317	338	68664	341	68983	353	69128	206	69210	209
67811	258	67895	261	68318	338	68665	341	68984	353	69129	206	69211	209
67812	258	67896	261	68319	338	68666	341	68985	353	69130	206	69212	209
67813	258	67897	261	68320	338	68667	341	68986	353	69131	206	69213	209
67814	258	67898	261	68321	338	68668	341	68987	353	69132	206	69214	209
67815	258	67899	261	68322	338	68669	341	68988	353	69133	206	69215	209
67816	259	67900	261	68323	338	68670	341	68989	353	69134	206	69216	209
67817	259	67901	261	68324	338	68671	341	68990	353	69135	206	69217	209
67818	259	67902	261	68325	338	68672	341	68991	353	69136	206	69218	209
67819	259	67903	261	68326	338	68673	341	68992	353	69137	206	69219	209
67820	259	67904	261	68327	338	68674	341	68993	353	69138	206	69220	209
67821	259	67905	261	68328	338	68675	341	68994	353	69139	206	69221	209
67822	259	67906	261	68329	338	68676	341	68995	353	69140	206	69222	209
67823	259	67907	261	68330	338	68677	342	68996	353	69141	206	69223	210
67824	259	67908	262	68331	339	68678	342	68997	353	69142	206	69224	210
67825	259	67909	262	68332	339	68679	342	68998	353	69143	206	69225	210
67826	259	67910	262	68333	339	68680	342	68999	353	69144	206	69226	210
67827	259	67911	262	68334	339	68681	342	69000	353	69145	206	69227	210
67828	259	67912	262	68335	339	68682	342	69001	353	69146	206	69228	210
67829	259	67913	262	68336	339	68683	342	69002	353	69147	207	69229	210
67830	259	67914	262	68337	339	68684	342	69003	354	69148	207	69230	210
67831	259	67915	262	68338	339	68685	342	69004	354	69149	207	69231	210
67832	259	67916	262	68339	339	68686	342	69005	354	69150	207	69232	210
67835	259	67917	262	68340	339	68687	342	69006	354	69151	207	69233	210
67836	259	67918	262	68341	339	68688	342	69007	354	69152	207	69234	210
67837	259	67919	262	68342	339	68689	342	69008	354	69153	207	69235	210
67838	259	67920	262	68343	339	68690	342	69009	354	69154	207	69236	210
67839	259	67921	262	68344	339	68691	342	69010	354	69155	207	69237	210
67840	260	67922	262	68345	339	68692	342	69011	354	69156	207	69238	210
67841	260	67923	262	68346	339	68693	342	69012	354	69157	207	69239	210
67842	260	67924	262	68347	339	68694	342	69013	354	69158	207	69240	210
67843	260	67925	262	68348	339	68695	342	69014	354	69159	207	69241	210
67844	260	67926	262	68349	339	68696	342	69015	354	69160	207	69242	210
67845	260	68268	336	68350	339	68697	342	69016	354	69161	207	69243	210
67846	260	68269	336	68351	339	68698	342	69017	354	69162	207	69244	210
67847	260	68270	336	68352	339	68699	342	69018	354	69163	207	69245	210
67848	260	68271	336	68353	339	68700	342	69019	354	69164	207	69246	210
67849	260	68272	336	68354	340	68701	342	69020	354	69165	207	69247	210
67850	260	68273	337	68355	340	68702	342	69021	354	69166	207	69248	210
67851	260	68274	337	68356	340	68703	342	69022	354	69167	207	69249	210
67852	260	68275	337	68357	340	68704	342	69023	354	69168	207	69250	211
67853	260	68276	337	68358	340	68705	342	69024	354	69169	207	69251	211
67854	260	68277	338	68359	340	68706	342	69025	354	69170	207	69252	211
67855	260	68278	338	68360	340	68707	342	69026	355	69171	207	69253	211
67856	260	68279	338	68361	340	68708	342	69027	355	69172	207	69254	211
67857	260	68280	338	68362	340	68709	343	69028	355	69173	207	69255	211
67858	260	68281	339	68363	340	68710	343	69029	355	69174	207	69256	211
67859	260	68282	339	68364	340	68711	343	69030	355	69175	207	69257	211
67860	260	68283	339	68365	340	68712	343	69031	355	69176	207	69258	211
67861	260	68284	339	68366	340	68713	343	69032	355	69177	207	69259	211

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
69260.....	211	70019.....	374	72948.....	386	74101.....	364	74342.....	90	74428.....	90
69261.....	211	70020.....	374	72949.....	386	74104.....	364	74343.....	90	74429.....	90
69262.....	211	70021.....	374	72950.....	386	74107.....	364	74348.....	90	74430.....	90
69263.....	211	70022.....	374	72951.....	386	74110.....	364	74349.....	90	74431.....	90
69264.....	211	70023.....	374	72952.....	386	74113.....	364	74350.....	90	74432.....	90
69265.....	211	70024.....	374	72953.....	386	74116.....	364	74351.....	90	74433.....	90
69266.....	211	70025.....	374	72954.....	390	74119.....	364	74352.....	90	74434.....	90
69267.....	211	70026.....	374	72955.....	390	74122.....	364	74353.....	90	74435.....	90
69268.....	211	70027.....	374	72956.....	390	74125.....	367	74354.....	90	74436.....	90
69269.....	211	70028.....	374	72957.....	390	74128.....	367	74355.....	90	74437.....	90
69270.....	211	70029.....	374	72958.....	390	74131.....	367	74356.....	90	74438.....	90
69271.....	211	70030.....	374	72959.....	390	74134.....	367	74357.....	90	74439.....	90
69272.....	211	70031.....	374	72960.....	390	74137.....	367	74358.....	90	74440.....	90
69273.....	211	70032.....	374	72961.....	390	74140.....	367	74359.....	90	74441.....	90
69274.....	211	70441.....	110	72962.....	390	74143.....	367	74360.....	90	74442.....	90
69275.....	211	70442.....	110	72963.....	390	74146.....	367	74361.....	90	74443.....	90
69276.....	211	70444.....	110	72964.....	390	74149.....	370	74362.....	90	74444.....	90
69277.....	211	70445.....	110	72965.....	390	74152.....	370	74363.....	90	74445.....	90
69278.....	211	70447.....	110	72966.....	390	74155.....	370	74364.....	90	74446.....	90
69279.....	211	70448.....	110	72967.....	390	74158.....	370	74365.....	90	74447.....	90
69280.....	211	70450.....	110	72968.....	390	74161.....	370	74366.....	90	74448.....	90
69281.....	211	70451.....	110	72969.....	390	74164.....	370	74367.....	90	74449.....	90
69282.....	211	70453.....	110	72970.....	393	74167.....	370	74368.....	90	74450.....	90
69283.....	211	70454.....	110	72971.....	393	74170.....	370	74369.....	90	74451.....	90
69284.....	212	70456.....	110	72972.....	393	74201.....	364	74370.....	90	74452.....	90
69285.....	212	70457.....	110	72973.....	393	74204.....	364	74371.....	90	74453.....	90
69286.....	212	70459.....	110	72974.....	393	74207.....	364	74372.....	90	74454.....	90
69287.....	212	70460.....	110	72975.....	393	74210.....	364	74373.....	90	74455.....	90
69288.....	212	70462.....	110	72976.....	393	74213.....	364	74374.....	90	74456.....	90
69289.....	212	70463.....	110	72977.....	393	74216.....	364	74375.....	90	74457.....	90
69290.....	212	70465.....	110	72978.....	119	74219.....	364	74376.....	90	74458.....	90
69291.....	212	70466.....	110	72979.....	119	74222.....	364	74377.....	90	74459.....	90
69292.....	212	70468.....	110	72980.....	119	74225.....	367	74378.....	90	74460.....	90
69293.....	212	70469.....	110	72981.....	119	74228.....	367	74379.....	90	74461.....	90
69294.....	212	70470.....	109	72982.....	119	74231.....	367	74380.....	90	74462.....	90
69295.....	212	70471.....	109	72983.....	119	74234.....	367	74381.....	90	74463.....	90
69296.....	212	70472.....	109	72984.....	119	74237.....	367	74382.....	90	74464.....	90
69297.....	212	70473.....	109	72985.....	119	74240.....	367	74383.....	90	74465.....	90
69298.....	212	70474.....	109	73012.....	386	74243.....	367	74384.....	90	74466.....	90
69299.....	212	70475.....	109	73013.....	386	74246.....	367	74385.....	90	74467.....	90
69300.....	212	70476.....	109	73014.....	386	74249.....	370	74386.....	90	74468.....	90
69301.....	212	70477.....	109	73026.....	386	74252.....	370	74387.....	90	74469.....	90
69302.....	212	70478.....	109	73027.....	386	74255.....	370	74388.....	90	74470.....	90
69303.....	212	70479.....	109	73028.....	386	74258.....	370	74389.....	90	74471.....	90
69304.....	212	70480.....	109	73029.....	386	74261.....	370	74390.....	90	74472.....	91
69305.....	212	70481.....	109	73041.....	386	74264.....	370	74391.....	90	74473.....	91
69306.....	212	70482.....	109	73070.....	387	74267.....	370	74392.....	90	74474.....	91
69307.....	212	70483.....	109	73071.....	387	74270.....	370	74393.....	90	74475.....	91
69308.....	212	70484.....	109	73072.....	387	74300.....	90	74394.....	90	74476.....	91
69309.....	212	70485.....	109	73073.....	387	74301.....	90	74395.....	90	74477.....	91
69310.....	212	70486.....	109	73074.....	387	74302.....	90	74396.....	90	74478.....	91
69311.....	212	70487.....	109	73075.....	387	74303.....	90	74397.....	90	74479.....	91
69312.....	212	70488.....	109	73078.....	387	74304.....	90	74398.....	90	74480.....	91
69313.....	213	70489.....	109	73079.....	387	74305.....	90	74399.....	90	74481.....	91
69314.....	213	70527.....	112	73080.....	387	74306.....	90	74400.....	90	74482.....	91
69315.....	213	70529.....	112	73081.....	387	74307.....	90	74401.....	90	74483.....	91
69316.....	213	70531.....	112	73082.....	387	74308.....	90	74402.....	90	74484.....	91
69317.....	213	70533.....	112	73083.....	387	74309.....	90	74403.....	90	74485.....	91
69318.....	213	70535.....	112	74001.....	364	74310.....	90	74404.....	90	74486.....	91
69319.....	213	70537.....	112	74004.....	364	74311.....	90	74405.....	90	74487.....	91
69320.....	213	70539.....	112	74007.....	364	74316.....	90	74406.....	90	74488.....	91
69321.....	213	70540.....	112	74010.....	364	74317.....	90	74407.....	90	74489.....	91
69322.....	213	70542.....	112	74013.....	364	74318.....	90	74408.....	90	74490.....	91
69323.....	213	70544.....	112	74016.....	364	74319.....	90	74409.....	90	74491.....	91
69324.....	213	70546.....	112	74019.....	364	74320.....	90	74410.....	90	74492.....	91
69325.....	213	70548.....	112	74022.....	364	74321.....	90	74411.....	90	74493.....	91
70003.....	374	70550.....	112	74025.....	367	74322.....	90	74412.....	90	74494.....	91
70004.....	374	70551.....	112	74028.....	367	74323.....	90	74413.....	90	74495.....	91
70005.....	374	70552.....	112	74031.....	367	74324.....	90	74414.....	90	74496.....	91
70006.....	374	70553.....	112	74034.....	367	74325.....	90	74415.....	90	74497.....	91
70007.....	374	70554.....	112	74037.....	367	74326.....	90	74416.....	90	74498.....	91
70008.....	374	70555.....	112	74040.....	367	74327.....	90	74417.....	90	74499.....	91
70009.....	374	70556.....	112	74043.....	367	74332.....	90	74418.....	90	74500.....	91
70010.....	374	70557.....	112	74046.....	367	74333.....	90	74419.....	90	74501.....	91
70011.....	374	70558.....	112	74049.....	370	74334.....	90	74420.....	90	74502.....	91
70012.....	374	70559.....	112	74052.....	370	74335.....	90	74421.....	90	74503.....	91
70013.....	374	70560.....	112	74055.....	370	74336.....	90	74422.....	90	74504.....	91
70014.....	374	70561.....	112	74058.....	370	74337.....	90	74423.....	90	74505.....	91
70015.....	374	70562.....	112	74061.....	370	74338.....	90	74424.....	90	74506.....	91
70016.....	374	70563.....	112	74064.....	370	74339.....	90	74425.....	90	74507.....	91
70017.....	374	72930.....	386	74067.....	370	74340.....	90	74426.....	90	74508.....	91
70018.....	374	72947.....	386	74070.....	370	74341.....	90	74427.....	90	74509.....	91

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
74592.....	91	74667.....	91	77170.....	86	77245.....	87	77320.....	87	83041.....	386	91017.....	397
74593.....	91	74668.....	91	77171.....	86	77246.....	87	77321.....	87	83042.....	386	91021.....	397
74594.....	91	74669.....	91	77172.....	86	77247.....	87	77322.....	87	83043.....	386	91025.....	397
74595.....	91	74670.....	91	77173.....	86	77248.....	87	77323.....	87	83044.....	386	91029.....	397
74596.....	91	74671.....	91	77174.....	86	77249.....	87	77324.....	87	83056.....	119	91033.....	397
74597.....	91	77100.....	86	77175.....	86	77250.....	87	77325.....	87	83057.....	119	91037.....	397
74598.....	91	77101.....	86	77176.....	86	77251.....	87	77326.....	87	83058.....	119	91041.....	397
74599.....	91	77102.....	86	77177.....	86	77252.....	87	77327.....	87	83059.....	119	91045.....	397
74600.....	90	77103.....	86	77178.....	86	77253.....	87	77328.....	87	83060.....	119	91049.....	397
74601.....	90	77104.....	86	77179.....	86	77254.....	87	77329.....	87	83061.....	119	91053.....	397
74602.....	90	77105.....	86	77180.....	86	77255.....	87	77330.....	87	83062.....	119	91101.....	397
74603.....	90	77106.....	86	77181.....	86	77256.....	87	77331.....	87	83063.....	119	91107.....	397
74604.....	90	77107.....	86	77182.....	86	77257.....	87	77332.....	87	83064.....	119	91109.....	397
74605.....	90	77108.....	86	77183.....	86	77258.....	87	77333.....	87	83065.....	119	91113.....	397
74606.....	90	77109.....	86	77184.....	86	77259.....	87	77334.....	87	83070.....	386	91121.....	397
74607.....	90	77110.....	86	77185.....	86	77260.....	87	77335.....	87	83071.....	386	91129.....	397
74608.....	90	77111.....	86	77186.....	86	77261.....	87	77336.....	87	83072.....	386	91137.....	397
74609.....	90	77112.....	86	77187.....	86	77262.....	87	77337.....	87	83073.....	386	91235.....	176
74610.....	90	77113.....	86	77188.....	86	77263.....	87	77338.....	87	83100.....	386	91236.....	176
74611.....	90	77114.....	86	77189.....	86	77264.....	87	77339.....	87	83101.....	386	91237.....	176
74612.....	90	77115.....	86	77190.....	86	77265.....	87	81001.....	378	83102.....	386	91238.....	176
74613.....	90	77116.....	86	77191.....	86	77266.....	87	81003.....	378	83103.....	386	91239.....	176
74614.....	90	77117.....	86	77192.....	86	77267.....	87	81005.....	378	83104.....	386	91240.....	176
74615.....	90	77118.....	86	77193.....	86	77268.....	87	81007.....	378	83105.....	386	91241.....	176
74616.....	90	77119.....	86	77194.....	86	77269.....	87	81009.....	378	83106.....	386	91242.....	176
74617.....	90	77120.....	86	77195.....	86	77270.....	87	81011.....	378	83107.....	386	91243.....	176
74618.....	90	77121.....	86	77196.....	86	77271.....	87	81013.....	378	83108.....	386	91244.....	176
74619.....	90	77122.....	86	77197.....	86	77272.....	87	81015.....	378	83109.....	386	91245.....	176
74620.....	90	77123.....	86	77198.....	86	77273.....	87	81017.....	378	83110.....	386	91246.....	176
74621.....	90	77124.....	86	77199.....	86	77274.....	87	81019.....	378	83111.....	386	91247.....	176
74622.....	90	77125.....	86	77200.....	86	77275.....	87	81021.....	378	83200.....	390	91248.....	176
74623.....	90	77126.....	86	77201.....	86	77276.....	87	81023.....	378	83201.....	390	91250.....	176
74624.....	91	77127.....	86	77202.....	86	77277.....	87	81025.....	378	83202.....	390	91251.....	176
74625.....	91	77128.....	86	77203.....	86	77278.....	87	81027.....	378	83203.....	390	91252.....	176
74626.....	91	77129.....	86	77204.....	86	77279.....	87	81029.....	378	83204.....	390	91253.....	176
74627.....	91	77130.....	86	77205.....	86	77280.....	87	82930.....	386	83205.....	390	91254.....	176
74628.....	91	77131.....	86	77206.....	86	77281.....	87	82931.....	386	83206.....	390	91255.....	176
74629.....	91	77132.....	86	77207.....	86	77282.....	87	82932.....	386	83207.....	390	91256.....	176
74630.....	91	77133.....	86	77208.....	86	77283.....	87	82933.....	386	83220.....	387	91257.....	176
74631.....	91	77134.....	86	77209.....	86	77284.....	87	82966.....	386	83221.....	387	91258.....	176
74632.....	91	77135.....	86	77210.....	86	77285.....	87	82967.....	386	83222.....	387	91259.....	176
74633.....	91	77136.....	86	77211.....	86	77286.....	87	82968.....	386	83223.....	387	91260.....	176
74634.....	91	77137.....	86	77212.....	86	77287.....	87	82969.....	386	83224.....	387	91261.....	176
74635.....	91	77138.....	86	77213.....	86	77288.....	87	82970.....	386	83225.....	387	91262.....	176
74636.....	91	77139.....	86	77214.....	86	77289.....	87	82971.....	386	83230.....	387	91263.....	176
74637.....	91	77140.....	86	77215.....	86	77290.....	87	82972.....	386	83231.....	387	91349.....	114
74638.....	91	77141.....	86	77216.....	86	77291.....	87	82973.....	386	83232.....	387	91350.....	114
74639.....	91	77142.....	86	77217.....	86	77292.....	87	82974.....	390	83233.....	387	91351.....	114
74640.....	91	77143.....	86	77218.....	86	77293.....	87	82975.....	390	83234.....	387	91352.....	114
74641.....	91	77144.....	86	77219.....	86	77294.....	87	82976.....	390	83235.....	387	91353.....	114
74642.....	91	77145.....	86	77220.....	87	77295.....	87	82977.....	390	90001.....	396	91354.....	114
74643.....	91	77146.....	86	77221.....	87	77296.....	87	82978.....	390	90005.....	396	91355.....	114
74644.....	91	77147.....	86	77222.....	87	77297.....	87	82979.....	390	90009.....	396	91356.....	114
74645.....	91	77148.....	86	77223.....	87	77298.....	87	82980.....	390	90013.....	396	91357.....	114
74646.....	91	77149.....	86	77224.....	87	77299.....	87	82981.....	390	90017.....	396	91358.....	114
74647.....	91	77150.....	86	77225.....	87	77300.....	87	82982.....	390	90021.....	396	91359.....	114
74648.....	91	77151.....	86	77226.....	87	77301.....	87	82983.....	390	90025.....	396	91360.....	114
74649.....	91	77152.....	86	77227.....	87	77302.....	87	82984.....	390	90029.....	396	91361.....	114
74650.....	91	77153.....	86	77228.....	87	77303.....	87	82985.....	390	90033.....	396	93272.....	114
74651.....	91	77154.....	86	77229.....	87	77304.....	87	82986.....	390	90037.....	396	93273.....	114
74652.....	91	77155.....	86	77230.....	87	77305.....	87	82987.....	390	90041.....	396	93274.....	114
74653.....	91	77156.....	86	77231.....	87	77306.....	87	82988.....	390	90045.....	396	93275.....	114
74654.....	91	77157.....	86	77232.....	87	77307.....	87	82989.....	390	90049.....	396	93276.....	114
74655.....	91	77158.....	86	77233.....	87	77308.....	87	82990.....	393	90053.....	396	93277.....	114
74656.....	91	77159.....	86	77234.....	87	77309.....	87	82991.....	393	90101.....	396	93278.....	114
74657.....	91	77160.....	86	77235.....	87	77310.....	87	82992.....	393	90107.....	396	93279.....	114
74658.....	91	77161.....	86	77236.....	87	77311.....	87	82993.....	393	90109.....	396	93280.....	114
74659.....	91	77162.....	86	77237.....	87	77312.....	87	82994.....	393	90113.....	396	93281.....	114
74660.....	91	77163.....	86	77238.....	87	77313.....	87	82995.....	393	90121.....	396	93282.....	114
74661.....	91	77164.....	86	77239.....	87	77314.....	87	82996.....	393	90129.....	396		
74662.....	91	77165.....	86	77240.....	87	77315.....	87	82997.....	393	90137.....	396		
74663.....	91	77166.....	86	77241.....	87	77316.....	87	83026.....	386	91001.....	397		
74664.....	91	77167.....	86	77242.....	87	77317.....	87	83027.....	386	91005.....	397		
74665.....	91	77168.....	86	77243.....	87	77318.....	87	83028.....	386	91009.....	397		
74666.....	91	77169.....	86	77244.....	87	77319.....	87	83029.....	386	91013.....	397		

KSPT Reference Information

ISO h6 SPECIFICATIONS					
DIAMETER	+	-	DIAMETER	+	-
$\geq 1/8 - 3/16$	0.00000	-0.00032	≤ 3	0,000	0,006
$> 3/16 - 7/16$	0.00000	-0.00035	$> 3 - 6$	0,000	0,008
$> 7/16 - 5/8$	0.00000	-0.00043	$> 6 - 10$	0,000	0,009
$> 5/8 - 1$	0.00000	-0.00051	$> 10 - 18$	0,000	0,011
$> 1 - 1-1/4$	0.00000	-0.00063	$> 18 - 25$	0,000	0,013

MACHINING FORMULAS	
INCH FORMULAS	METRIC FORMULAS
sfm = rpm x .262 x cutting diameter	m/min = (3.14 x cutting diameter x rpm) / 1000
rpm = sfm x 3.82 / cutting diameter	rpm = (1000 x m / min) / (3.14 x cutting diameter)
feed (inches per tooth) = ipm / (number of teeth x rpm)	feed (mm per tooth) = millimeters per minute / (number of teeth x rpm)
feed (inches / minute) = inches per tooth x number of teeth x rpm	feed (mm/minute) = feed per tooth x number of teeth x rpm
feed (inches / minute) = ipr x rpm	feed (mm/minute) = mmr x rpm
feed (inches / revolution) = ipm / rpm	feed (mm per revolution) = mmr / rpm
cuspl height = (tool diameter / 2) - $\sqrt{(\text{tool diameter}^2 - \text{pitch}^2) / 4}$	cuspl height = (tool diameter / 2) - $\sqrt{(\text{tool diameter}^2 - \text{pitch}^2) / 4}$
pitch = $\sqrt{4 \times (\text{cuspl height} \times \text{tool diameter}) - 4 \times (\text{cuspl height}^2)}$	pitch = $\sqrt{4 \times (\text{cuspl height} \times \text{tool diameter}) - 4 \times (\text{cuspl height}^2)}$
mrr – milling – (in ³ /min) = width of cut x depth of cut x ipm	mrr – milling – (cm ³ /min) = (width of cut x depth of cut x mm/min) / 1000
cutting time – drilling – (minutes) = length / ipm	cutting time – drilling – (minutes) = length / mm/min

sfm	surface feet per minute
rpm	revolutions per minute
ipm	feed rate in inches per minutes
ipr	inches per revolution
mmr	millimeters per revolution
mm/min	feed rate in millimeters per minute
mrr	material removal rate
	on flat surface

GENERAL FORMULAS	
coolant pressure: 1 Bar = 14.5 Pounds per Square Inch (PSI)	
calculation of coolant pressure: Pounds Per Square Inch (PSI) = (Horsepower of Pump x 1.460) / Gallons per Minute (GPM)	
1 Liter = 0.254 Gallons	
inch = millimeters / 25.4	millimeters = inch x 25.4
inch tap drill sizes = major diameter – ((1.299 x % of thread) / threads per inch)	
metric tap drill sizes = major diameter – (1.082 x pitch x % of thread)	
inch thread forming drill size: maximum diameter = basic major diameter – (3/8 x number of threads per inch)	
inch thread forming drill size: minimum diameter = basic major diameter – (1/2 x number of threads per inch)	
metric thread forming drill size: maximum diameter = basic major diameter – (.375 x pitch)	
metric thread forming drill size: minimum diameter = basic major diameter – (.500 x pitch)	

Decimal Equivalents

Fraction • Number • Letter • Metric Sizes

INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT
—	0,10	0.0039	—	1,60	0.0630	9/64	3,57	0.1406	#1	5,79	0.2280	R	8,61	0.3390	—	13,00	0.5118
—	0,20	0.0079	#52	1,61	0.0635	—	3,60	0.1417	—	5,80	0.2283	—	8,70	0.3425	33/64	13,10	0.5156
—	0,25	0.0098	—	1,65	0.0650	#27	3,66	0.1440	—	5,90	0.2323	11/32	8,73	0.3438	17/32	13,49	0.5312
—	0,30	0.0118	#51	1,70	0.0669	—	3,70	0.1457	A	5,94	0.2340	—	8,75	0.3445	—	13,50	0.5315
#80	0,34	0.0135	—	1,75	0.0689	#26	3,73	0.1470	15/64	5,95	0.2344	—	8,80	0.3465	35/64	13,89	0.5469
—	0,35	0.0138	#50	1,78	0.0700	—	3,75	0.1476	—	6,00	0.2362	S	8,84	0.3480	—	14,00	0.5512
#79	0,37	0.0145	—	1,80	0.0709	#25	3,80	0.1495	B	6,05	0.2380	—	8,90	0.3504	9/16	14,29	0.5625
1/64	0,40	0.0156	#49	1,85	0.0728	—	3,80	0.1496	—	6,10	0.2402	—	9,00	0.3543	—	14,50	0.5709
#78	0,41	0.0160	—	1,90	0.0748	#24	3,86	0.1520	C	6,15	0.2420	T	9,09	0.3580	37/64	14,68	0.5781
—	0,45	0.0177	#48	1,93	0.0760	—	3,90	0.1535	—	6,20	0.2441	—	9,10	0.3583	—	15,00	0.5906
#77	0,46	0.0180	—	1,95	0.0768	#23	3,91	0.1540	D	6,25	0.2461	23/64	9,13	0.3594	19/32	15,08	0.5938
—	0,50	0.0197	5/64	1,98	0.0781	5/32	3,97	0.1562	—	6,30	0.2480	—	9,20	0.3622	39/64	15,48	0.6094
#76	0,51	0.0200	#47	1,99	0.0785	#22	3,99	0.1570	E	6,35	0.2500	—	9,25	0.3642	—	15,50	0.6102
#75	0,53	0.0210	—	2,00	0.0787	—	4,00	0.1575	1/4	6,35	0.2500	—	9,30	0.3661	5/8	15,88	0.6250
—	0,55	0.0217	—	2,05	0.0807	#21	4,04	0.1590	—	6,40	0.2520	U	9,35	0.3680	—	16,00	0.6299
#74	0,57	0.0225	#46	2,06	0.0810	#20	4,09	0.1610	—	6,50	0.2559	—	9,40	0.3701	41/64	16,27	0.6406
—	0,60	0.0236	#45	2,08	0.0820	—	4,10	0.1614	F	6,53	0.2570	—	9,50	0.3740	—	16,50	0.6496
#73	0,61	0.0240	—	2,10	0.0827	—	4,20	0.1654	—	6,60	0.2598	3/8	9,53	0.3750	21/32	16,67	0.6562
#72	0,64	0.0250	—	2,15	0.0846	#19	4,22	0.1660	G	6,63	0.2610	V	9,56	0.3770	—	17,00	0.6693
—	0,65	0.0256	#44	2,18	0.0860	—	4,25	0.1673	—	6,70	0.2638	—	9,60	0.3780	43/64	17,07	0.6719
#71	0,66	0.0260	—	2,20	0.0866	—	4,30	0.1693	17/64	6,75	0.2656	—	9,70	0.3819	11/16	17,46	0.6875
—	0,70	0.0276	—	2,25	0.0886	#18	4,31	0.1695	H	6,76	0.2660	—	9,75	0.3839	—	17,50	0.6890
#70	0,71	0.0280	#43	2,26	0.0890	11/64	4,37	0.1719	—	6,80	0.2677	W	9,80	0.3858	45/64	17,86	0.7031
#69	0,74	0.0292	—	2,30	0.0906	#17	4,39	0.1730	—	6,90	0.2717	—	9,90	0.3898	—	18,00	0.7087
—	0,75	0.0295	—	2,35	0.0925	—	4,40	0.1732	I	6,91	0.2720	25/64	9,92	0.3906	23/32	18,26	0.7188
#68	0,79	0.0310	#42	2,37	0.0935	#16	4,50	0.1770	—	7,00	0.2756	—	10,00	0.3937	—	18,50	0.7283
1/32	0,79	0.0313	3/32	2,38	0.0938	—	4,50	0.1772	J	7,04	0.2770	X	10,08	0.3970	47/64	18,65	0.7344
—	0,80	0.0315	—	2,40	0.0945	#15	4,57	0.1800	—	7,10	0.2795	—	10,10	0.3976	—	19,00	0.7480
#67	0,81	0.0320	#41	2,44	0.0960	—	4,60	0.1811	K	7,14	0.2810	—	10,20	0.4016	3/4	19,05	0.7500
#66	0,84	0.0330	—	2,45	0.0965	#14	4,62	0.1820	9/32	7,14	0.2812	Y	10,26	0.4040	49/64	19,45	0.7656
—	0,85	0.0335	#40	2,50	0.0984	#13	4,70	0.1850	—	7,20	0.2835	—	10,30	0.4055	—	19,50	0.7677
#65	0,89	0.0350	#39	2,53	0.0995	—	4,75	0.1870	—	7,25	0.2854	13/32	10,32	0.4062	25/32	19,84	0.7812
—	0,90	0.0354	#38	2,58	0.1015	3/16	4,76	0.1875	—	7,30	0.2874	—	10,40	0.4094	—	20,00	0.7874
#64	0,91	0.0360	—	2,60	0.1024	#12	4,80	0.1890	L	7,37	0.2900	Z	10,49	0.4130	51/64	20,24	0.7969
#63	0,94	0.0370	#37	2,64	0.1040	#11	4,85	0.1910	—	7,40	0.2913	—	10,50	0.4134	—	20,50	0.8071
—	0,95	0.0374	—	2,70	0.1063	—	4,90	0.1929	M	7,49	0.2950	—	10,60	0.4173	13/16	20,64	0.8125
#62	0,97	0.0380	#36	2,71	0.1065	#10	4,91	0.1935	—	7,50	0.2953	—	10,70	0.4213	—	21,00	0.8268
#61	0,99	0.0390	—	2,75	0.1083	#9	4,98	0.1960	19/64	7,54	0.2969	27/64	10,72	0.4219	53/64	21,03	0.8281
—	1,00	0.0394	7/64	2,78	0.1094	—	5,00	0.1969	—	7,60	0.2992	—	10,80	0.4252	27/32	21,43	0.8438
#60	1,02	0.0400	#35	2,79	0.1100	#8	5,05	0.1990	N	7,67	0.3020	—	10,90	0.4291	—	21,50	0.8465
#59	1,04	0.0410	—	2,80	0.1102	—	5,10	0.2008	—	7,70	0.3031	—	11,00	0.4331	55/64	21,84	0.8594
—	1,05	0.0413	#34	2,82	0.1110	#7	5,11	0.2010	—	7,75	0.3051	—	11,10	0.4370	—	22,00	0.8661
#58	1,07	0.0420	#33	2,87	0.1130	13/64	5,16	0.2031	—	7,80	0.3071	7/16	11,11	0.4375	7/8	22,23	0.8750
#57	1,09	0.0430	—	2,90	0.1142	#6	5,18	0.2040	—	7,90	0.3110	—	11,20	0.4409	—	22,50	0.8858
—	1,10	0.0433	#32	2,95	0.1160	—	5,20	0.2047	5/16	7,94	0.3125	—	11,30	0.4449	57/64	22,62	0.8906
—	1,15	0.0453	—	3,00	0.1181	#5	5,22	0.2055	—	8,00	0.3150	—	11,40	0.4488	—	23,00	0.9055
#56	1,18	0.0465	#31	3,05	0.1200	—	5,25	0.2067	O	8,03	0.3160	—	11,50	0.4528	29/32	23,02	0.9062
3/64	1,19	0.0469	—	3,10	0.1220	—	5,3	0.2087	—	8,10	0.3189	29/64	11,51	0.4531	59/64	23,42	0.9219
—	1,20	0.0472	1/8	3,18	0.1250	#4	5,31	0.2090	—	8,20	0.3228	—	11,60	0.4567	—	23,50	0.9252
—	1,25	0.0492	—	3,20	0.1260	—	5,40	0.2126	P	8,20	0.3230	—	11,70	0.4606	15/16	23,81	0.9375
—	1,30	0.0512	—	3,25	0.1280	#3	5,41	0.2130	—	8,25	0.3248	—	11,80	0.4646	—	24,00	0.9449
#55	1,32	0.0520	#30	3,26	0.1285	—	5,50	0.2165	—	8,30	0.3268	—	11,90	0.4685	61/64	24,21	0.9531
—	1,35	0.0531	—	3,30	0.1299	7/32	5,56	0.2188	21/64	8,33	0.3281	15/32	11,91	0.4688	—	24,50	0.9646
#54	1,40	0.0550	—	3,40	0.1339	—	5,60	0.2205	—	8,40	0.3307	—	12,00	0.4724	31/32	24,61	0.9688
#53	1,51	0.0595	#29	3,45	0.1360	#2	5,61	0.2210	Q	8,43	0.3320	31/64	12,30	0.4844	—	25,00	0.9843
—	1,55	0.0610	—	3,50	0.1378	—	5,70	0.2244	—	8,50	0.3346	—	12,50	0.4921	63/64	25,00	0.9844
1/16	1,59	0.0625	#28	3,57	0.1405	—	5,75	0.2264	—	8,60	0.3386	1/2	12,70	0.5000	1	25,40	1.0000

Hardness Conversion Chart

ROCKWELL HARDNESS (HRb)	ROCKWELL HARDNESS (HRC)	BRINELL HARDNESS (HB)	VICKERS HARDNESS (HV)	TENSILE STRENGTH (N/mm2)	PSI (1000lb/in2)
67	—	121	122	401	58
70	—	126	127	432	63
73	—	132	132	448	65
75	—	136	137	455	66
77	—	140	143	463	67
80	—	147	150	479	69
82	—	153	156	494	72
84	—	159	163	525	76
86	—	165	171	540	78
89	—	177	178	556	81
91	—	186	188	602	88
93	—	197	196	632	92
96	—	216	212	664	97
97	—	223	218	695	101
98	21	230	234	756	110
—	22	236	241	772	112
—	23	242	247	787	114
—	24	248	255	818	118
—	25	254	261	849	123
—	27	266	269	865	125
—	28	272	275	895	130
—	29	278	284	911	132
—	30	284	292	942	136
—	31	293	300	973	141
—	32	302	308	988	143
—	33	310	318	1019	147
—	34	319	327	1050	152
—	35	328	337	1096	159
—	37	345	349	1127	163
—	38	353	359	1158	168
—	39	362	370	1189	172
—	40	370	381	1235	179
—	41	381	395	1266	183
—	42	391	408	1312	190
—	44	411	422	1359	197
—	45	422	437	1420	206
—	46	433	452	1467	212
—	48	455	470	1513	219
—	50	479	497	1559	226
—	51	485	517	1621	235
—	52	497	532	1668	241
—	54	—	573	1729	250
—	56	—	609	1807	262
—	57	—	630	1884	273
—	59	—	670	1961	284
—	60	—	698	2039	295
—	61	—	725	—	—
—	62	—	740	—	—
—	63	—	780	—	—
—	64	—	812	—	—
—	65	—	847	—	—
—	66	—	885	—	—
—	67	—	926	—	—
—	68	—	971	—	—

Conversions from each scale are approximate

SOLUTIONS AROUND THE GLOBE

KYOCERA SGS Precision Tools is an ISO 9001:2015 Certified leader of round solid carbide cutting tool technology for the aerospace, metalworking, and automotive industries with manufacturing sites in the United States and United Kingdom. Our global network of Sales Representatives, Industrial Distributors, and Agents blanket the world selling into more than 60 countries.

LEADERS IN SOLID CARBIDE TOOL TECHNOLOGY

Brand names such as Z-Carb, S-Carb®, V-Carb, Hi-PerCarb®, Multi-Carb have become synonymous with high performance tooling in the machining and metalworking industry.

We're proud to have pioneered some of the world's most advanced cutting technology right here on our Northeast Ohio manufacturing campus. KSPT high performance end mills, drills and routers are increasing productivity and reducing cost around the world.

EXCEEDING CUSTOMER EXPECTATIONS

As the world's manufacturing needs change, so does KSPT. It's all about the science, starting with our lab inspected substrate materials to our tool designs and coatings. Our exceptional team of researchers, engineers, and machinists are dedicated to developing the absolute best and delivering the ultimate Value at the Spindle®.

- Incredible batch-to-batch consistency
- Metallurgical lab dedicated to testing and rigorous quality control
- ISO 9001:2015 Certified quality procedures
- Patented geometries that extend tool life, reduce chatter, cut cycle times, and improve part quality—even at extreme parameters
- Specialists in extreme and demanding product applications
- Comprehensive tooling services
- Experienced Field Sales Engineers who work to optimize a tool for your particular application
- Dedicated multi-lingual customer service representatives

SGS PRODUCTS ARE DISTRIBUTED BY:



www.kyocera-sgstool.com



UNITED STATES OF AMERICA

KYOCERA SGS Precision Tools
150 Marc Drive
Cuyahoga Falls, Ohio 44223 U.S.A.
customer service -
US and Canada: (330) 686-5700
orders: sales@kyocera-sgstool.com
web: www.kyocera-sgstool.com

VALUE AT THE SPINDLE®

UNITED KINGDOM

KYOCERA SGS Precision Tools Europe Ltd.
10 Ashville Way
Wokingham, Berkshire
RG41 2PL England
phone: (44) 1189-795-200
fax: (44) 1189-795-295
e-mail: SalesEU@kyocera-sgstool.com
web: www.kyocera-sgstool.co.uk

JAPAN

KYOCERA Corporation
International Sales Dept.
6 Takeda Tobadono-cho,
Fushimi-ku, Kyoto 612-8501, Japan
phone: +81-75-604-3473
fax: +81-75-604-3472
web: global.kyocera.com/prdct/tool/index.html

COMMERCIAL OFFICES

EASTERN EUROPE

SINTCOM
Sintcom Tools
95 Arsenalski Blvd.
1421 Sofia, Bulgaria
phone: (359) 283-64421
fax: (359) 286-52493
e-mail: sintcom@sintcomtools.com

FRANCE

DOGA Usinage
8, Avenue Gutenberg CS 50510
78317 Maurepas Cedex - France
phone: +33 1 30 66 41 41
e-mail: usinage-outils@dogaf.fr

GERMANY

KADIGO Tool Systems GmbH
Walramster. 27
65510 Idstein, Germany
phone: +49 8376 9287238
fax: +49 8376 9287237
e-mail: info@kadigo-ts.com

INDIA

KYOCERA Asia Pacific India Pvt. Ltd
Plot No.51, Phase-I,
Udyog Vihar Gurgaon 122016,
Haryana, India
phone: +91-124-4025022
fax: +91-124-4025001

KOREA

KYOCERA Precision Tools Korea Co., Ltd.
2LT 69BL, Namdong Industrial Estate,
638-1, Kozan-Dong, Namdong Incheon,
Korea
phone: +82-32-821-8365
fax: +82-32-821-8369
web: www.kptk.co.kr/

POLAND

KYOCERA SGS Precision Tools
phone: +48 530 432 002
e-mail: SalesEU@kyocera-sgstool.com

SPAIN

KYOCERA SGS Precision Tools IBERICA
e-mail: SalesEU@kyocera-sgstool.com

THAILAND

KYOCERA Asia Pacific (Thailand) Co., Ltd.
1 Capital Work Place Building
7th Floor, Soi Chamchan, Sukhumvit
55 Road, Klongton Nua, Wattana,
Bangkok 10110, Thailand
phone: +66-2-030-6688
fax: +66-2-030-6600

SINGAPORE

KYOCERA Asia Pacific Pte. Ltd.
298 Tiong Bahru Road, #13-03/05 Central Plaza,
Singapore 168730
phone: +65-6373-6700
fax: +65-6271-0600
web: asia.kyocera.com/products/cuttingtools/index.html

CHINA

KYOCERA (China) Sales & Trading Corporation
Room 140, Building A3, Daning Central Square,
No. 700 Wanrong Road,
Zhabei District, Shanghai, 200072,
P.R. China
phone: +86-21-3660-7711
fax: +86-21-568-6200
web: www.kyocera.com.cn/prdct/cuttingtool

